

Report No.:	SEWM2311000466RG08
Rev.:	01
Page:	1 of 37

HAC (T-Coil) Test Report

Application No.:	SEWM2311000466RG
Applicant:	COOSEA GROUP (HK) COMPANY LIMITED
Manufacturer:	COOSEA GROUP (HK) COMPANY LIMITED
Product Name:	Smart Phone
Model No.(EUT):	SN339D
FCC ID:	2A28USN339D
Standards:	ANSI C63.19-2019 CFR 47 FCC Part 20
Date of Receipt:	2023-11-17
Date of Test:	2023-11-18 to 2024-01-26
Date of Issue:	2024-01-30
Test conclusion:	PASS *
* In the configuration tested	the FUT detailed in this report convolied with the standards appeidin

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

I Nell

Well Wei Wireless Laboratory Manager



ct to its General Conditions o <u>litions.aspx</u> and, for electronic fo at <u>http://www.sgs.com/</u> ronic Documents at <u>http</u> lity, indemnification and reflects the Company's r accessible and for Electron tion of liability /www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx urisdiction issues defined therein. Any holder of this document is Jurisdiction issues defined therein. Any hotder or the findings at the time of its intervention only and with s to its Client and this document does not exoners the transaction documents. This document cannot y unauthorized alteration, forgery or falsification of secuted to the fullest extent of the law. Unless other discharged and the secure of the son only. the bility 0 ys only (86-755) 8307 1443

		215000	(, , , , , , , , , , , , , , , , , , ,	sgs.china@sgs.com
South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zor	no	215000	t (86–512) 62992980	www.sgsgroup.com.cn

Member of the SGS Group (SGS SA)

of Se



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 2 of 37

REVISION HISTORY

Revision Record						
Version	Chapter Date Modifier Rem		Remark			
01		2024-01-25		Original		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions.rems-en/Conditi

South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 2150000

S

Report No.: SEWM2311000466RG08 Rev.: 01 3 of 37 Page:

TEST SUMMARY

Test Results
PASS

HAC Test result: PASS

Reviewed by

Njek Un

Nick Hu



Leon Xu

Leon Xu

時用章

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are tested and such sample(s) are tested for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 4 of 37

CONTENTS

1	GEN		5
	1.1	Introduction	
	1.2	Details of Client	
	1.3	Test Location	5
	1.4	Test Facility	
	1.5	General Description of EUT	
	1.5.		
		2 List of air interfaces/frequency bands	
	1.6 1.7	Test Specification	
2		ANSI C63.19-2019 limits IBRATION CERTIFICATE	
2			
3	HAG	C (T-COIL) MEASUREMENT SYSTEM	
	3.1	Measurement System Diagram for SPEAG Robotic	. 13
	3.2	T-Coil Measurement	
	3.3	System Calibration	
	3.4 3.5	Audio Magnetic Probe AM1DV3 Test Arch	
	3.5 3.6	Phone Holder	
	3.7	AMCC- Audio Magnetic Calibration Coil	
	3.8	AMMI - Audio Magnetic Measurement Instrument	
4		ASUREMENT UNCERTAINTY EVALUATION	
_		C (T-COIL) MEASUREMENT	
5	HAU		
	5.1	T-Coil Performance Requirements	
	5.2	T-Coil measurement points and reference plane	
	5.3	T-Coil Measurement Procedure	. 26
6	T-C	OIL TESTING FOR CMRS VOICE	. 27
	6.1	General Description	. 27
	6.2	GSM Tests Results	
	6.3	UMTS Tests Results	. 28
7	T-C	OIL TESTING FOR CMRS IP VOICE	. 29
	7.1	VoLTE/VONR Tests Results	29
	7.2	VoWiFi Tests Results	-
	7.3	T-Coil testing for OTT VoIP Application	
8	EQI	JIPMENT LIST	. 37
9	CAL	IBRATION CERTIFICATE	. 37
10		DTOGRAPHS	
		IX A: DETAILED TEST RESULTS	
		IX B: CALIBRATION CERTIFICATE	-
AF	PEND	IX C: PHOTOGRAPHS	. 37



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.apx.and, for electronic format documents, subject to Terms and Conditions for Terms cand Conditions for Terms cand Conditions for the Electronic Document as the Intro/Web sector and Conditions for the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any, The Company's sole responsibility is to its Client and this document consumed thereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any, The Company's sole responsibility is to its Client and this document does not exonerate parties to a gapearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: Ch.Doccheck@gs.com

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 5 of 37

1 General Information

1.1 Introduction

The purpose of this standard is to provide tests and establish requirements for hearing aids and for WDs that allow a hearing aid user to effectively use a WD when both the hearing aid and WD meet the requirements of this standard. The various parameters required in order to demonstrate compatibility are measured. The design of the standard is such that when a hearing aid and a WD achieve the specified requirements, as measured by the methodology of this standard, the user of a hearing aid can effectively use a WD In order to provide for the usability of a hearing aid with a WD, several factors are coordinated, as follows:

a) The field strength emitted by a WD must not exceed the RF immunity of the hearing aid.

b) The T-Coil baseband H-field transmission of the WD must be compatible with the T-Coil mode of the hearing aid.

c) The magnetic noise from the WD in the T-Coil band must not degrade the reception quality to unacceptable levels.

Both the WD's RF and audio-band emissions are measured. Hence, the following measurements are made for the WDs:

a) RF amplitude modulation characteristics and power level or, optionally, near-feld E-field emissions

b) T-Coil mode, magnetie signal strength in the audio band.

c) T-Coil mode, magnetic noise in the audio band

d) T-Coil mode, magnetic signal frequency response in the audio band

Corresponding to these quantities, the hearing aid is measured for the following:

1) RF immunity in microphone mode

2) RF immunity in T-Coil mode

1.2 Details of Client

Applicant:	COOSEA GROUP (HK) COMPANY LIMITED	
Address:	UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL	
Manufacturer:	COOSEA GROUP (HK) COMPANY LIMITED	
Address:	UNIT 5-6 16/F MULTIFIELD PLAZA 3-7A PRAT AVENUE TSIMSHATSUI KL	


1.3 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.		
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone		
Post code:	215000		
Test Engineer:	Leon Liu		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document and the ereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To encek the authenticity of testing finspection report & certificate, please contact us at telephone: (86-756) 8307 1443,

South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000



1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, http://www.sec.aster.estimation.aster.estimation and telephone: (86-755) 8307 1443, http://www.sec.aster.estimation.aster.estimation.aster.estimation.aster.estimation and the second the state second the state second the state second the second secon

South of No. P Part, No.1, Runsherg Road, Starbui Industria Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 7 of 37

1.5 General Description of EUT

S

Device Type :	portable device						
Exposure Category:	uncontrolled environme	uncontrolled environment / general population					
Product Name:	smart phone						
Model No.(EUT):	SN339D						
FCC ID:	2A28USN339D						
Product Phase:	Identical Prototype						
IMEI:	356704760005055						
Hardware Version:	1.0						
Software Version:	SN339DD10010						
Antenna Type:	Inner Antenna						
Device Operating Configurat	ions :						
Modulation Mode:		/CDMA: QPSK; M,64QAM,256QAM,CP-OFDI T: GFSK, π/4DQPSK,8DPSK					
Device Class:	В	· · · · · · · · · · · · · · · · · · ·					
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12				
HSDPA UE Category:	24	HSUPA UE Category	7				
	4,tested with power level 1,tested with power level						
Power Class		3, tested with power control "all 1"(WCDMA Band)					
	I	3, tested with power control Max Power(LTE Band)					
_	Band	Tx (MHz)	Rx (MHz)				
	GSM 850	824 - 849 MHz	869 - 894 MHz				
	PCS 1900	1850 - 1910 MHz	1930 - 1990 MHz				
	WCDMA band 2	1850 -1910 MHz	1930 - 1990 MHz				
	WCDMA band 5	824 - 849MHz	869 - 894MHz				
	LTE band 2	1850 - 1910 MHz	1930 - 1990 MHz				
	LTE band 4	1710 - 1755 MHz	2110 - 2155 MHz				
	LTE band 5	824 - 849 MHz	869 - 894 MHz				
	LTE band 12	699 - 716 MHz	729 - 746 MHz				
	LTE band 14	788 - 798 MHz	758 - 768 MHz				
Frequency Bands:	LTE band 17	704 - 716 MHz	734 - 746 MHz				
, ,	LTE band 26	814 - 849 MHz	859 - 894 MHz				
	LTE band 30	2305 - 2315 MHz	2350 - 2360 MHz				
	LTE band 48	3550 - 3700 MHz	3550 - 3700 MHz				
	LTE band 66	1710 - 1780 MHz	2110 - 2200 MHz				
	LTE band 71	663 - 698 MHz	617 - 652 MHz				
	n2	1850 - 1910 MHz	1930 - 1990 MHz				
	n5	824 - 849 MHz	869 - 894 MHz				
	n25	1850 - 1915 MHz	1930 - 1995 MHz				
	n26	814 - 849 MHz	859 - 894 MHz				
	n30	2305 - 2315 MHz	2350 - 2360 MHz				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document central exprises at transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are related for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CM.Doccheck@sgs.com

South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 2150000



		Report No.: SEWN	/2311000466RG08
		Rev.: 01	
		Page: 8 of 37	7
	n41	2496 - 2690 MHz	2496 - 2690 MHz
	n48	3550 - 3700 MHz	3550 - 3700 MHz
	n66	1710 - 1780 MHz	2110 - 2200 MHz
	n70	1695 - 1710 MHz	1995 - 2020 MHz
	n71	663 - 698 MHz	617 - 652 MHz
	WLAN2.4GHz	2400~2483.5	2400~2483.5
		5150~5250MHz	5150~5250MHz
	WLAN5GHz	5250~5350MHz	5250~5350MHz
	WLANJOHZ	5470~5725MHz	5470~5725MHz
		5725~5850MHz	5725~5850MHz
	Bluetooth	2400~2483.5	2400~2483.5
	Model:	BL-A62CT	
Detter / Information	Normal Voltage:	+3.87V	
Battery Information:	Rated capacity:	4900mAh	
	Manufacturer:	Guangdong Fenghua New E	Energy Co.,Ltd.

Note:

*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

Remark:

As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions.rems-en/Conditi


South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 2150000

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 9 of 37

1.5.1 DUT Antenna Locations(Back view)

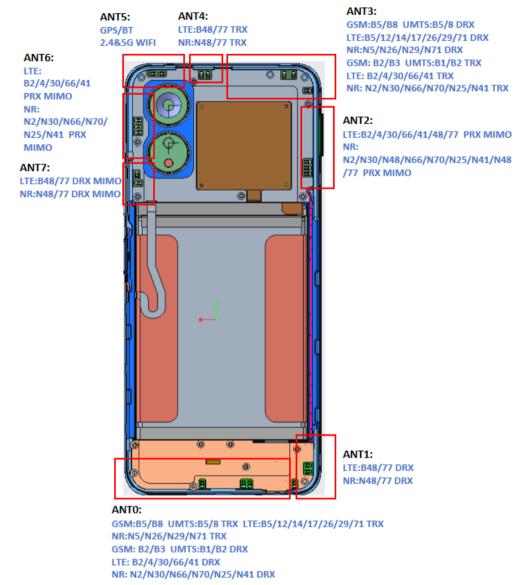

Note:

1) The diversity Antenna does not support transmitter function.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are tested and such sample(s) are tested for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. P Part, No.1, Runsherg Road, Starbui Industria Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 10 of 37

Air Interface	Band (MHz)	Туре	ANSI C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Reduction
	850	VO	Yes		CMRS Voice	NO
GSM	1900			BT, Wi-Fi	CIVING VOICE	
	EDGE	VD	Yes		Google Duo*	
	Band II	vo	Yes		CMRS Voice	NO
WCDMA	Band V			BT, Wi-Fi		
	HSPA	VD	Yes		Google Duo*	
	LTE Band 2					
	LTE Band 4					
	LTE Band 5					
	LTE Band 12					
LTE	LTE Band 14				VoLTE	
(FDD)	LTE Band 17	VD	Yes	BT, Wi-Fi		NO
(FDD)	LTE Band 26				Google Duo*	
	LTE Band 30					
	LTE Band 48	-				
	LTE Band 66					
	LTE Band 71					
LTE	Band 48	VD	Yes	BT, Wi-Fi	VoLTE	NO
(TDD)		10	105	BI, WITT	Google Duo*	NO
	NR Band n2			BT, Wi-Fi	VoNR Google Duo*	
	NR Band n5					
	NR Band n25					
5G NR	NR Band n26	VD	Yes			NO
(FDD)	NR Band n30		103			
	NR Band n66]				
	NR Band n70					
	NR Band n71					
5G NR	NR Band n41				VoNR	
(FDD	NR Band n48	VD	Yes	BT, Wi-Fi	Google Duo*	NO
עם ו)	NR Band n77				Google Duo	
Wi-Fi	2450	VD	Yes	WWAN	Google Duo*	NO
BT	2450	DT	NO	WWAN	NO	NO
DT: Digital T /D: IP Voic	Cellular Voice Service Fransport (no voice) e Service over Digital Tra cols not listed in Table		NSI 662 10 2	010 the everage	anaach laval af	

1.5.2 List of air interfaces/frequency bands

* For protocols not listed in Table 6.1 of ANSI C63.19-2019, the average speech level of −16 dBm0 should be used.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Condite</u>

South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 2150000

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 11 of 37

1.6 Test Specification

Identity	Document Title
CFR 47 FCC Part 20	§20.19 Hearing aid-compatible mobile handsets.
ANSI C63.19-2019	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices
KDB 285076 D01	HAC Guidance v06
KDB 285076 D02	T-Coil testing v04

1.7 ANSI C63.19-2019 limits

GSM operating modes:

- The primary group shall include at least 25 measurement points.
- The secondary group shall include at least 125 contiguous measurement points.

Non-2G GSM operating modes:

- The primary group shall include at least 75 measurement points.
- The secondary group shall include at least 300 contiguous measurement points

Additionally, to avoid an oddly shaped area of low noise, the secondary group shall include at least one longitudinal column of at least 10 contiguous qualifying oints and t least one transverse row containing at least 15 contiguous qualifying points.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.rems-a-Document.aspx</u>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are tested of or 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, the Document's approxed of the state store of the stephone: (86-755) 8307 1443, the Document's store of the s

South of No. P Part, No.1, Runsherg Road, Starbui Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 12 of 37

2 Calibration certificate

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Table 4 The Analdon to Com BR.	

Table 1:The Ambient Conditions



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documentis at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, sadvised that information contained hereon reflects the Company s findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are tested for 30 days only. Attention: To Aboccheck&gs.sc.m.

South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 2150000

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 13 of 37

3 HAC (T-Coil) Measurement System

3.1 Measurement System Diagram for SPEAG Robotic

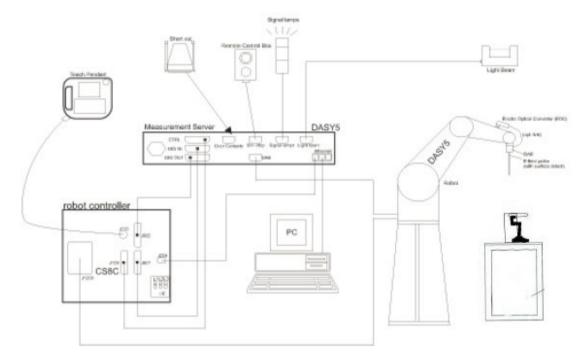


Fig. 1. The SPEAG Robotic Diagram

The DASY8 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- An Audio Magnetic probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch SAM phantom
- The device holder for handheld mobile phones.
- · Validation dipole kits allowing to validate the proper functioning of the system.



Unless otherwise agreed in writing, this document is issued by the Company sub overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Co-
subject">http://www.sgs.com/en/Terms-and-Co- subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Co-
dvised that information contained hereon reflects the Company">http://www.sgs.com/en/Terms-and-Co- advised that information contained hereon reflects the Company's findings at the ti Client's instructions, if any. The Company's sole responsibility is to its Client and rensaction from exercising all their rights and obligations under the transaction der vept in full, without prior written approval of the Company. Any unauthorized at appearance of this document is unlawful and offenders may be prosecuted to the ful results shown in this test report refer only to the sample(s) tested and such sample(s). Attention: To check the authenticity of testing /inspection report & certificate. p)	nditions.aspx and, for electro miTerms-and-Conditions/Ter so defined therein. Any hold me of its intervention only a d this document does not e locuments. This document toration, forgery or falsifica liest extent of the law. Unles are retained for 30 days only	nic format documents, ms-e-Document.aspx. er of this document is and within the limits of exonerate parties to a cannot be reproduced tion of the content or s otherwise stated the
or email: <u>CN.Doccheck@sgs.com</u>	ieuse sontaet us at telepho	10. (00 100,0001 1440,
South of No. 6 Plant. No. 1, Runsheng Road. Suzhou Industrial Park. Suzhou Area. China (Jiangsu) Pilot Free Trade Zone 215000	t (86–512) 62992980	www.sasaroup.com.cn

South of No. FPlant, No. 1, Kunsheng Koad, Suzhou industral Park, Suzhou Area, China (Jaargau) Hot Free Irade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 14 of 37

3.2 T-Coil Measurement

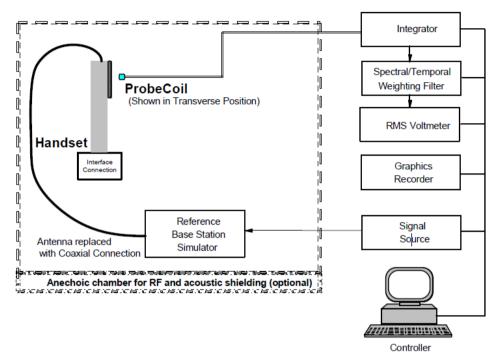


Fig. 2. T-coil signal measurement test setup-in call method

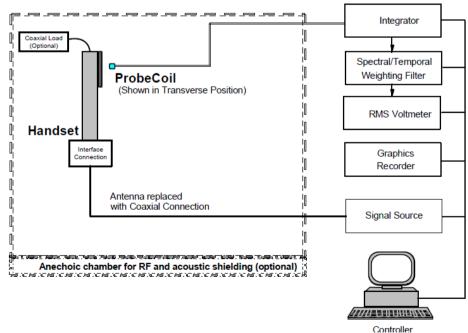


Fig. 3. T-coil signal measurement test setup-test mode method.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions</u>. For the Company subject to its General Conditions for Comments, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions</u>. For the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing fingepetion report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN_Doccheck@ags.com</u> 215000 t (86-512) 62992980 www.sgsgroup.com.cn

Sound wee, chain, we. F, cutaining, ruad, Suzhou industrai ran, Suzhou ree, china (kaingsu) rink riee indu 2019 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 sgs.china@sgs.com



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 15 of 37

The reference axis is normal to the reference plane and passes through the center of the acoustie output (or the center of the hole array); or may be centered on or near a secondary inductive source. The actual location of the reference axis and resultant measurement area shall be noted in the test report.

The measurement area shall be 50 mm by 50 mm. The measurement area for both desired ABM signal and undesired ABM field may be located where the transverse magnetic measurements are optimum with regard to the requirements. However, the measurement area should be in the vicinity of the acoustic output of the WD and shall be located in the same half of the phone as the WD receiver. In a WD handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.

Measurements of desired ABM signal strength and undesired ABM field are made at 2.0 mm +0.5 mm or 4 mm intervals in an X-Y measurement area patter over the entire measurement area(676 measurement points total); either all measured, or measured plus interpolated.

Note.

#. The EUT do not use the special HAC SW.

#. Setting the maximum volume for EUT during the measurement.

#. For the measurement, it don't use the "post-test measurement processing of results".

#. Per KDB 285076 D01v06, handsets that that have the ability to support concurrent connections using simultaneous transmissions shall be independently tested for each air interface/band given in ANSI C63.19-2019. At the present time ANSI C63.19 does not provide simultaneous transmission test procedures.

Define the all applicable inpot audio level as below according to c63 and KDB 285076 D02v04:

GSM input Level: -16dB UMTS input Level: -16dB VOLTE input Level: -16dB VOWIFI input Level: -16dB VONR input Level: -16dB OTT input Level: -16dB

For GSM/UMTS/VoLTE/VOWIF test setup and input level, the correct input level definition is via a communication tester CMW500 "Decoder Cal" and "Codec Cal" to set the correct audiao input levels.

For VONR test setup and input level, the correct input level definition is via a communication tester CMX500 and External DAU USB sound card "Decoder Cal" and "Codec Cal" to set the correct audiao input levels.

CMW500 and External DAU USB sound card is able to output 1 kHz audio signal equivalent to 3.14dBm0 at "Decoder Cal". configuration, the signal reference is used to adjust the AMMI gain setting to reach-16Bm0 for GSM/UMTS/VoLTE/VONR. CMW500/CMX500 input is calibrated and the relation between the analog input voltage and the internal level in dBm0 can be determined.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. Pfanr, No.1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

Report No.: SEWM2311000466RG08 Rev.: 01 Page: 16 of 37

3.2.1 Define the input level for GSM/UMTS/LTE/WLAN/NR

- 1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx.the same level as for the 1kHz sine signal
- 2. The below calculation formula is an example and showing how to determine the input level for the device

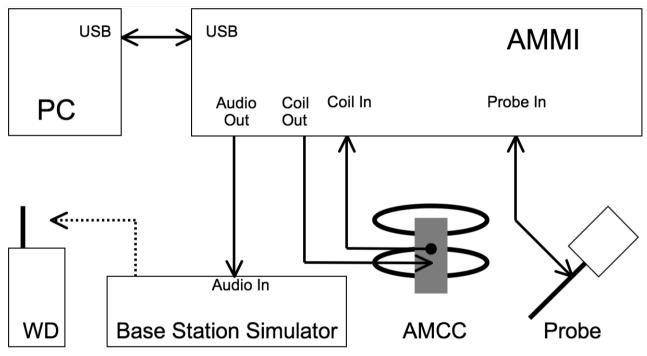


Fig. 2. T-coil signal measurement test setup

The predefined signal types have the following differences / factors compared to the 1kHz sine signal:

Signal [file name]	Duration [s]	Peak-to- RMS [dB]	RMS [dB]	Required gain factor *)	Gain setting
1kHz sine		3.0	0.0	1.00	
48k_1.025kHz_10s.wav	10	3.0	0.0	1.00	
48k_1kHz_3.15kHz_10s.wav	10	6.0	-3.0	1.42	
48k_315Hz_1kHz_10s.wav	10	6.0	-2.9	1.40	
48k_csek_8k_441_white_10s.wav	10	13.8	-10.5	3.34	
48k_multisine_50-5000_10s.wav	10	11.1	-7.9	2.49	
48k_voice_1kHz_1s.wav	1	16.2	-12.7	4.33	
48k_voice_300-3000_2s.wav	2	21.6	-18.6	8.48	

(*) The gain for the specific signal shall typically be multiplied by this factor to acheive approx. the same level as for the 1kHz sine signal.

Insert the gain applicable for your setup in the last column of the table.



overleaf, available on request or accessible at http://www.sgs.com subject to Terms and Conditions for Electronic Documents at http://www.sgs.com advised that information contained hereon reflects the Company's Client's instructions, if any. The Company's sole responsibility i transaction from exercising all their rights and obligations under except in full, without prior written approval of the Company. An appearance of this document is unlawful and offenders may be pro- results shown in this test report refer only to the sample(s) tested at	he Company subject to its General Conditions of Service printed en/Terms-and-Conditions.aspx and, for electronic format documents. .//www.sgs.com/an/Terms-and-Conditions/Terms-d-Document.aspx. Individual of the time of the servention only and within foe limits of to its Cilent and this document does not exonerate parties to a the transaction documents. This document does not exonerate parties to a the transaction document. forgery or faisification of the content or secuted to the fullest extent of the law. Longe only and within such as the time document does not exonerate parties to a the transaction document. This document does not exonerate parties to a secuted a distration, forgery or faisification of the content or secuted to the fullest extent of the law. Unless otherwise stated the d such sample(s) are relianed for 30 days only. t & certificate, please contact us at telephone: (86-755) 8307 1443,
South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone	215000 t (86–512) 62992980 www.sgsgroup.com.cn
中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编	215000 t (86–512) 62992980 sgs.china@sgs.com

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 17 of 37

				rage. It er	•		
Input Level for GSM/UMTS/VoLTE/VOWIFI/VONR							
Gain Value	dBm0	Full scal Voltage	dB	AMMI audio out dBv (RMS)	AMCC Coil Out (dBv (RMS)		
	3.14	1.5		0.55			
100	5.53		40	2.94	3.09		
8.39	-16		18.47		-18.44		
Signal Type	Duration (s)	Peak to RMS (dB)	RMS (dB)	Gain Factor	Gain Setting		
1kHz sine	-	3	0	1	8.39		
48k_voice_1kHz	1	15.74	-12.7	4.33	36.32		
48k_voice_300-3000	2	21.57	-18.6	8.48	71.13		

Define the input level for OTT

- 1. The Required gain factor for the specific signal shall typically be multiplied by this factor to achieve approx.the same level as for the 1kHz sine signal
- 2. The below calculation formula is an example and showing how to determine the input level for the device.

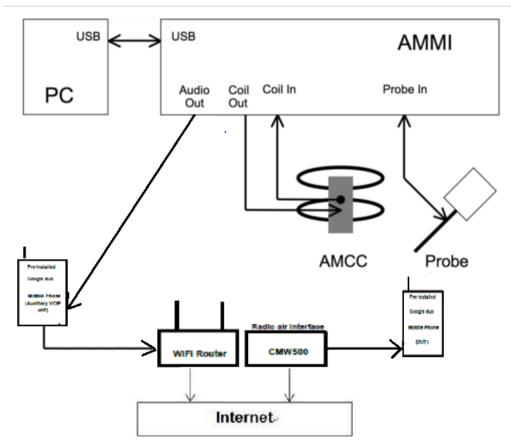


Fig. 2. T-coil signal measurement test setup





Report No.: SEWM2311000466RG08

Rev.: 01

- Page: 18 of 37
- #. Voice over Internet Protocol (VoIP) such as google duo application, also called IP telephony, is a methodology and group of technologies for the delivery of voice communications and multimedia sessions over Internet Protocol (IP) networks, such as the Internet. The terms Internet telephony, broadband telephony, and broadband phone service specifically refer to the provisioning of communications services (voice, fax, SMS, voice-messaging) over the public Internet, rather than via the public switched telephone network (PSTN)
- #. The Google DUO service support code and bitrate are list in section9, the customized Google DUO software is installed on a mobile phone which is used as the Auxiliary for the test. The software enables audio coding rate to be changed, and reports the input digital audio level before audio processing which can be used to calibrate the input audio level
- .#. This device comes with the preinstalled VoIP application that supports the Google DUO service and related codec. The test configuration establishes a call between the device under test and an auxiliary handset via the google DUO server
- #. The test setup used for Google DUO VoIP call is via the data application unit on the 2G/3G/4G/5G/WiFi simulate base station, connected to the internet via the google DUO serverr to the auxiliary device. The auxiliary device runs special software that allows the codecs and bit rate to be fixed to a specific value. Please refer to section9, an assessment was made of each of the different codec bit rates to determine the worst case for each of the different OTT transport (WiFi, LTE, GSM, WCDMA,NR)
- #. The auxiliary device includes software that displays the audio level in dBFS which allows calibration of the system to establish the -16dBm0 reference level. After establishing the voice call between auxiliary device and device under test the audio output from the AMMI is injected into the auxiliary device. The gain factor to establish a reference level of -16dBm0 for use during the test is determined as detailed in the next page based on the 0dBFull Scale (0dBFS) value being equivalent to 3.14dBm0.

Gain Value		20* log(gain)	* log(gain) AMCC Coil Out			Level	
(linear)		dB	dB (dBv RMS)			dBm0	
				0.533			3.14
10		20			-18.39		-15.78
9.75		19.78		-22.61			-16
Signal Type	Duratio (s)	n Peak to l (dB)	-	RMS (dB)	Gain Factor	G	ain Setting
1kHz sine	-	3	3 0		1		9.75
48k_voice_1kHz	1	15.74	15.74		4.33		42.23
48k_voice_300-3000	2	21.57	21.57		8.48		82.71

Input Level for OTT



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein, Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. Pfanr, No.1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 19 of 37

3.3 System Calibration

For correct and calibrated measurement of the voltages and ABM field, DASY will perform a calibration job as below.

In phase 1, the audio output is switched off, and a 200 mVpp symmetric rectangular signal of 1 kHz is generated and internally connected directly to both channels of the sampling unit (Coil in, Probe in).

In phase 2, the audio output is off, and a 20 mVpp symmetric 100 Hz signal is internally connected. The signals during phases 1 and 2 are available at the output on the rear panel of the AMMI. However, the output must not be loaded, in order to avoid influencing the calibration. An RMS voltmeter would indicate 100 mVRMS during the first phase and 10 mVRMS during the second phase. After the first two phases, the two input channels are both calibrated for absolute measurements of voltages. The resulting factors are displayed above the multi-meter window.

After phases 1 and 2, the input channels are calibrated to measure exact voltages. This is required to use the inputs for measuring voltages with their peak and RMS value.

In phase 3, a multi-sine signal covering each third-octave band from 50 Hz to 10 kHz is generated and applied to both audio outputs. The probe should be positioned in the center of the AMCC and aligned in the z-direction, the field orientation of the AMCC. The "Coil In" channel is measuring the voltage over the AMCC internal shunt, which is proportional to the magnetic field in the AMCC. At the same time, the "Probe In" channel samples the amplified

signal picked up by the probe coil and provides it to a numerical integrator. The ratio of the two voltages in each third-octave filter leads to the spectral representation over the frequency band of interest. The Coil signal is scaled in dBV, and the Probe signal is first integrated and normalized to show dB A/m. The ratio probe-to-coil at the frequency of 1 kHz is the sensitivity which will be used in the consecutive T-Coil jobs.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Co-comments</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Diless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing finspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. Pfanr, No.1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 20 of 37

3.4 Audio Magnetic Probe AM1DV3

Description	Active single sensor probe for both axial and radial measurement scans- Fully RF shielded, compatible with DAE, with adapted probe cup	1
Dynamic Range	0.1 KHz to 20 KHz	
Sensitivity	<-50dB A/m @ 1KHz	
Internal Amp	20dB	4
Dimensions	300X18mm	
		AM1DV3 Audio Probe

3.5 Test Arch

S

Description	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.	
Dimensions	length: 370 mm width: 370 mm height: 370 mm	Test Arch

3.6 Phone Holder

Supports accurate and reliable positioning of any phone Effect on near field <+/- 0.5 dB	
	Phone Holder



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indermification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forger or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)8307 1443,

South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 2150000


 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 21 of 37

3.7 AMCC- Audio Magnetic Calibration Coil

S

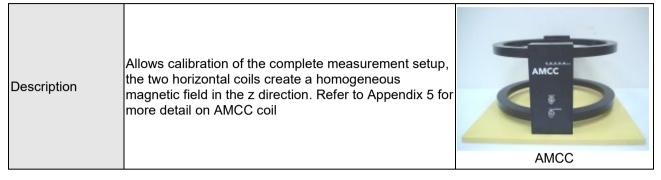

3.8 AMMI - Audio Magnetic Measurement Instrument

Description	-USB interface to PC - Probe signal digitization and power supply- Test signal generation for wireless device (via base station simulator)- Auto- calibration and interfaces to AMCC for complete setup-calibration	
Data Rate	48 KHz / 24bit	
Dynamic Range	85 dB	
Dimensions:	19" X 65 X 270mm	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are tested and such sample(s) are tested for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 2150000



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 22 of 37

4 Measurement uncertainty evaluation

Error Description	Uncertainty Value (%)	Probability Dist.	Divisor	ci ABM1	ci ABM2	Standard Uncertainty ABM1 (%)	Standard Uncertainty ABM2 (%)
Related to probe sensitivity							
Reference level	±3.0	R	$\sqrt{3}$	1	1	±3.0	±3.0
AMCC geometry	±0.4	R	$\sqrt{3}$	1	1	±0.2	±0.2
AMCC current	±0.6	R	$\sqrt{3}$	1	1	±0.4	±0.4
Probe positioning during calibration	±0.2	R	$\sqrt{3}$	1	1	±0.1	±0.1
Noise distribution	±0.7	R	$\sqrt{3}$	0.0143	1	±0.0	±0.4
Frequency slope	±5.9	R	$\sqrt{3}$	0.1	1	±0.3	±3.5
Related to probe system							
Repeatability / drift	±1.0	R	$\sqrt{3}$	1	1	±0.6	±0.6
Linearity / dynamic range	±0.6	Ν	1	1	1	±0.4	±0.4
Audio noise	±1.0	R	$\sqrt{3}$	0.1	1	±0.1	±0.6
Probe angle	±2.3	R	$\sqrt{3}$	1	1	±1.4	±1.4
Spectral Processing	±0.9	R	$\sqrt{3}$	1	1	±0.5	±0.5
Integration time	±0.6	N	1	1	5	±0.6	±3.0
Field distribution	±0.2	R	$\sqrt{3}$	1	1	±0.1	±0.1
Test signal							
Reference signal spectrum response	±0.6	R	$\sqrt{3}$	0	1	±0.0	±0.4
Positioning							
Probe positioning	±1.9	R	$\sqrt{3}$	1	1	±1.1	±1.1
Phantom Thickness	±0.9	R	$\sqrt{3}$	1	1	±0.5	±0.5
DUT positioning	±1.9	R	$\sqrt{3}$	1	1	±1.1	±1.1
External Contributions							
RF interference	±0.0	R	$\sqrt{3}$	1	0.3	±0.0	±0.0
Test Signal Variation	±2.0	R	$\sqrt{3}$	1	1	±1.2	±1.2
Combined Std. Uncertainty (ABM Field)		$u_c' = \sqrt{\sum_{i=1}^{20}}$		±4.1	±6.2		
Expanded Std. Uncertainty (K=2) Table 2: Measurem						±8.2	±12.4

Table 2: Measurement uncertainties for T-Coil



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is document is at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is document is document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company any unauthorized alteration, forgery or fasification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refor roly to the sample(s) test estimate for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CM.Doccheck@sgs.com"

South of No. P Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 23 of 37

5 HAC (T-Coil) Measurement

5.1 T-Coil Performance Requirements

In order to be rated for T-Coil use, a WD shall meet the requirements for signal level and signal quality contained in this part.

1) T-Coil coupling field intensity

When measured as specified in ANSI C63.19, the T-Coil signal shall be ≥ -18 dB (A/m) at 1 kHz, in a 1/3 octave band filter for all orientations.

2) Frequency response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. Figure 1 and Figure 2 provide the boundaries for the specified frequency.

These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

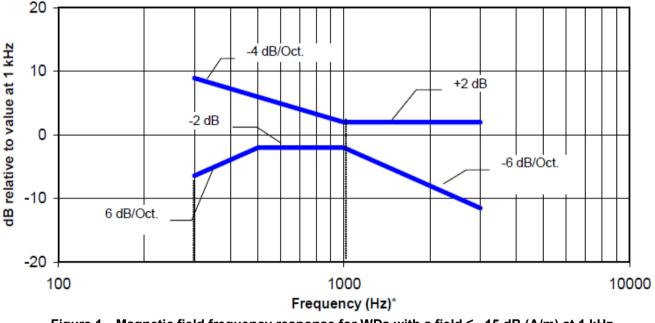


Figure 1—Magnetic field frequency response for WDs with a field ≤ –15 dB (A/m) at 1 kHz





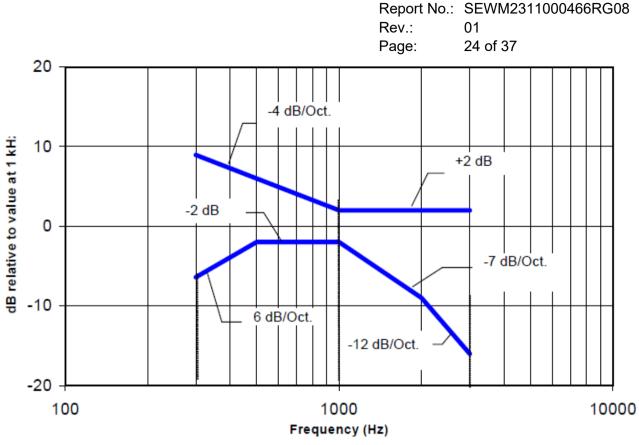



Figure 2 —Magnetic field frequency response for WDs with a field that exceeds -15dB(A/m) at 1 kHz

3) Signal quality

This part provides the signal quality requirement for the intended T-Coil signal from a WD. Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criteria that can be measured is the RF immunity in T-Coil mode. This is measured using the same procedure as for the audio coupling mode and at the same levels.

The worst signal quality of the three T-Coil signal measurements shall be used to determine the T-Coil mode category per Table 3

Category	Telephone parameters WD signal quality [(signal + noise) – to – noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein, Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extend for 30 days only. Attention: To check the authenticity of testing fingeection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South dNo. 6Pant, No. 1, Nunsheng Noad, Suzhou Industria Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业国区海胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 25 of 37

5.2 T-Coil measurement points and reference plane

Figure 3 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry. Please refer to Appendix C for the setup photographs.

- ♦ The area is 5 cm by 5 cm.
- The area is centered on the audio frequency output transducer of the EUT.

• The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.

• The measurement plane is parallel to, and 10 mm in front of, the reference plane.


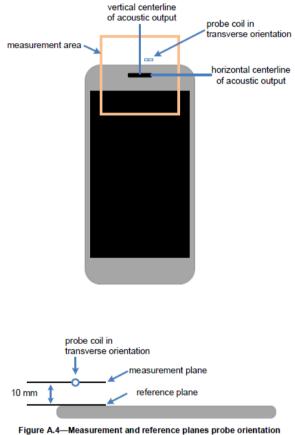


Figure A.4—Measurement and reference planes probe orientation for WD audio frequency magnetic field measurements

Figure 3 Axis and planes for WD audio frequency magnetic field measurements





5.3 T-Coil Measurement Procedure

According to ANSI C63.19-2019, section4:

This subclause describes the procedures used to measure the ABM (T-Coi) performance of the WD. Measurements shall be performed over a meastrement area 50 mm square, in the measurement plane, as specified in A.3. The measurement area shall be scanned with a uniform measurement point spacing of 2.0 mm \pm 0.5 mm in each X=Y axis of the plane, yielding 676 measurement points with approximately even spacing throughout the area.

Optionally, measurement point spacing may be inereased to 4 mm, with interpolation employed to yield the required 676 equivalent measurement points distributed uniformly over the 50 mm square measurement area. Interpolated points shall be derived from the average of the linear representations of the field strengths of the nearest two or four equidistant measured points. The area of measurement is increased to a 52 mm square so that edge rows and columns of the required 50 mm square can be either measured or interpolated with none extrapolated.

In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal shall be made at the same locations. Measurements shall not include undesired influence from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load might be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there could still be RF leakage from the WD, which could interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. Al measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 6.1. If the device display can be tumed off during a phone call, then that may be done during the measurement as well. If tested with the display in the off state this shall be documented in the test report.

Measurements shall be performed with the probe coil oriented in the transverse direction, aligned in the plane of the measurement area and perpendicular to the long dimension of the WD. A multi-stage sequence consists of first measuring the field strength of the desired T-Coil signal(desired ABM signal) that is useful to a hearing aid.

T-Coil at each specified measurement point. The undesired magnetic component (undesired ABM field) is then measured in the same transverse orientation at each of the same measurement point.

The following steps summarize the basic test flow for determining desired ABM signal and undesired ABM field. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of desired ABM signal level.

To minimize the need to test every WD operating mode to the telecoil requirements of Clause 6, it is permissible to exclude some subset of supported configurations. For a given WD, every mode that supports voice communication shall be considered for telecoil testing. However, if it can be demonstrated that a certain configuration will not be the worst-case telecoil configuration, such configurations may be excluded from the fall telecoil scans of 6.4.}4 For example, operating modes may be pre-screened by scanning for both desired ABM signal and udesired ABM field at a lower measurement point density than the final scans, thus saving considerable testing time by eliminating configurations that are excellent performers from more detailed testing for worst-case.

Many factors could affect telecoil test results. RF power level and amplitude modulation characteristics as well as the specific curent paths within the WD associated with the RF output stage(s), the display, and processing circuitry could affect the undesired ABM field. Audio codec implementation and acoustic receiver characteristies could also affect the desired ABM signal).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document company and be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) near estained for 30 days only. Attention: To check the authenticity of testing fungection.
or email: <u>CN.Doccheck@sgs.com</u>
South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86–512) 62992980 www.sgsgroup.com.cn

Soundrivo.eham, wo.1, kunsheng kasa, suzhou industria Hark, suzhou Area, china (Jangsu) Hiot Hee Hade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

SGS

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 27 of 37

6 T-Coil testing for CMRS Voice

6.1 General Description

1. Codec Investigation:

This clause describes the measurement of the baseband (audio frequency) magnetic T-Coil signal from a WD. The goal is to evaluate the size of the area where a user could position their WD relative to their hearing aid's telecoil and receive an acceptable magnetically coupled signal. Three quantities are measured and evaluated. The first is the field strength of the desired signal at the center of the audio band (desired ABM signal). The second is the frequency response of the desired signal measured across the audio band. The third is the field strength of the undesired audio band magnetic field.

2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface.

b. According to the ANSI C63.19 2019 section 6.3.4, test middle channel of each frequency band for HAC testing for each orientation to determine worst HAC T-Coil.

c. Opening the Hearing-aid can improve the HAC T-Coil performance of the earpiece.

6.2 GSM Tests Results

Codec Investigation:

Air Interface	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Frequency Response	Date
GSM850	Voice	190	AMR NB FR	278	444	PASS	2023-11-18
GSM850	Voice	190	EFR (FR V2)	276	441	PASS	2023-11-18
GSM850	Voice	190	AMR WB FR	275	438	PASS	2023-11-18

Remark: According to codec investigation, the worst codec is AMR WB FR

Air Interface Investigation:

Air Interface	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Frequency Response	Date
GSM850	Voice	190	AMR WB FR	275	438	PASS	2023/11/18
GSM1900	Voice	661	AMR WB FR	282	443	PASS	2023/11/18

Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditi</u>

South of No. Pfanr, No.1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 28 of 37

6.3 UMTS Tests Results

Codec Investigation:

S

Air Interface	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
WCDMA II	Voice	9400	AMR NB 4.75Kbps	508	676	26	26	PASS	2023/11/18
WCDMA II	Voice	9400	AMR WB 6.60Kbps	494	676	26	26	PASS	2023/11/18
WCDMA II	Voice	9400	AMR NB12.2Kbps	493	670	26	26	PASS	2023/11/18
WCDMA II	Voice	9400	AMR WB 23.85Kbps	473	656	26	26	PASS	2023/11/18

Remark: According to codec investigation, the worst codec is AMR WB 23.85Kbps

Air Interface Investigation:

	Air Interface	Modulation	Channel		Primary Group Contiguous Point Count	•	Secondary Group Max Longitudinal		Pasnansa	Date
	WCDMA II	Voice	9400	AMR WB 23.85Kbps	473	656	26	26	PASS	2023/11/18
	WCDMA V	Voice	4182	AMR WB 23.85Kbps	449	647	26	26	PASS	2023/11/18
1	Dense ender									

Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documentis at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, sadvised that information contained hereon reflects the Company s findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are tested for 30 days only. Attention: To Aboccheck&gs.sc.m.

South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 2150000



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 29 of 37

7 T-Coil testing for CMRS IP Voice

7.1 VoLTE/VONR Tests Results

1. Codec Investigation:

For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel / band, the following worst investigation codec would be remarked to be used for the testing for the handset.

2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands / channel / bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the handset.

b. Select LTE FDD one frequency band to do measurement at the worst Primary Group Contiguous Point Count position was additionally performed with varying the BWs/Modulations/RB size to verify the variation to find out worst configuration, the observed variation is very little to be within 1.5 dB which is much less than the margin from the rating threshold.

Air Interface	BW (MHz)	Modulation	RB Size	RB offset	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
LTE Band2	20	QPSK	1	0	18900	AMR NB 4.75Kbps	454	623	26	26	PASS	2023/11/22
LTE Band2	20	QPSK	1	0	18900	AMR NB 12.2Kbps	481	645	26	26	PASS	2023/11/22
LTE Band2	20	QPSK	1	0	18900	AMR WB 6.60Kbps	478	643	26	26	PASS	2023/11/22
LTE Band2	20	QPSK	1	0	18900	AMR WB 23.85Kbps	483	651	26	26	PASS	2023/11/22
LTE Band2	20	QPSK	1	0	18900	EVS WB 5.9Kbps	466	639	26	26	PASS	2023/11/22
LTE Band2	20	QPSK	1	0	18900	EVS WB 13.2Kbps	470	642	26	26	PASS	2023/11/22
LTE Band2	20	QPSK	1	0	18900	EVS NB 5.9Kbps	471	642	26	26	PASS	2023/11/22
LTE Band2	20	QPSK	1	0	18900	EVS NB 13.2Kbps	453	625	26	26	PASS	2023/11/22
LTE Band2	20	QPSK	50	0	18900	EVS NB 13.2Kbps	462	633	26	26	PASS	2023/11/22
LTE Band2	20	QPSK	100	0	18900	EVS NB 13.2Kbps	473	644	26	26	PASS	2023/11/22
LTE Band2	20	16QAM	1	0	18900	EVS NB 13.2Kbps	472	643	26	26	PASS	2023/11/22
LTE Band2	20	64QAM	1	0	18900	EVS NB 13.2Kbps	474	646	26	26	PASS	2023/11/22
LTE Band2	20	256QAM	1	0	18900	EVS NB 13.2Kbps	461	633	26	26	PASS	2023/11/22
LTE Band2	15	QPSK	1	0	18900	EVS NB 13.2Kbps	458	633	26	26	PASS	2023/11/22
LTE Band2	10	QPSK	1	0	18900	EVS NB 13.2Kbps	470	632	26	26	PASS	2023/11/22
LTE Band2	5	QPSK	1	0	18900	EVS NB 13.2Kbps	484	643	26	26	PASS	2023/11/22
LTE Band2	3	QPSK	1	0	18900	EVS NB 13.2Kbps	483	648	26	26	PASS	2023/11/22
LTE Band2	1.4	QPSK	1	0	18900	EVS NB 13.2Kbps	478	642	26	26	PASS	2023/11/22

LTE FDD Codec Investigation:

Remark:

1. Select Worst worst codec Bandwidth/Modulation/RB Size from LTE FDD Test results to do LTE FDD

2. Select Worst Bandwidth/Modulation/RB Size from LTE FDD Test results to do LTE FDD

3. According to codec investigation, the worst codec is **EVS NB 13.2Kbps**



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Condita</u>

South of No. P Fant, No.1, Runsheng Read, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 30 of 37

Air interface: Primary Secondary Group Secondary Secondary Group RW RB RB Frequency Air Interface Modulation Channel Codec Contiguous Contiguous Group Max Group Max Date (MHz) Size offset Response Point Point Longitudinal Transverse Count Count QPSK 18900 EVS NB 13.2Kbps PASS LTE Band2 20 1 0 453 625 26 26 2023/11/23 LTE Band4 QPSK 1 0 26 26 PASS 2023/11/23 20 20175 EVS NB 13.2Kbps 312 476 LTE Band5 10 QPSK 1 0 20525 EVS NB 13.2Kbps 488 650 26 26 PASS 2023/11/23 QPSK 26 2023/11/23 LTE Band12 10 1 0 23095 EVS NB 13.2Kbps 138 647 26 PASS LTE Band14 QPSK 1 0 23330 EVS NB 13.2Kbps 138 630 26 26 PASS 2023/11/23 10 QPSK PASS 2023/11/23 LTE Band17 10 1 0 23790 EVS NB 13.2Kbps 138 630 26 26 PASS QPSK 26865 EVS NB 13.2Kbps LTE Band26 15 1 0 462 649 26 26 2023/11/23 LTE Band30 10 QPSK 0 27710 EVS NB 13.2Kbps 459 646 26 26 PASS 2023/11/23 1 LTE Band66 20 QPSK 0 132322 EVS NB 13.2Kbps 453 644 26 26 PASS 2023/11/23 1 LTE Band71 20 QPSK 1 0 133297 EVS NB 13.2Kbps 460 650 26 26 PASS 2023/11/23

Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A

LTE TDD Codec Investigation:

Air Interface	BW (MHz)	Modulation	RB Size	RB offset	Channel	UL-DL Configuration	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Poenoneo	Date
LTE Band48	20	QPSK	1	0	55990	0	AMR NB 4.75Kbps	405	500	22	26	PASS	2023/11/26
LTE Band48	20	QPSK	1	0	55990	0	AMR NB 12.2Kbps	407	500	22	26	PASS	2023/11/26
LTE Band48	20	QPSK	1	0	55990	0	AMR WB 6.6Kbps	407	500	22	26	PASS	2023/11/26
LTE Band48	20	QPSK	1	0	55990	0	AMR WB 23.85Kbps	307	398	19	26	PASS	2023/11/26
LTE Band48	20	QPSK	1	0	55990	0	EVS NB 5.9Kbps	286	396	19	26	PASS	2023/11/26
LTE Band48	20	QPSK	1	0	55990	0	EVS NB 13.2Kbps	410	501	22	26	PASS	2023/11/26
LTE Band48	20	QPSK	1	0	55990	0	EVS WB 5.9Kbps	290	402	19	26	PASS	2023/11/26
LTE Band48	20	QPSK	1	0	55990	0	EVS WB 13.2Kbps	315	402	19	26	PASS	2023/11/26
LTE Band48	20	QPSK	50	0	55990	0	EVS NB 5.9Kbps	314	411	20	26	PASS	2023/11/26
LTE Band48	20	QPSK	100	0	55990	0	EVS NB 5.9Kbps	302	404	19	26	PASS	2023/11/26
LTE Band48	20	16QAM	1	0	55990	0	EVS NB 5.9Kbps	312	413	20	26	PASS	2023/11/26
LTE Band48	20	64QAM	1	0	55990	0	EVS NB 5.9Kbps	314	415	20	26	PASS	2023/11/26
LTE Band48	20	256QAM	1	0	55990	0	EVS NB 5.9Kbps	311	413	20	26	PASS	2023/11/26
LTE Band48	15	QPSK	1	0	55990	0	EVS NB 5.9Kbps	288	393	19	26	PASS	2023/11/26
LTE Band48	10	QPSK	1	0	55990	0	EVS NB 5.9Kbps	297	405	19	26	PASS	2023/11/26
LTE Band48	5	QPSK	1	0	55990	0	EVS NB 5.9Kbps	299	411	20	26	PASS	2023/11/26

Remark:

1. Select Worst worst codec Bandwidth/Modulation/RB Size from LTE TDD Test results to do LTE TDD

2. Select Worst Bandwidth/Modulation/RB Size from LTE TDD Test results to do LTE TDD

3. According to codec investigation, the worst codec is **NB EVS 5.90kbps**

LTE TDD Air interface:

Air Interface	BW (MHz)	Modulation	RB Size	RB offset	Channel	UL-DL Configuration	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
LTE Band48	20	QPSK	1	0	55990	0	EVS NB 5.9Kbps	286	396	19	26	PASS	2023/11/26

Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditi</u>

South of No. P Part, No.1, Runsherg Road, Starbui Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 31 of 37

FR1 NR Codec Investigation:

S

Air Interface	BW (MHz)	Modulation	RB Size	RB offset	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	AMR NB 4.75Kbps	177	323	18	26	PASS	2023/12/23
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	AMR NB 12.2Kbps	180	322	18	26	PASS	2023/12/23
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	AMR WB 6.6Kbps	152	322	18	26	PASS	2023/12/23
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	AMR WB 23.85Kbps	153	315	17	26	PASS	2023/12/23
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	EVS NB 5.9Kbps	158	324	19	26	PASS	2023/12/23
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	EVS NB 13.2Kbps	202	339	18	26	PASS	2023/12/23
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	EVS WB 5.9Kbps	144	332	18	26	PASS	2023/12/23
FR1 n77	100	DFT-s-OFDM QPSK	1	1	656000	EVS WB 13.2Kbps	188	337	18	26	PASS	2023/12/23
FR1 n77	100	DFT-s-OFDM QPSK	50	0	656000	EVS WB 5.9Kbps	152	334	18	26	PASS	2023/12/23
FR1 n77	100	DFT-s-OFDM QPSK	100	0	656000	EVS WB 5.9Kbps	163	343	18	26	PASS	2023/12/23
FR1 n77	100	DFT-s-OFDM 16QAM	1	1	656000	EVS WB 5.9Kbps	146	332	18	26	PASS	2023/12/23
FR1 n77	100	DFT-s-OFDM 64QAM	1	1	656000	EVS WB 5.9Kbps	146	331	18	26	PASS	2023/12/23
FR1 n77	100	DFT-s-OFDM 256QAM	1	1	656000	EVS WB 5.9Kbps	194	378	19	26	PASS	2023/12/23
FR1 n77	100	DFT-PI/2 BPSK	1	1	656000	EVS WB 5.9Kbps	175	359	19	26	PASS	2023/12/23
FR1 n77	100	CP-OFDM QPSK	1	1	656000	EVS WB 5.9Kbps	165	354	19	26	PASS	2023/12/23
FR1 n77	90	DFT-s-OFDM QPSK	1	1	656000	EVS WB 5.9Kbps	174	358	19	26	PASS	2023/12/23
FR1 n77	80	DFT-s-OFDM QPSK	1	1	656000	EVS WB 5.9Kbps	176	356	19	26	PASS	2023/12/23
FR1 n77	60	DFT-s-OFDM QPSK	1	1	656000	EVS WB 5.9Kbps	170	355	19	26	PASS	2023/12/23
FR1 n77	50	DFT-s-OFDM QPSK	1	1	656000	EVS WB 5.9Kbps	160	354	19	26	PASS	2023/12/23
FR1 n77	40	DFT-s-OFDM QPSK	1	1	656000	EVS WB 5.9Kbps	152	335	18	26	PASS	2023/12/23
FR1 n77	20	DFT-s-OFDM QPSK	1	1	656000	EVS WB 5.9Kbps	148	334	18	26	PASS	2023/12/23
FR1 n77	15	DFT-s-OFDM QPSK	1	1	656000	EVS WB 5.9Kbps	159	343	18	26	PASS	2023/12/23
FR1 n77	10	DFT-s-OFDM QPSK	1	1	656000	EVS WB 5.9Kbps	163	355	18	26	PASS	2023/12/23
FR1 n2	5	DFT-s-OFDM QPSK	1	1	376000	EVS WB 5.9Kbps	425	672	26	26	PASS	2023/12/23

Remark:

1. Select Worst worst codec Bandwidth/Modulation/RB Size from FR1 NR Test results to do FR1 NR

2. Select Worst Bandwidth/Modulation/RB Size from FR1 NR Test results to do FR1 NR

3. According to codec investigation, the worst codec is EVS WB 5.9Kbps



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documentis at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, sadvised that information contained hereon reflects the Company s findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are tested for 30 days only. Attention: To Aboccheck&gs.sc.m.

South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 2150000



VONR Air interface:

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 32 of 37

Air Interface	BW (MHz)	Modulation	RB Size	RB offset	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
FR1 n2	20	DFT-s- OFDM QPSK	1	1	376000	EVS WB 5.9Kbps	393	650	26	26	PASS	2023/12/24
FR1 n5	20	DFT-s- OFDM QPSK	1	1	167300	EVS WB 5.9Kbps	410	676	26	26	PASS	2023/12/24
FR1 n25	20	DFT-s- OFDM QPSK	1	1	376500	EVS WB 5.9Kbps	417	673	26	26	PASS	2023/12/24
FR1 n26	20	DFT-s- OFDM QPSK	1	1	166300	EVS WB 5.9Kbps	341	675	26	26	PASS	2023/12/24
FR1 n30	10	DFT-s- OFDM QPSK	1	1	462000	EVS WB 5.9Kbps	419	674	26	26	PASS	2023/12/24
FR1 n41	20	DFT-s- OFDM QPSK	1	1	518598	EVS WB 5.9Kbps	138	324	18	26	PASS	2023/12/24
FR1 n48	20	DFT-s- OFDM QPSK	1	1	641666	EVS WB 5.9Kbps	266	458	21	26	PASS	2023/12/24
FR1 n66	20	DFT-s- OFDM QPSK	1	1	349000	EVS WB 5.9Kbps	402	655	26	26	PASS	2023/12/24
FR1 n70	15	DFT-s- OFDM QPSK	1	1	340500	EVS WB 5.9Kbps	435	655	26	26	PASS	2023/12/24
FR1 n71	20	DFT-s- OFDM QPSK	1	1	136100	EVS WB 5.9Kbps	449	676	26	26	PASS	2023/12/24

Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documentis at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, sadvised that information contained hereon reflects the Company s findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are tested for 30 days only. Attention: To Aboccheck&gs.sc.m.

South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 2150000



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 33 of 37

7.2 VoWiFi Tests Results

1. Codec Investigation:

For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel/band, the following worst investigation codec would be remarked to be used for the testing for the handset.

2. Air Interface Investigation:

a. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface and the following worst configure would be remarked to be used for the testing for the handset.

b. Select WLAN 2.4GHz and WLAN5GHz one frequency band to do measurement at the worst Primary Group Contiguous Point Count position was additionally performed with varying the BWs/Modulations/data rate to verify the variation to find out worst configuration, the observed variation is very little to be within 1 dB which is much less than the margin from the rating threshold.

Air Interface	BW (MHz)	Modulation	Channel	Codec	Primary Group Contiguous Point Count		Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
802.11b	20	1M	6	AMR NB 4.75Kbps	283	443	23	26	PASS	2023/12/26
802.11b	20	1M	6	AMR WB 6.60Kbps	315	476	26	26	PASS	2023/12/26
802.11b	20	1M	6	AMR NB12.2Kbps	300	456	26	26	PASS	2023/12/26
802.11b	20	1M	6	AMR WB 23.85Kbps	293	455	25	26	PASS	2023/12/26
802.11b	20	1M	6	EVS WB 5.9Kbps	379	562	26	26	PASS	2023/12/26
802.11b	20	1M	6	EVS WB 13.2Kbps	327	506	24	26	PASS	2023/12/26
802.11b	20	1M	6	EVS NB 5.9Kbps	319	502	26	26	PASS	2023/12/26
802.11b	20	1M	6	EVS NB 13.2Kbps	322	504	26	26	PASS	2023/12/26
802.11b	20	11M	6	AMR NB 4.75Kbps	327	506	24	26	PASS	2023/12/26
802.11g	20	6M	6	AMR NB 4.75Kbps	139	429	26	26	PASS	2023/12/26
802.11g	20	54M	6	AMR NB 4.75Kbps	221	473	26	26	PASS	2023/12/26
802.11n-HT20	20	MCS0	6	AMR NB 4.75Kbps	428	656	26	26	PASS	2023/12/26
802.11n-HT20	20	MCS7	6	AMR NB 4.75Kbps	134	426	26	26	PASS	2023/12/26
802.11n-HT40	40	MCS0	6	AMR NB 4.75Kbps	282	546	26	26	PASS	2023/12/26
802.11n-HT40	40	MCS7	6	AMR NB 4.75Kbps	335	554	26	26	PASS	2023/12/26
802.11a	20	6M	40	AMR NB 4.75Kbps	149	369	18	26	PASS	2023/12/26
802.11a	20	54M	40	AMR NB 4.75Kbps	150	371	19	26	PASS	2023/12/26
802.11n-HT20	20	MCS0	40	AMR NB 4.75Kbps	142	362	18	26	PASS	2023/12/26
802.11n-HT20	20	MCS7	40	AMR NB 4.75Kbps	150	370	19	26	PASS	2023/12/26
802.11n-HT40	40	MCS0	38	AMR NB 4.75Kbps	261	481	26	26	PASS	2023/12/26
802.11n-HT40	40	MCS7	38	AMR NB 4.75Kbps	219	436	22	26	PASS	2023/12/26
802.11ac-VHT20	20	MCS0	40	AMR NB 4.75Kbps	211	431	21	26	PASS	2023/12/26
802.11ac-VHT20	20	MCS7	40	AMR NB 4.75Kbps	221	440	22	26	PASS	2023/12/26
802.11ac-VHT40	40	MCS0	38	AMR NB 4.75Kbps	255	474	25	26	PASS	2023/12/26
802.11ac-VHT40	40	MCS7	38	AMR NB 4.75Kbps	256	478	25	26	PASS	2023/12/26
802.11ac-VHT80	80	MCS0	42	AMR NB 4.75Kbps	253	473	25	26	PASS	2023/12/26
802.11ac-VHT80	80	MCS7	42	AMR NB 4.75Kbps	251	470	25	26	PASS	2023/12/26

Remark:

1. According to codec investigation, the worst codec is NB AMR 4.75kbps

2. According to codec investigation, WiFi 2.4G the worst codec is 802.11n-HT20 MCS7, WiFi 5G the worst codec is 802.11n-HT20 MCS0



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions. Terms-and-Conditions for Electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions. Terms-and-Conditions for Electronic Document aspx. Attention is sues defined therein. Any holder of this document is advised that information contained hereon reflects the Company s findings at the time of its intervention only and within the limits of Clients' instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company nay nualthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulleest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. P Part, No.1, Runsherg Road, Starbui Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 34 of 37

Air interface:

Air Interface	BW (MHz)	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Contiguous	Secondary Group Max Longitudinal	Croup mux	Docnonco	Date
802.11n-HT20	20	MCS7	6	AMR NB 4.75Kbps	134	426	26	26	PASS	2023/12/27
802.11ac-VHT20	20	MCS0	40	AMR NB 4.75Kbps	211	431	21	26	PASS	2023/12/27
802.11n-HT20	20	MCS0	56	AMR NB 4.75Kbps	213	432	21	26	PASS	2023/12/27
802.11n-HT20	20	MCS0	116	AMR NB 4.75Kbps	236	455	22	26	PASS	2023/12/27
802.11n-HT20	20	MCS0	157	AMR NB 4.75Kbps	221	441	21	26	PASS	2023/12/27

Remark:

1. Phone Condition: Air Link; Hearing-aid on; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documentis at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, sadvised that information contained hereon reflects the Company s findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are tested for 30 days only. Attention: To Aboccheck&gs.sc.m.

South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 2150000



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 35 of 37

7.3 T-Coil testing for OTT VoIP Application

1. The Google Duo only support OPUS audio codec and support 6kbps to 75kbps bitrate.

2. The test setup used for OTT VoIP call is the DUT connect to the CMW500/CMX500 and via the data application unit on CMW500/CMX500 connection to the Internet, the Auxiliary EUT is connected to the WiFi access point, the channel/Modulation/Frequency bands/data rate is configured on the CMW500/CMX500 for the DUT unit. For the Auxiliary VoIP unit which is used to configure the audio codec rate and determine the audio. 3. Codec Investigation: For a voice service/air interface, investigate the variations of codec configurations (WB, NB bit rate) and document the parameters for that voice service. It is only necessary to document this for one channel/band, the following tests results which the worst-case codec would be remarked to be used for the testing for the handset.

4. Use the worst-case codec test and document a limited set of bands/channel/bandwidths. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations. Using the knowledge of the observed variations, it is necessary to report only a set band/channel/bandwidth for each orientation for a voice service/air interface.

Air interface:

GS	M	:

Air Interface	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
GSM850	EDGE	190	OPUS 6kbps	340	407	19	26	PASS	2024/01/13
GSM850	EDGE	190	OPUS 40kbps	356	415	19	26	PASS	2024/01/13
GSM850	EDGE	190	OPUS 75kbps	351	412	19	26	PASS	2024/01/13

WCDMA:

Air Interface	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
WCDMA V	HSPA	4182	OPUS 6kbps	569	641	26	26	PASS	2024/01/13
WCDMA V	HSPA	4182	OPUS 40kbps	577	649	26	26	PASS	2024/01/13
WCDMA V	HSPA	4182	OPUS 75kbps	571	644	26	26	PASS	2024/01/13

FDD LTE:

Air Interface	BW (MHz)	Modulation	RB Size	RB offset	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal		Frequency	Date
LTE Band14	10	QPSK	1	0	23330	OPUS 6kbps	585	658	26	26	PASS	2024/01/16
LTE Band14	10	QPSK	1	0	23330	OPUS 40kbps	589	659	26	26	PASS	2024/01/16
LTE Band14	10	QPSK	1	0	23330	OPUS 75kbps	607	660	26	26	PASS	2024/01/16

TDD LTE:

Air Interface	BW (MHz)	Modulation	RB Size	RB offset	Channel	UL-DL Configuration	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
LTE Band48	20	QPSK	1	0	55990	0	OPUS 6kbps	348	410	20	26	PASS	2024/01/20
LTE Band48	20	QPSK	1	0	55990	0	OPUS 40kbps	355	420	20	26	PASS	2024/01/20
LTE Band48	20	QPSK	1	0	55990	0	OPUS 75kbps	359	421	20	26	PASS	2024/01/20



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditi</u>

South of No. P Part, No.1, Runsheng Road, Stanbur Industrial Park, Suzhou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国・苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 単编: 215000



 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 36 of 37

FR1 NR:

Air Interface	BW (MHz)	Modulation	RB Size	RB offset	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
FR1 n41	20	DFT-s- OFDM QPSK	1	1	518598	OPUS 6kbps	342	407	20	26	PASS	2024/01/26
FR1 n41	20	DFT-s- OFDM QPSK	1	1	518598	OPUS 40kbps	356	416	20	26	PASS	2024/01/26
FR1 n41	20	DFT-s- OFDM QPSK	1	1	518598	OPUS 75kbps	348	411	20	26	PASS	2024/01/26

WIFI:

Air Interface	BW (MHz)	Modulation	Channel	Codec	Primary Group Contiguous Point Count	Secondary Group Contiguous Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Frequency Response	Date
802.11n-HT20	20	MCS7	6	OPUS 6kbps	581	650	26	26	PASS	2024/01/21
802.11n-HT20	20	MCS7	6	OPUS 40kbps	588	653	26	26	PASS	2024/01/21
802.11n-HT20	20	MCS7	6	OPUS 75kbps	587	659	26	26	PASS	2024/01/21
802.11n-HT20	20	MCS0	40	OPUS 6kbps	574	645	26	26	PASS	2024/01/21
802.11n-HT20	20	MCS0	40	OPUS 40kbps	588	652	26	26	PASS	2024/01/21
802.11n-HT20	20	MCS0	40	OPUS 75kbps	590	653	26	26	PASS	2024/01/21

Remark:

1. Phone Condition: Air Link; Mute on; Backlight off; Max Volume

2. The detail frequency response results please refer to appendix A.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are tested of or 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Doccheck@sgs.com

South of No. P Park, No.1, Runsheng Road, Suchou Industria Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区测胜路1号的6号厂房南部 邮编: 2150000

 Report No.:
 SEWM2311000466RG08

 Rev.:
 01

 Page:
 37 of 37

8 Equipment list

S

	Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration	
\square	Software	SPEAG	DASY8	NA	NCR	NCR	
\square	DAE	SPEAG	DAE4	1484	2023-06-05	2024-06-04	
	Audio Magnetic 1D Field Probe	SPEAG	AM1DV3	3115	2023-06-13	2024-06-12	
\square	Test Arch SD HAC	SPEAG	NA	NA	NCR	NCR	
	Audio Magnetic Measuring Instrument	SPEAG	AMMI	1028	NCR	NCR	
\boxtimes	Audio Magnetic	SPEAG	AMCC	1143	N/A	N/A	
	Universal Radio Communication Tester	R&S	CMW500	111637	2023-09-13	2024-09-12	
	RADIO COMMUNICATION TESTR	R&S	CMX500	101930	2023-02-08	2024-02-07	
	Humidity and Temperature Indicator	MingGao	MingGao	NA	2023-06-15	2024-06-14	

Note:

1. All the equipments are within the valid period when the tests are performed.

2. NCR: "No-Calibration Required".

9 Calibration certificate

Please see the Appendix B

10 Photographs

Please see the Appendix C

Appendix A: Detailed Test Results

Appendix B: Calibration certificate

Appendix C: Photographs





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.rems-a-Document.aspx</u>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are tested of or 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM.Occcheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Stuchou Industrial Park, Stuchou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000