

# FCC Radio Test Report

## FCC ID: XMR2022SC262RWF

This report concerns: Original Grant

**Project No.** : 2204H021  
**Equipment** : Smart Module  
**Brand Name** : Quectel  
**Test Model** : SC262R-WF  
**Series Model** : N/A  
**Applicant** : Quectel Wireless Solutions Co., Ltd  
**Address** : Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233  
**Manufacturer** : Quectel Wireless Solutions Co., Ltd  
**Address** : Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, China 200233  
**Date of Receipt** : May 20, 2022  
**Date of Test** : May 24, 2022~Jun. 08, 2022  
**Issued Date** : Jun. 29, 2022  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: SH2022052370 for radiated, SH2022052371 for conducted.  
**Standard(s)** : FCC CFR Title 47, Part 15, Subpart E  
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01  
ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Maker Qi

Prepared by : Maker Qi

Ryan Wang

Approved by : Ryan Wang



TESTING CERT #5123.03

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China

TEL: +86-021-61765666

Web: www.newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>REPORT ISSUED HISTORY</b>	<b>5</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
<b>2 . GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 TEST MODES	10
2.3 PARAMETERS OF TEST SOFTWARE	13
2.4 DUTY CYCLE	15
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	17
2.6 SUPPORT UNITS	17
<b>3 . AC POWER LINE CONDUCTED EMISSIONS</b>	<b>18</b>
3.1 LIMIT	18
3.2 TEST PROCEDURE	18
3.3 DEVIATION FROM TEST STANDARD	18
3.4 TEST SETUP	19
3.5 EUT OPERATION CONDITIONS	19
3.6 TEST RESULTS	19
<b>4 . RADIATED EMISSIONS</b>	<b>20</b>
4.1 LIMIT	20
4.2 TEST PROCEDURE	21
4.3 DEVIATION FROM TEST STANDARD	22
4.4 TEST SETUP	22
4.5 EUT OPERATION CONDITIONS	23
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	23
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	23
4.8 TEST RESULTS - ABOVE 1000 MHZ	23
<b>5 . BANDWIDTH</b>	<b>24</b>
5.1 LIMIT	24
5.2 TEST PROCEDURE	24
5.3 DEVIATION FROM STANDARD	24
5.4 TEST SETUP	25

<b>Table of Contents</b>	<b>Page</b>
5.5 EUT OPERATION CONDITIONS	25
5.6 TEST RESULTS	25
<b>6 . MAXIMUM OUTPUT POWER</b>	<b>26</b>
6.1 LIMIT	26
6.2 TEST PROCEDURE	26
6.3 DEVIATION FROM STANDARD	26
6.4 TEST SETUP	26
6.5 EUT OPERATION CONDITIONS	26
6.6 TEST RESULTS	26
<b>7 . POWER SPECTRAL DENSITY</b>	<b>27</b>
7.1 LIMIT	27
7.2 TEST PROCEDURE	27
7.3 DEVIATION FROM STANDARD	27
7.4 TEST SETUP	28
7.5 EUT OPERATION CONDITIONS	28
7.6 TEST RESULTS	28
<b>8 . MEASUREMENT INSTRUMENTS LIST</b>	<b>29</b>
<b>9 . EUT TEST PHOTOS</b>	<b>31</b>
<b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>	<b>35</b>
<b>APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ</b>	<b>38</b>
<b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b>	<b>39</b>
<b>APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ</b>	<b>42</b>
<b>APPENDIX E - BANDWIDTH</b>	<b>165</b>
<b>APPENDIX F - MAXIMUM OUTPUT POWER</b>	<b>182</b>
<b>APPENDIX G - POWER SPECTRAL DENSITY</b>	<b>188</b>

**REPORT ISSUED HISTORY**

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2204H021	R00	Original Report	Jun. 29, 2022	Valid

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	N/A	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
  - Outdoor access point device
  - Indoor access point device
  - Fixed point-to-point access points device
  - Client device

### 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China

BTL's Registration Number for FCC: 476765

BTL's Designation Number for FCC: CN1241

### 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

#### A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
SH-C01	CISPR	150 kHz ~ 30 MHz	2.64

#### B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
SH-CB02	CISPR	9 KHz~30 MHz	-	2.16
		30 MHz~200 MHz	V	4.04
		30 MHz~200 MHz	H	2.90
		200 MHz~1,000 MHz	V	3.76
		200 MHz~1,000 MHz	H	3.82
		1GHz ~ 6GHz	-	4.56
		6GHz ~ 18GHz	-	4.14
		18 ~ 26.5 GHz	-	3.48
		26.5 ~ 40 GHz	-	3.64

#### C. Conducted test:

Parameter	U
Output Power	±0.95 dB
Occupied Channel Bandwidth	±3.8 %
Power Spectral Density	±0.86 dB
Temperature	±0.08 °C
Humidity	±1.5 %
Supply voltages	±0.3 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	22°C	54%	AC 120V/60Hz	Joven Xiong
Radiated Emissions-9kHz to 30MHz	24°C	58%	AC 120V/60Hz	Jane Wang
Radiated Emissions-30MHz to 1000MHz	24°C	58%	AC 120V/60Hz	Jane Wang
Radiated Emissions-Above 1000 MHz	24°C	58%	AC 120V/60Hz	Jane Wang
Bandwidth	28°C	34%	AC 120V/60Hz	Forest Li
Maximum Output Power	28°C	34%	AC 120V/60Hz	Forest Li
Power Spectral Density	28°C	34%	AC 120V/60Hz	Forest Li

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Module
Brand Name	Quectel
Test Model	SC262R-WF
Series Model	N/A
Model Difference(s)	N/A
Software Version	N/A
Hardware Version	R1.0
Power Source	DC Voltage supplied from AC/DC adapter. Model: P12F050200
Power Rating	I/P: 100-240V ~ 50/60Hz 0.3A O/P: 5.0V $\overline{\text{---}}$ 2.0A
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 150 Mbps IEEE 802.11ac: up to 433.3 Mbps
Maximum Output Power _UNII-1	IEEE 802.11a: 12.76 dBm (0.0189 W)
Maximum Output Power _UNII-2A	IEEE 802.11a: 12.81 dBm (0.0191 W)
Maximum Output Power _UNII-2C	IEEE 802.11n40: 12.84 dBm (0.0192 W)
Maximum Output Power _UNII-3	IEEE 802.11n20: 12.95 dBm (0.0197 W)

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



## 2. Channel List:


IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

## 3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	 圣丹纳 SAINTENNA	SAA31578A	Dipole	SMA-J	1.28

Note:

The antenna gain is provided by the manufacturer.

**2.2 TEST MODES**

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 8	TX N(HT20) Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX N(HT40) Mode Channel 54/62 (UNII-2A)
Mode 10	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 11	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 12	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 13	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 14	TX N(HT20) Mode Channel 100/116/140 (UNII-2C)
Mode 15	TX N(HT40) Mode Channel 102/110/134 (UNII-2C)
Mode 16	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 17	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 18	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 19	TX A Mode Channel 149/157/165 (UNII-3)
Mode 20	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 21	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 22	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 23	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 24	TX AC(VHT80) Mode Channel 155 (UNII-3)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

<b>AC power line conducted emissions test</b>	
Final Test Mode	Description
Mode 20	TX N(HT20) Mode Channel 165 (UNII-3)

<b>Radiated Emissions Test - Below 1GHz</b>	
Final Test Mode	Description
Mode 20	TX N(HT20) Mode Channel 165 (UNII-3)

<b>Radiated Emissions Test - Above 1GHz</b>	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 8	TX N(HT20) Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX N(HT40) Mode Channel 54/62 (UNII-2A)
Mode 12	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 13	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 14	TX N(HT20) Mode Channel 100/116/140 (UNII-2C)
Mode 15	TX N(HT40) Mode Channel 102/110/134 (UNII-2C)
Mode 18	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 19	TX A Mode Channel 149/157/165 (UNII-3)
Mode 20	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 21	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 24	TX AC(VHT80) Mode Channel 155 (UNII-3)

Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 8	TX N(HT20) Mode Channel 52/60/64 (UNII-2A)
Mode 9	TX N(HT40) Mode Channel 54/62 (UNII-2A)
Mode 10	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 11	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 12	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 13	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 14	TX N(HT20) Mode Channel 100/116/140 (UNII-2C)
Mode 15	TX N(HT40) Mode Channel 102/110/134 (UNII-2C)
Mode 16	TX AC(VHT20) Mode Channel 100/116/140 (UNII-2C)
Mode 17	TX AC(VHT40) Mode Channel 102/110/134 (UNII-2C)
Mode 18	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 19	TX A Mode Channel 149/157/165 (UNII-3)
Mode 20	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 21	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 22	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 23	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 24	TX AC(VHT80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX N(HT20) Mode Channel 165 (UNII-3) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (4) The measurements for Output Power are tested, the worst case are IEEE 802.11a mode, IEEE 802.11n(HT20) mode, IEEE 802.11n(HT40) mode, IEEE 802.11ac(VHT80) mode, only the worst cases are documented for other test items.

**2.3 PARAMETERS OF TEST SOFTWARE**

UNII-1			
Test Software Version	QRCT		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	13.00	13.00	13.00
IEEE 802.11n(HT20)	13.00	13.00	13.00
IEEE 802.11ac(VHT20)	12.00	12.00	12.00
Frequency (MHz)	5190	5230	
IEEE 802.11n(HT40)	14.00	14.00	
IEEE 802.11ac(VHT40)	12.50	12.50	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	13.00		

UNII-2A			
Test Software Version	QRCT		
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	13.00	13.00	13.00
IEEE 802.11n(HT20)	13.00	13.00	13.00
IEEE 802.11ac(VHT20)	12.00	12.00	12.00
Frequency (MHz)	5270	5310	
IEEE 802.11n(HT40)	14.00	14.00	
IEEE 802.11ac(VHT40)	12.50	12.50	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	13.00		

UNII-2C			
Test Software Version	QRCT		
Frequency (MHz)	5500	5580	5700
IEEE 802.11a	13.50	13.50	13.50
IEEE 802.11n(HT20)	13.50	13.50	13.50
IEEE 802.11ac(VHT20)	12.50	12.50	12.50
Frequency (MHz)	5510	5550	5670
IEEE 802.11n(HT40)	14.50	14.50	14.50
IEEE 802.11ac(VHT40)	13.50	13.50	13.50
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	13.50	13.50	

UNII-3			
Test Software Version	QRCT		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	13.50	13.50	13.50
IEEE 802.11n(HT20)	13.50	13.50	13.50
IEEE 802.11ac(VHT20)	12.50	12.50	12.50
Frequency (MHz)	5755	5795	
IEEE 802.11n(HT40)	14.50	14.50	
IEEE 802.11ac(VHT40)	13.50	13.50	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	13.50		

## 2.4 DUTY CYCLE


If duty cycle is  $\geq 98\%$ , duty factor is not required.

If duty cycle is  $< 98\%$ , duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


**IEEE 802.11a**

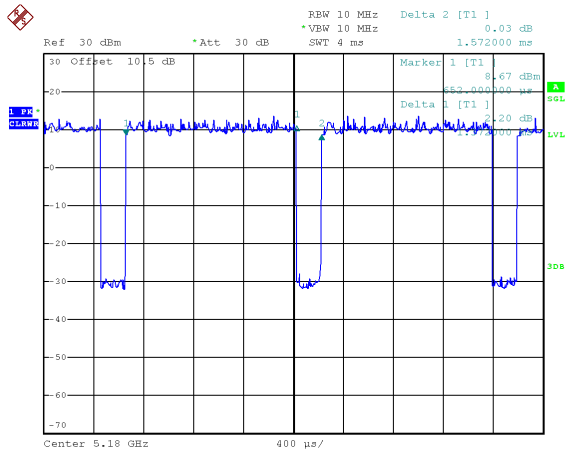

Date: 25.MAY.2022 12:42:09

Duty cycle =  $1.3720 \text{ ms} / 1.5720 \text{ ms} = 87.28\%$   
 Duty Factor =  $10 \log(1 / \text{Duty cycle}) = 0.64$


**IEEE 802.11n(HT20)**

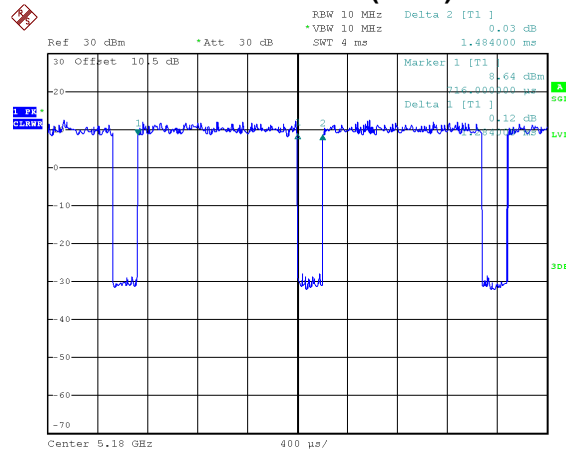

Date: 25.MAY.2022 12:43:57

Duty cycle =  $1.2840 \text{ ms} / 1.4840 \text{ ms} = 86.52\%$   
 Duty Factor =  $10 \log(1 / \text{Duty cycle}) = 0.67$


**IEEE 802.11n(HT40)**

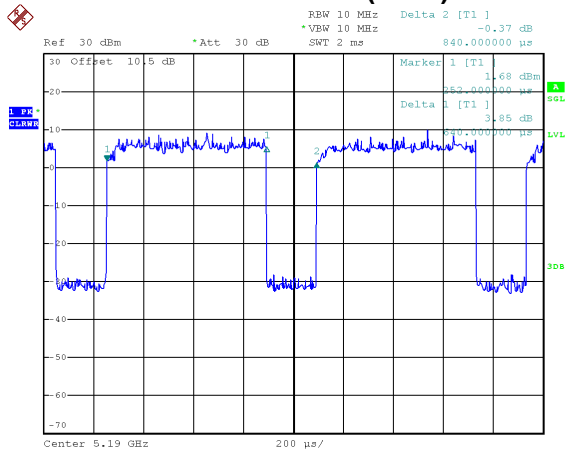

Date: 25.MAY.2022 12:45:15

Duty cycle =  $0.6400 \text{ ms} / 0.8400 \text{ ms} = 76.19\%$   
 Duty Factor =  $10 \log(1 / \text{Duty cycle}) = 1.19$


**IEEE 802.11ac(VHT20)**

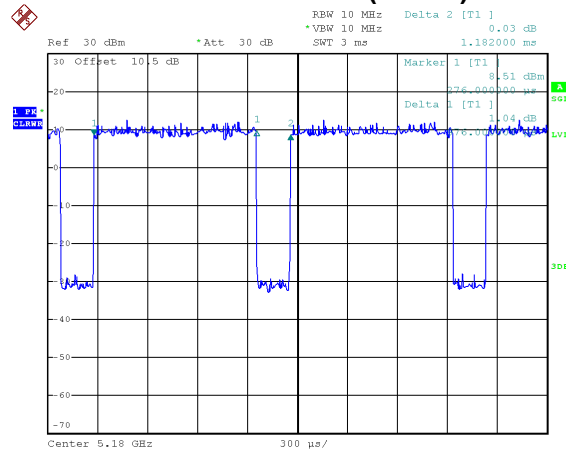

Date: 25.MAY.2022 12:46:33

Duty cycle =  $0.9760 \text{ ms} / 1.1820 \text{ ms} = 82.57\%$   
 Duty Factor =  $10 \log(1 / \text{Duty cycle}) = 0.85$


### IEEE 802.11ac(VHT40)

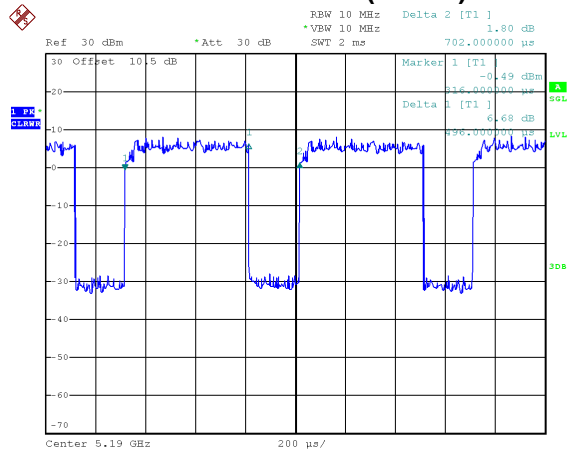

Date: 25.MAY.2022 12:47:36

Duty cycle = 0.4960 ms / 0.7020 ms = 70.66%  
 Duty Factor = 10 log(1 / Duty cycle) = 1.42

### IEEE 802.11ac(VHT80)

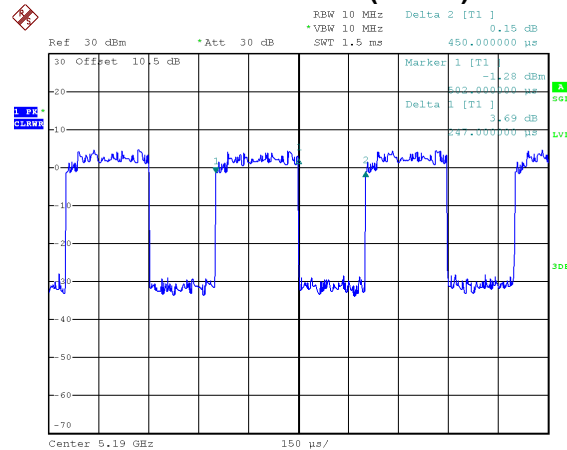

Date: 25.MAY.2022 12:49:18

Duty cycle = 0.2470 ms / 0.4500 ms = 54.89%  
 Duty Factor = 10 log(1 / Duty cycle) = 2.22

**NOTE:**

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).


For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle < 98%).

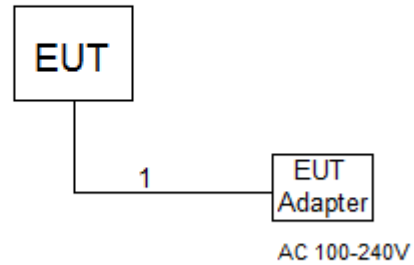

**2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED****2.6 SUPPORT UNITS**

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC	N/A	N/A	1m

### 3. AC POWER LINE CONDUCTED EMISSIONS

#### 3.1 LIMIT

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

**NOTE:**

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.4 TEST SETUP

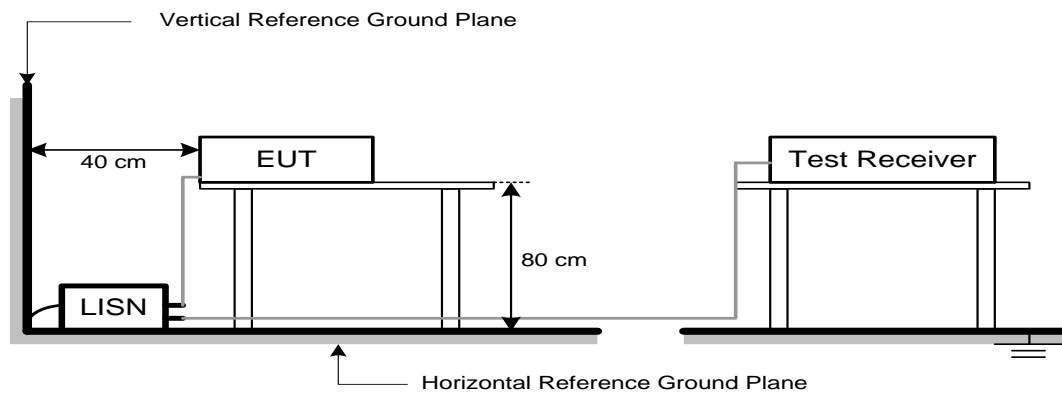

### 3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

### 3.6 TEST RESULTS

Please refer to the APPENDIX A.

## 4. RADIATED EMISSIONS

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850 NOTE (2)	-27	68.2
	10	105.2
	15.6	110.8
	27	122.2

#### NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

## 4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

### 4.3 DEVIATION FROM TEST STANDARD


No deviation.


### 4.4 TEST SETUP

#### 9 kHz to 30 MHz

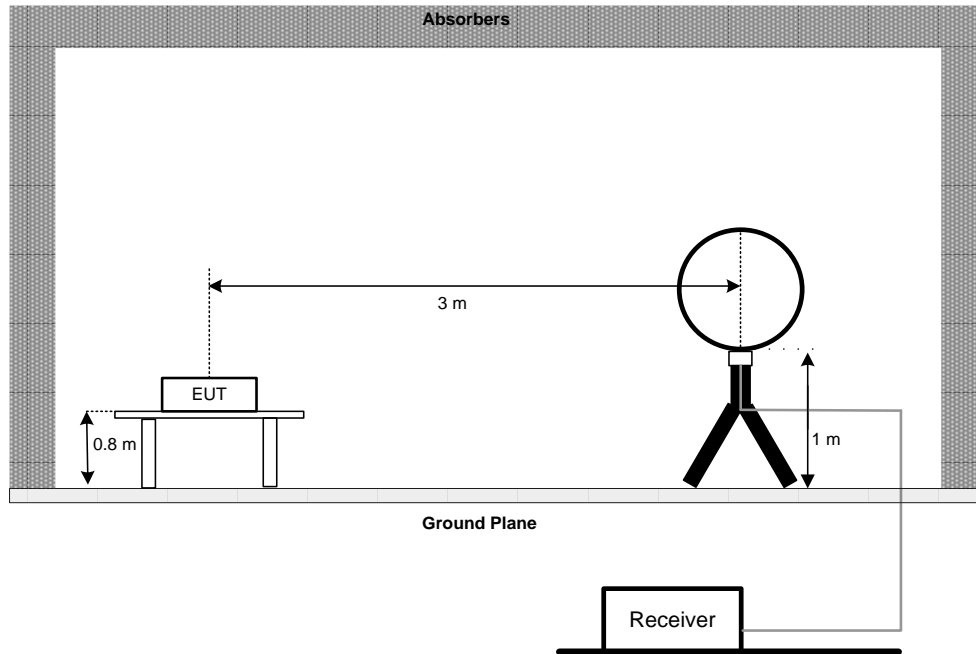

#### 30 MHz to 1 GHz

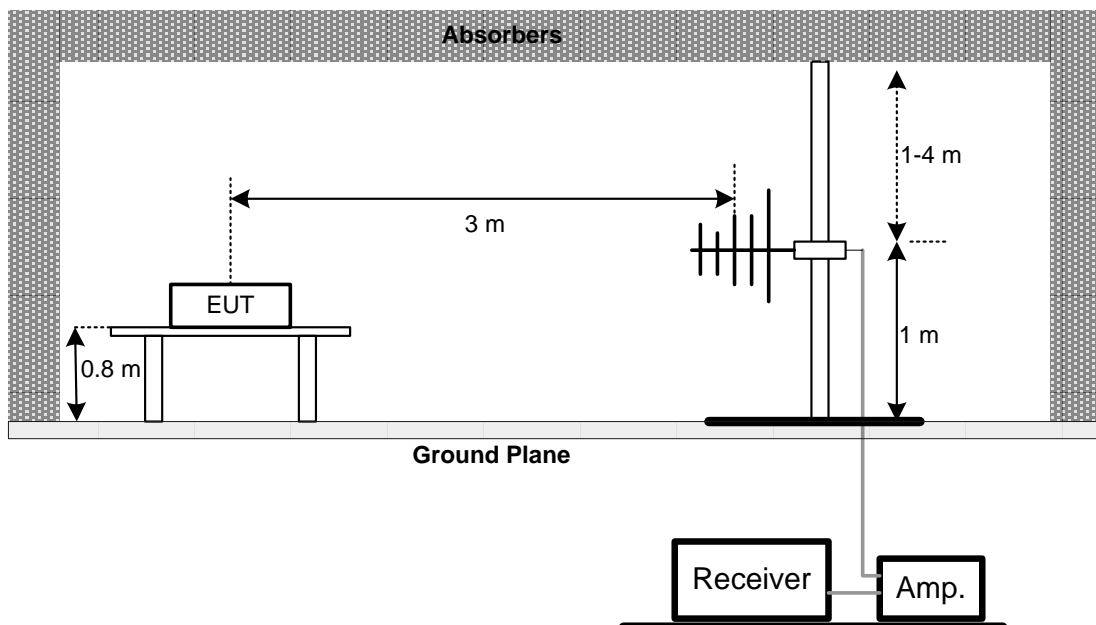

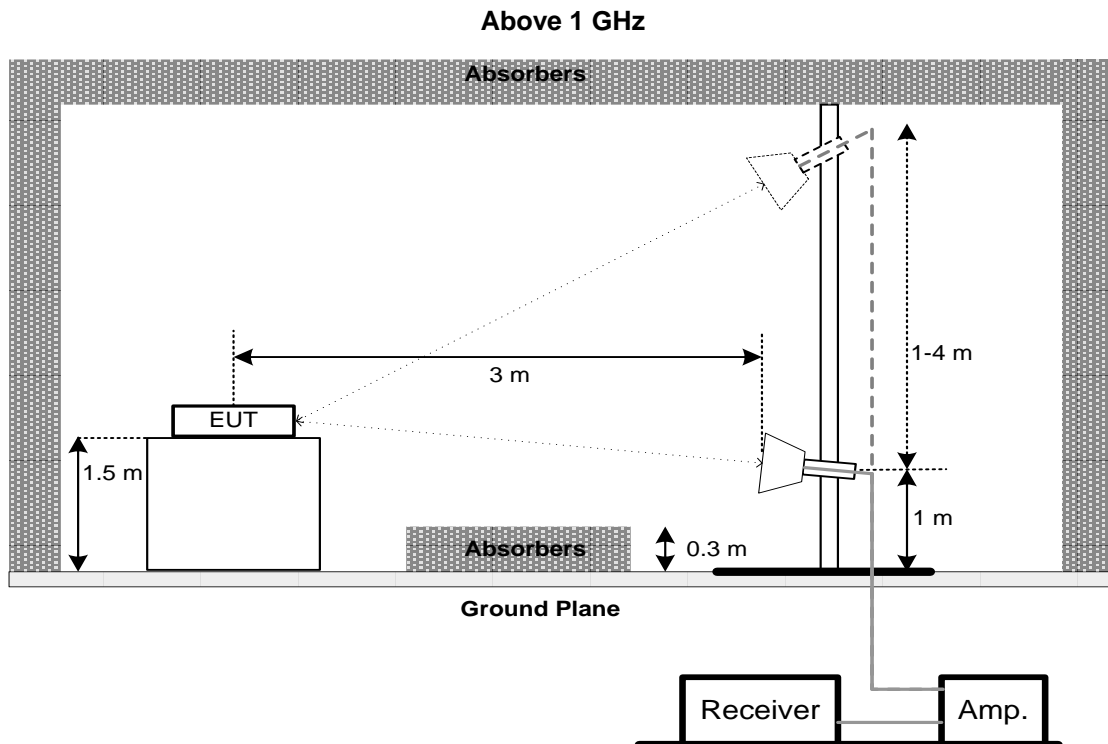

#### 4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

#### 4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. BANDWIDTH

### 5.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

### 5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. Spectrum Setting:  
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Appromoximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

### 5.3 DEVIATION FROM STANDARD

No deviation.



**5.4 TEST SETUP****5.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**5.6 TEST RESULTS**

Please refer to the APPENDIX E.

## 6. MAXIMUM OUTPUT POWER

### 6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm)	5150-5250
		Client device: 250 mW (23.98 dBm)	
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- a. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- b. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


### 6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP

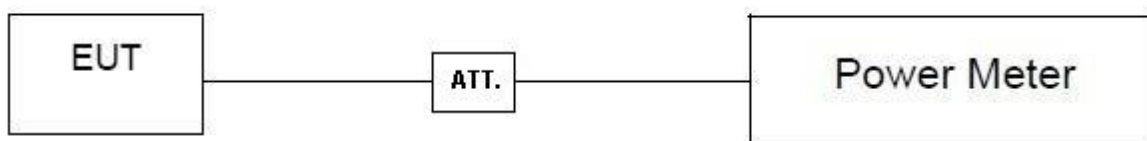

### 6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6 TEST RESULTS

Please refer to the APPENDIX F.

## 7. POWER SPECTRAL DENSITY

### 7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

### 7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:  
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz.
VBW	3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz.
VBW	300 kHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add  $10 \log(500 \text{ kHz}/100 \text{ kHz})$  to the measured result, i.e. 7 dB.
- During the test of U-NII 3 PSD, the measurement result with RBW=100kHz has been added 7 dB by compensating offset. For example, the cable loss is 13 dB, and the final offset is  $13 + 7 = 20$  dB when RBW=100kHz is used.

### 7.3 DEVIATION FROM STANDARD

No deviation.

#### 7.4 TEST SETUP



#### 7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 7.6 TEST RESULTS

Please refer to the APPENDIX G.

## 8. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Line Impedance Stabilisation Network	Schwarzbeck	NNLK 8121	8121-822	Mar. 20, 2023
2	TWO-LINE V-NETWORK	R&S	ENV216	101340	Aug. 23, 2022
3	Test Cable	emci	EMCRG400-BM-NM-10000	170628	Apr. 05, 2023
4	EMI Test Receiver	R&S	ESCI	100082	Mar. 20, 2023
5	50Ω Terminator	SHX	TF2-1G-A	17051602	Mar. 20, 2023
6	50Ω coaxial switch	Anritsu	MP59B	6201750902	Mar. 20, 2023
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EMCI	EMCI LPA600	275	Mar. 20, 2023
2	MXE EMI Receiver	Keysight	N9038A	MY56400088	Mar. 20, 2023
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB 9160	9160-3233	Mar. 23, 2023
2	Pre-Amplifier	emci	EMC9135	980401	Mar. 20, 2023
3	MXE EMI Receiver	Keysight	N9038A	MY56400088	Mar. 20, 2023
4	Test Cable	emci	EMC104-SM-SM-7000	181020	Apr. 05, 2023
5	Test Cable	emci	EMC104-SM-SM-2500	170618	Apr. 05, 2023
6	Test Cable	emci	EMC104-SM-SM-800	170647	Apr. 05, 2023
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	BBHA 9120D	9120D-1817	Mar. 23, 2023
2	Pre-Amplifier	emci	EMC051845SE	980725	Aug. 23, 2022
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Mar. 20, 2023
4	Test Cable	emci	EMC104-SM-SM-700 0	181020	Apr. 05, 2023
5	Test Cable	emci	EMC104-SM-SM-250 0	170618	Apr. 05, 2023
6	Test Cable	emci	EMC104-SM-SM-800	170647	Apr. 05, 2023
7	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	3116C	00203919	Mar. 20, 2023
8	Pre-Amplifier	emci	EMC184045B	980265	Apr. 05, 2023
9	Test Cable	emci	EMC102-SM-SM-800	170335	Apr. 05, 2023
10	Test Cable	emci	EMC102-KM-KM-250 0	170627	Apr. 05, 2023
11	MXE EMI Receiver	Keysight	N9038A	MY5640088	Mar. 20, 2023
12	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A


Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 20, 2023
2	Attenuator	JUK	ATT-2W6G-S- 10	N/A	N/A



Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyze	Keysight	8990B	MY51000507	Mar. 20, 2023
2	Wideband Power Sensor	Keysight	N1923A	MY58310003	Mar. 20, 2023
3	Attenuator	JUK	ATT-2W6G-S- 10	N/A	N/A

Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 20, 2023
2	Attenuator	JUK	ATT-2W6G-S- 10	N/A	N/A



Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

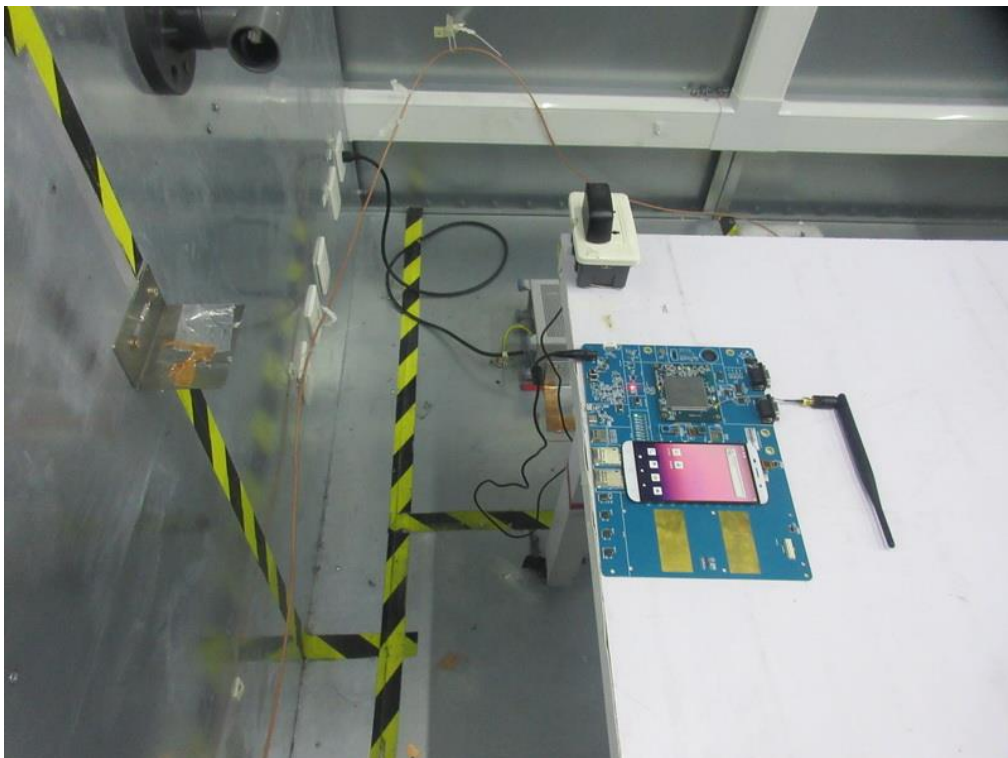**9. EUT TEST PHOTOS****AC Power Line Conducted Emissions Test Photos**

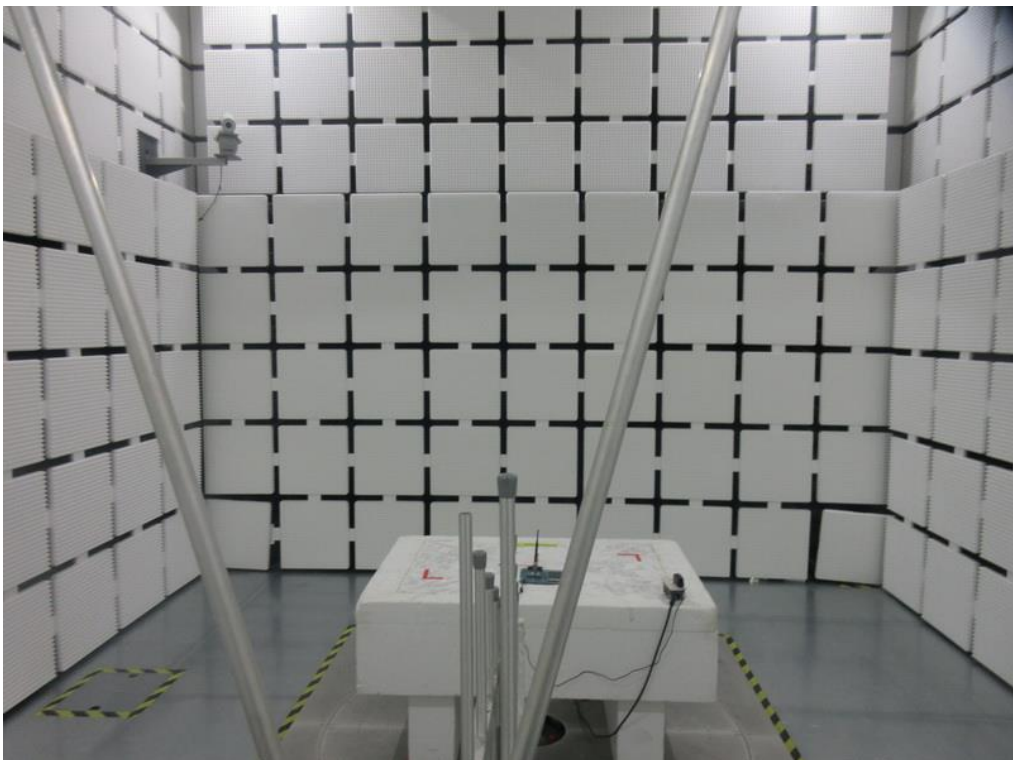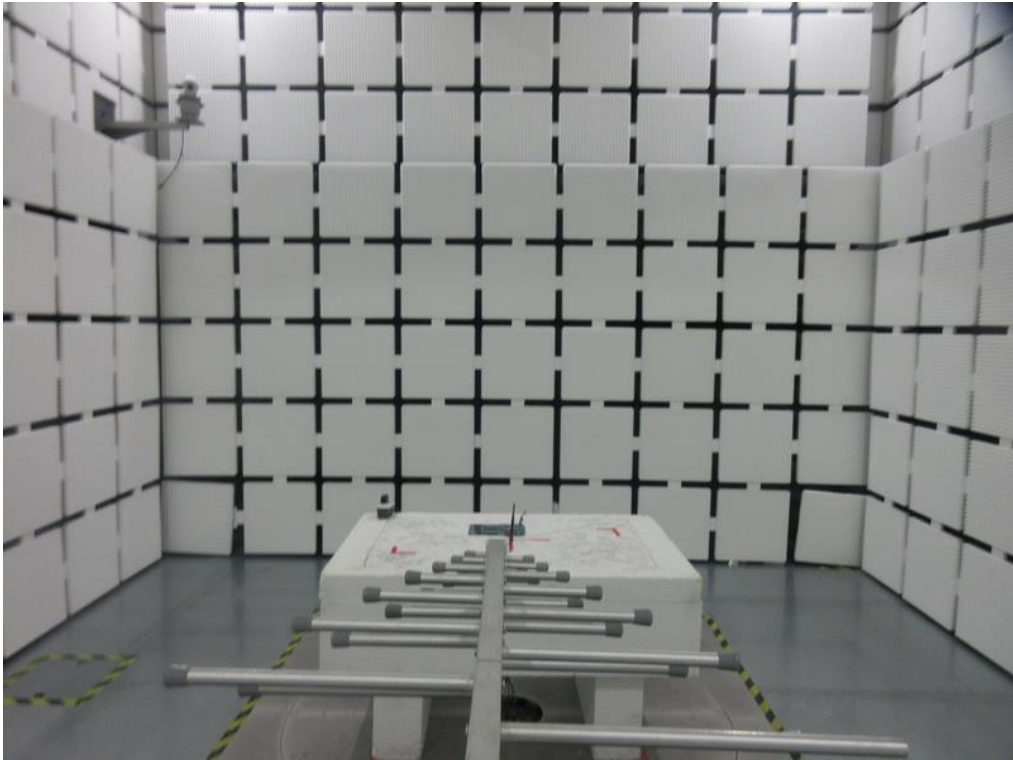**Radiated Emissions Test Photos****30 MHz to 1 GHz**

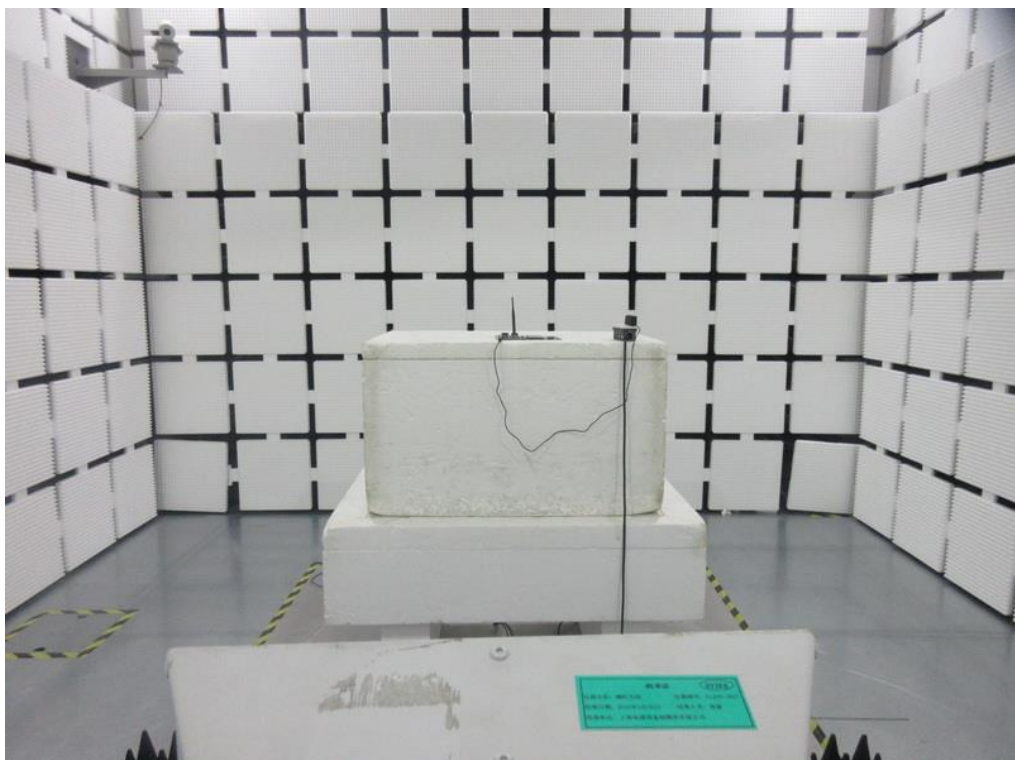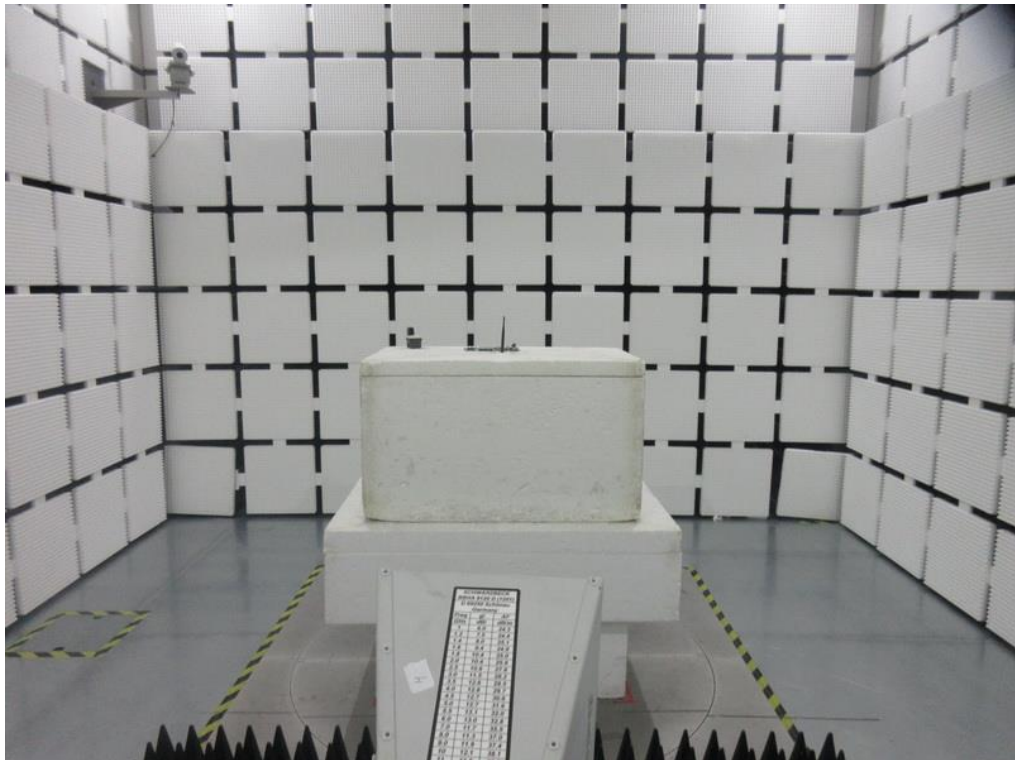


**Radiated Emissions Test Photos****Above 1 GHz**

**Close-up Test Photos**

## **APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS**

Test Mode	TX N(HT20) Mode Channel 165 (UNII-3)	Phase	Line
-----------	--------------------------------------	-------	------

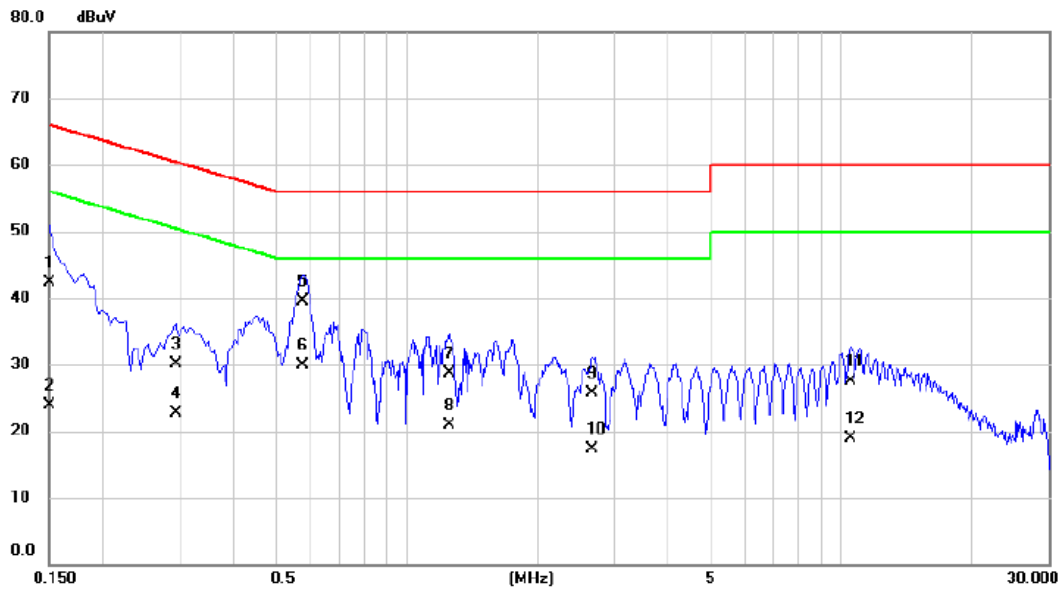


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	32.60	9.65	42.25	66.00	-23.75	QP	
2		0.1500	14.20	9.65	23.85	56.00	-32.15	AVG	
3		0.2940	20.40	9.75	30.15	60.41	-30.26	QP	
4		0.2940	12.90	9.75	22.65	50.41	-27.76	AVG	
5		0.5775	29.70	9.73	39.43	56.00	-16.57	QP	
6	*	0.5775	20.10	9.73	29.83	46.00	-16.17	AVG	
7		1.2525	18.90	9.88	28.78	56.00	-27.22	QP	
8		1.2525	11.10	9.88	20.98	46.00	-25.02	AVG	
9		2.6700	15.70	9.98	25.68	56.00	-30.32	QP	
10		2.6700	7.40	9.98	17.38	46.00	-28.62	AVG	
11		10.5270	17.30	10.26	27.56	60.00	-32.44	QP	
12		10.5270	8.60	10.26	18.86	50.00	-31.14	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

Test Mode	TX N(HT20) Mode Channel 165 (UNII-3)	Phase	Neutral
-----------	--------------------------------------	-------	---------

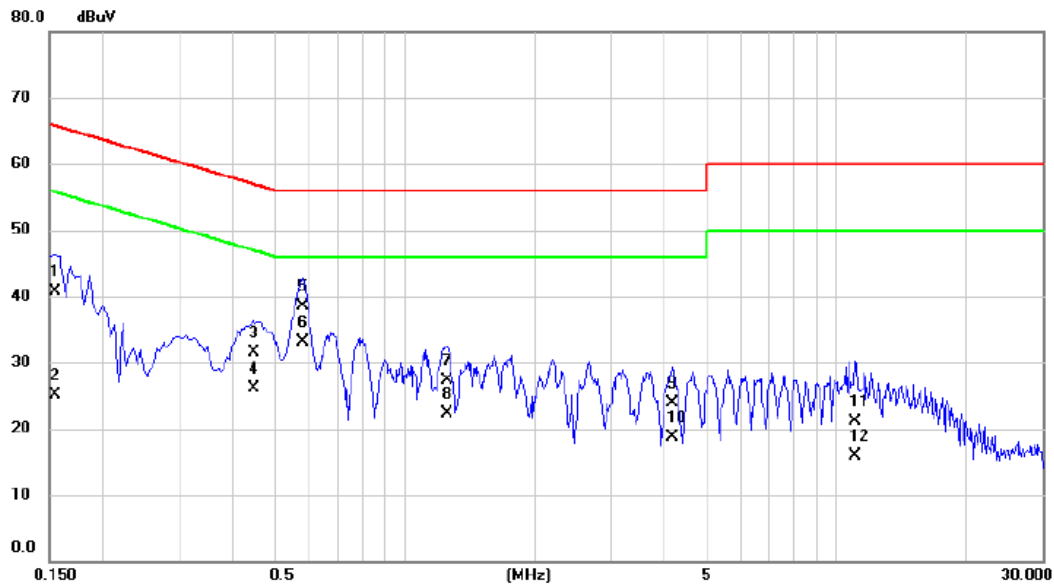

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	31.10	9.59	40.69	65.75	-25.06	QP	
2	0.1545	15.50	9.59	25.09	55.75	-30.66	AVG	
3	0.4470	21.70	9.78	31.48	56.93	-25.45	QP	
4	0.4470	16.40	9.78	26.18	46.93	-20.75	AVG	
5	0.5820	28.70	9.79	38.49	56.00	-17.51	QP	
6 *	0.5820	23.30	9.79	33.09	46.00	-12.91	AVG	
7	1.2525	17.60	9.79	27.39	56.00	-28.61	QP	
8	1.2525	12.60	9.79	22.39	46.00	-23.61	AVG	
9	4.1685	14.00	10.00	24.00	56.00	-32.00	QP	
10	4.1685	8.80	10.00	18.80	46.00	-27.20	AVG	
11	11.0444	10.70	10.41	21.11	60.00	-38.89	QP	
12	11.0444	5.40	10.41	15.81	50.00	-34.19	AVG	

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.
- (3) The test result has included the cable loss.

## **APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ**

Note: The measured value have enough margin over 20dB than the limit, therefore they are not reported.

**APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

Test Mode	TX N(HT20) Mode Channel 165 (UNII-3)	Polarization	Vertical
-----------	--------------------------------------	--------------	----------

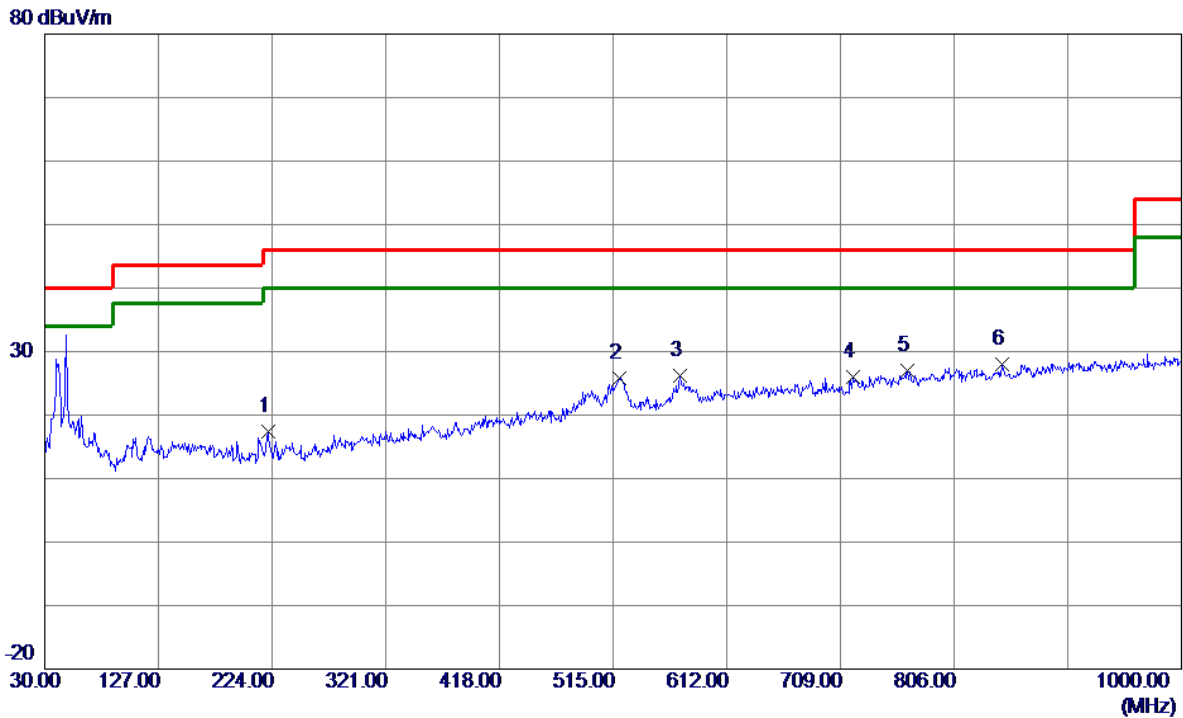


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	220.6050	35.71	-18.27	17.44	46.00	-28.56	Peak	
2	520.3350	36.04	-10.26	25.78	46.00	-20.22	Peak	
3	572.2300	35.45	-9.21	26.24	46.00	-19.76	Peak	
4	719.6700	32.85	-6.94	25.91	46.00	-20.09	Peak	
5	766.2300	32.99	-6.05	26.94	46.00	-19.06	Peak	
6 *	846.7400	33.27	-5.33	27.94	46.00	-18.06	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	TX N(HT20) Mode Channel 165 (UNII-3)	Polarization	Horizontal
-----------	--------------------------------------	--------------	------------

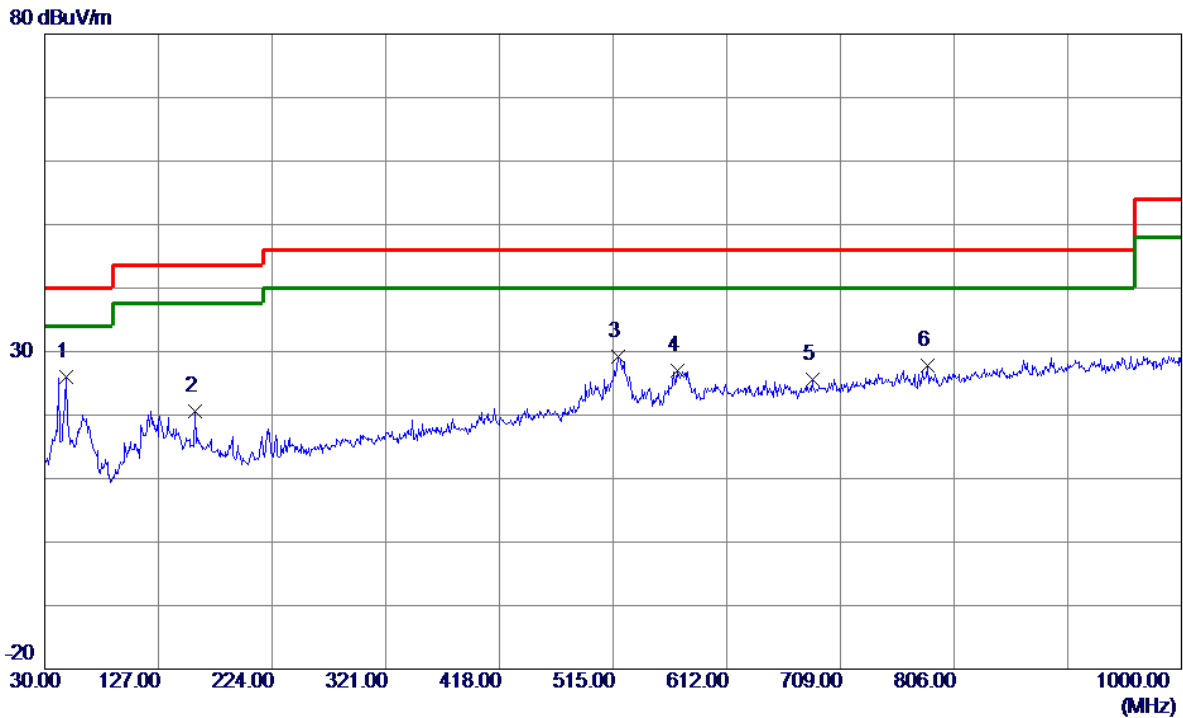


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	48.4300	43.25	-17.30	25.95	40.00	-14.05	Peak	
2	158.0399	36.55	-15.98	20.57	43.50	-22.93	Peak	
3	519.3650	39.52	-10.27	29.25	46.00	-16.75	Peak	
4	569.8050	36.27	-9.28	26.99	46.00	-19.01	Peak	
5	685.2350	33.14	-7.51	25.63	46.00	-20.37	Peak	
6	783.2050	33.70	-5.98	27.72	46.00	-18.28	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

**APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ**

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

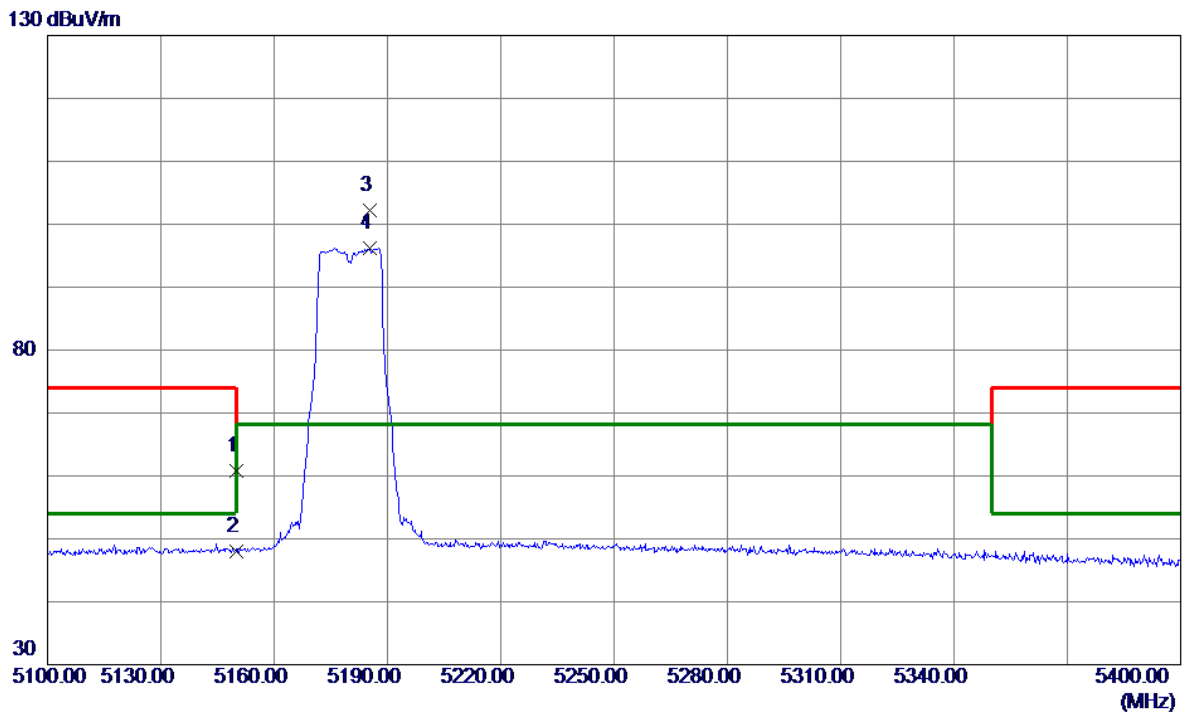


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.06	37.65	60.71	74.00	-13.29	Peak	
2	5150.0000	10.40	37.65	48.05	54.00	-5.95	AVG	
3 *	5185.2000	64.54	37.67	102.21	68.20	34.01	Peak	No Limit
4	5185.2000	58.52	37.67	96.19	68.20	27.99	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

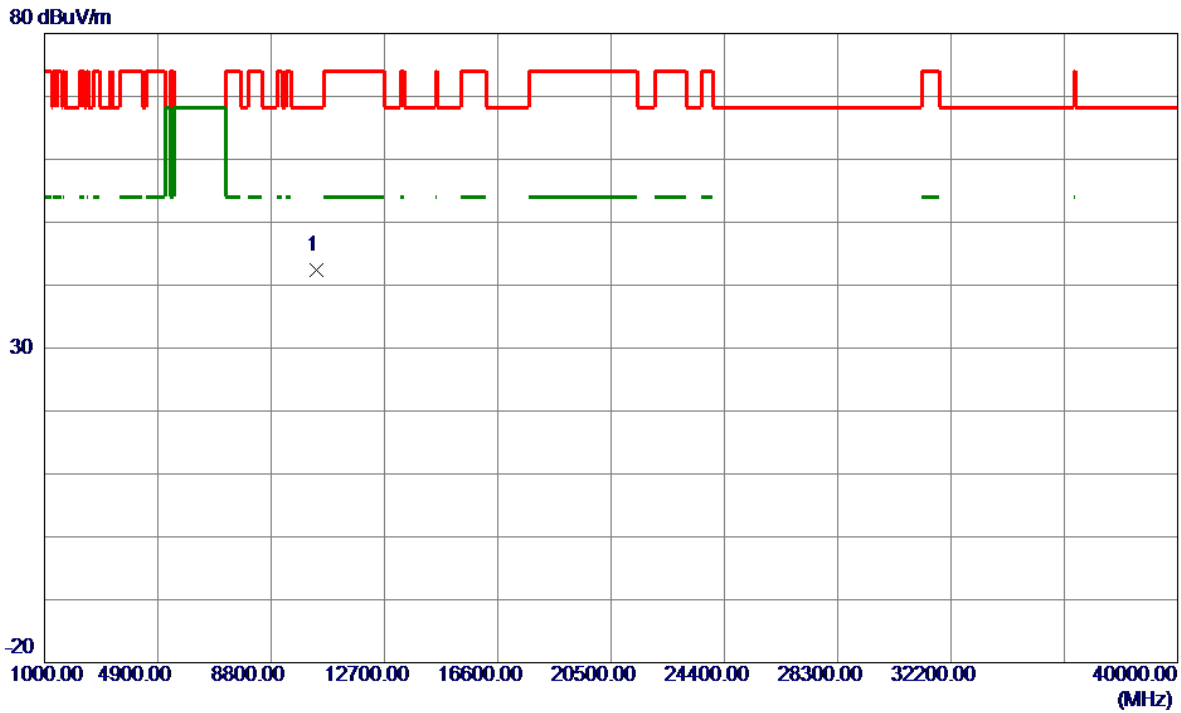


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	51.80	-9.38	42.42	68.20	-25.78	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

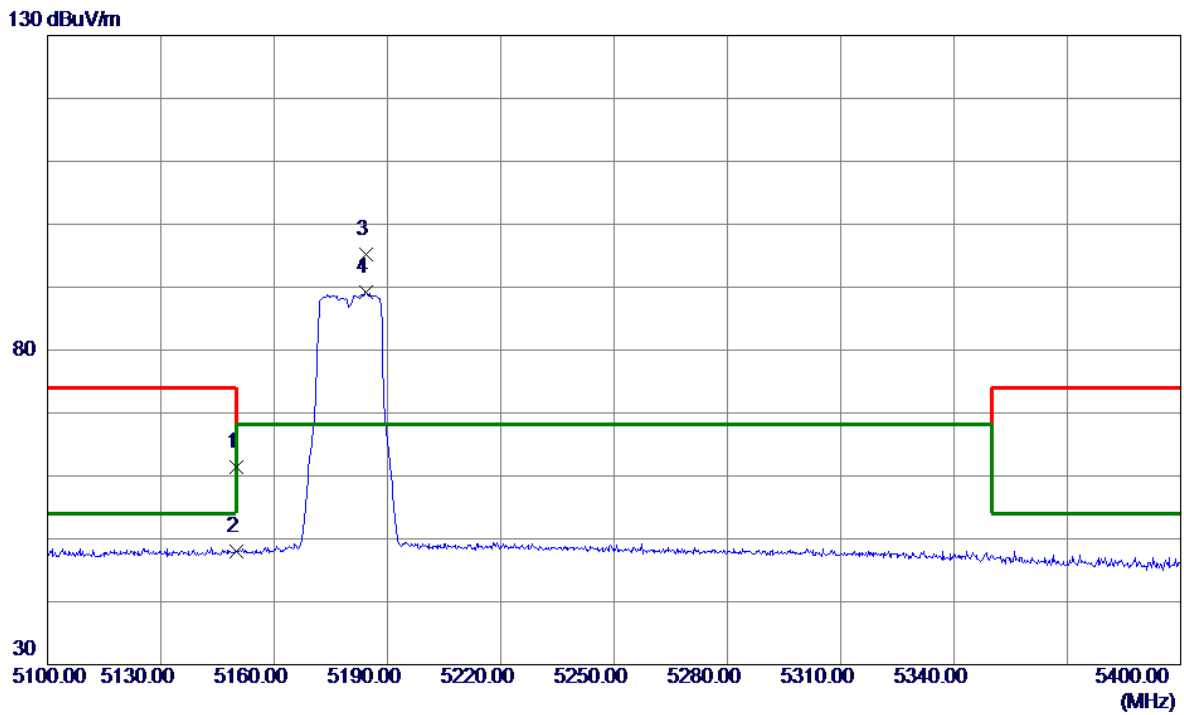


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.73	37.65	61.38	74.00	-12.62	Peak	
2	5150.0000	10.30	37.65	47.95	54.00	-6.05	AVG	
3 *	5184.3000	57.50	37.67	95.17	68.20	26.97	Peak	No Limit
4	5184.3000	51.52	37.67	89.19	68.20	20.99	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

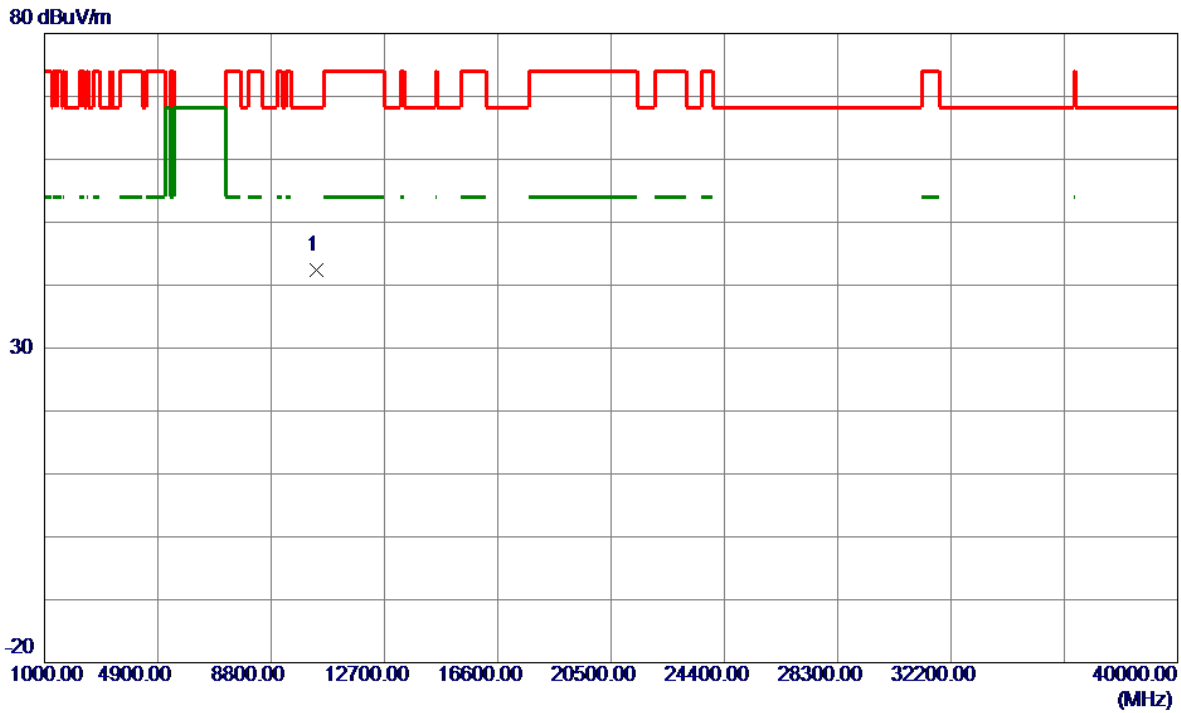


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	51.73	-9.38	42.35	68.20	-25.85	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

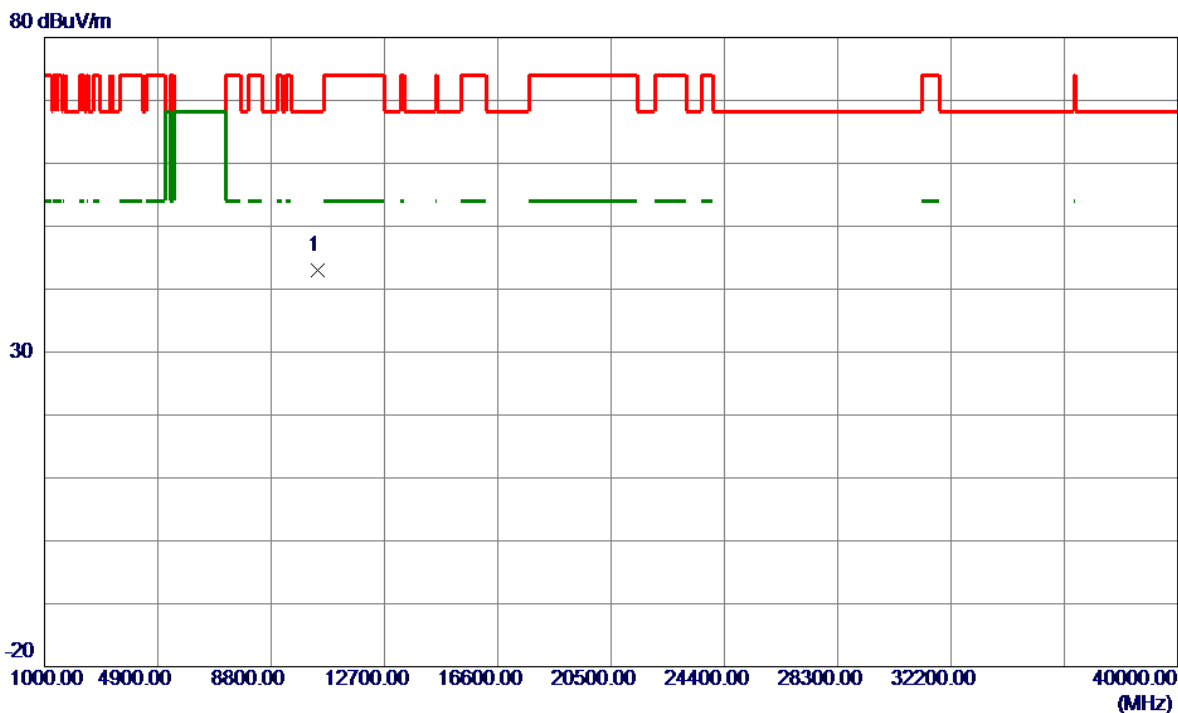


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0000	52.39	-9.35	43.04	68.20	-25.16	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

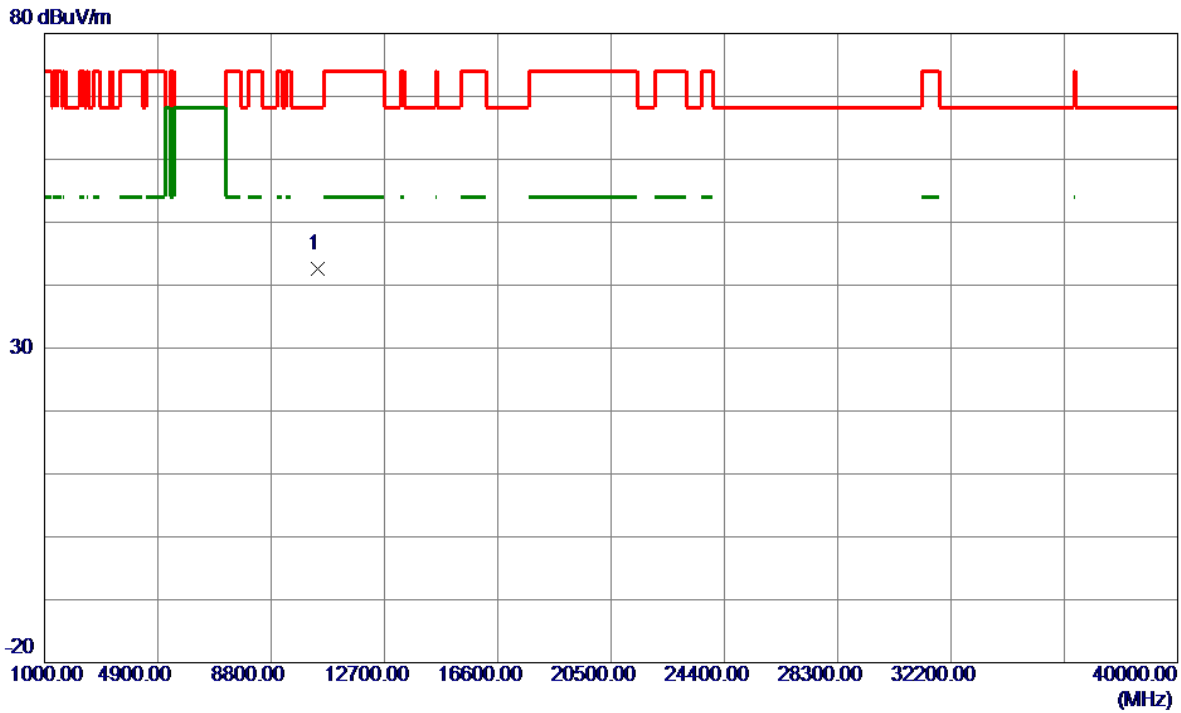


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0000	51.95	-9.35	42.60	68.20	-25.60	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

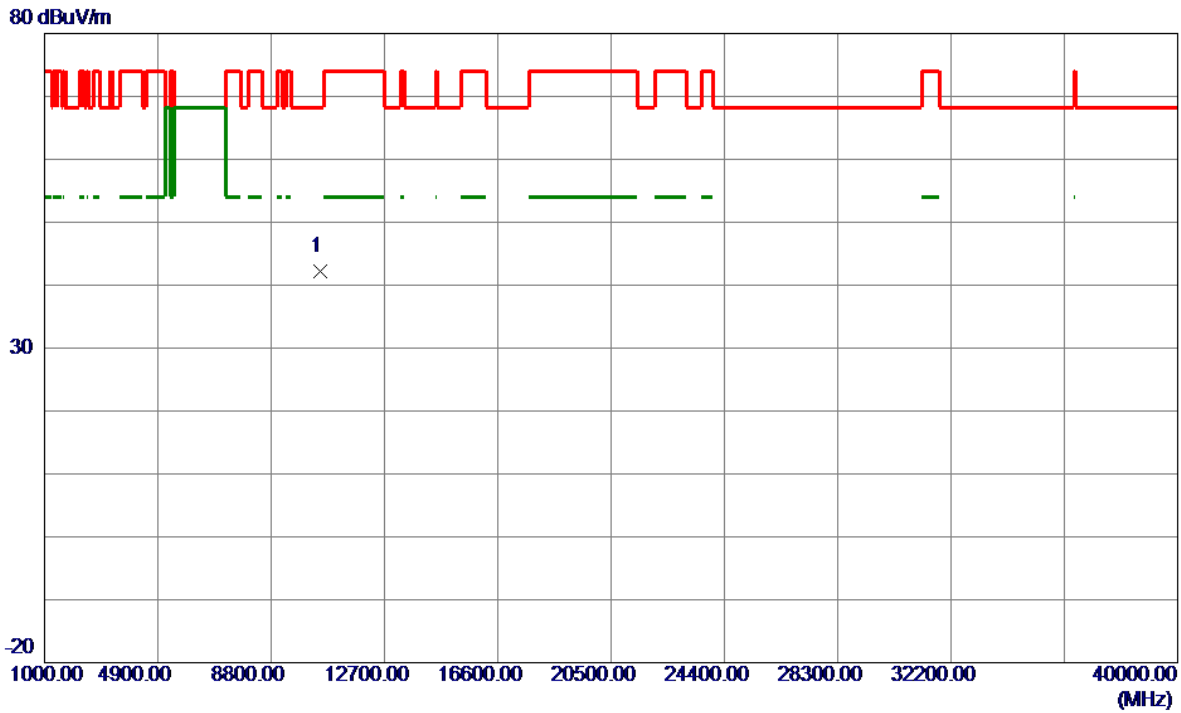


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	51.32	-9.19	42.13	68.20	-26.07	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

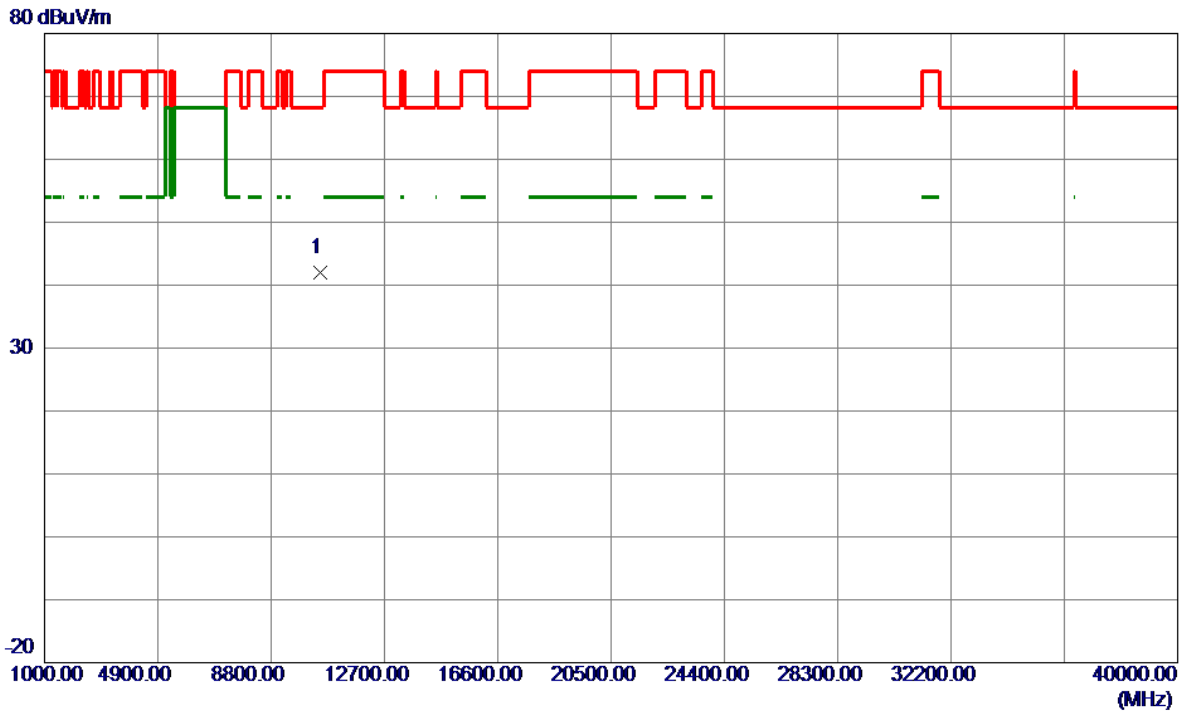


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	51.27	-9.19	42.08	68.20	-26.12	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

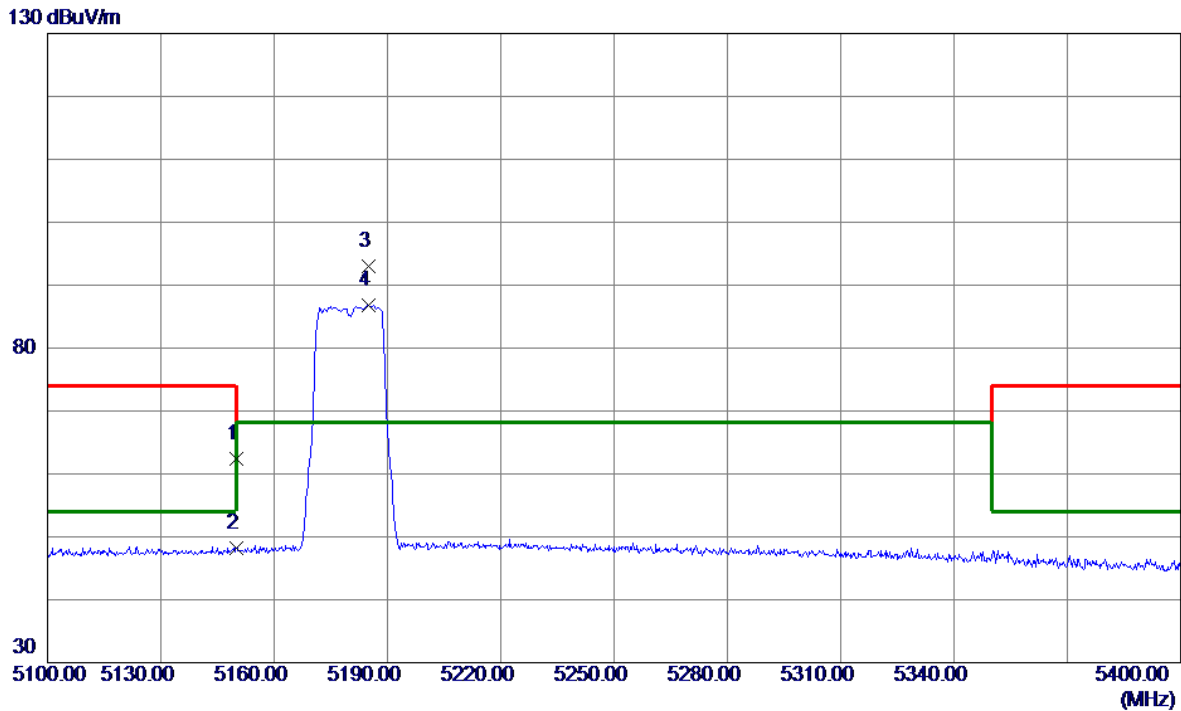


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	24.70	37.65	62.35	74.00	-11.65	Peak	
2	5150.0000	10.58	37.65	48.23	54.00	-5.77	AVG	
3 *	5184.9000	55.25	37.67	92.92	68.20	24.72	Peak	
4	5184.9000	49.21	37.67	86.88	68.20	18.68	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

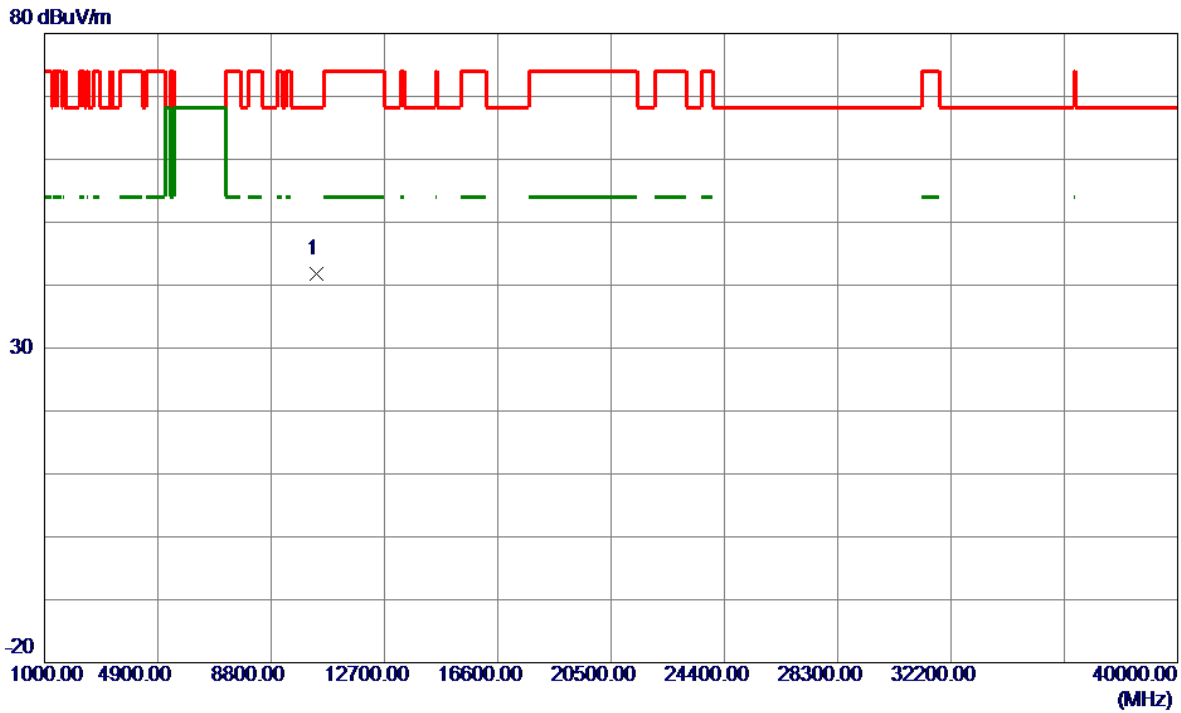


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	51.13	-9.38	41.75	68.20	-26.45	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

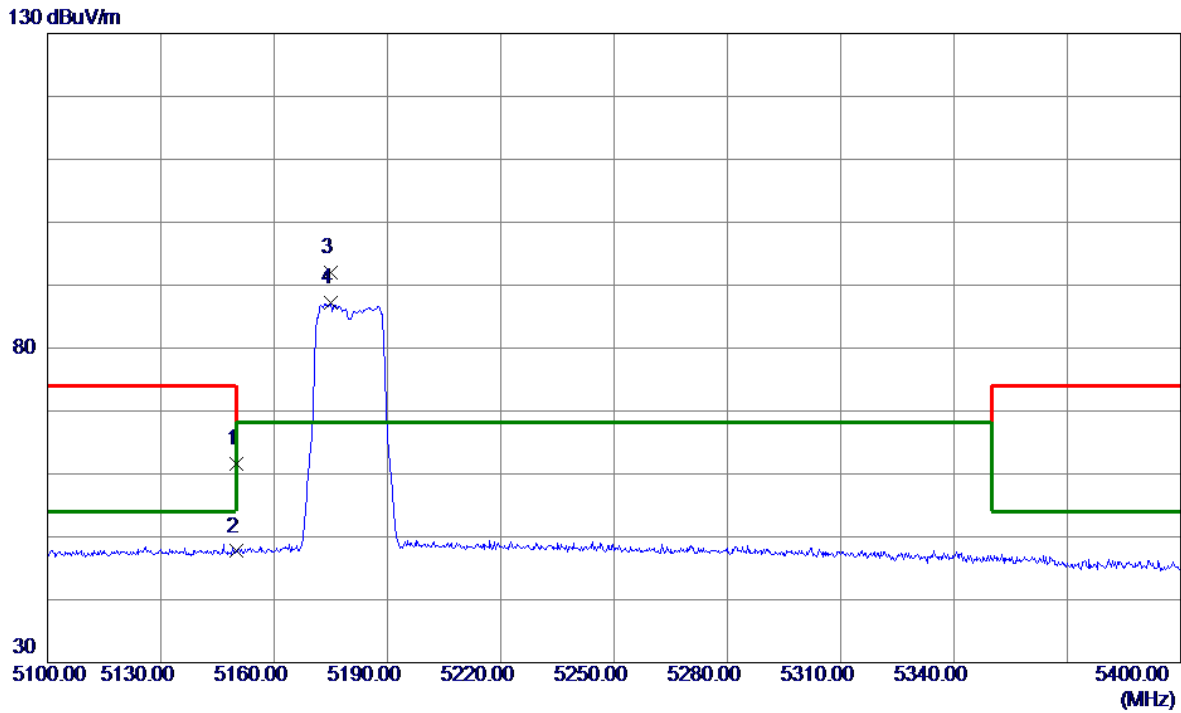


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.95	37.65	61.60	74.00	-12.40	Peak	
2	5150.0000	10.05	37.65	47.70	54.00	-6.30	AVG	
3 *	5175.1500	54.31	37.67	91.98	68.20	23.78	Peak	
4	5175.1500	49.46	37.67	87.13	68.20	18.93	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

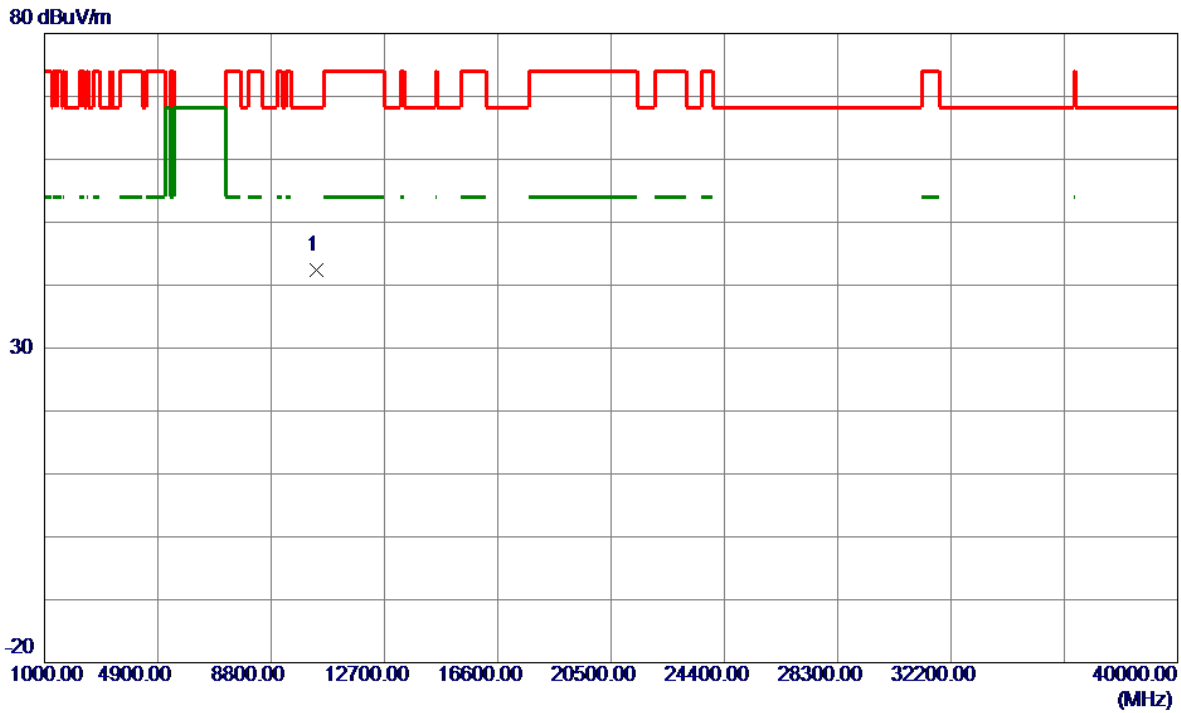


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	51.82	-9.38	42.44	68.20	-25.76	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

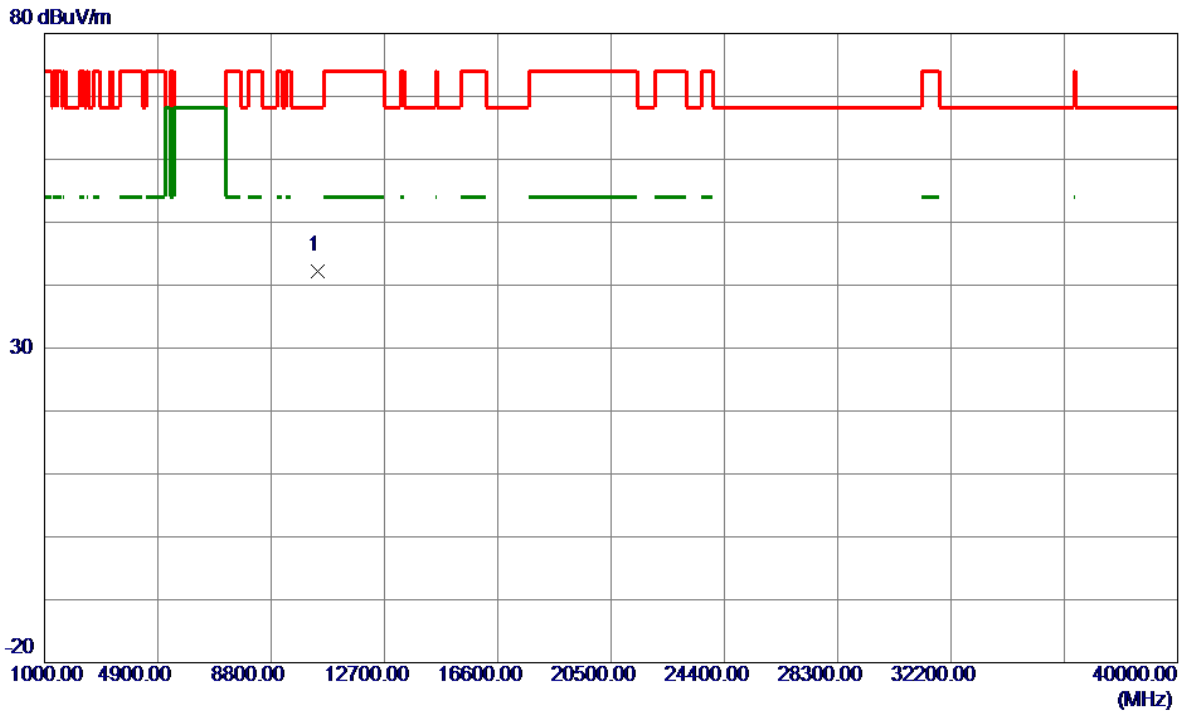


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0000	51.65	-9.35	42.30	68.20	-25.90	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

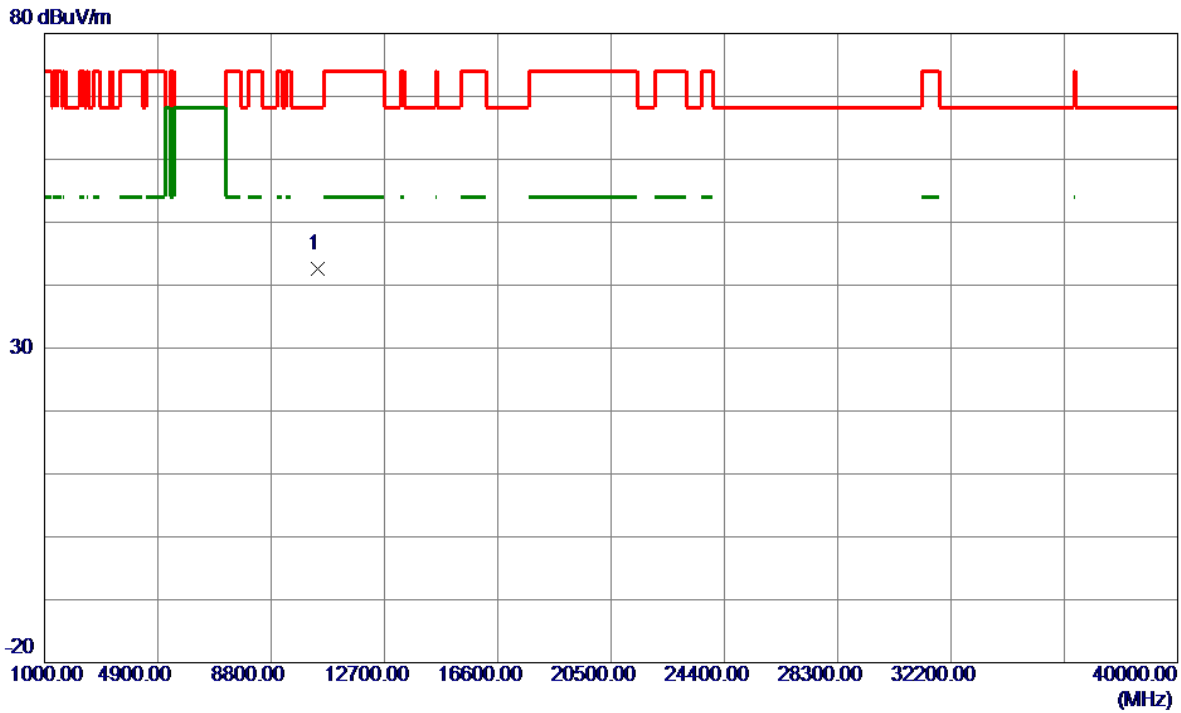


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0000	51.97	-9.35	42.62	68.20	-25.58	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-1_TX N(HT20) Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

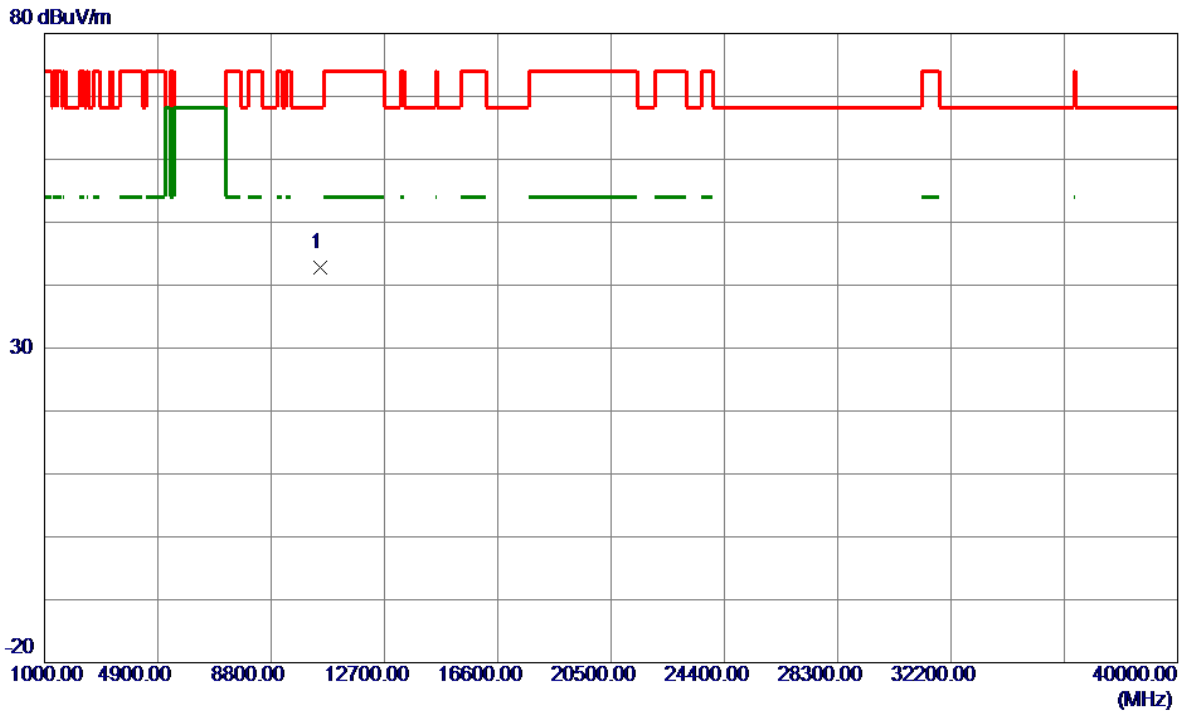


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	52.06	-9.19	42.87	68.20	-25.33	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5240 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

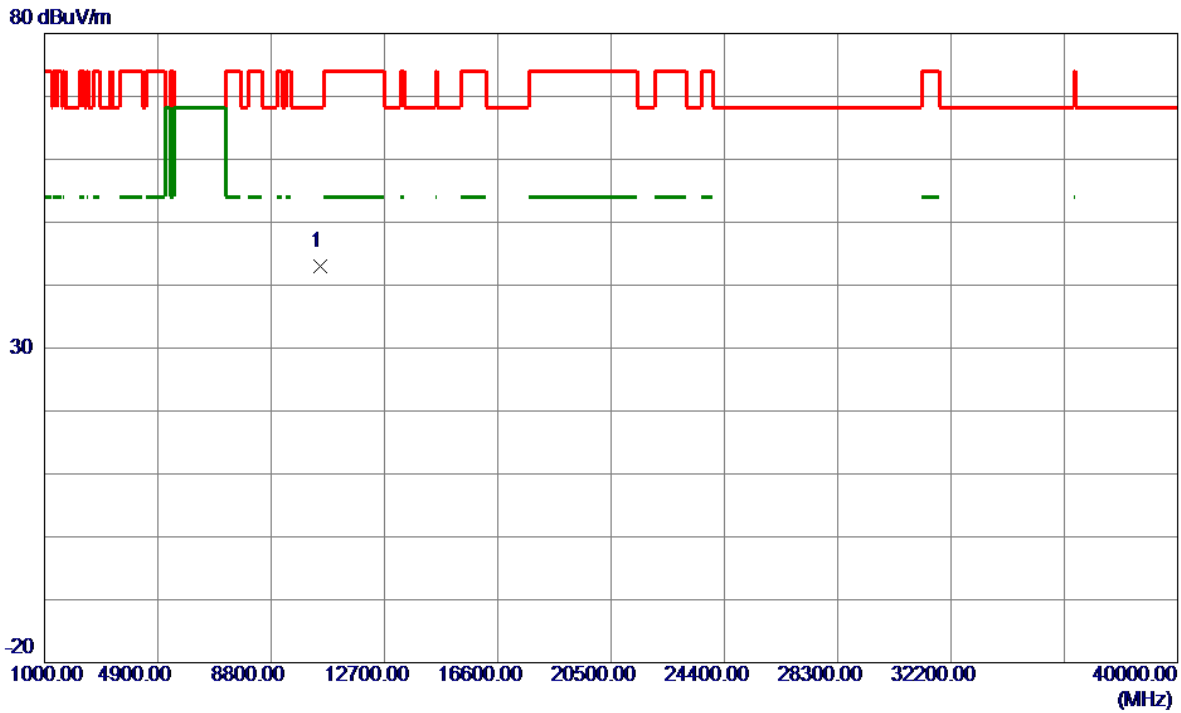


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	52.21	-9.19	43.02	68.20	-25.18	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5190 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

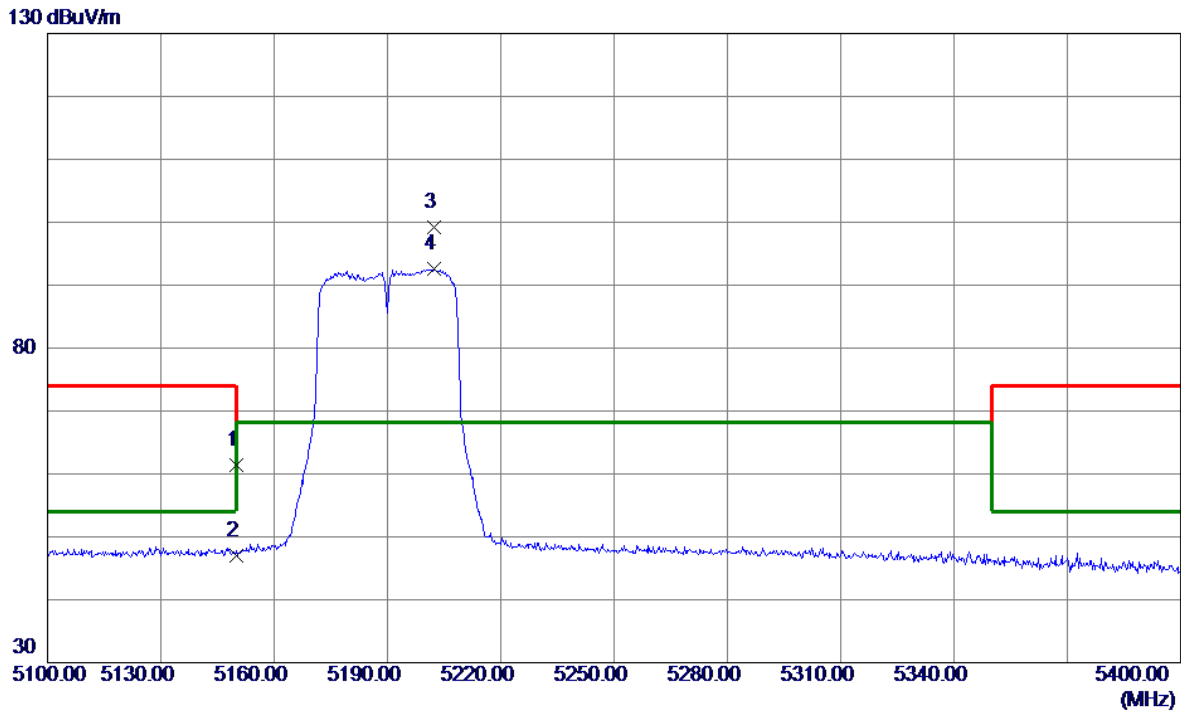


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.83	37.65	61.48	74.00	-12.52	Peak	
2	5150.0000	9.38	37.65	47.03	54.00	-6.97	AVG	
3 *	5202.3000	61.49	37.69	99.18	68.20	30.98	Peak	
4	5202.3000	54.84	37.69	92.53	68.20	24.33	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5190 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

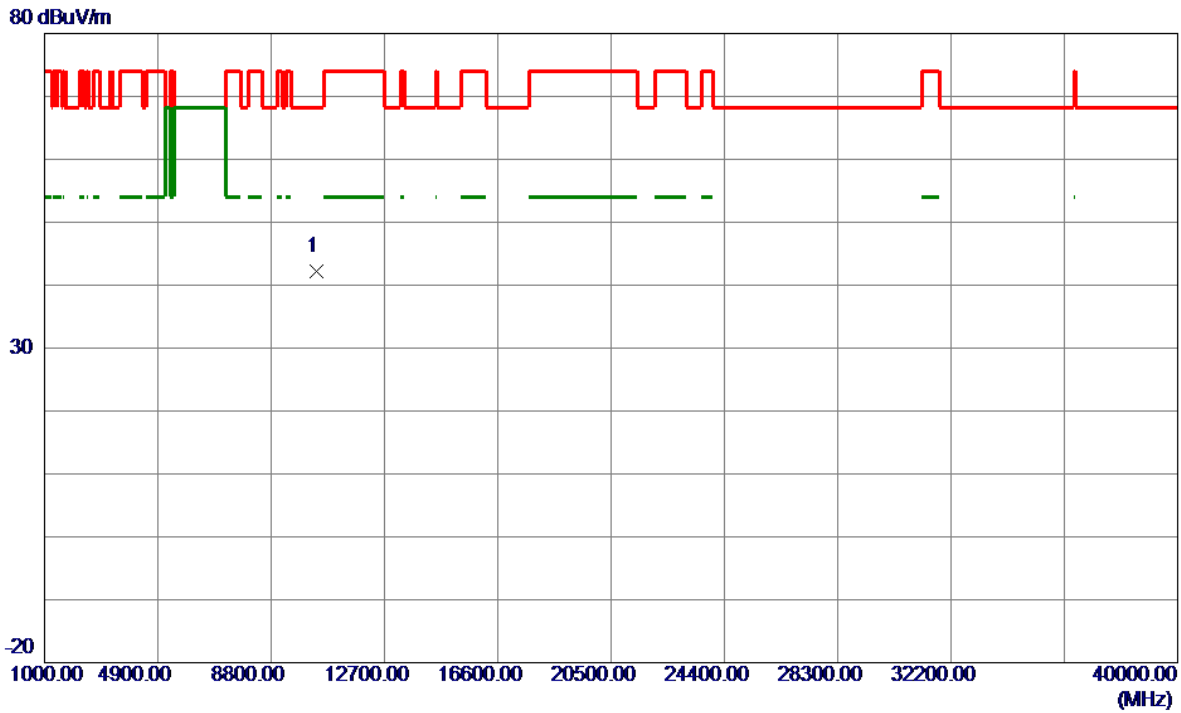


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.0000	51.49	-9.36	42.13	68.20	-26.07	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5190 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

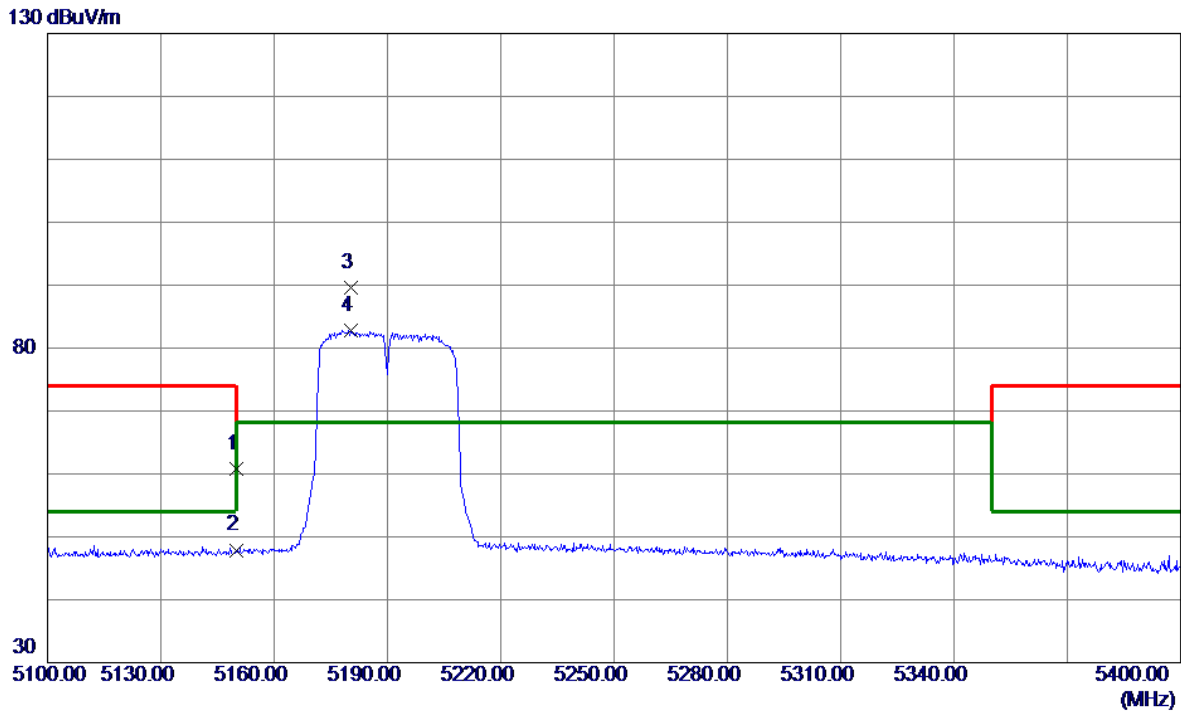


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.12	37.65	60.77	74.00	-13.23	Peak	
2	5150.0000	10.25	37.65	47.90	54.00	-6.10	AVG	
3 *	5180.4000	51.84	37.67	89.51	68.20	21.31	Peak	
4	5180.4000	45.20	37.67	82.87	68.20	14.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5190 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

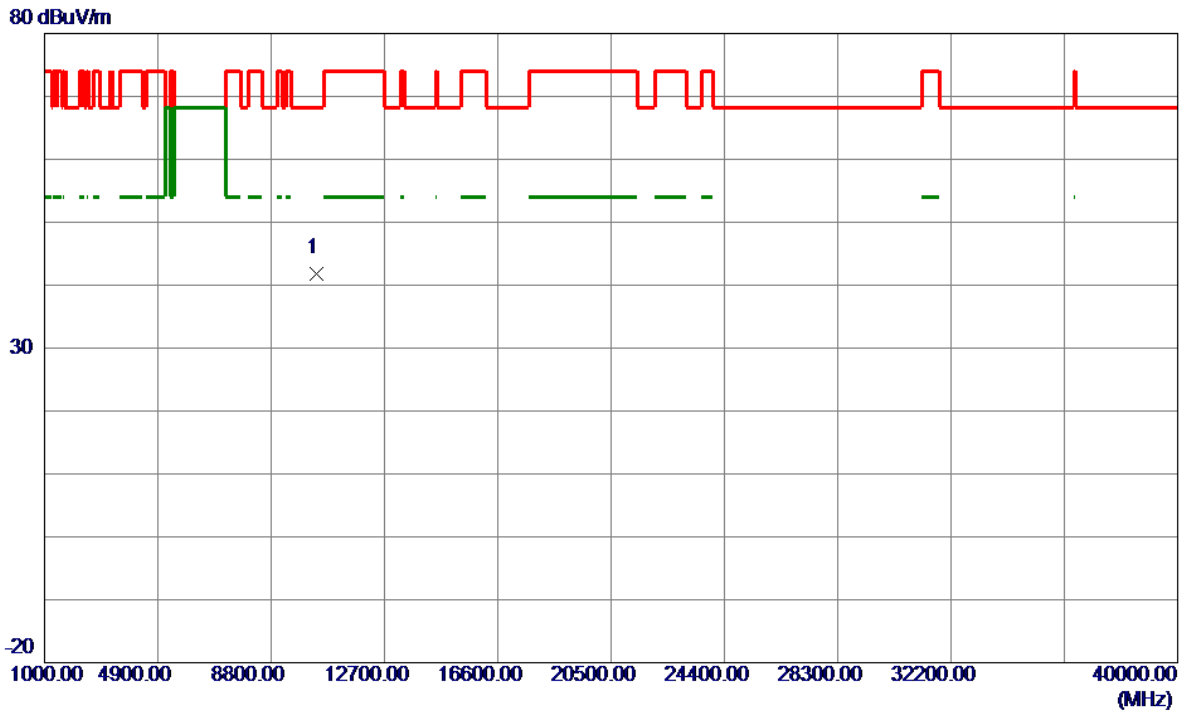


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.0000	51.26	-9.36	41.90	68.20	-26.30	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5230 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

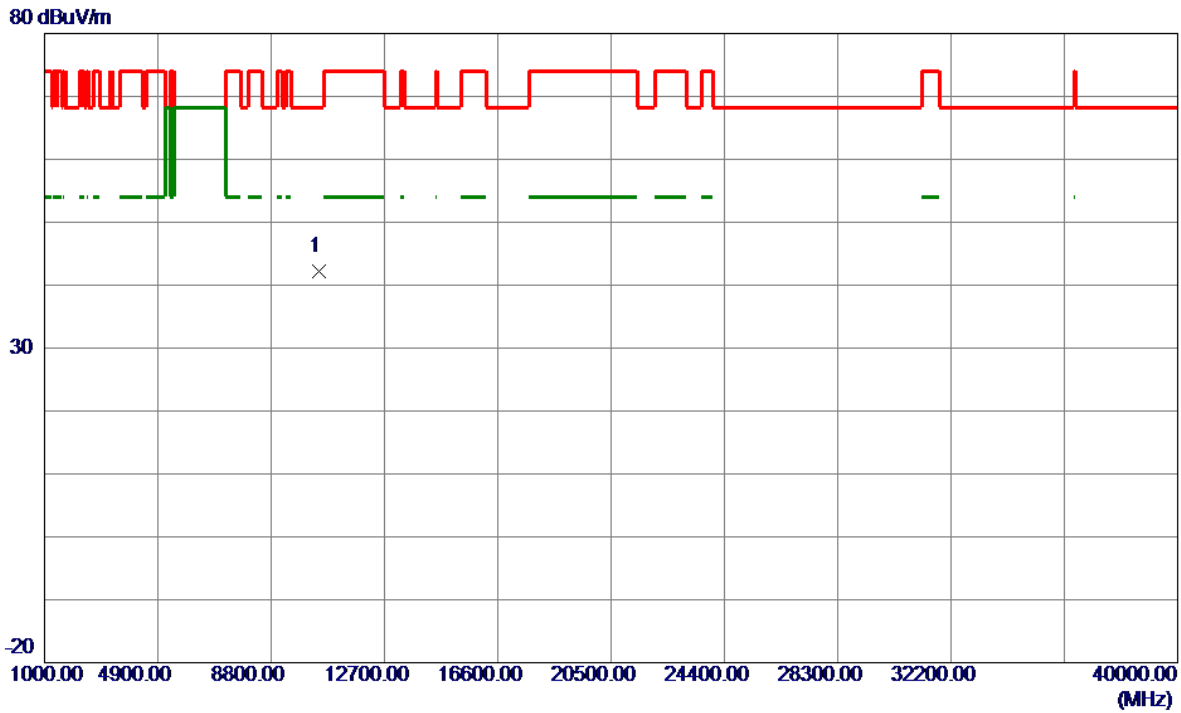


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10460.0000	51.46	-9.23	42.23	68.20	-25.97	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5230 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

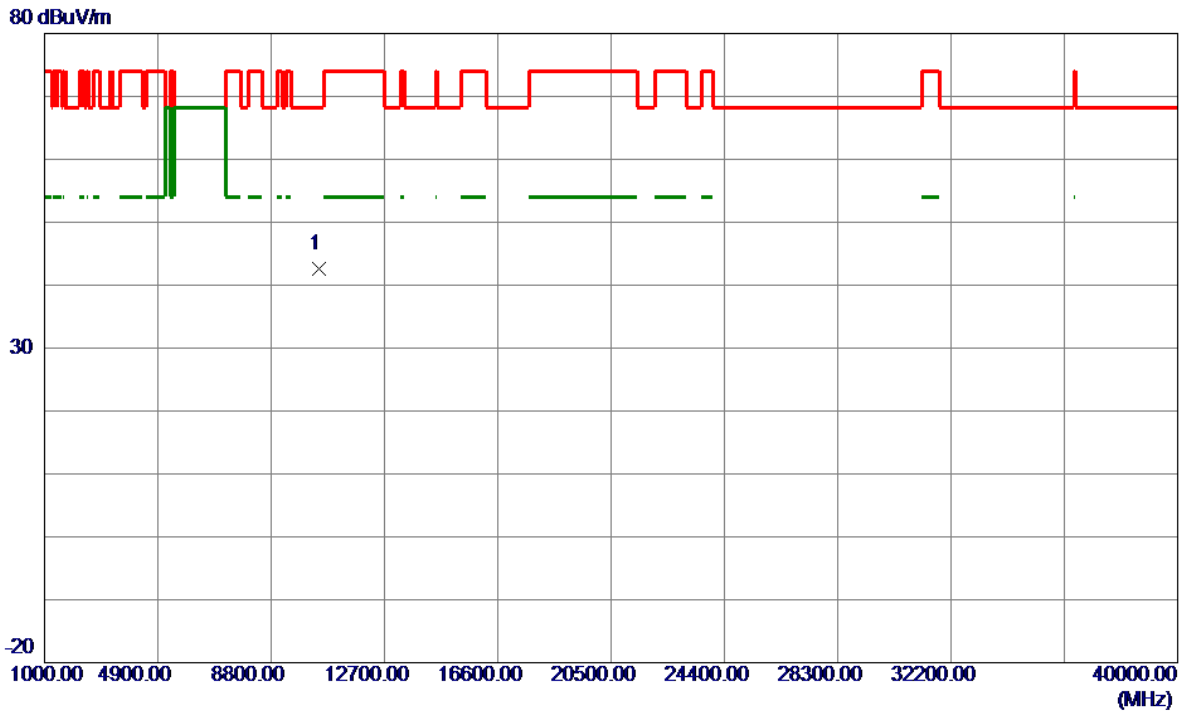


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10460.0000	51.91	-9.23	42.68	68.20	-25.52	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

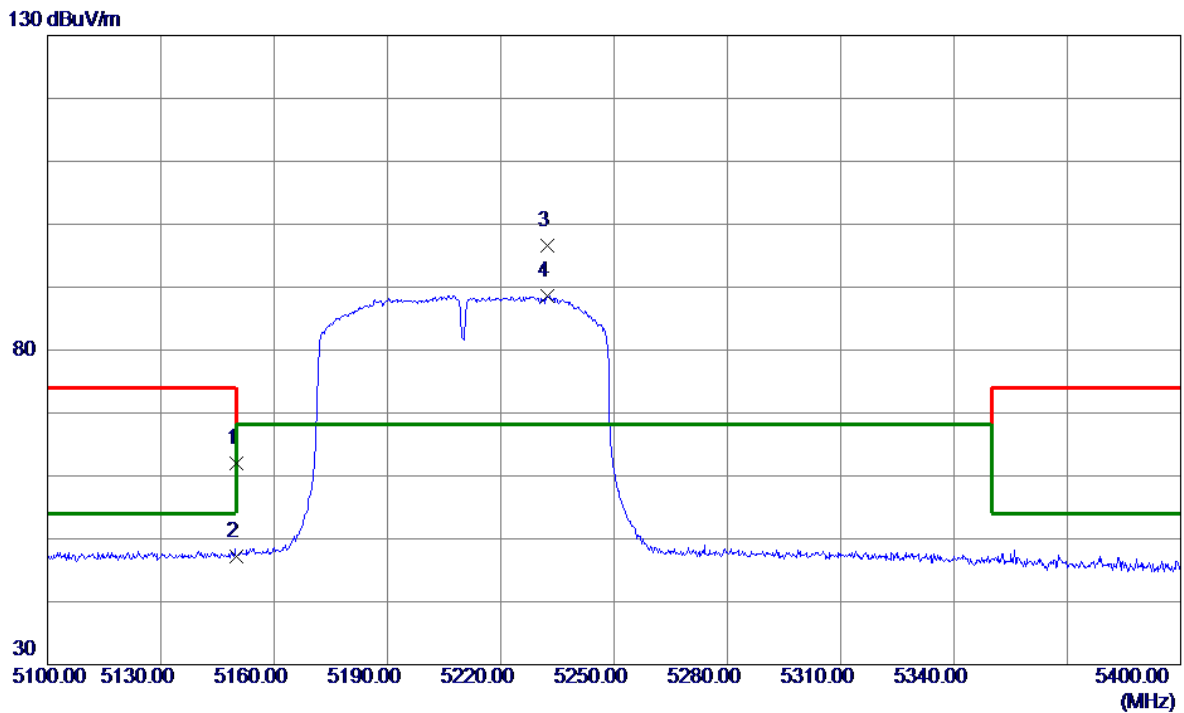


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	24.33	37.65	61.98	74.00	-12.02	Peak	
2	5150.0000	9.53	37.65	47.18	54.00	-6.82	AVG	
3 *	5232.4500	58.91	37.73	96.64	68.20	28.44	Peak	No Limit
4	5232.4500	50.91	37.73	88.64	68.20	20.44	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

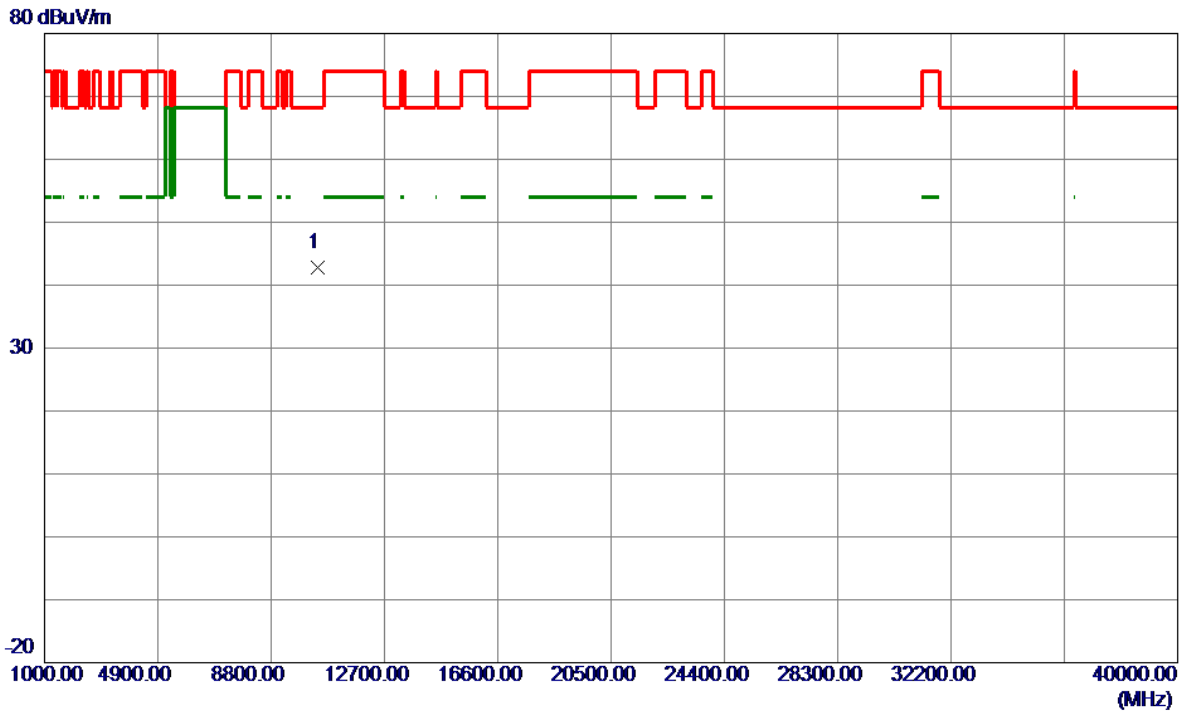


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	52.15	-9.31	42.84	68.20	-25.36	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

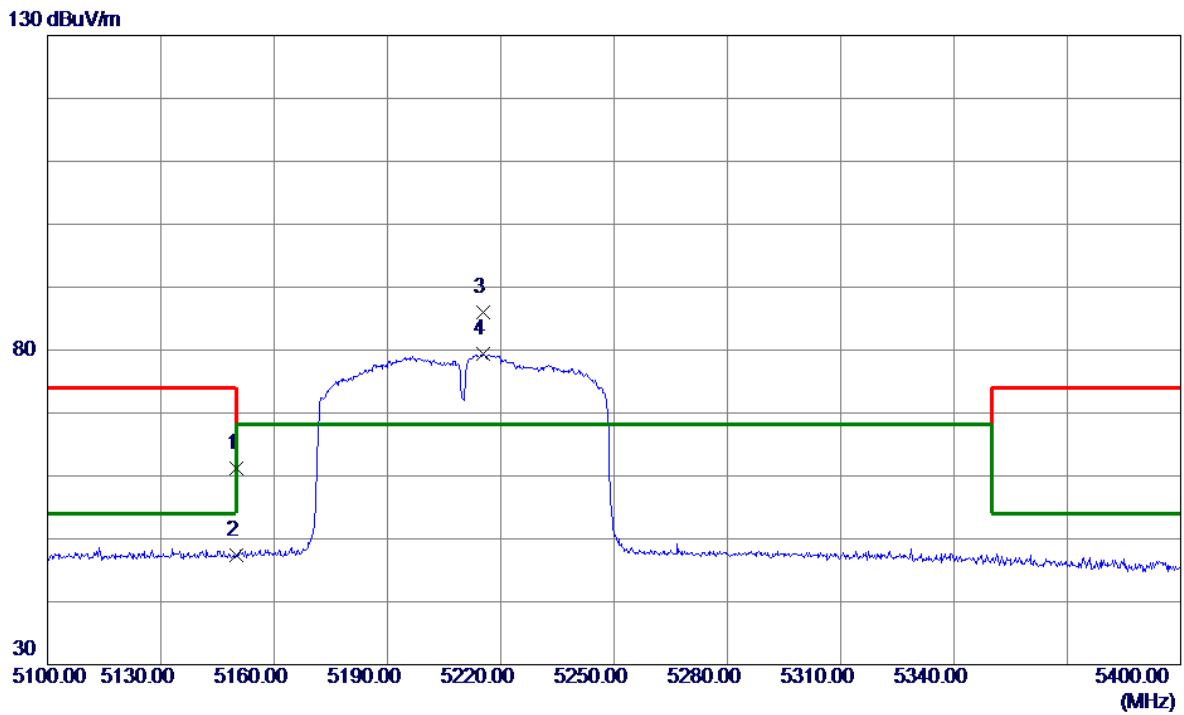


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.51	37.65	61.16	74.00	-12.84	Peak	
2	5150.0000	9.76	37.65	47.41	54.00	-6.59	AVG	
3 *	5215.2000	48.26	37.70	85.96	68.20	17.76	Peak	No Limit
4	5215.2000	41.71	37.70	79.41	68.20	11.21	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

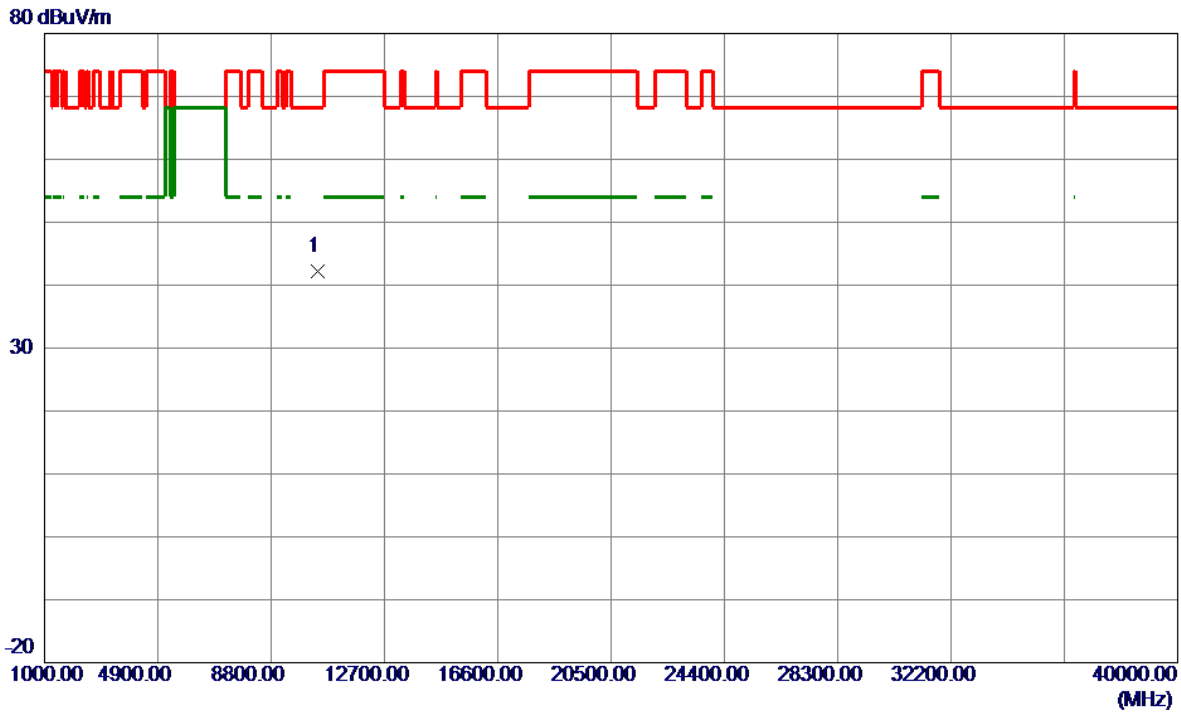


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	51.59	-9.31	42.28	68.20	-25.92	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

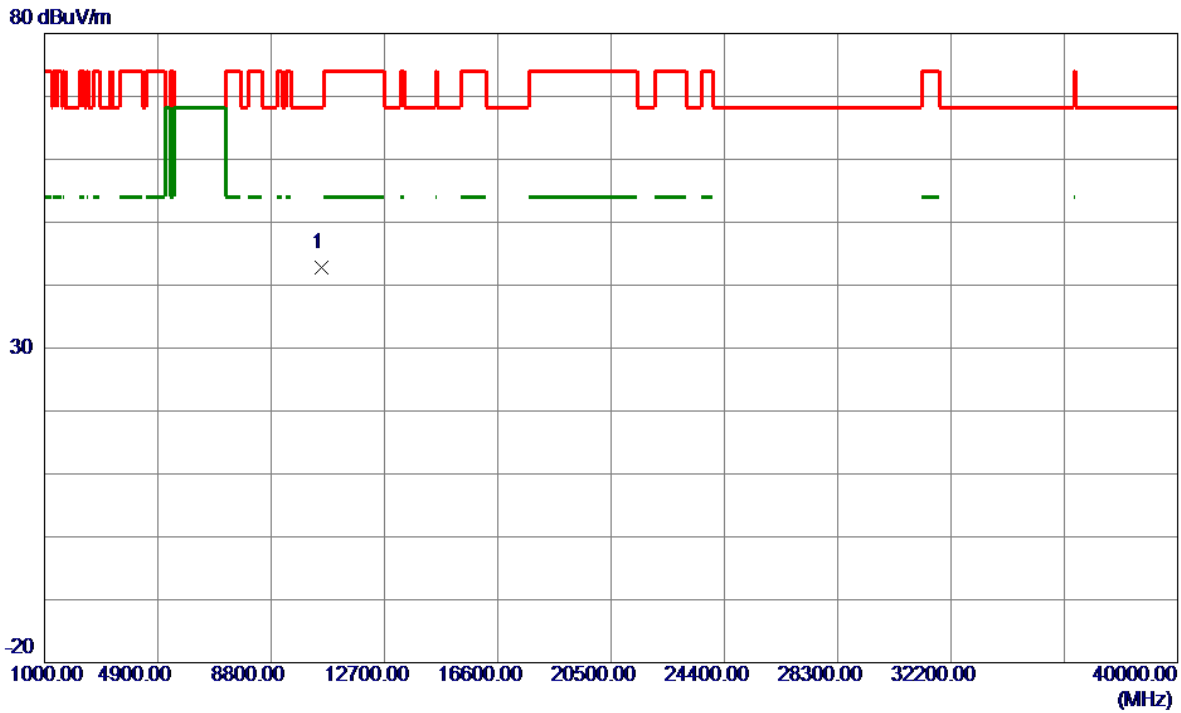


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	51.96	-9.12	42.84	68.20	-25.36	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

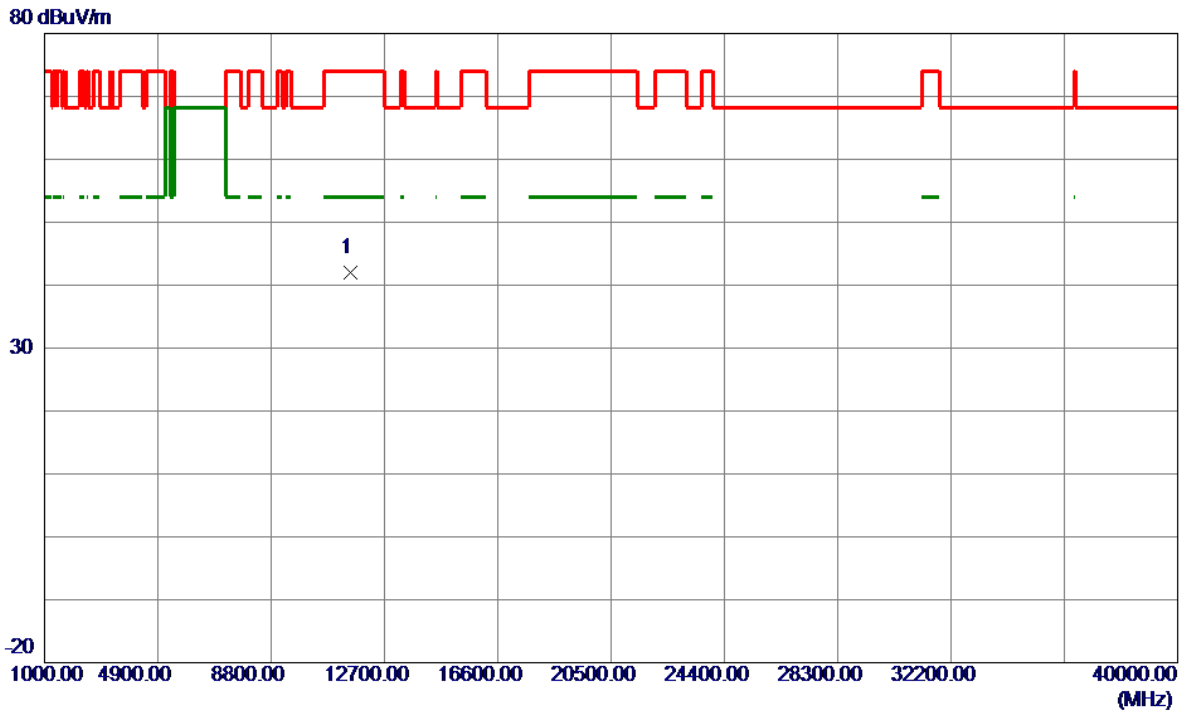


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11520.0000	50.08	-8.00	42.08	74.00	-31.92	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

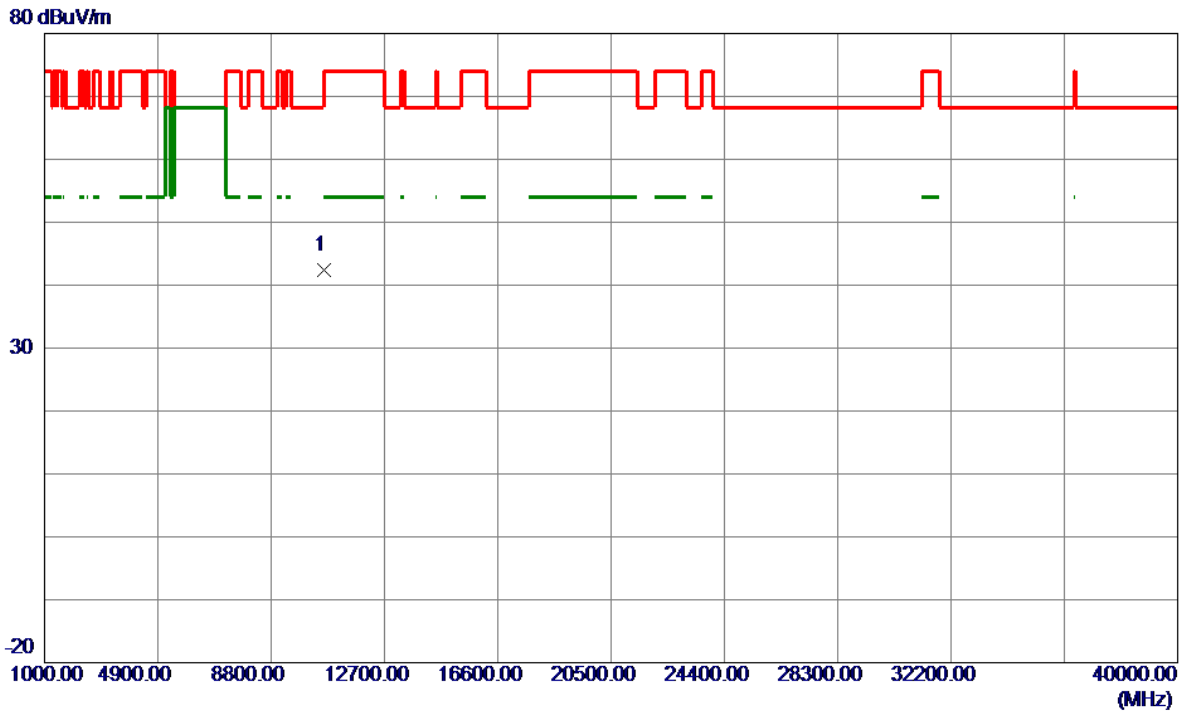


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	51.46	-9.01	42.45	68.20	-25.75	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

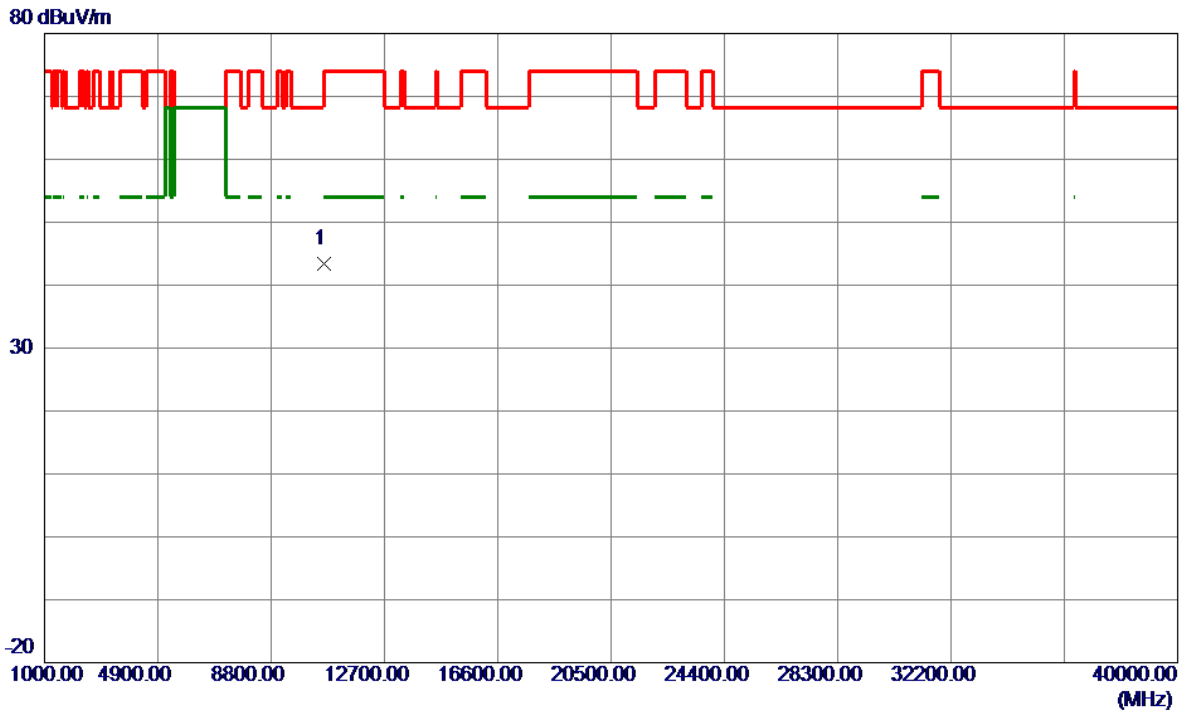


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	52.49	-9.01	43.48	68.20	-24.72	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

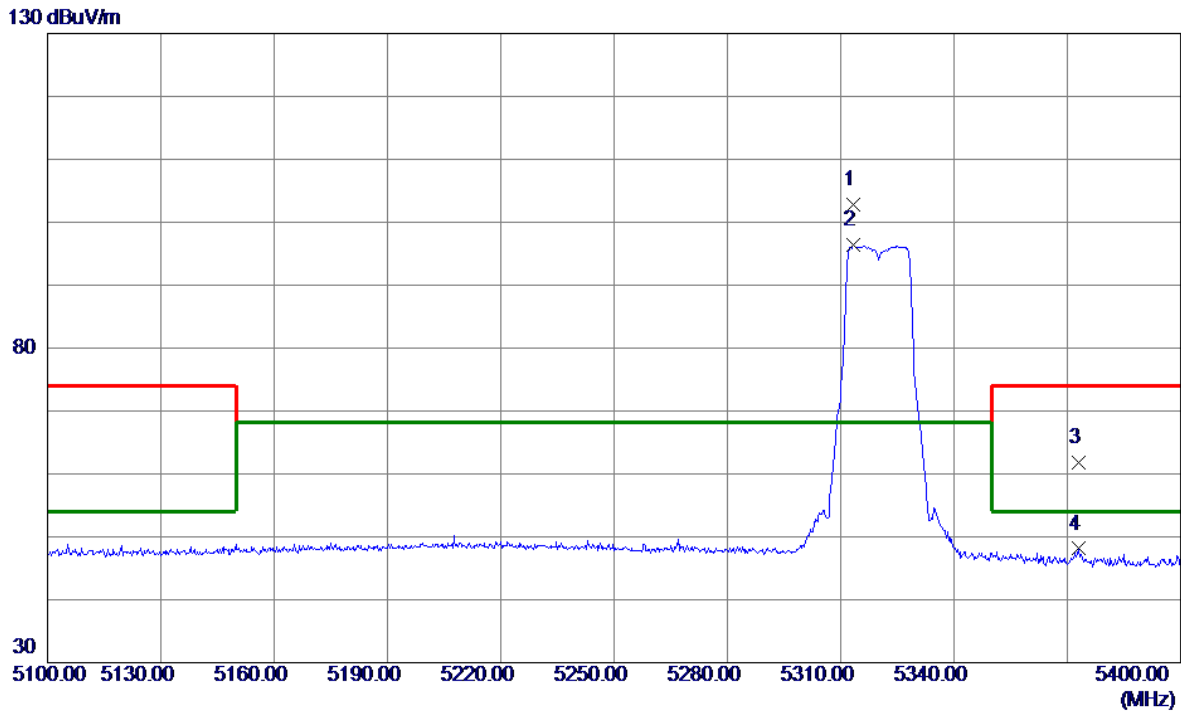


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5313.3000	64.88	37.85	102.73	68.20	34.53	Peak	No Limit
2	5313.3000	58.47	37.85	96.32	68.20	28.12	AVG	No Limit
3	5372.8500	23.92	37.94	61.86	74.00	-12.14	Peak	
4	5372.8500	10.16	37.94	48.10	54.00	-5.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

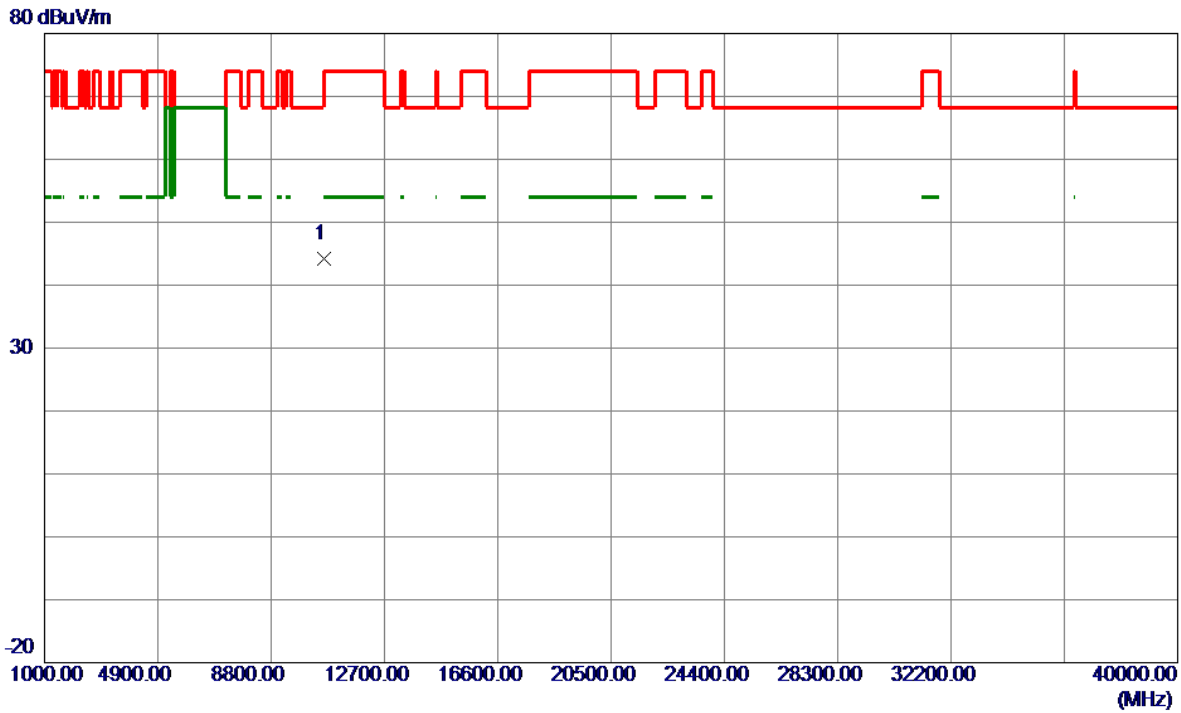


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10640.0000	53.15	-8.98	44.17	74.00	-29.83	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

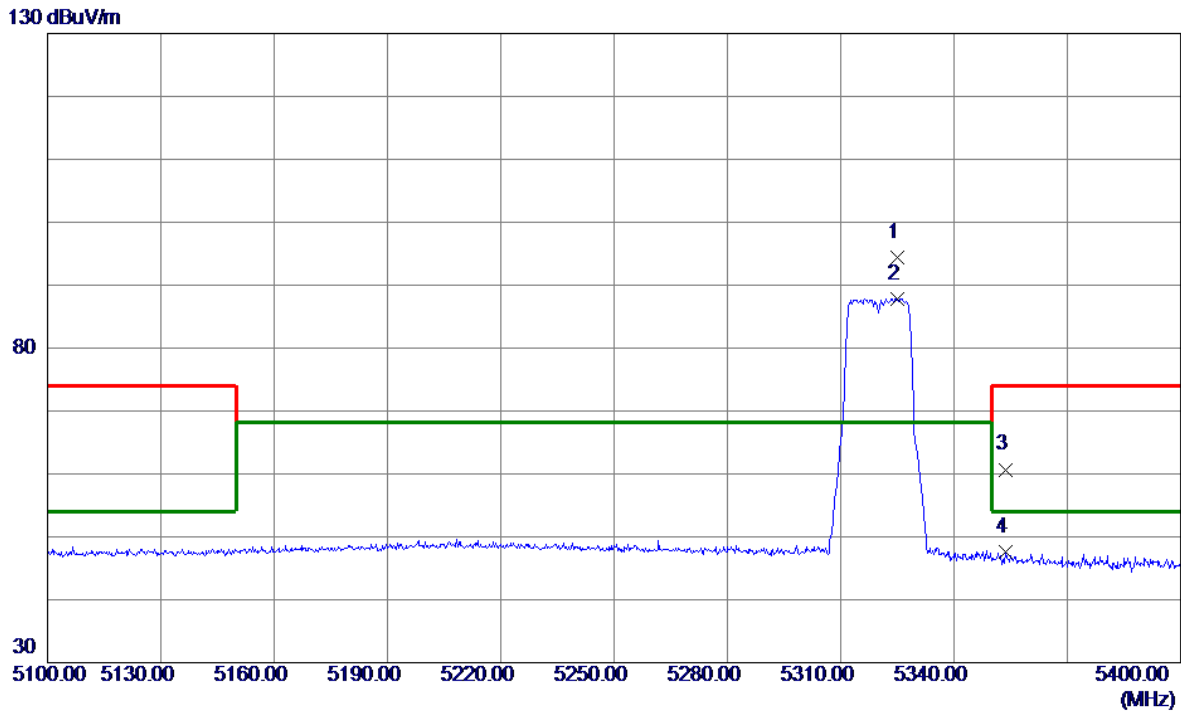


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5325.0000	56.61	37.87	94.48	68.20	26.28	Peak	No Limit
2	5325.0000	49.99	37.87	87.86	68.20	19.66	AVG	No Limit
3	5353.6500	22.79	37.91	60.70	74.00	-13.30	Peak	
4	5353.6500	9.73	37.91	47.64	54.00	-6.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

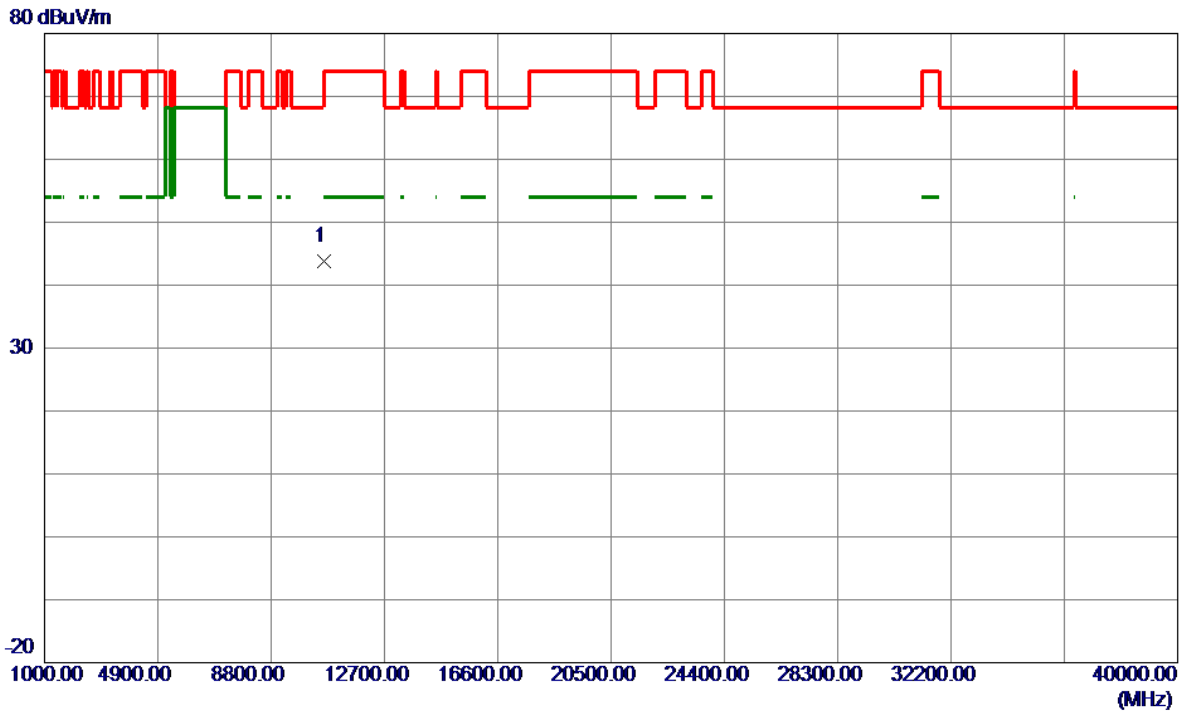


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10640.0000	52.87	-8.98	43.89	74.00	-30.11	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT20) Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

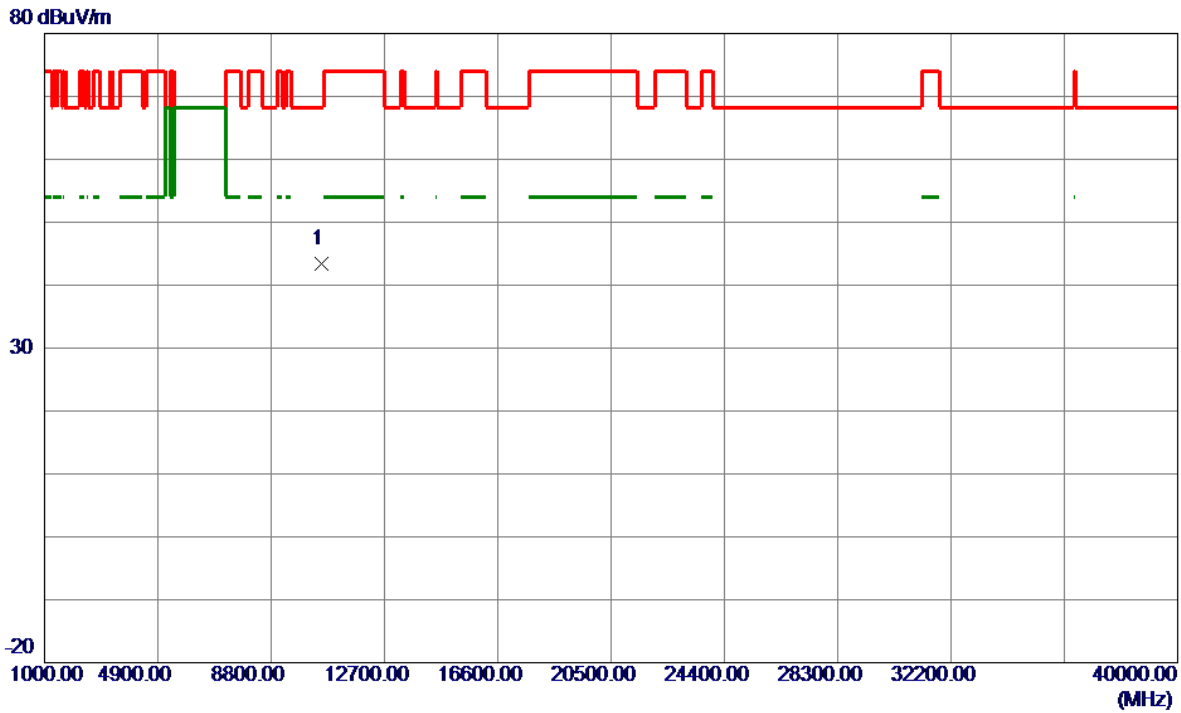


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	52.56	-9.12	43.44	68.20	-24.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT20) Mode 5260 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

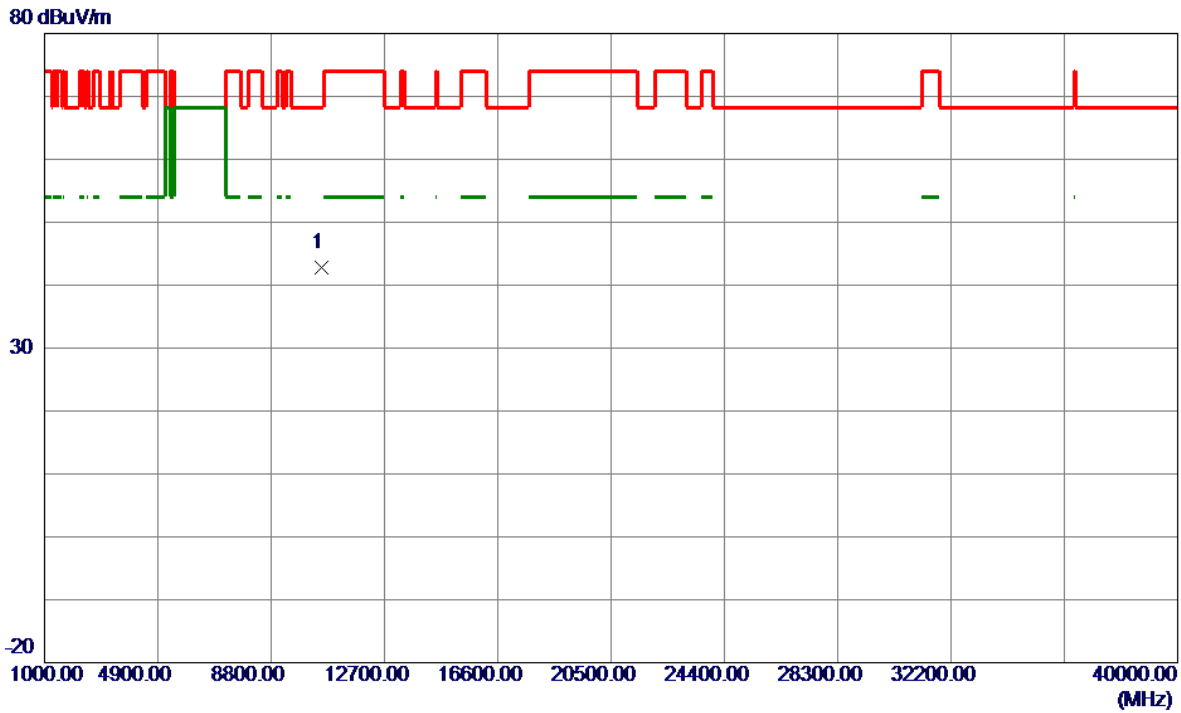


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10520.0000	51.97	-9.12	42.85	68.20	-25.35	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT20) Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

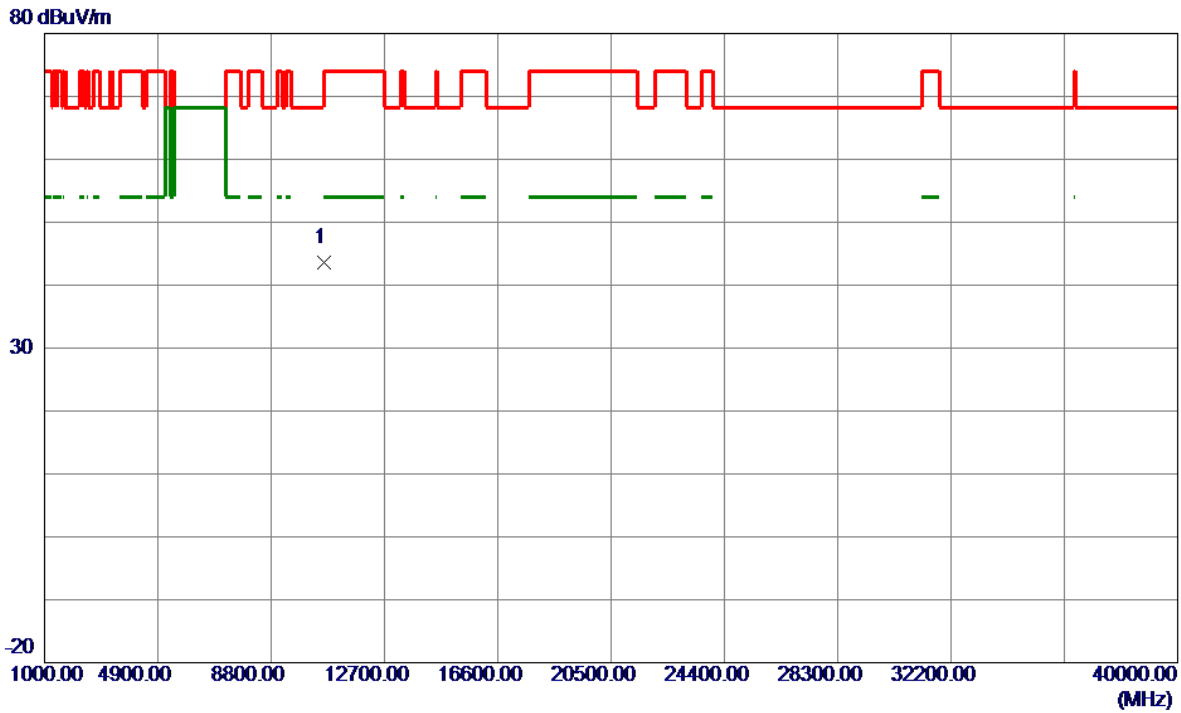


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	52.58	-9.01	43.57	68.20	-24.63	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT20) Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

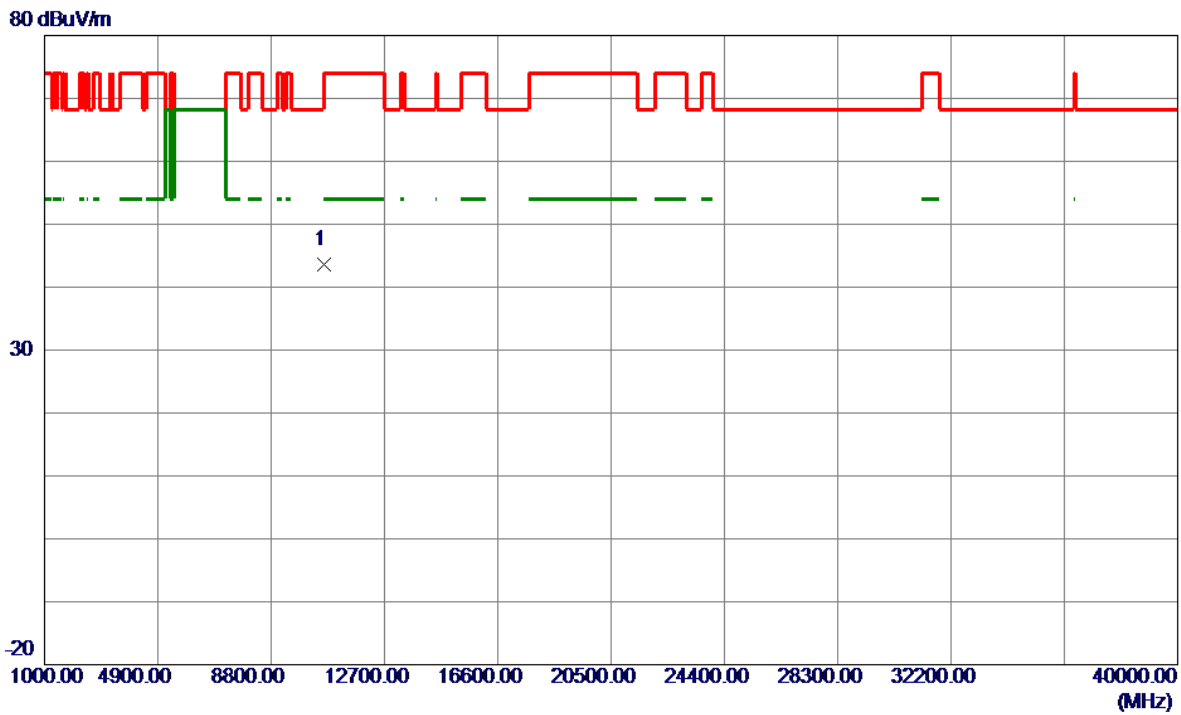


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10600.0000	52.60	-9.01	43.59	68.20	-24.61	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2A_TX N(HT20) Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

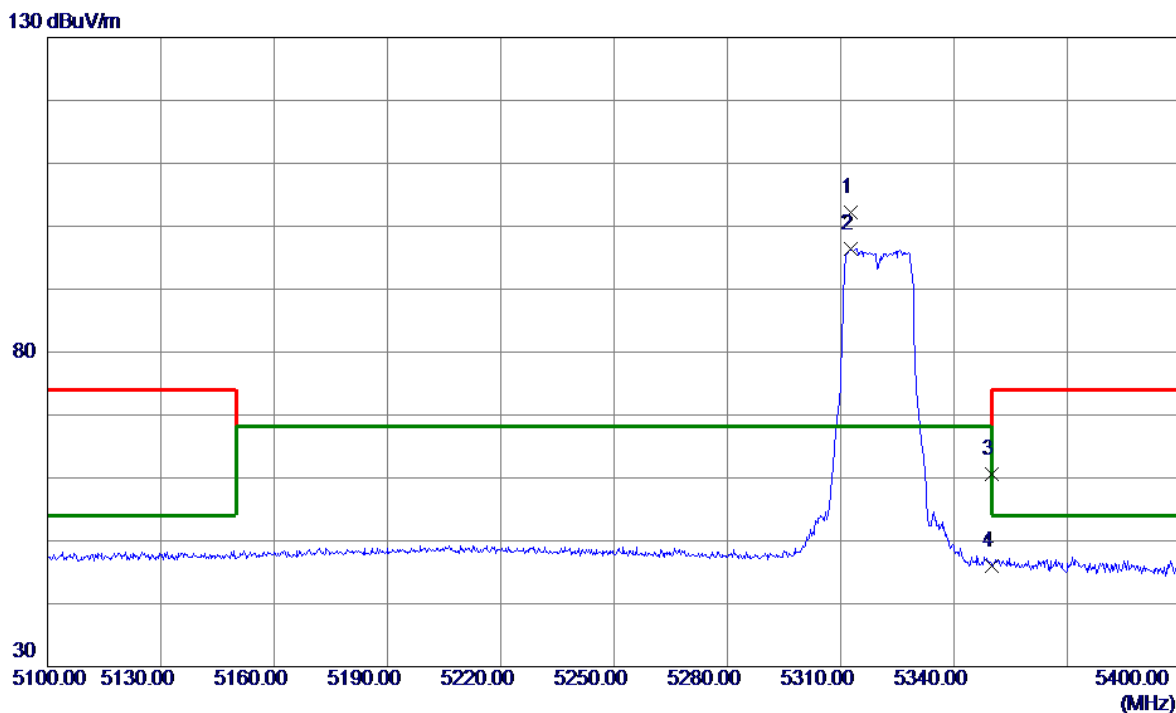


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5312.5500	64.42	37.85	102.27	68.20	34.07	Peak	
2	5312.5500	58.53	37.85	96.38	68.20	28.18	AVG	
3	5350.0000	22.65	37.91	60.56	74.00	-13.44	Peak	
4	5350.0000	8.15	37.91	46.06	54.00	-7.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT20) Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

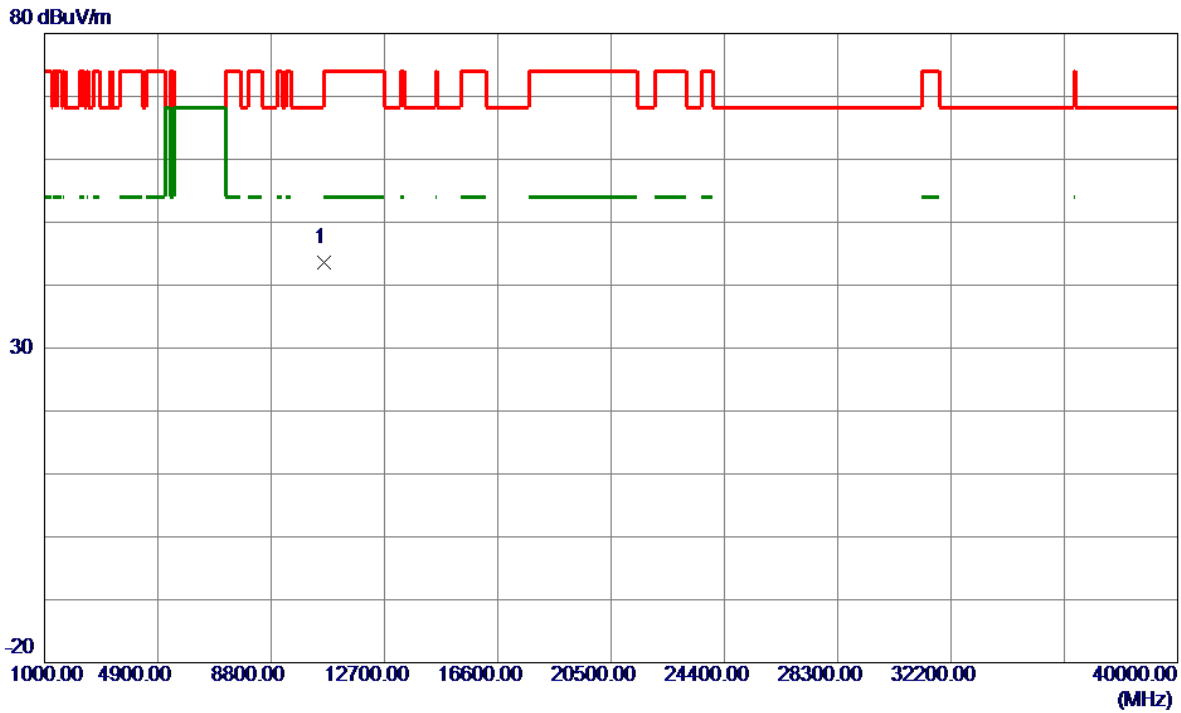


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10640.0000	52.57	-8.98	43.59	74.00	-30.41	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT20) Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

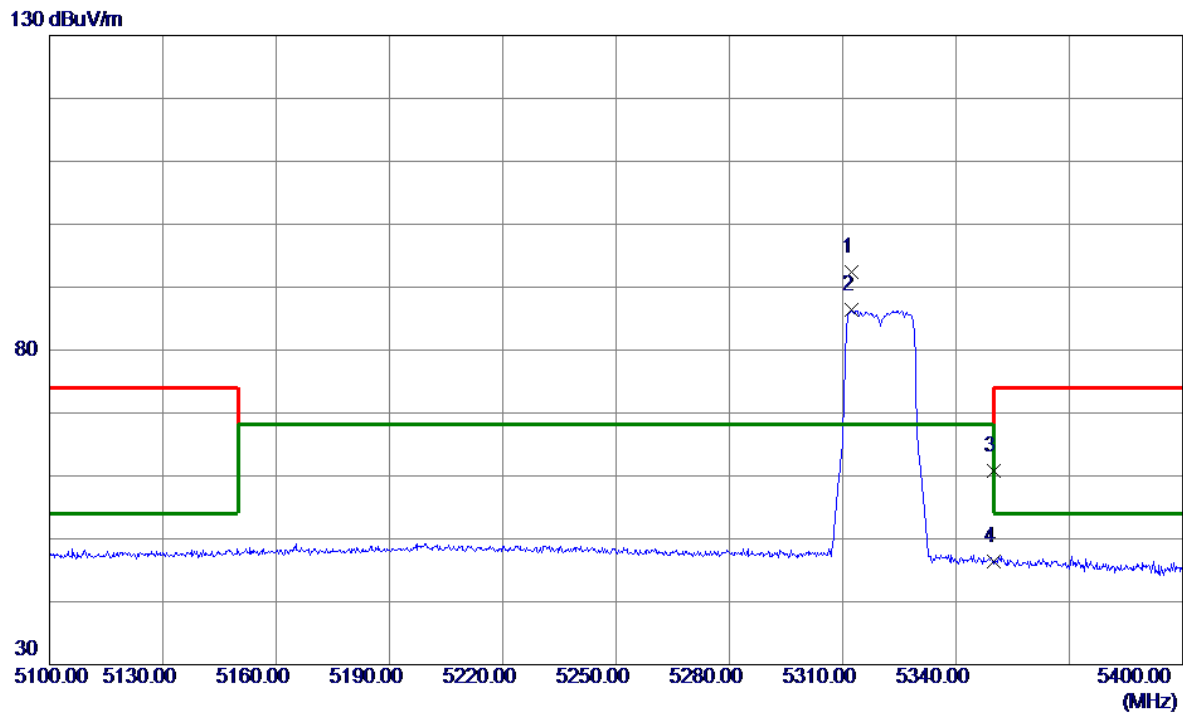


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5312.4000	54.46	37.85	92.31	68.20	24.11	Peak	
2	5312.4000	48.55	37.85	86.40	68.20	18.20	AVG	
3	5350.0000	22.93	37.91	60.84	74.00	-13.16	Peak	
4	5350.0000	8.46	37.91	46.37	54.00	-7.63	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT20) Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

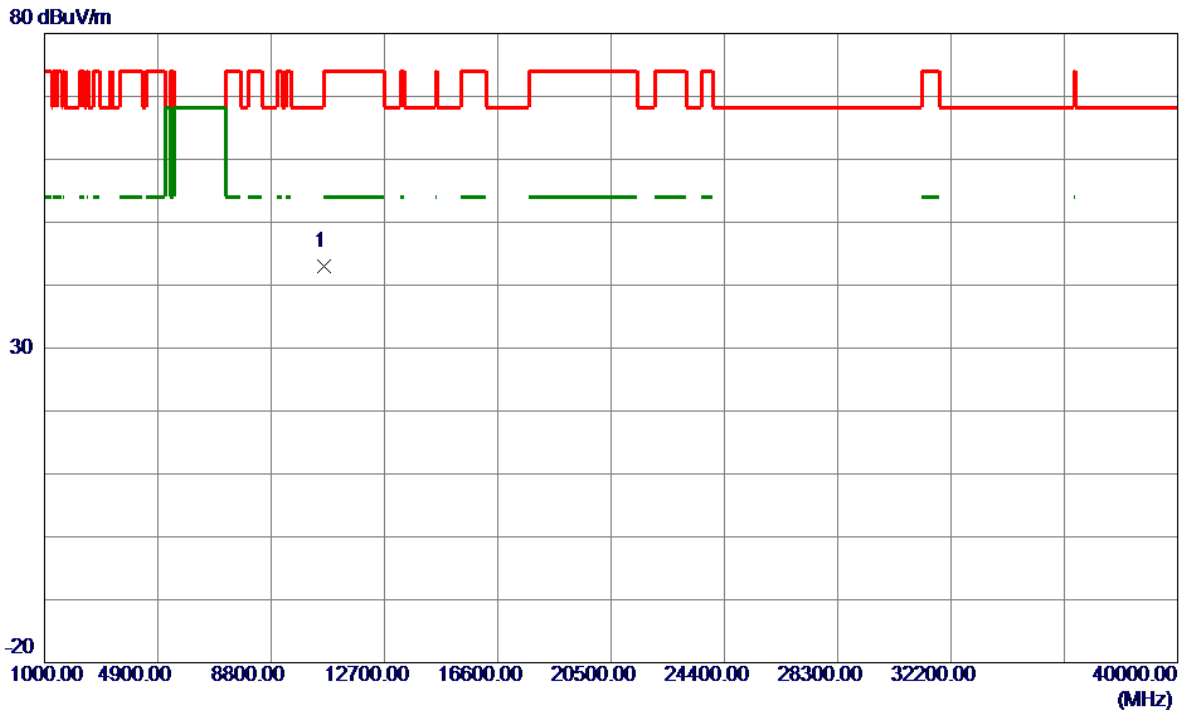


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10640.0000	52.01	-8.98	43.03	74.00	-30.97	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT40) Mode 5270 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

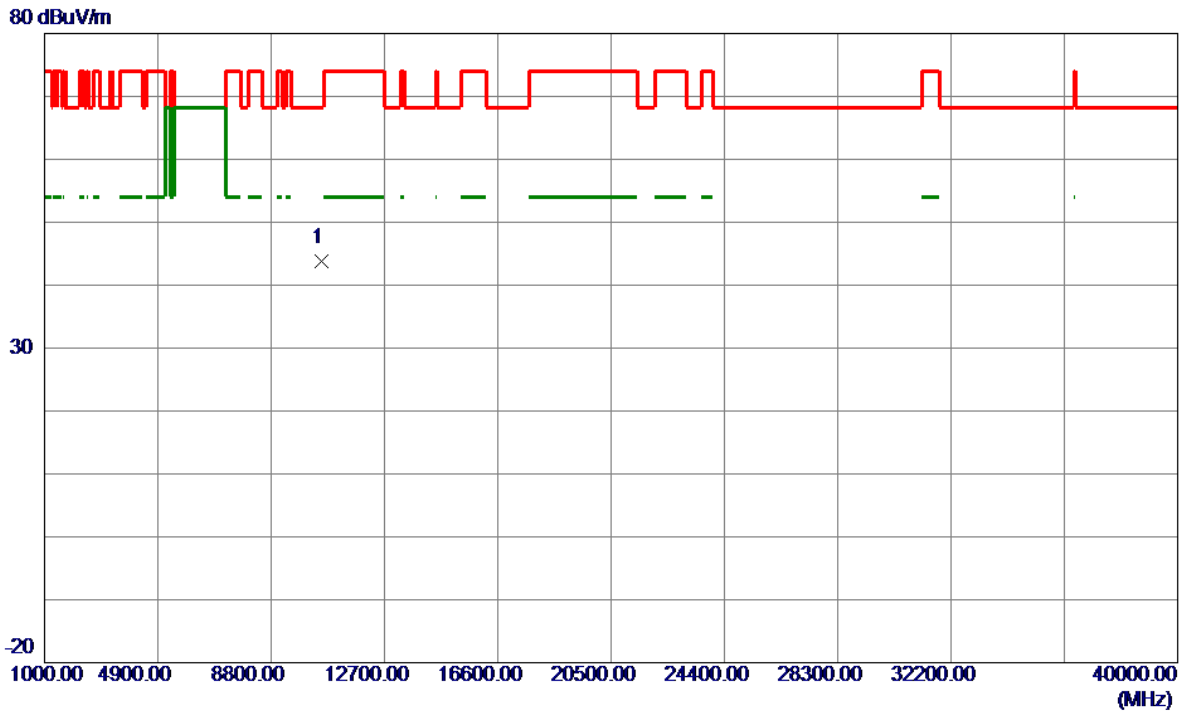


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10540.0000	52.79	-9.09	43.70	68.20	-24.50	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT40) Mode 5270 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

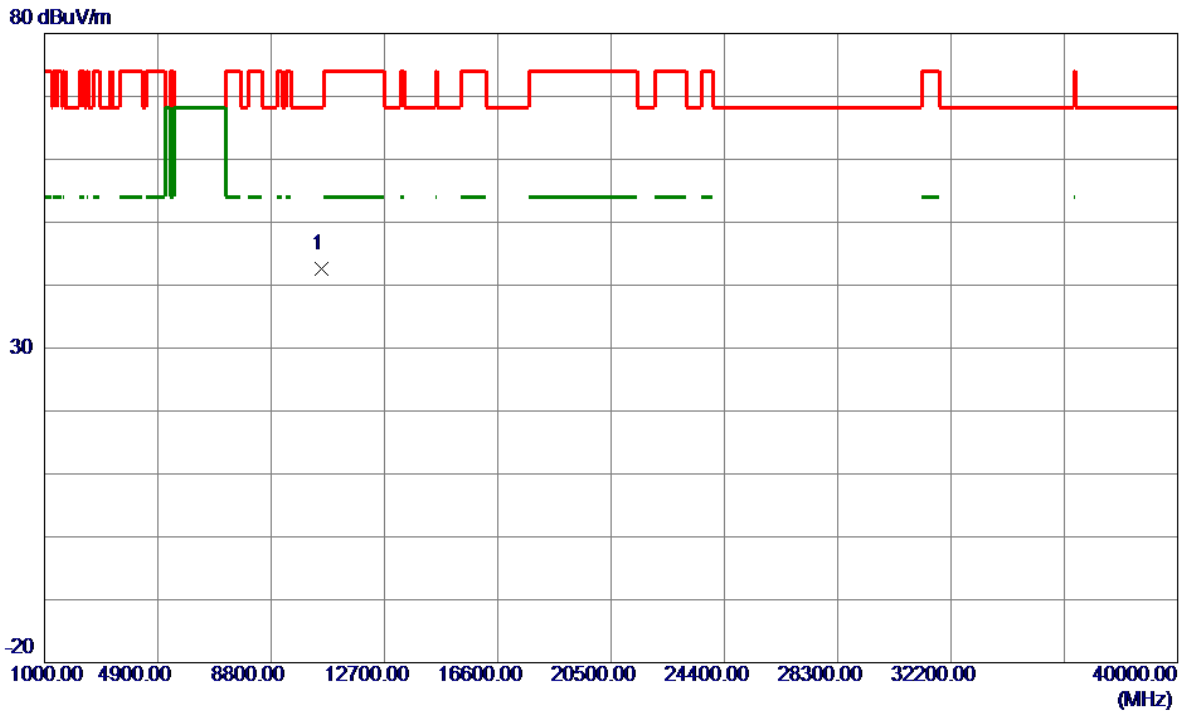


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10540.0000	51.65	-9.09	42.56	68.20	-25.64	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT40) Mode 5310 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

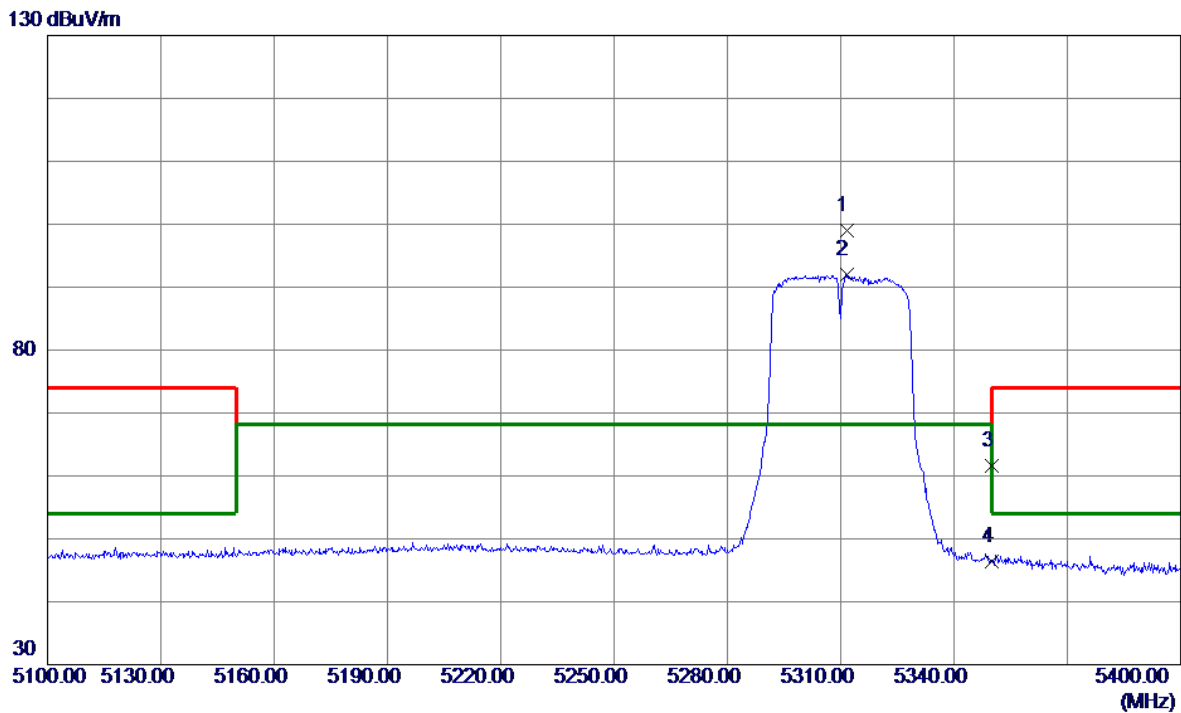


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5311.5000	61.13	37.85	98.98	68.20	30.78	Peak	
2	5311.5000	54.13	37.85	91.98	68.20	23.78	AVG	
3	5350.0000	23.77	37.91	61.68	74.00	-12.32	Peak	
4	5350.0000	8.43	37.91	46.34	54.00	-7.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT40) Mode 5310 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

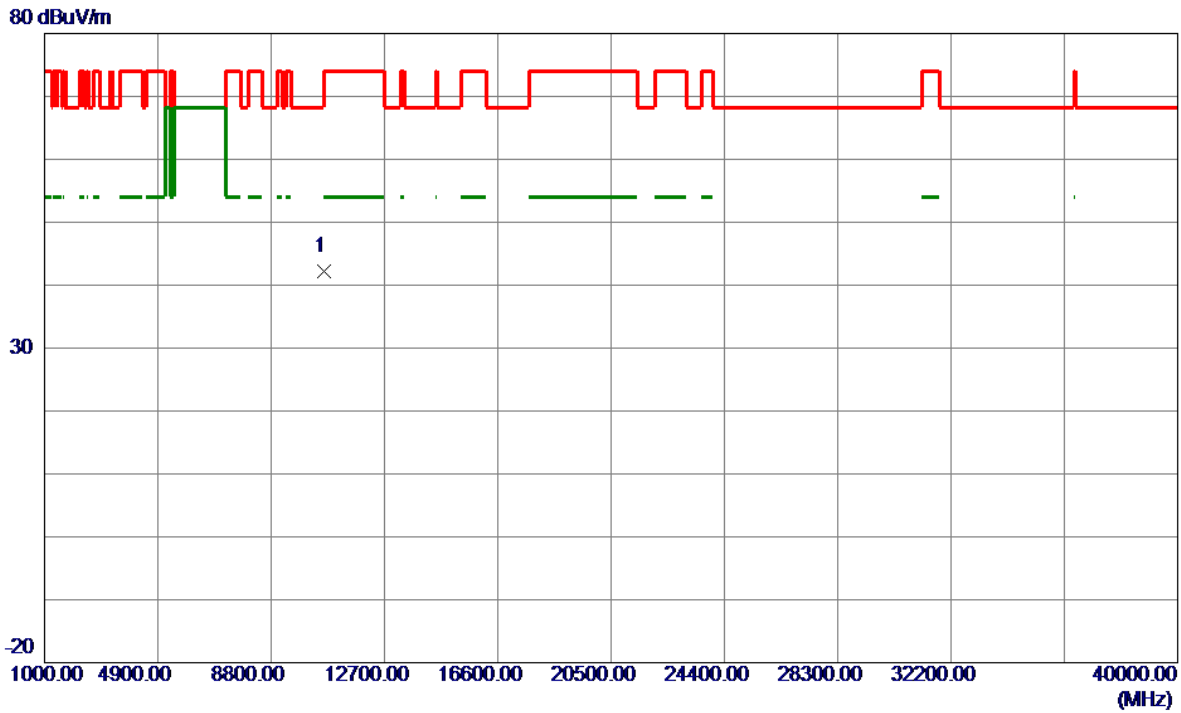


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10620.0000	51.20	-8.99	42.21	74.00	-31.79	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2A_TX N(HT40) Mode 5310 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

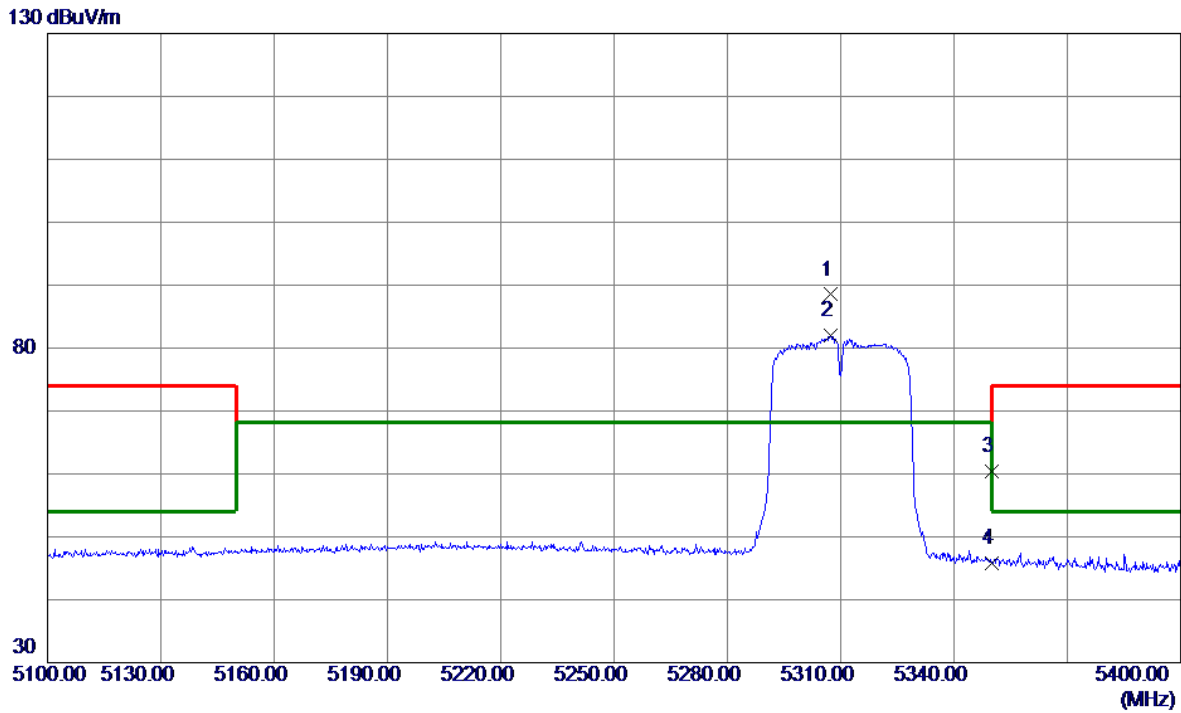


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5307.3000	50.66	37.84	88.50	68.20	20.30	Peak	
2	5307.3000	44.16	37.84	82.00	68.20	13.80	AVG	
3	5350.0000	22.40	37.91	60.31	74.00	-13.69	Peak	
4	5350.0000	7.84	37.91	45.75	54.00	-8.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT40) Mode 5310 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

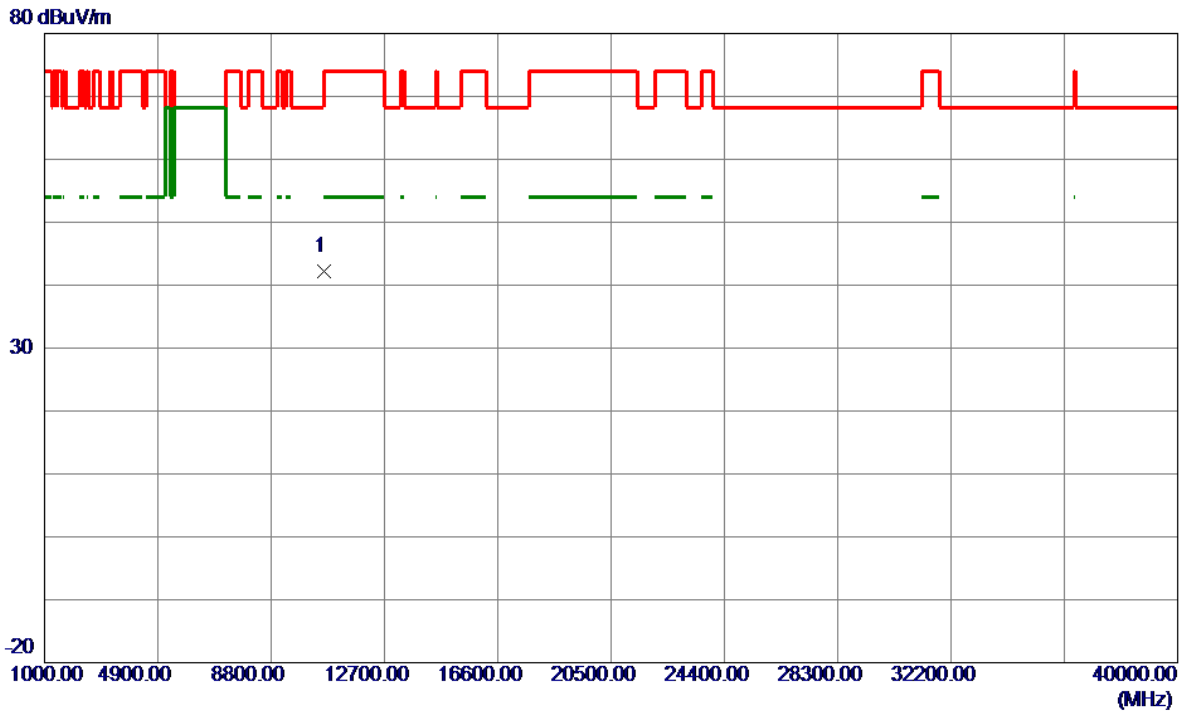


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10620.0000	51.12	-8.99	42.13	74.00	-31.87	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

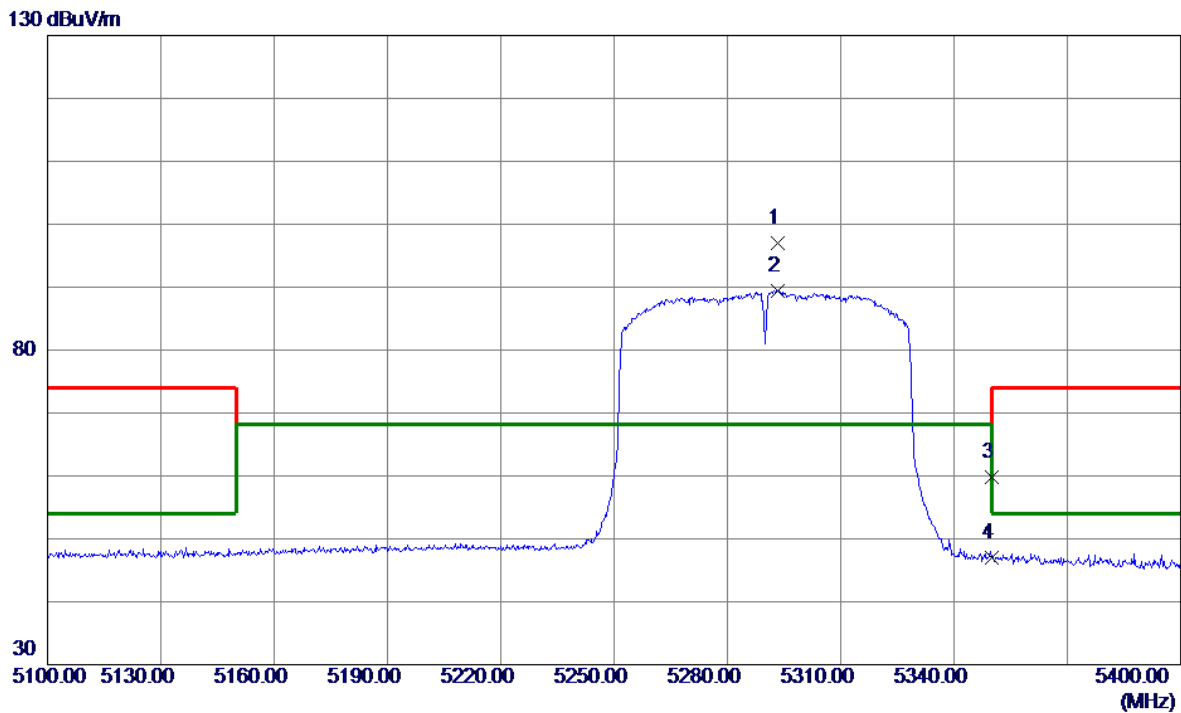


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5293.2000	59.09	37.82	96.91	68.20	28.71	Peak	No Limit
2	5293.2000	51.53	37.82	89.35	68.20	21.15	AVG	No Limit
3	5350.0000	21.86	37.91	59.77	74.00	-14.23	Peak	
4	5350.0000	9.18	37.91	47.09	54.00	-6.91	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

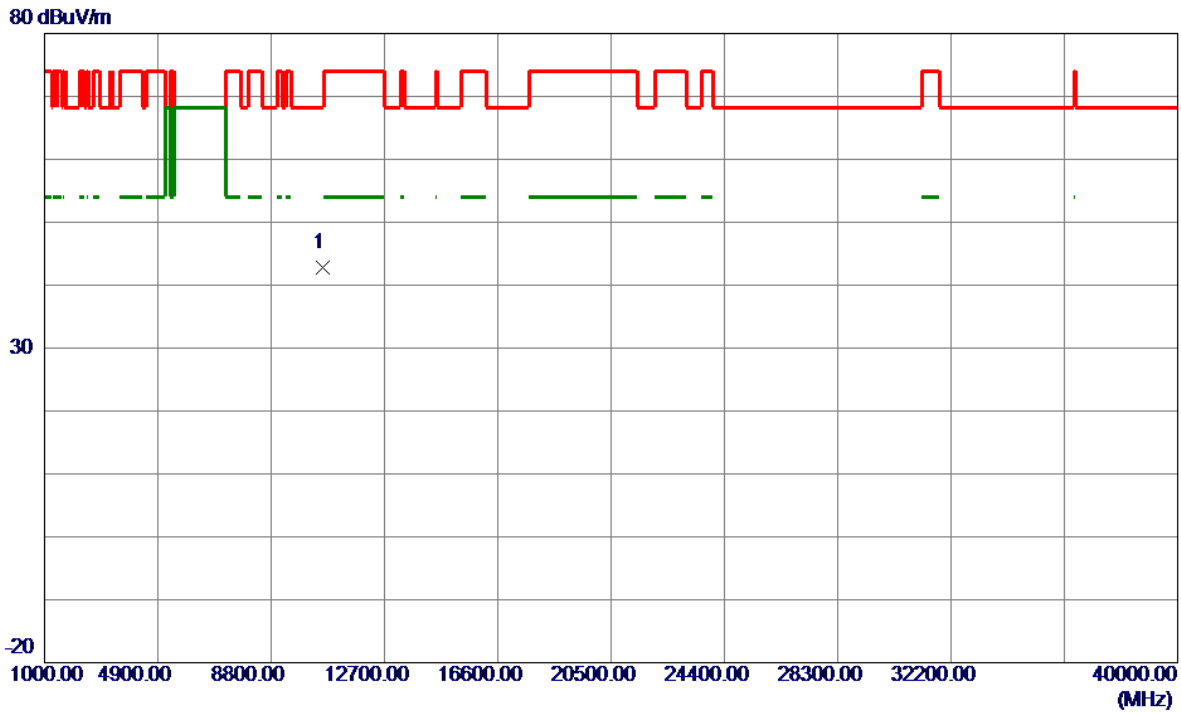


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	51.81	-9.03	42.78	68.20	-25.42	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

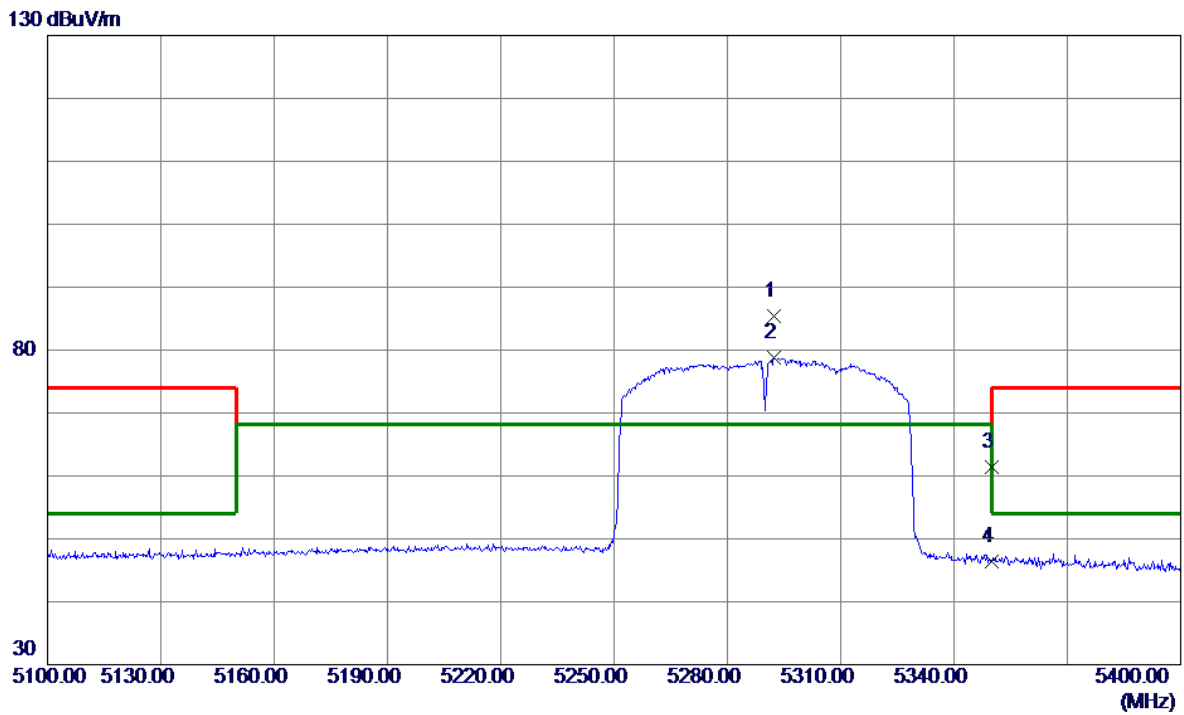


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5292.3000	47.53	37.82	85.35	68.20	17.15	Peak	No Limit
2	5292.3000	41.01	37.82	78.83	68.20	10.63	AVG	No Limit
3	5350.0000	23.41	37.91	61.32	74.00	-12.68	Peak	
4	5350.0000	8.55	37.91	46.46	54.00	-7.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

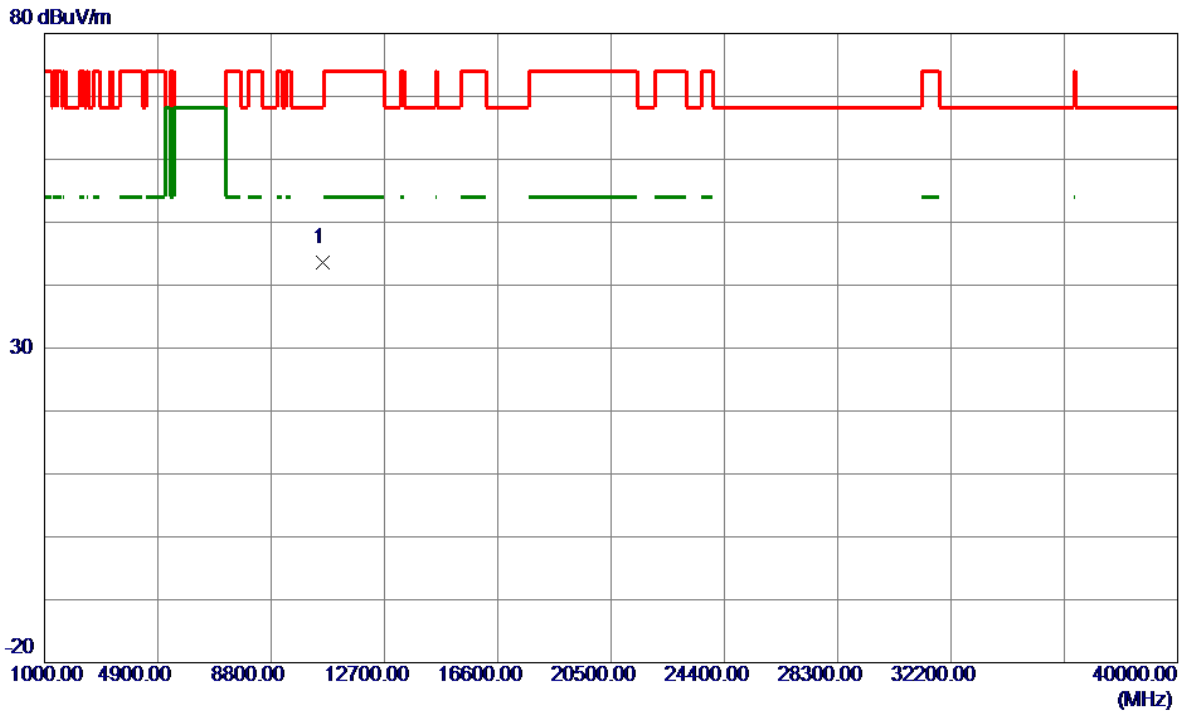


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.0000	52.68	-9.03	43.65	68.20	-24.55	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

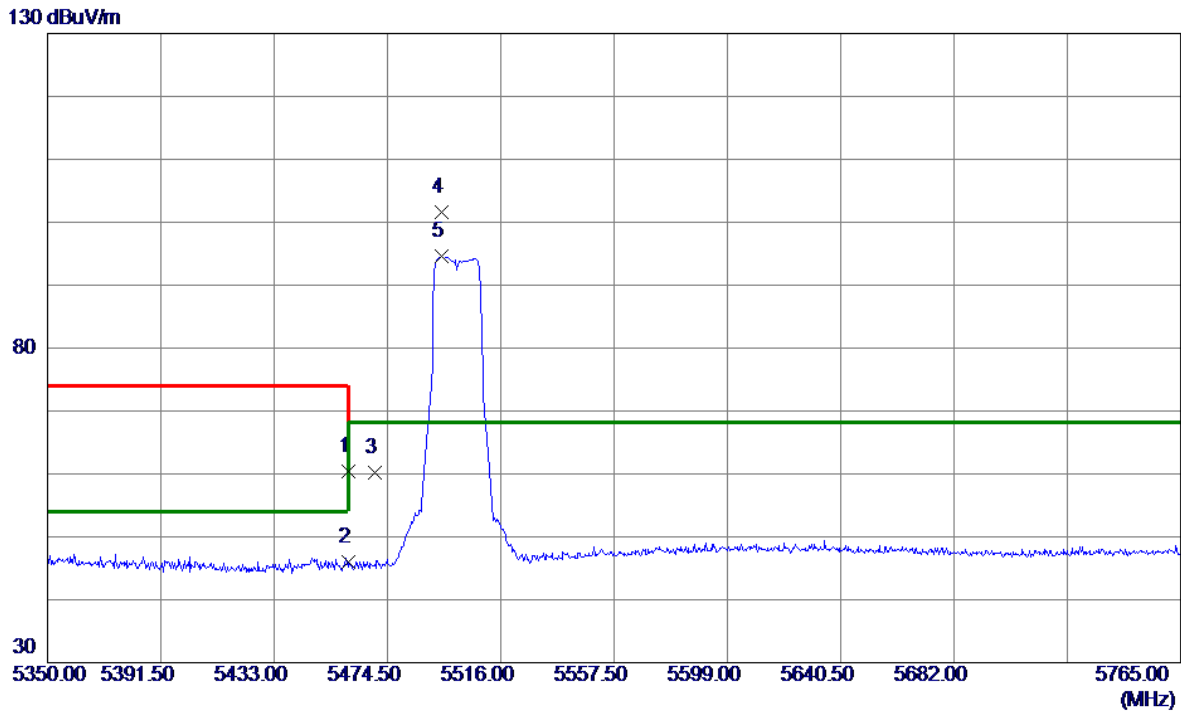


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.25	38.07	60.32	74.00	-13.68	Peak	
2	5460.0000	7.95	38.07	46.02	54.00	-7.98	AVG	
3	5470.0000	22.20	38.09	60.29	68.20	-7.91	Peak	
4 *	5494.4200	63.57	38.12	101.69	68.20	33.49	Peak	No Limit
5	5494.4200	56.45	38.12	94.57	68.20	26.37	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

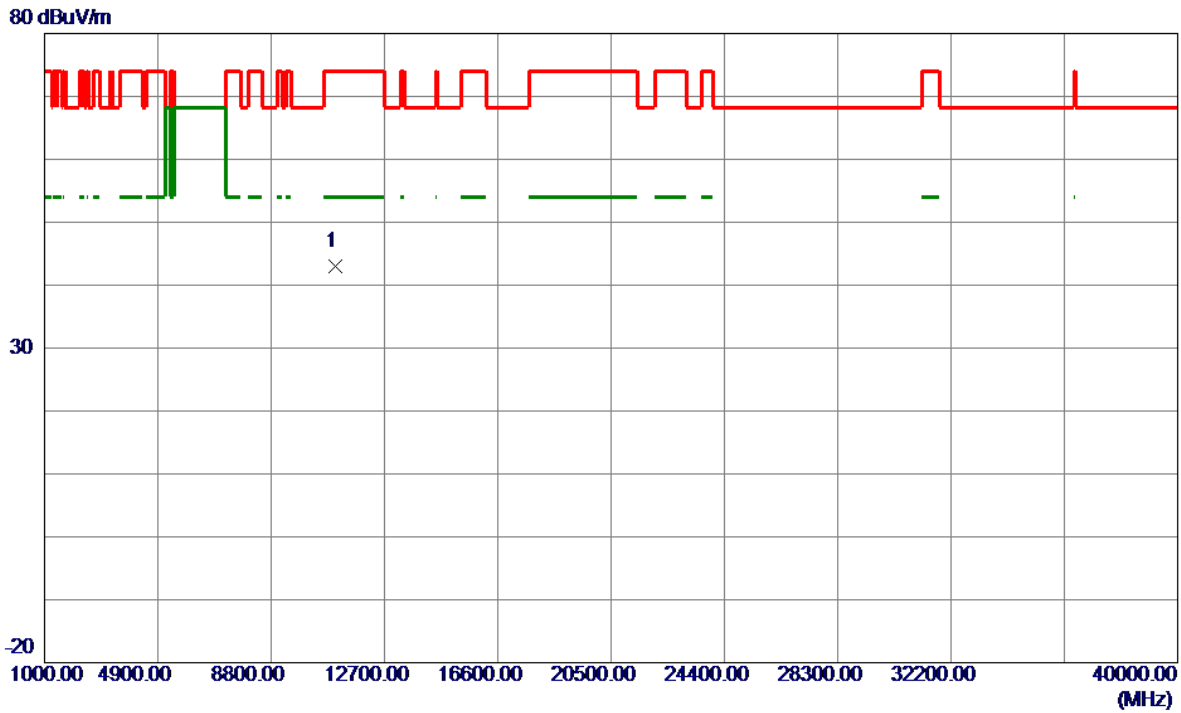


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.0000	51.63	-8.58	43.05	74.00	-30.95	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

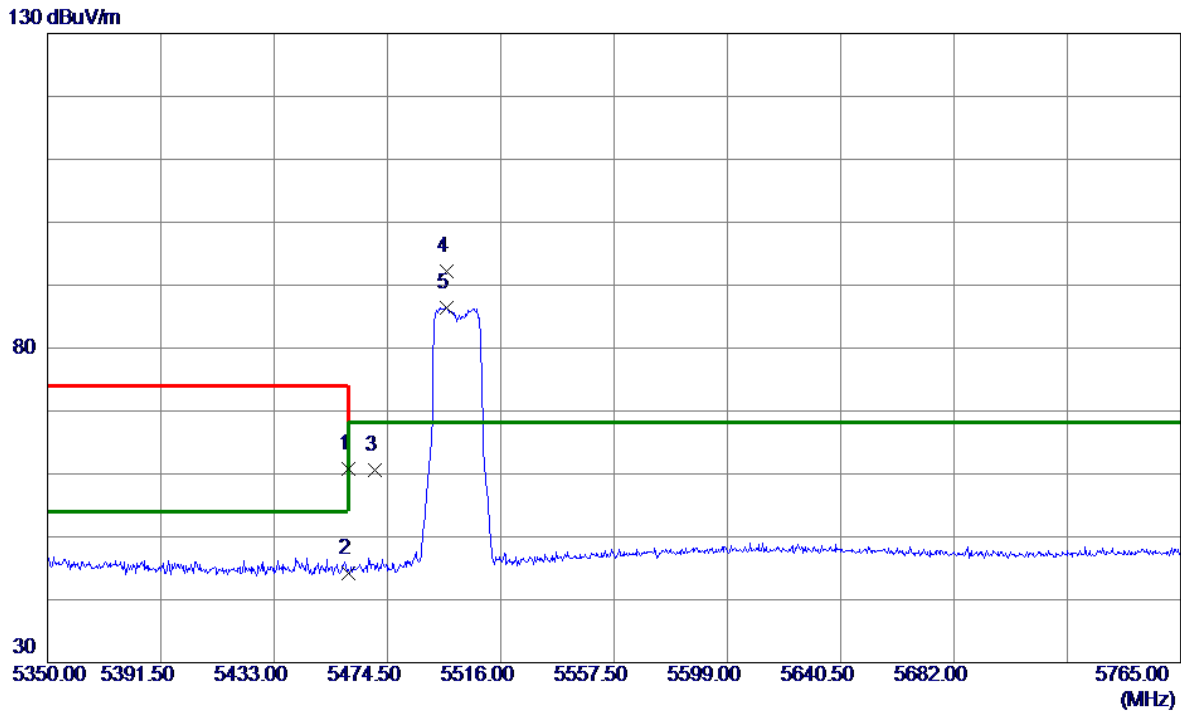


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.66	38.07	60.73	74.00	-13.27	Peak	
2	5460.0000	6.06	38.07	44.13	54.00	-9.87	AVG	
3	5470.0000	22.49	38.09	60.58	68.20	-7.62	Peak	
4 *	5496.0800	54.09	38.12	92.21	68.20	24.01	Peak	No Limit
5	5496.0800	48.32	38.12	86.44	68.20	18.24	AVG	No Limit

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

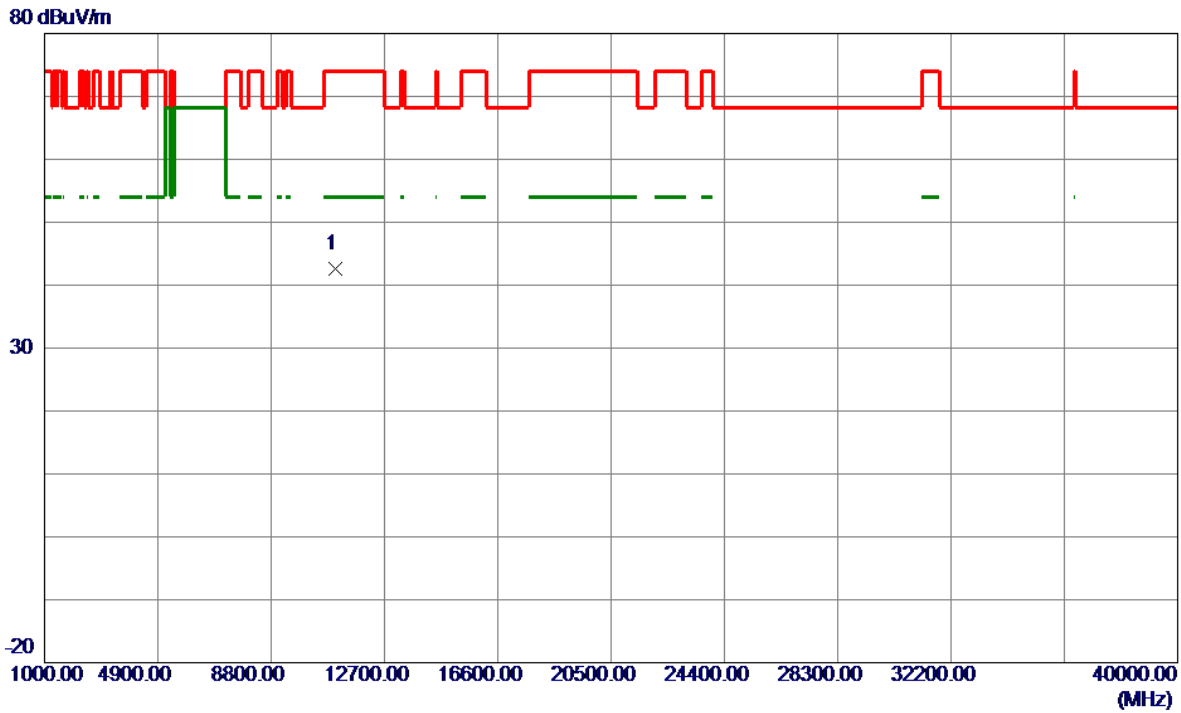


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.0000	51.14	-8.58	42.56	74.00	-31.44	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

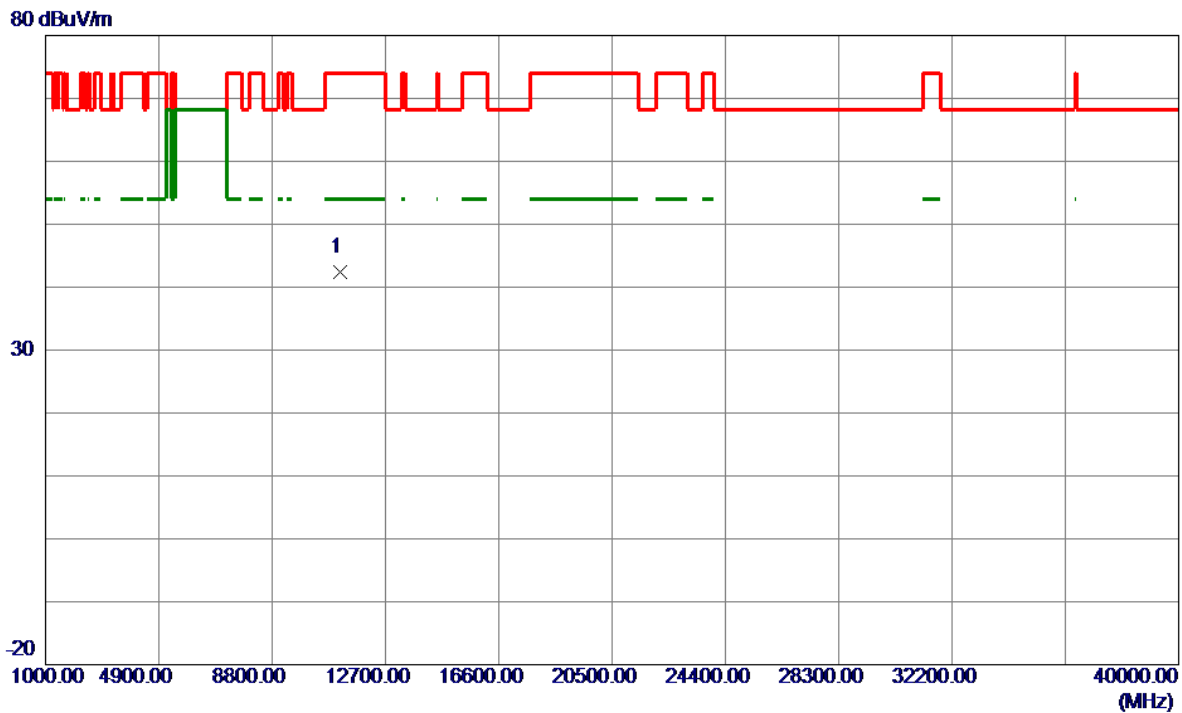


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.0000	50.90	-8.42	42.48	74.00	-31.52	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

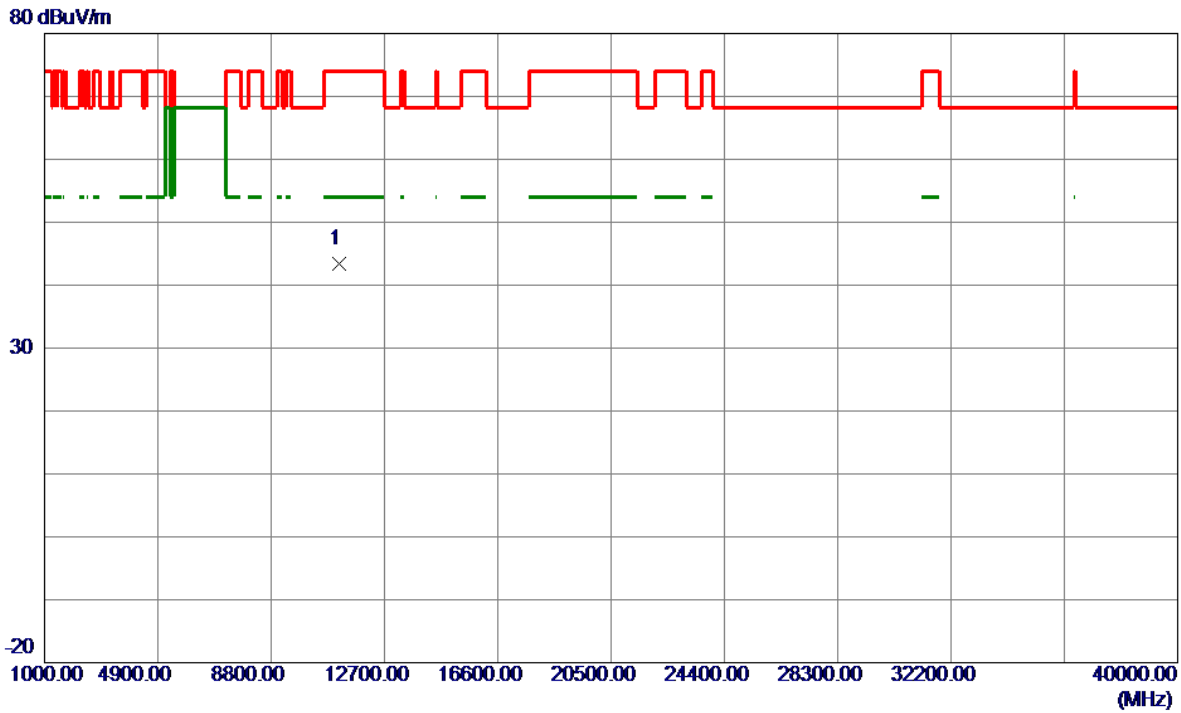


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.0000	51.81	-8.42	43.39	74.00	-30.61	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

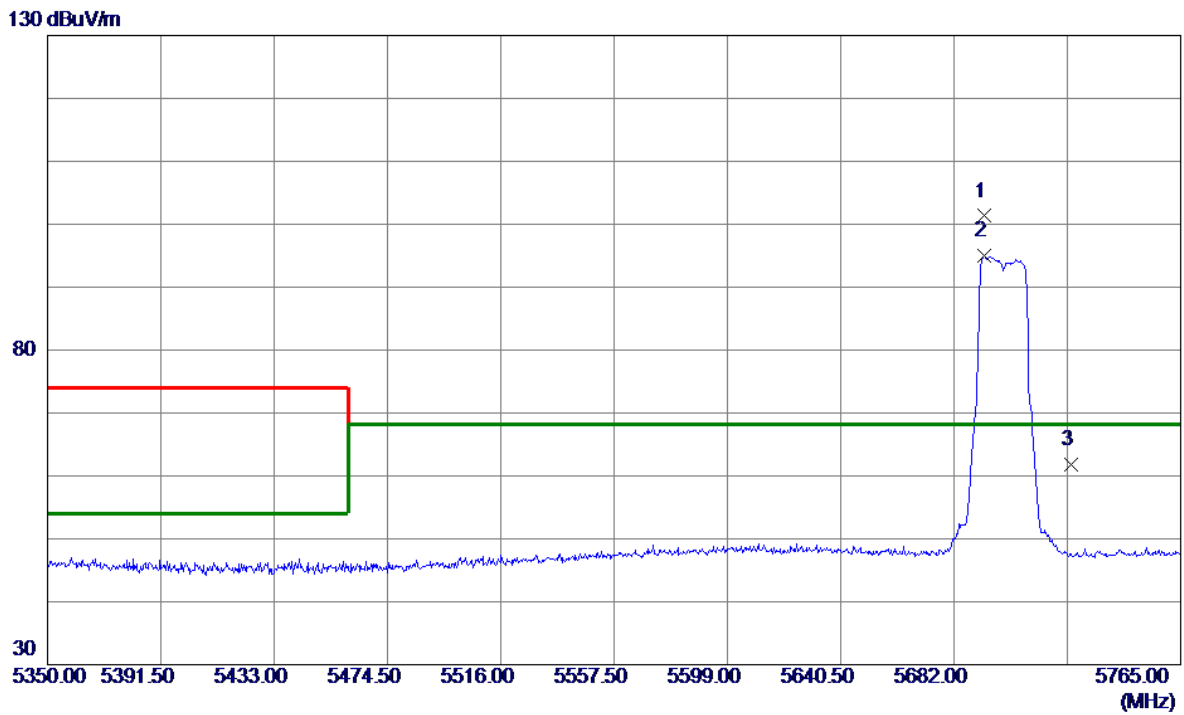


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5693.2050	62.79	38.51	101.30	68.20	33.10	Peak	No Limit
2	5693.2050	56.45	38.51	94.96	68.20	26.76	AVG	No Limit
3	5725.0000	23.30	38.56	61.86	68.20	-6.34	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

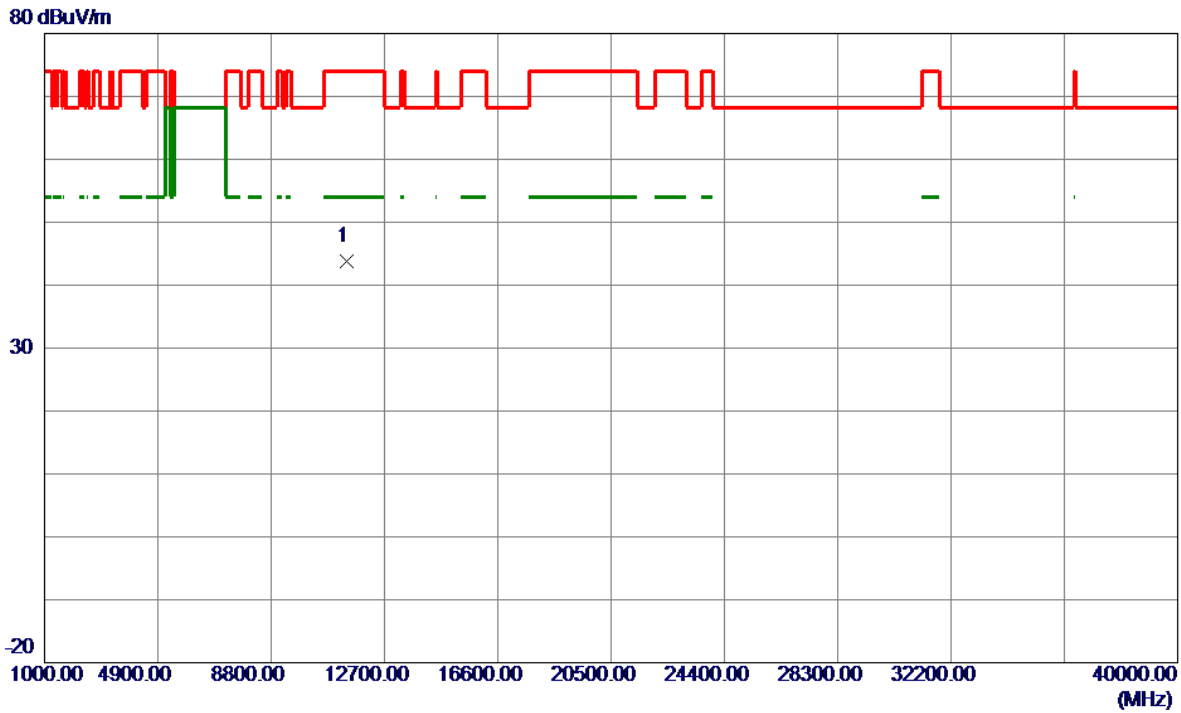


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0000	51.94	-8.21	43.73	74.00	-30.27	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

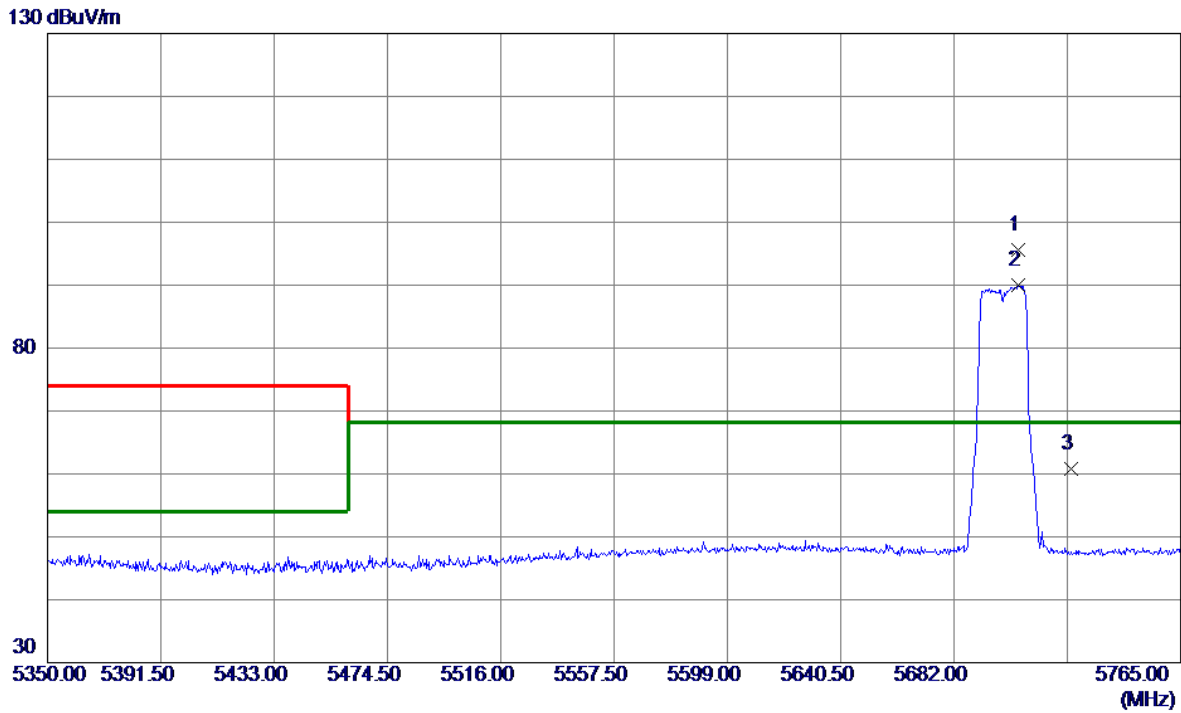


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5705.4480	57.16	38.53	95.69	68.20	27.49	Peak	No Limit
2	5705.4480	51.40	38.53	89.93	68.20	21.73	AVG	No Limit
3	5725.0000	22.25	38.56	60.81	68.20	-7.39	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

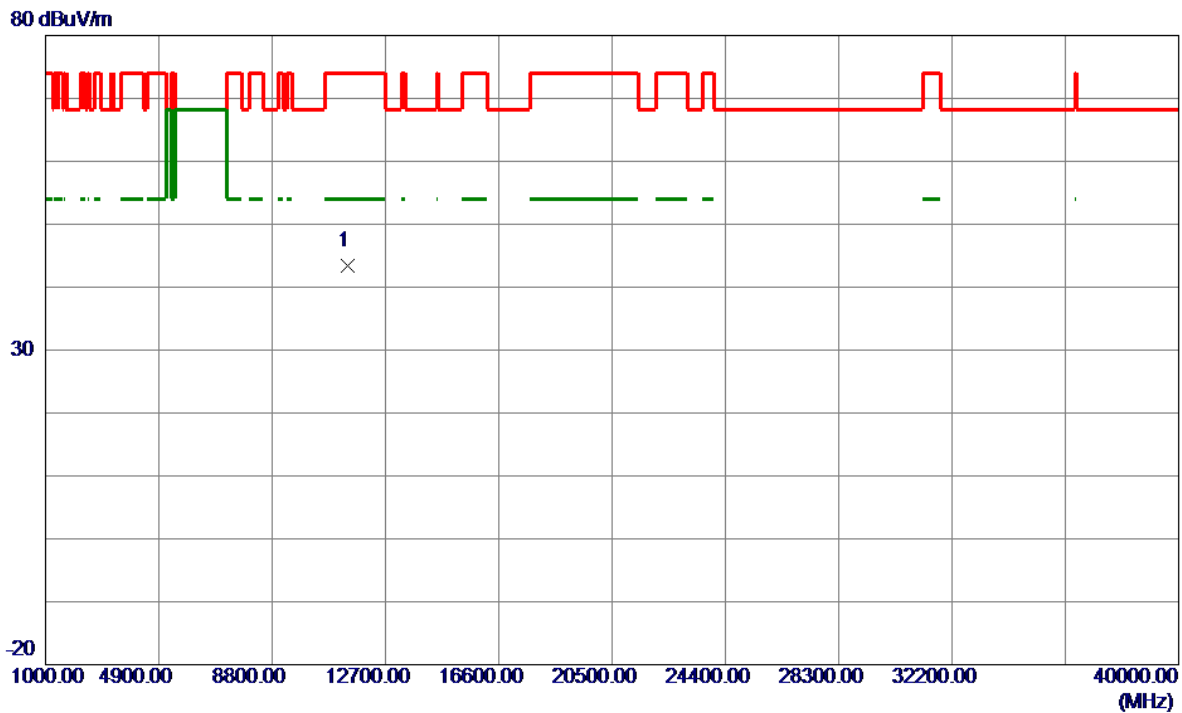


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0000	51.65	-8.21	43.44	74.00	-30.56	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2C_TX N(HT20) Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

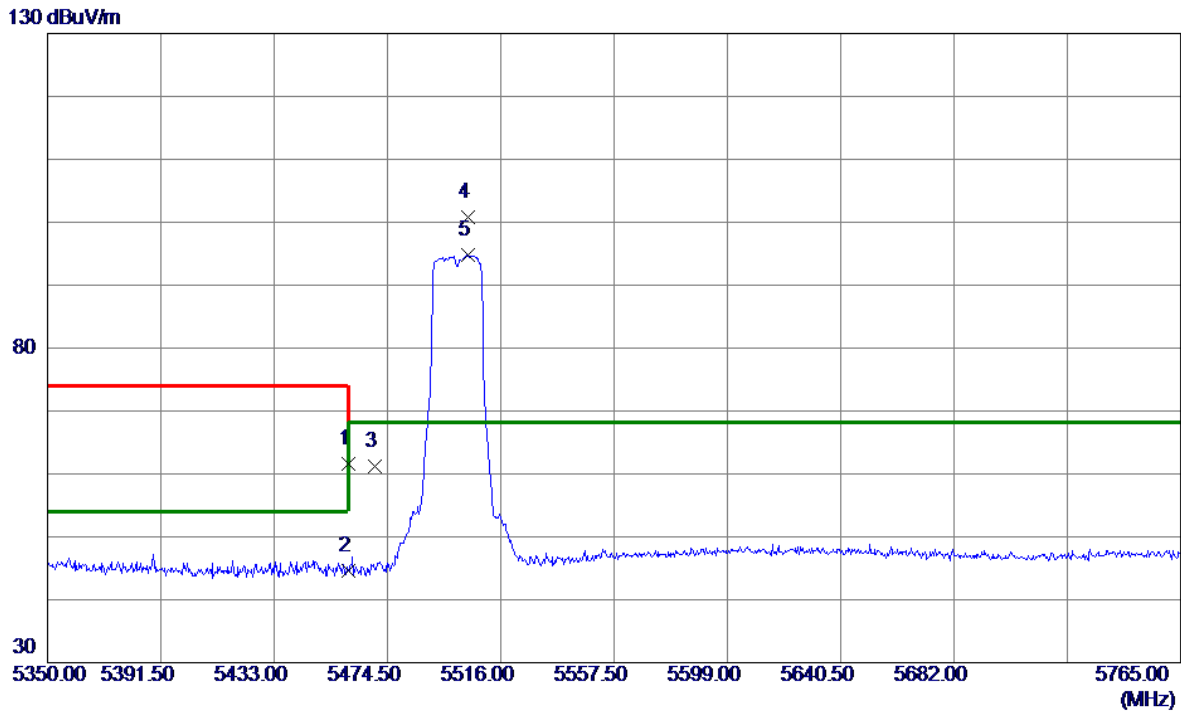


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	23.60	38.07	61.67	74.00	-12.33	Peak	
2	5460.0000	6.57	38.07	44.64	54.00	-9.36	AVG	
3	5470.0000	23.05	38.09	61.14	68.20	-7.06	Peak	
4 *	5503.9650	62.59	38.14	100.73	68.20	32.53	Peak	
5	5503.9650	56.75	38.14	94.89	68.20	26.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

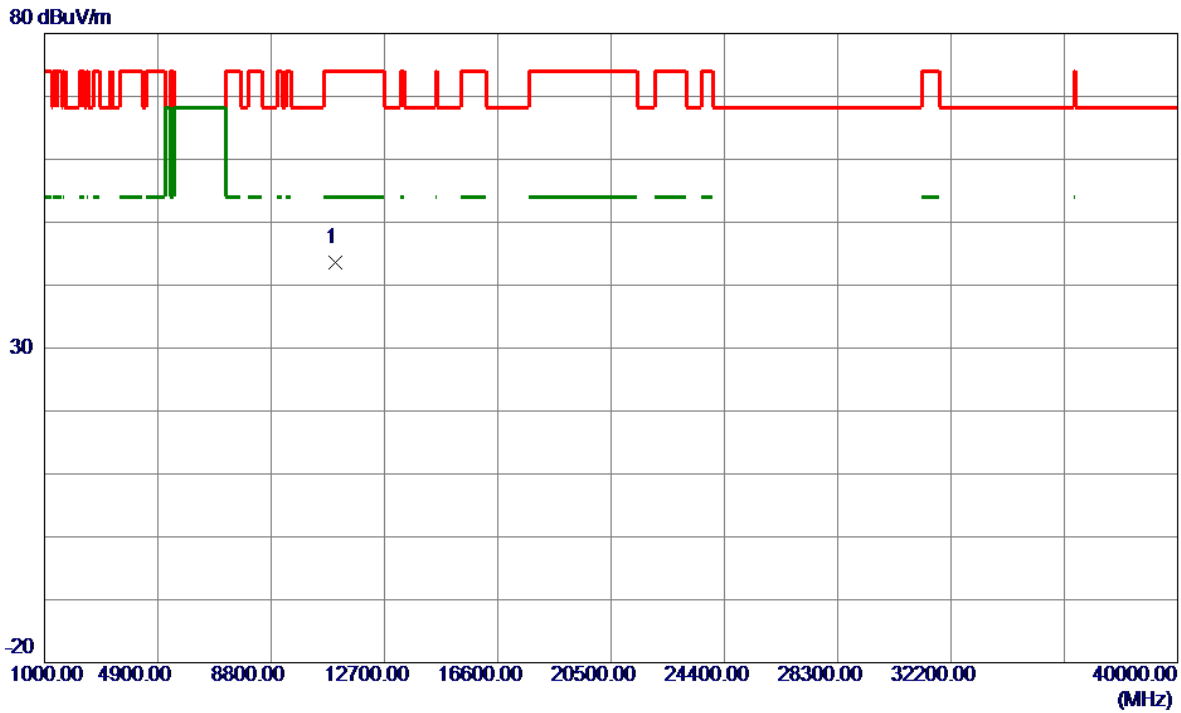


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.0000	52.13	-8.58	43.55	74.00	-30.45	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

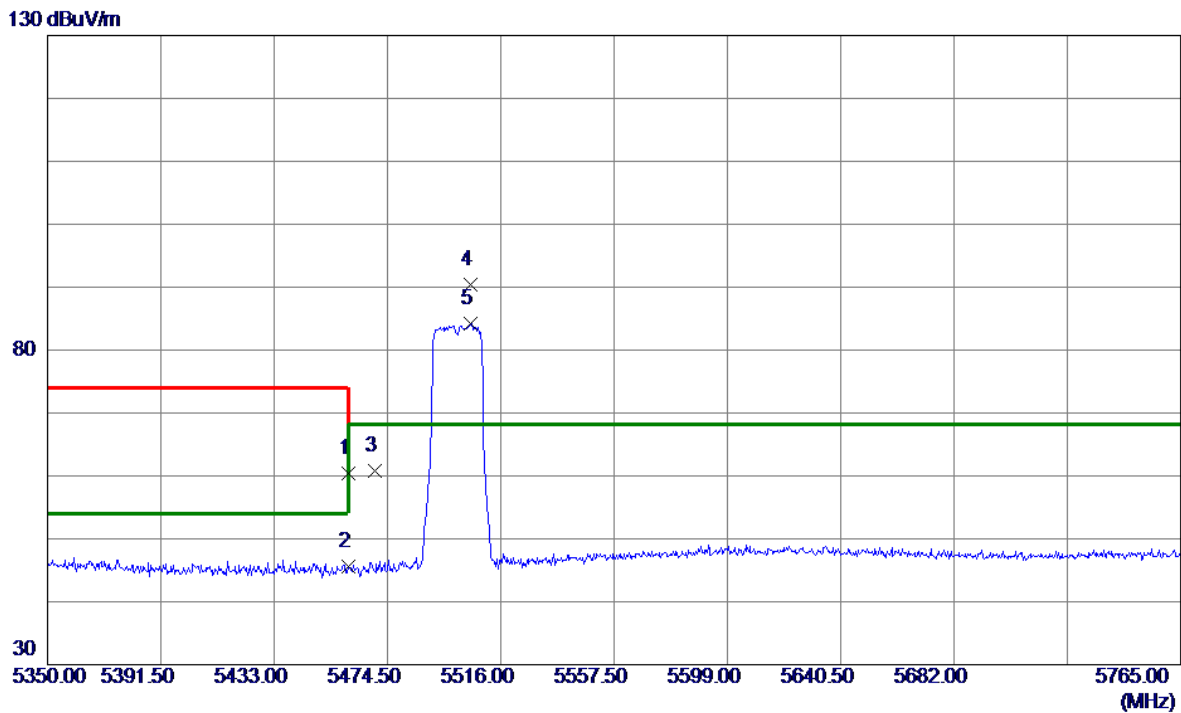


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.42	38.07	60.49	74.00	-13.51	Peak	
2	5460.0000	7.57	38.07	45.64	54.00	-8.36	AVG	
3	5470.0000	22.76	38.09	60.85	68.20	-7.35	Peak	
4 *	5505.0019	52.22	38.14	90.36	68.20	22.16	Peak	
5	5505.0019	46.01	38.14	84.15	68.20	15.95	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

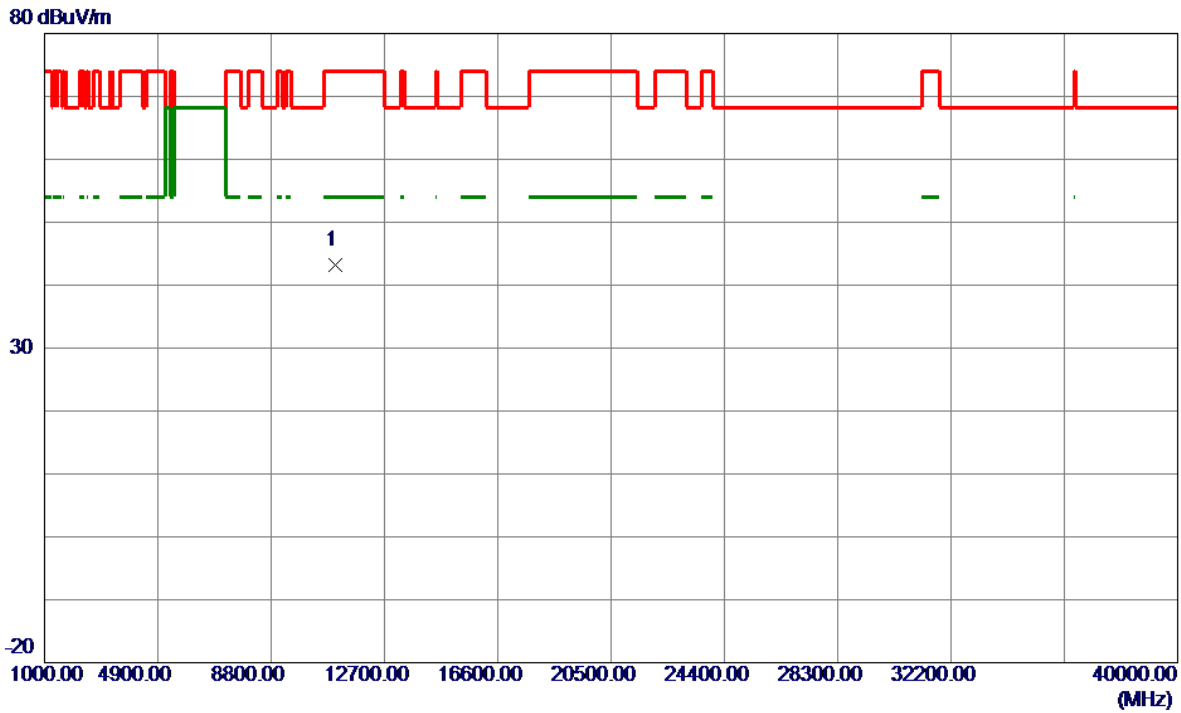


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11000.0000	51.79	-8.58	43.21	74.00	-30.79	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

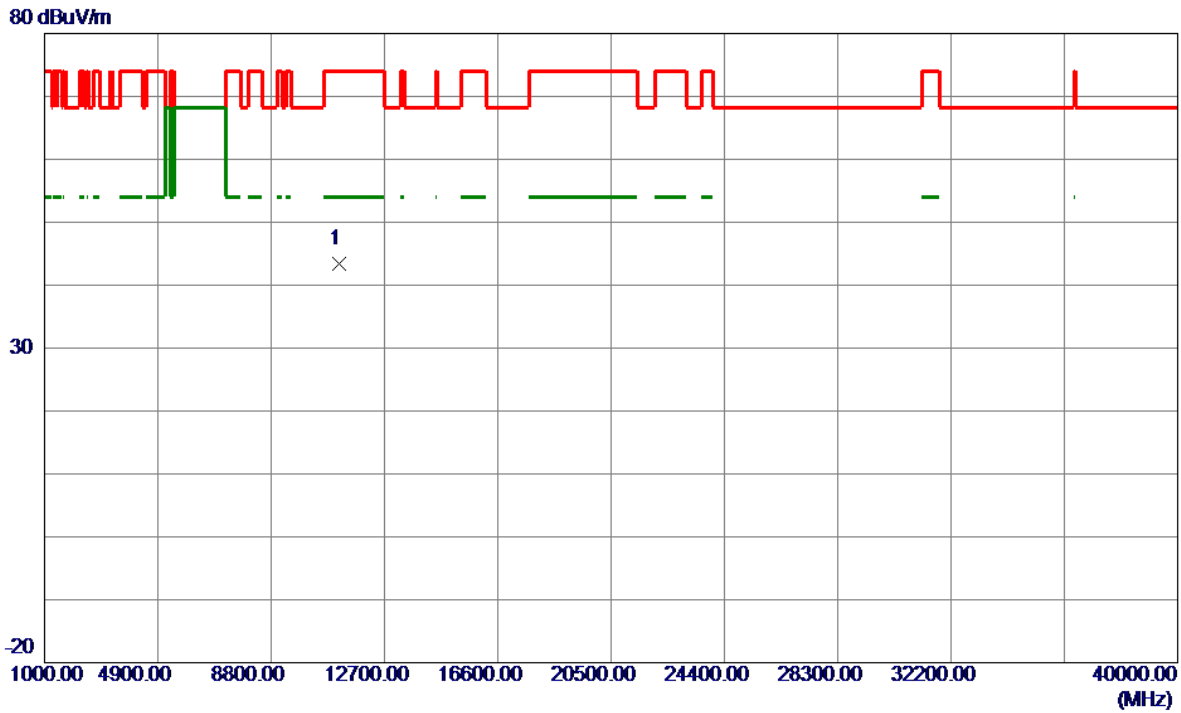


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.0000	51.87	-8.42	43.45	74.00	-30.55	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5580 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

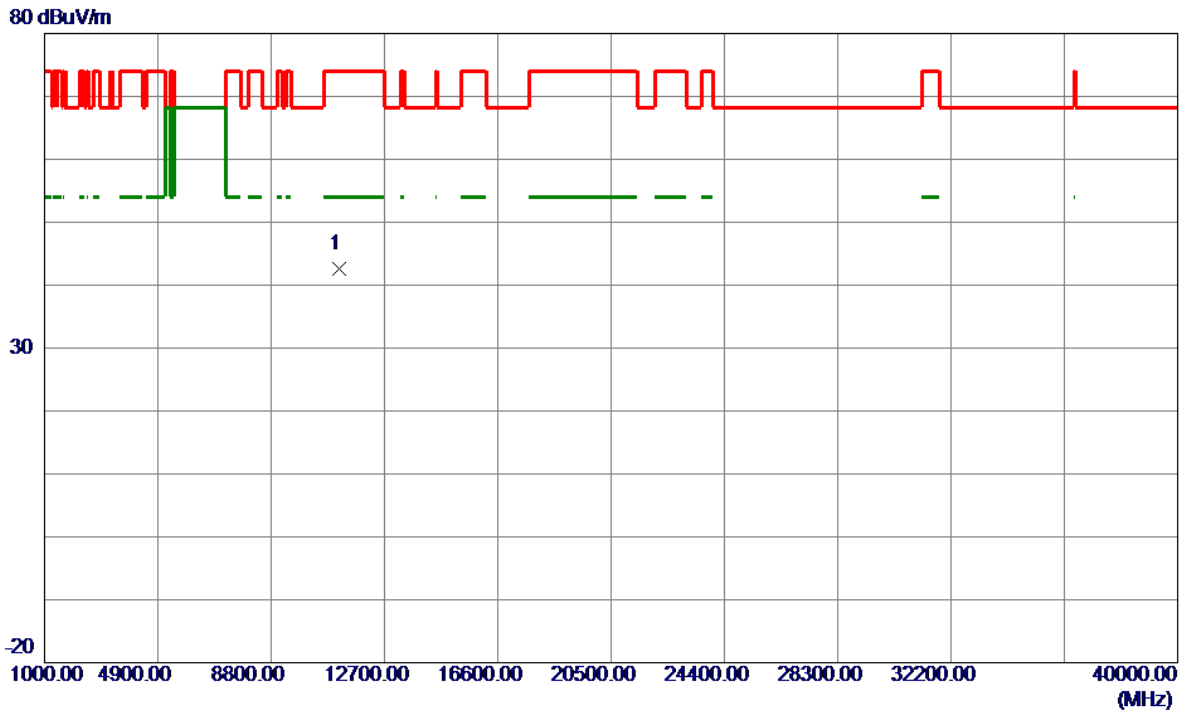


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11160.0000	50.94	-8.42	42.52	74.00	-31.48	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

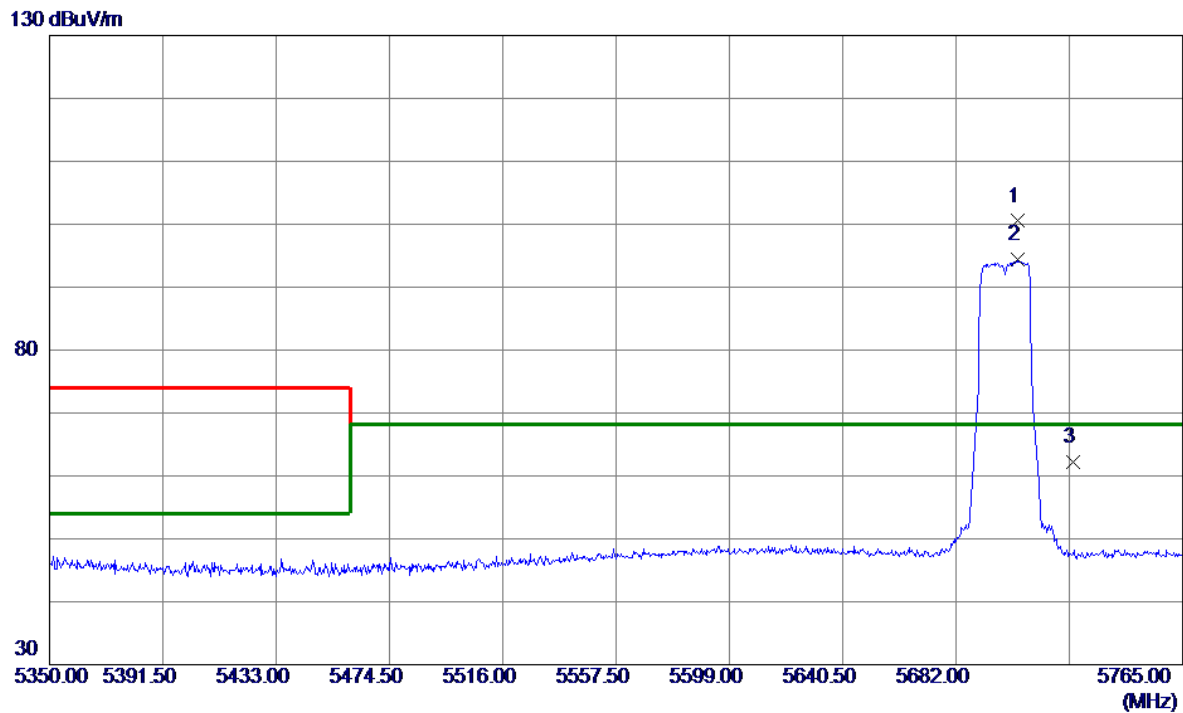


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5704.6180	61.97	38.53	100.50	68.20	32.30	Peak	
2	5704.6180	55.79	38.53	94.32	68.20	26.12	AVG	
3	5725.0000	23.60	38.56	62.16	68.20	-6.04	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

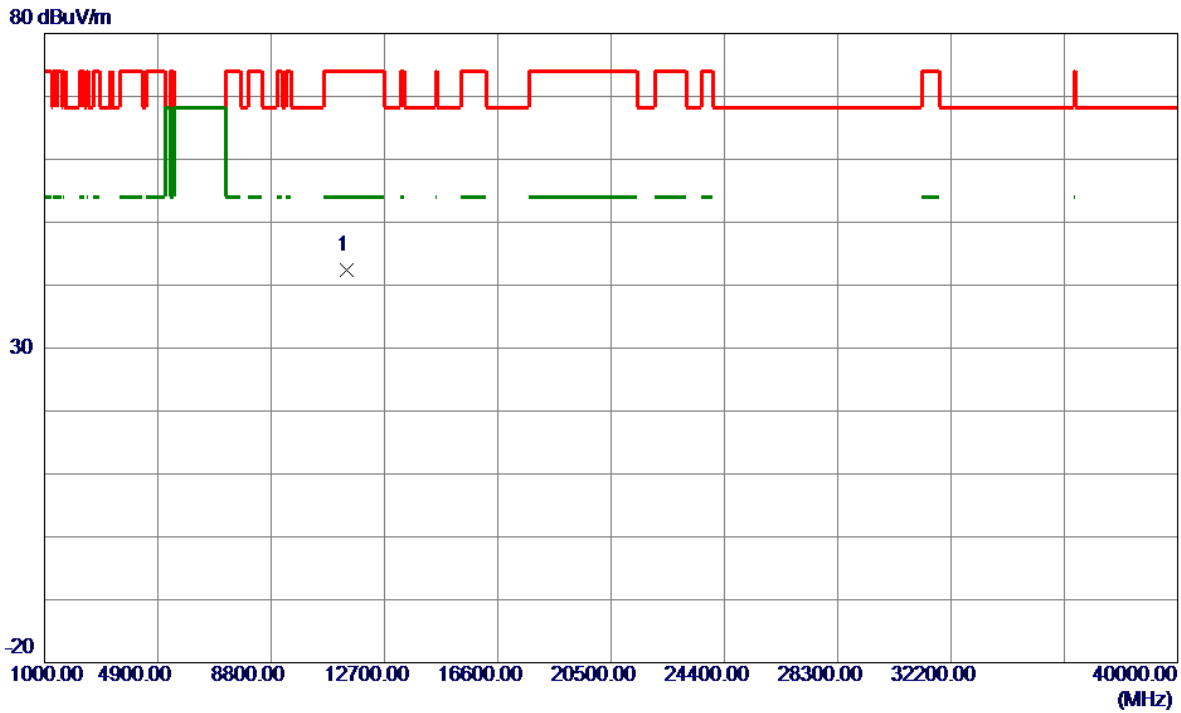


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0000	50.54	-8.21	42.33	74.00	-31.67	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2C_TX N(HT20) Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

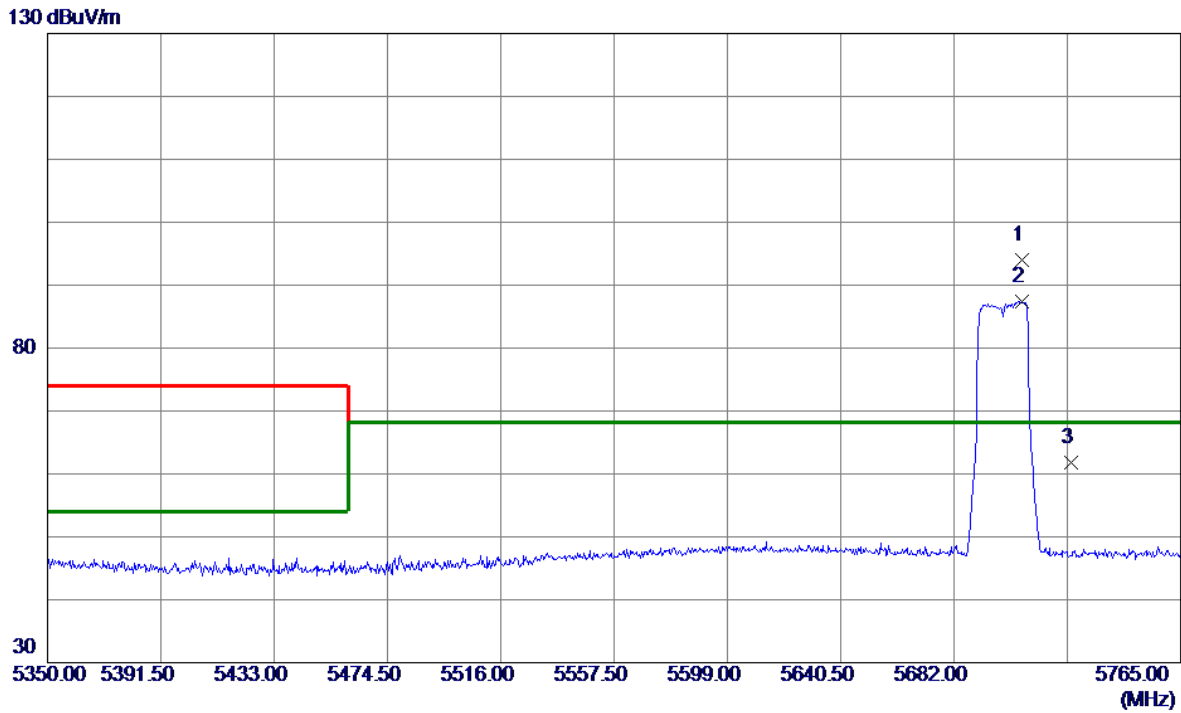


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5706.9000	55.44	38.53	93.97	68.20	25.77	Peak	
2	5706.9000	48.88	38.53	87.41	68.20	19.21	AVG	
3	5725.0000	23.21	38.56	61.77	68.20	-6.43	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

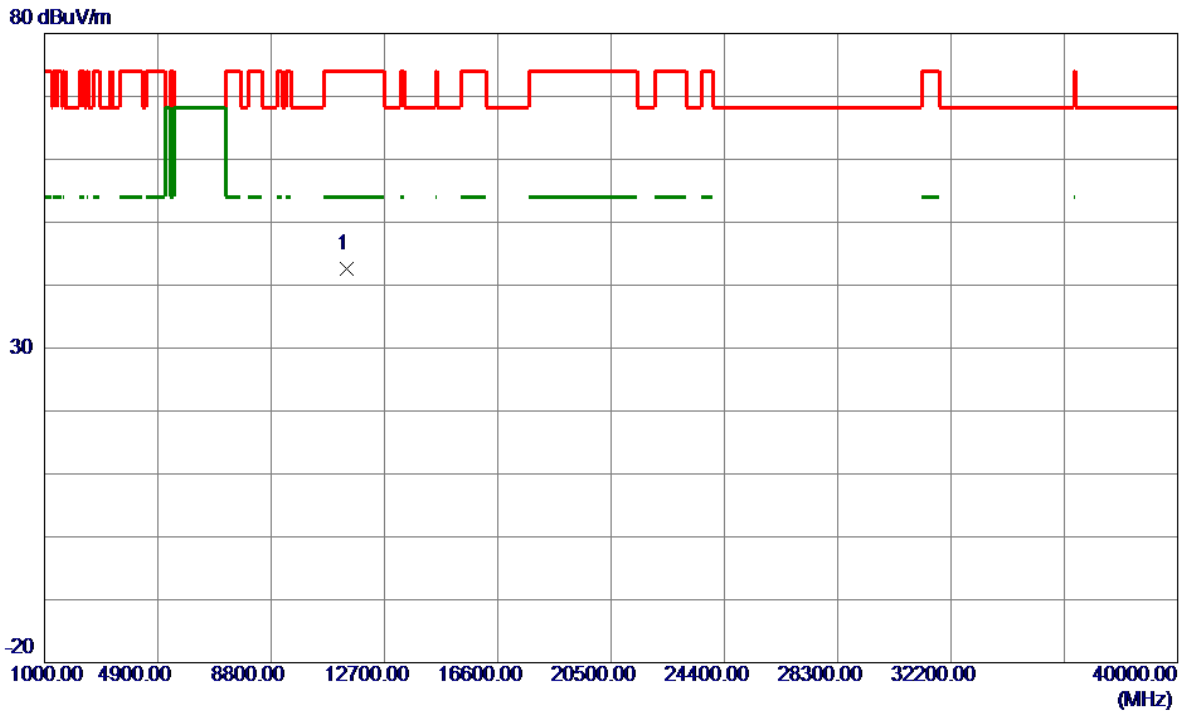


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11400.0000	50.87	-8.21	42.66	74.00	-31.34	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5510 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

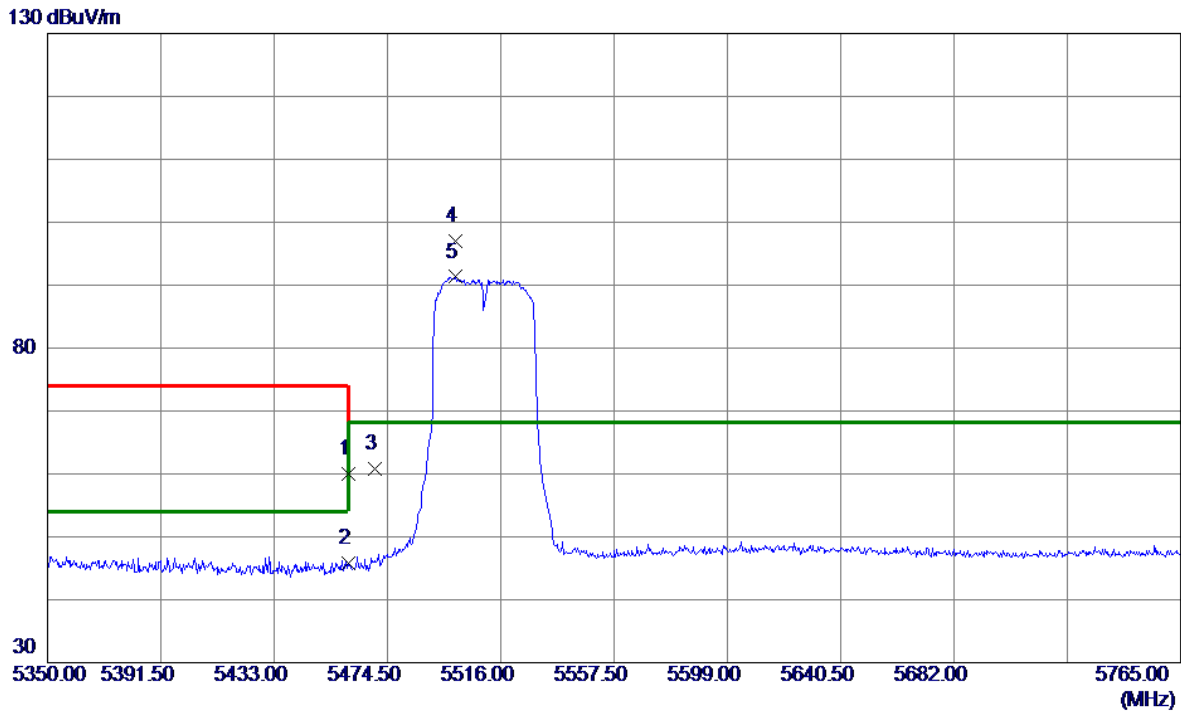


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	21.88	38.07	59.95	74.00	-14.05	Peak	
2	5460.0000	7.77	38.07	45.84	54.00	-8.16	AVG	
3	5470.0000	22.78	38.09	60.87	68.20	-7.33	Peak	
4 *	5499.6080	58.78	38.13	96.91	68.20	28.71	Peak	
5	5499.6080	53.17	38.13	91.30	68.20	23.10	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5510 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

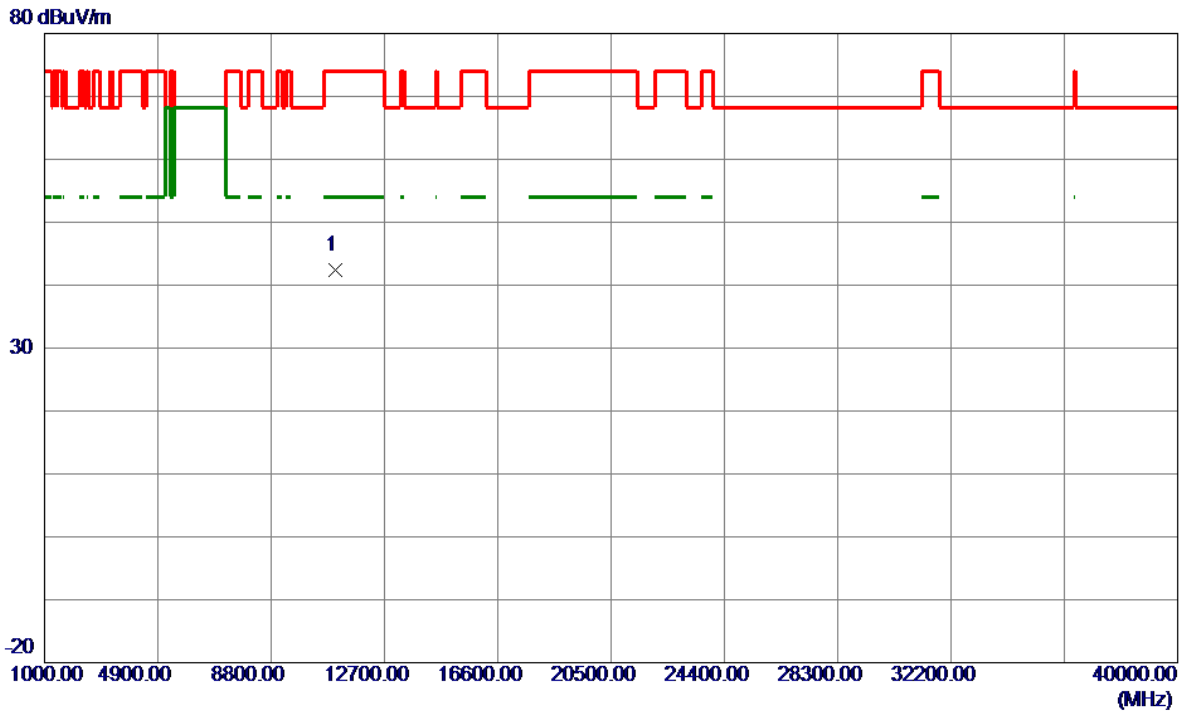


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11020.0000	50.91	-8.56	42.35	74.00	-31.65	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5510 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

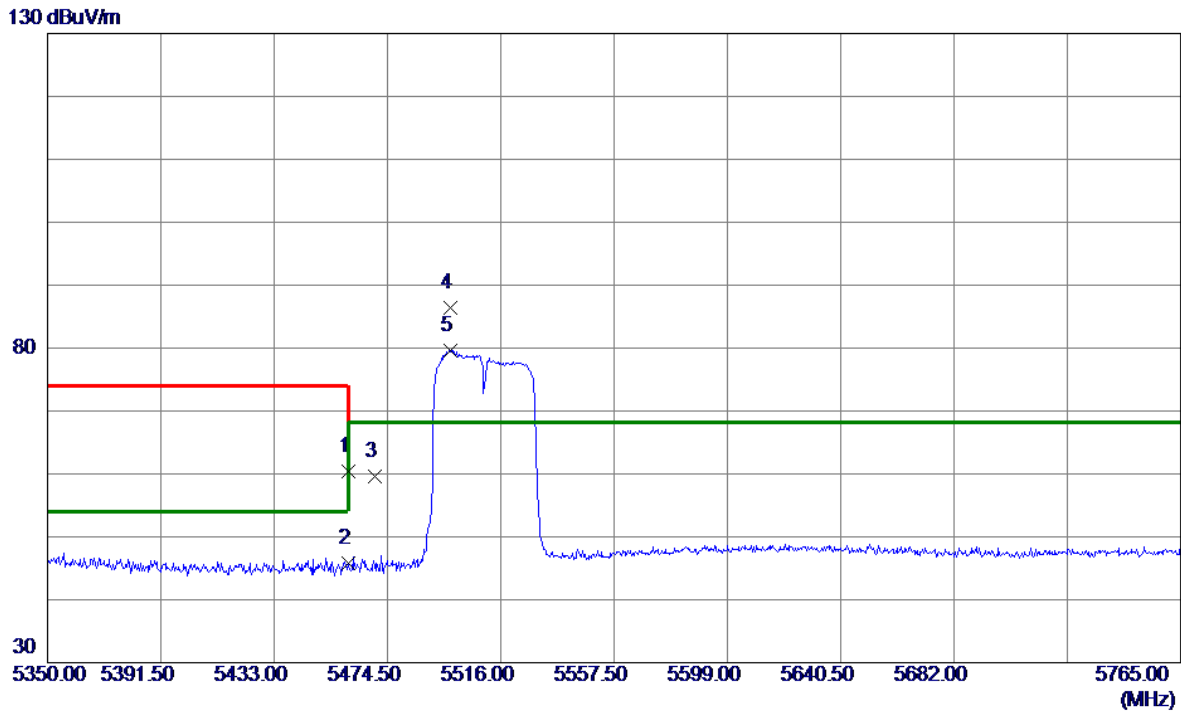


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	22.28	38.07	60.35	74.00	-13.65	Peak	
2	5460.0000	7.66	38.07	45.73	54.00	-8.27	AVG	
3	5470.0000	21.44	38.09	59.53	68.20	-8.67	Peak	
4 *	5497.7400	48.28	38.13	86.41	68.20	18.21	Peak	
5	5497.7400	41.55	38.13	79.68	68.20	11.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5510 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

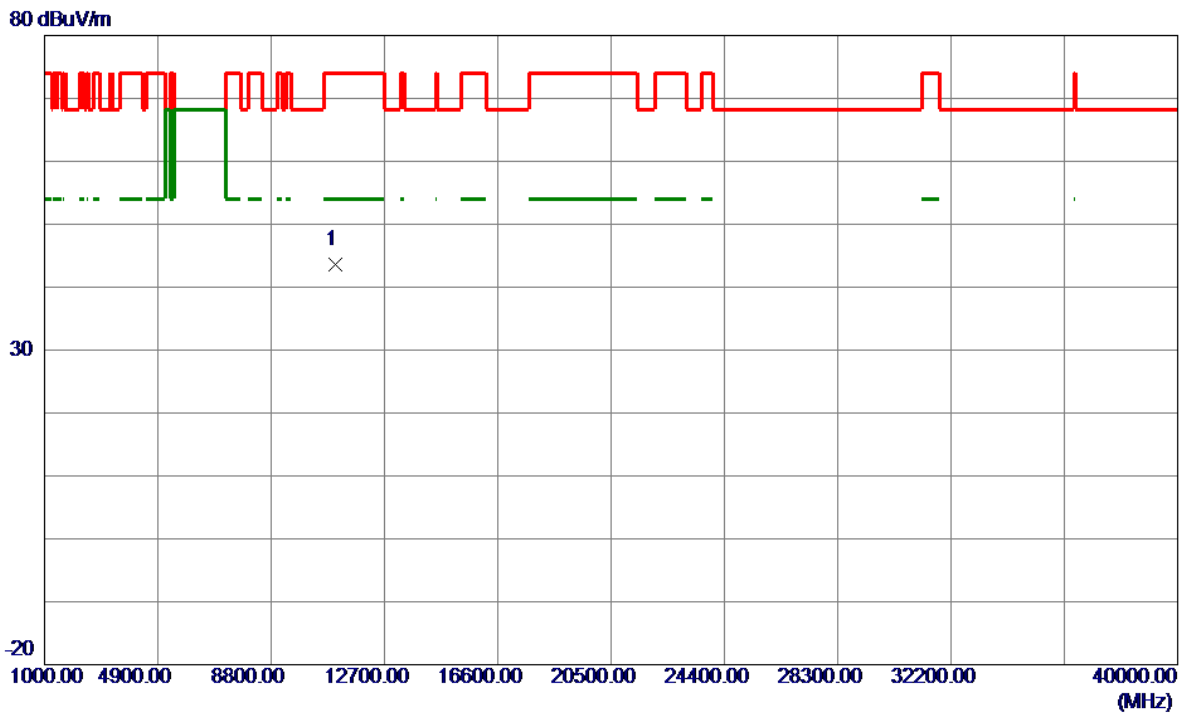


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11020.0000	52.10	-8.56	43.54	74.00	-30.46	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5550 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

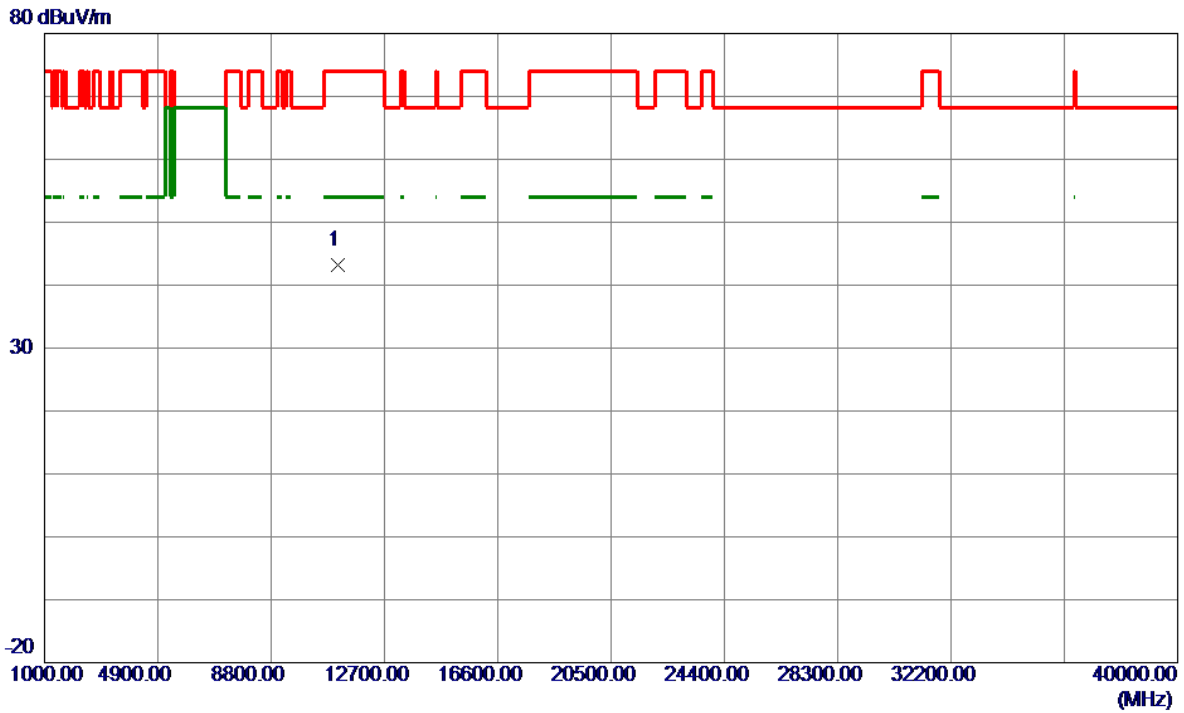


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.0000	51.71	-8.48	43.23	74.00	-30.77	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5550 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

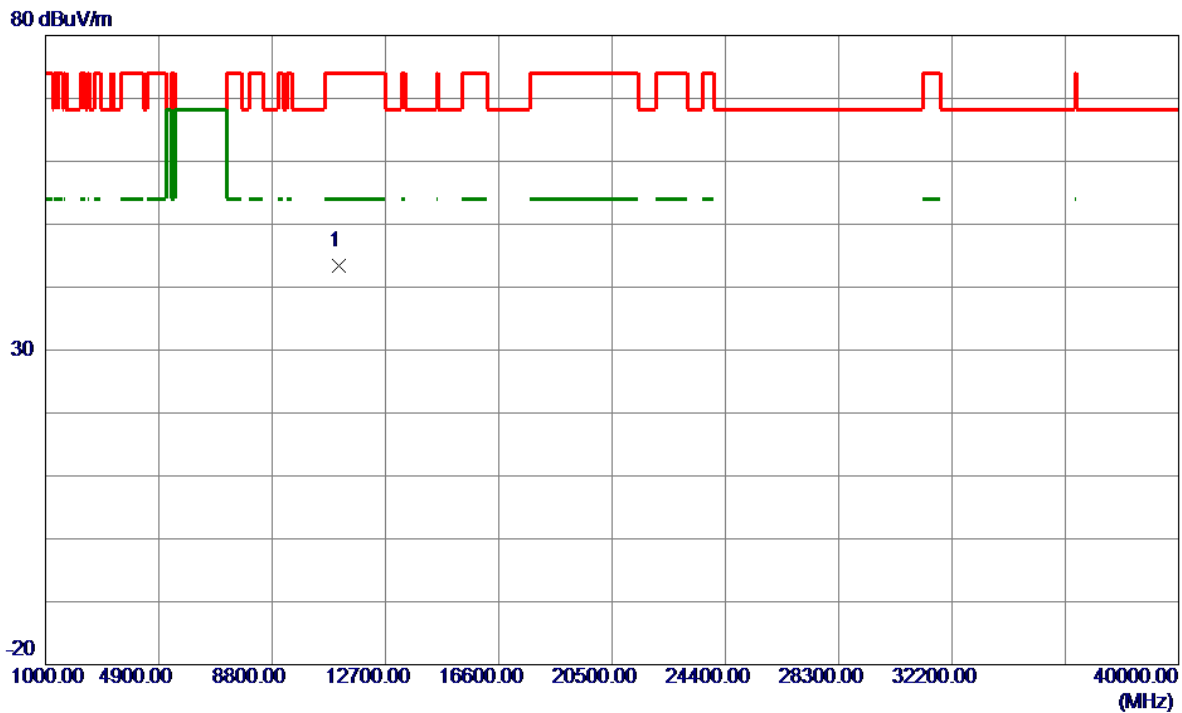


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.0000	51.86	-8.48	43.38	74.00	-30.62	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2C_TX N(HT40) Mode 5670 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

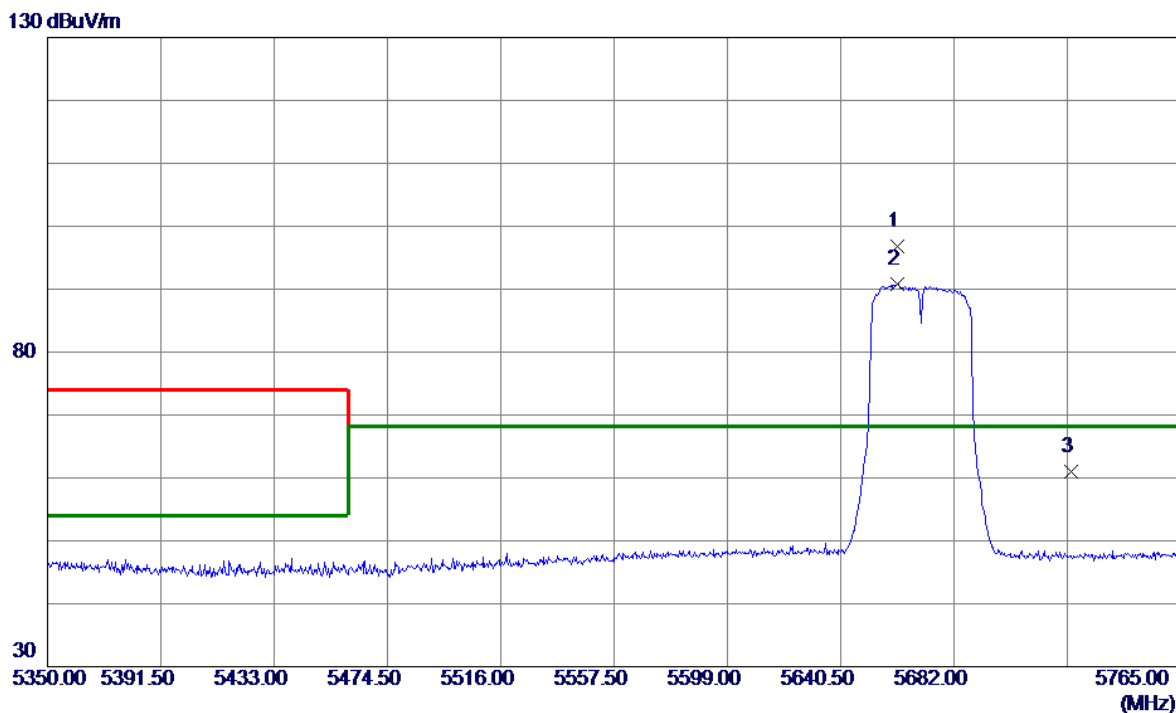


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5661.0419	58.43	38.46	96.89	68.20	28.69	Peak	
2	5661.0419	52.38	38.46	90.84	68.20	22.64	AVG	
3	5725.0000	22.50	38.56	61.06	68.20	-7.14	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5670 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

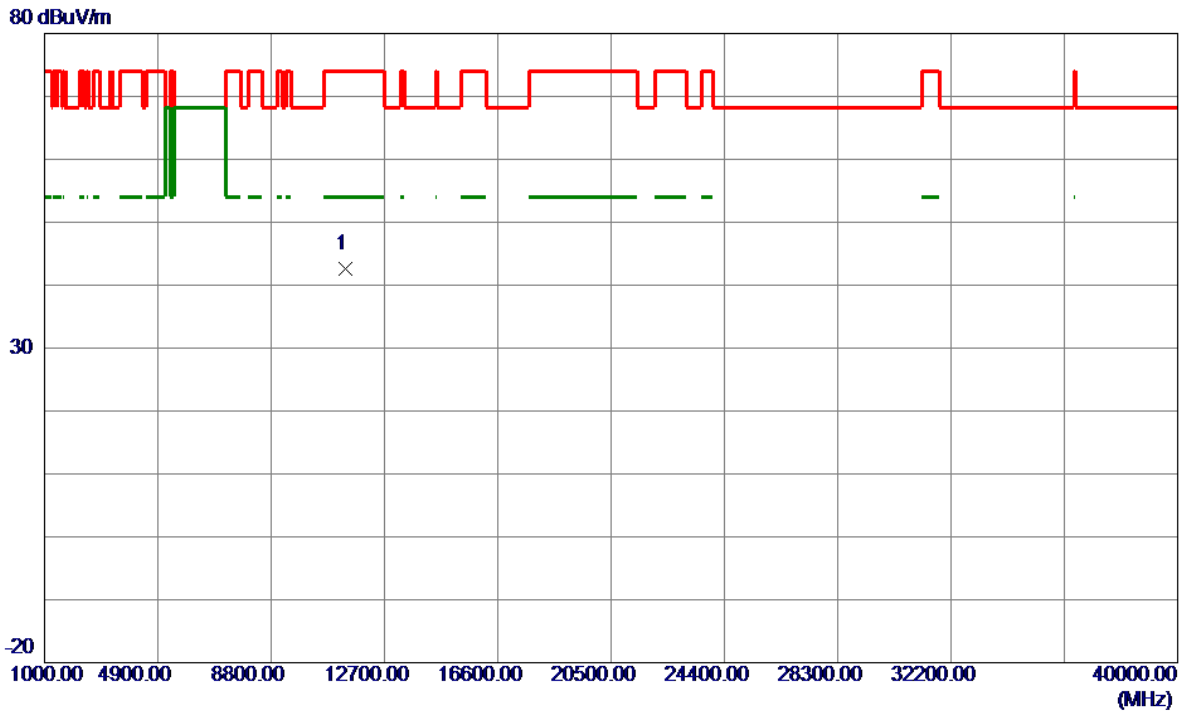


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11340.0000	50.89	-8.26	42.63	74.00	-31.37	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5670 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

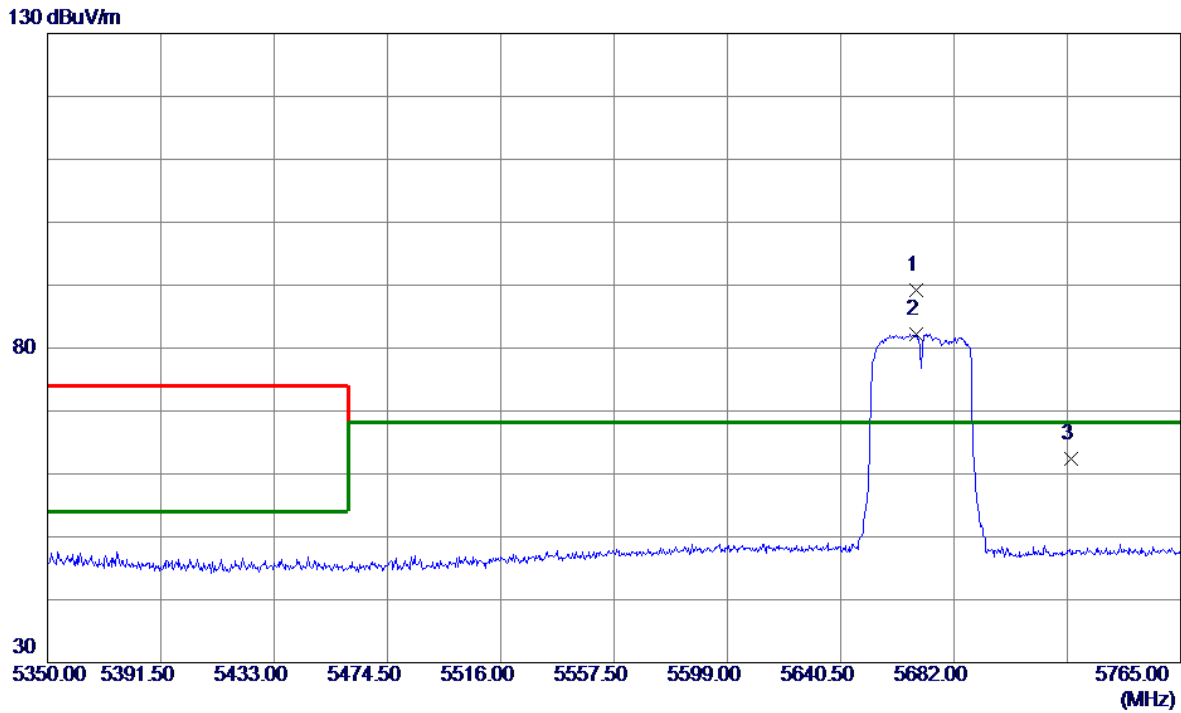


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5668.0970	50.70	38.47	89.17	68.20	20.97	Peak	
2	5668.0970	43.73	38.47	82.20	68.20	14.00	AVG	
3	5725.0000	23.86	38.56	62.42	68.20	-5.78	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5670 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

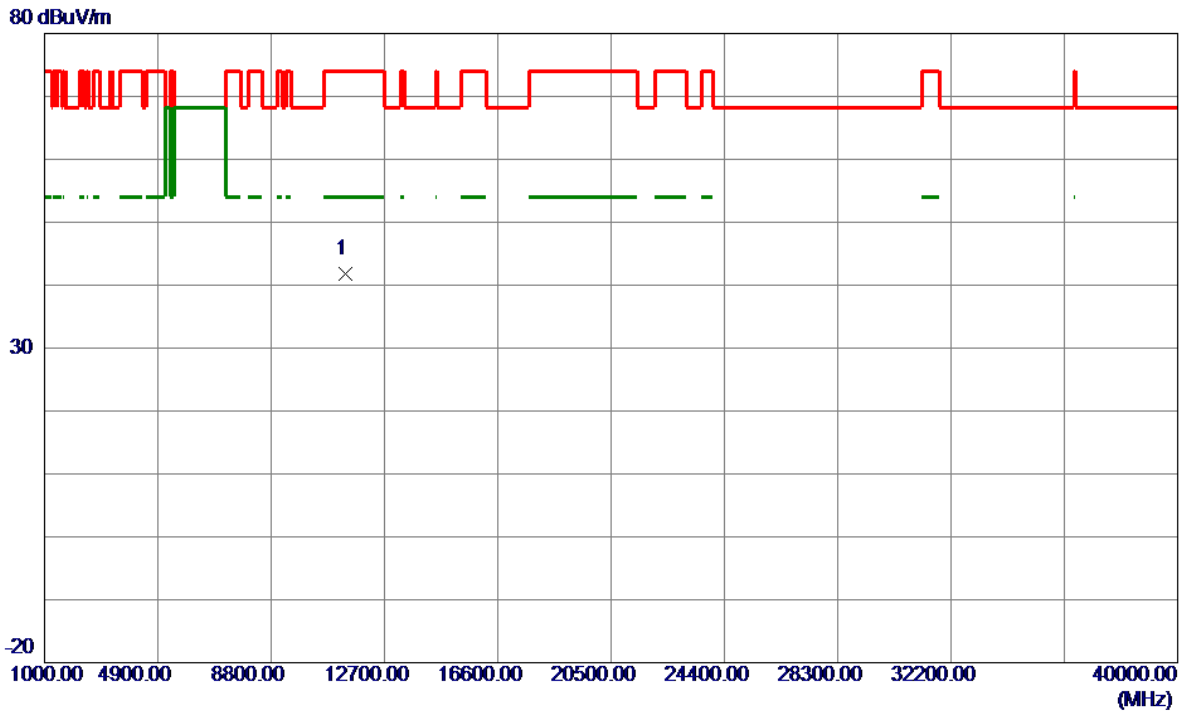


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11340.0000	50.00	-8.26	41.74	74.00	-32.26	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

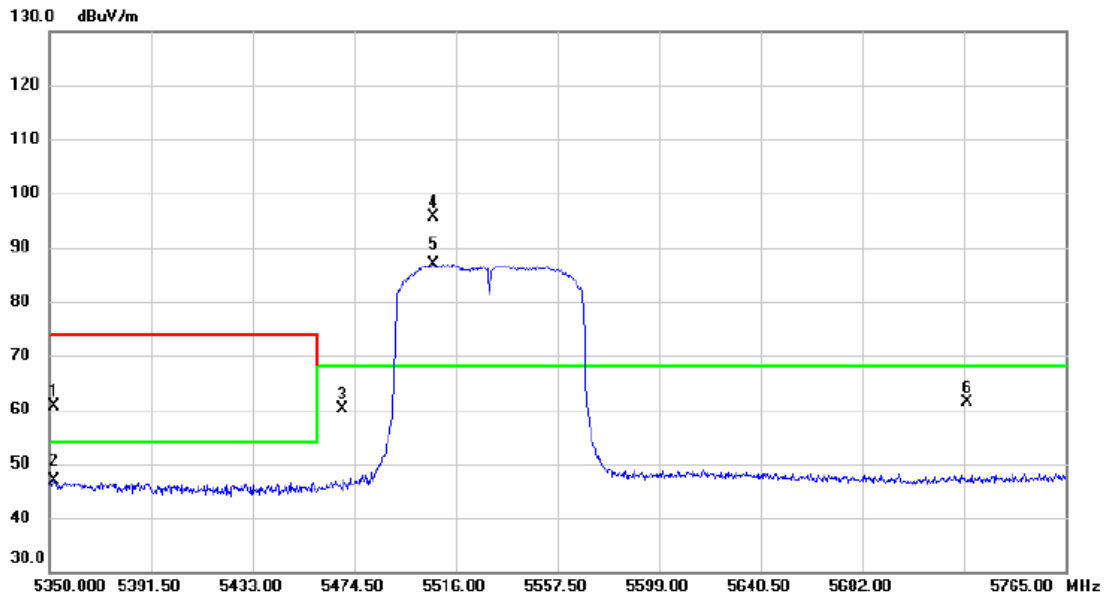


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5351.868	22.79	37.91	60.70	74.00	-13.30	peak	
2		5351.868	9.09	37.91	47.00	54.00	-7.00	AVG	
3		5470.000	22.12	38.08	60.20	68.20	-8.00	peak	
4	*	5506.663	57.48	38.15	95.63	68.20	27.43	peak	No Limit
5	X	5506.663	48.82	38.15	86.97	68.20	18.77	AVG	No Limit
6		5725.000	22.81	38.56	61.37	68.20	-6.83	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

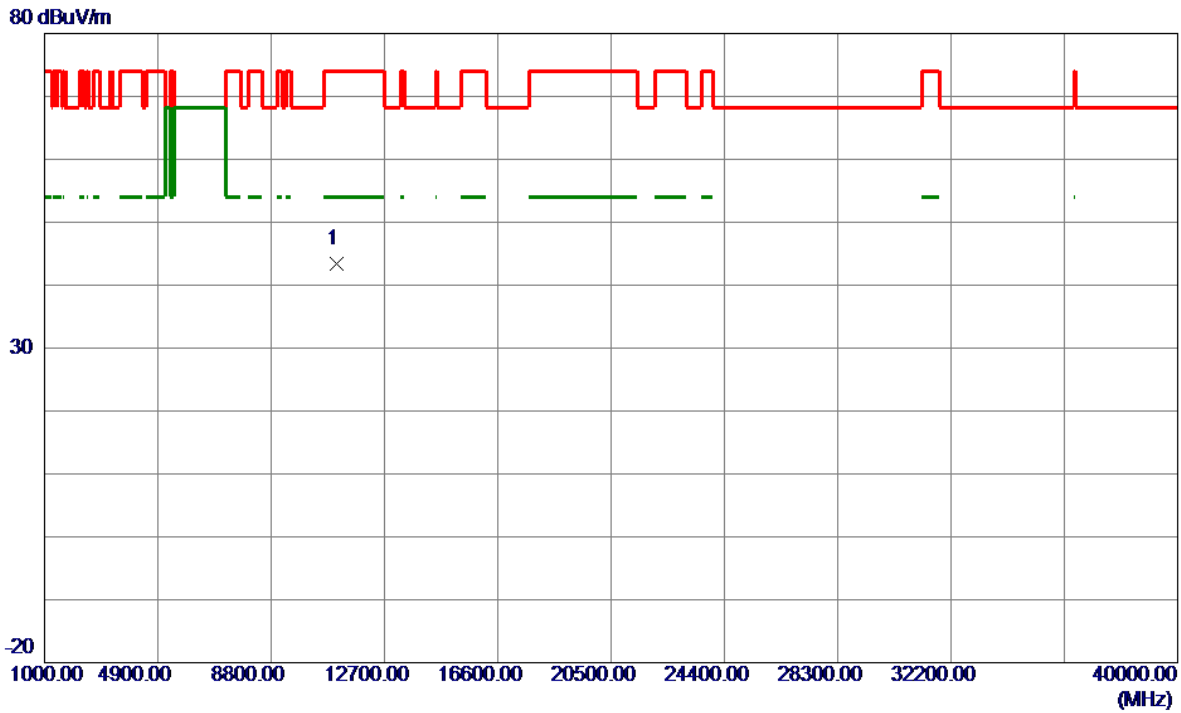


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	51.91	-8.52	43.39	74.00	-30.61	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

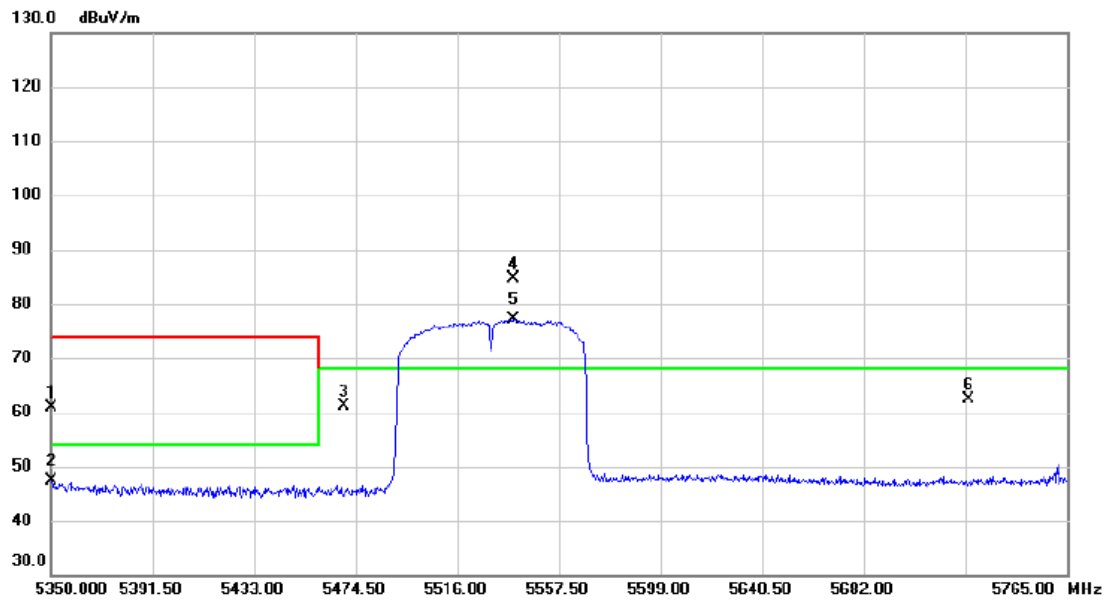


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5350.000	22.92	37.91	60.83	74.00	-13.17	peak	
2		5350.000	9.43	37.91	47.34	54.00	-6.66	AVG	
3		5470.000	23.13	38.08	61.21	68.20	-6.99	peak	
4	*	5539.240	46.37	38.22	84.59	68.20	16.39	peak	No Limit
5	X	5539.240	38.95	38.22	77.17	68.20	8.97	AVG	No Limit
6		5725.000	23.73	38.56	62.29	68.20	-5.91	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

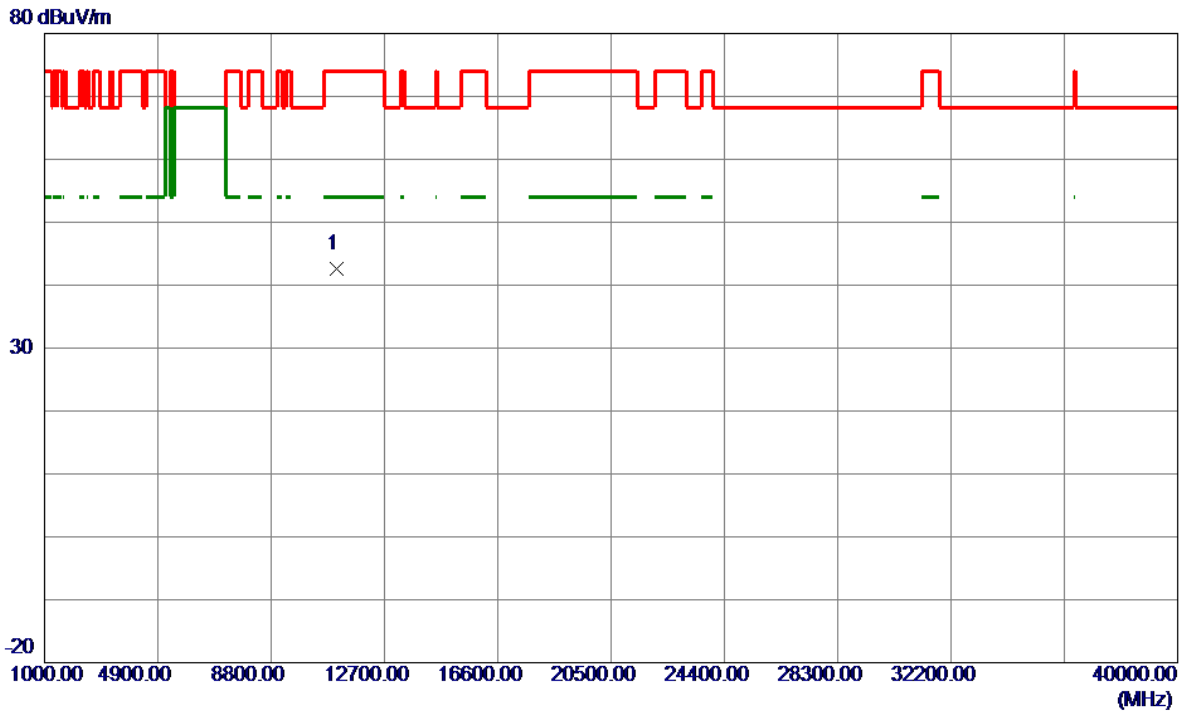


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	51.16	-8.52	42.64	74.00	-31.36	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

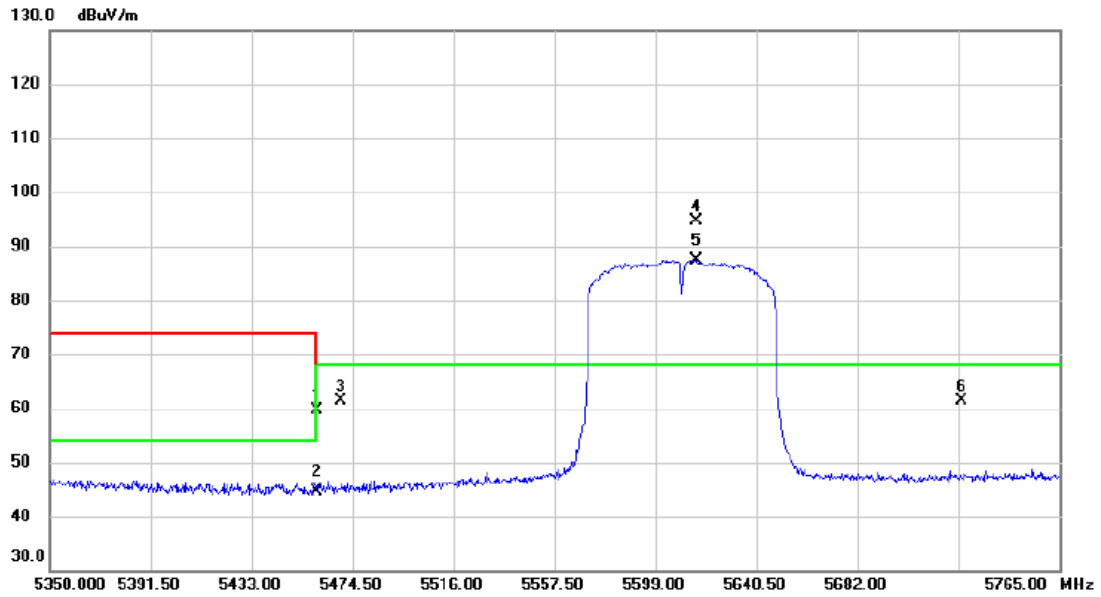


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	21.64	38.07	59.71	74.00	-14.29	peak	
2		5460.000	6.54	38.07	44.61	54.00	-9.39	AVG	
3		5470.000	23.40	38.08	61.48	68.20	-6.72	peak	
4	*	5615.600	56.16	38.38	94.54	68.20	26.34	peak	No Limit
5	X	5615.600	49.05	38.38	87.43	68.20	19.23	AVG	No Limit
6		5725.000	22.86	38.56	61.42	68.20	-6.78	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

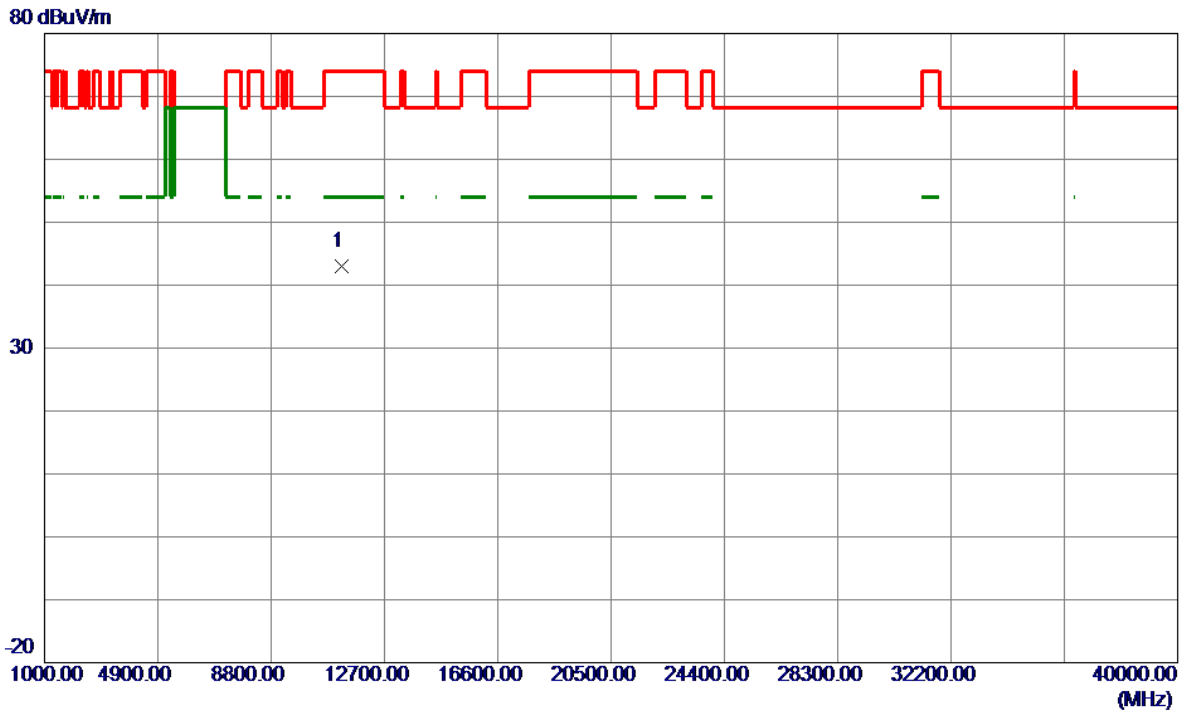

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11220.0000	51.45	-8.37	43.08	74.00	-30.92	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.