

# TEST REPORT



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-02336  
Page (1) / (20) Pages

## 1. Applicant

- Name : Aptiv Connection Systems Korea LLC
- Address : 38, Gongdan-ro 140beon-gil, Gunpo-si, Gyeonggi-do, Republic of Korea
- Date of Receipt : 2023-09-11

## 2. Manufacturer

- Name : Aptiv Connection Systems Korea LLC
- Address : 17 Yangdeungnonggong-gil Sangbuk-myeon Ulju-gun, Ulsan 44908, Republic of Korea

**3. Use of Report :** For FCC Certification, For ISED Certification

**4. Test Sample / Model :** Single Coil WPC Type 2 NFC / 35703750

**5. Date of Test :** 2023-09-26 to 2023-09-27

**6. Test Standard(method) used :** FCC 47 CFR part 15 subpart C 15.225  
RSS-Gen, RSS-210

**7. Testing Environment:** (24 ± 1) °C, Humidity: (57 ± 5) % R.H.

**8. Test Results :** Compliance

**9. Location of Test :**  Permanent Testing Lab  On Site Testing

(Address : (Unhak-Dong) 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yong-in-si, Gyeonggi-do, Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by Ji-Hye, Kim: (Signature) 	Technical Manager Young-taek Lee: (Signature) 
----------	---	--

Remark. This report is not related to KOLAS accreditation and relevant regulation.

2023-10-27

**CTK Co., Ltd.**



## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-02336  
Page (2) / (20) Pages

## REPORT REVISION HISTORY

Date	Revision	Page No
2023-10-27	Issued (CTK-2023-02336)	all

*This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.*



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-02336  
Page (3) / (20) Pages

## **CONTENTS**

1. General Product Description .....	4
1.1 Applicant Information .....	4
1.2 Product Information.....	4
1.3 Antenna Information.....	4
2. Accreditations .....	5
2.1 Laboratory Accreditations and Listings .....	5
2.2 Calibration Details of Equipment Used for Measurement .....	5
3. Test Specifications .....	6
3.1 Standards.....	6
3.2 Mode of operation during the test .....	7
3.3 Maximum Measurement Uncertainty .....	7
3.4 Test Software.....	7
4. Technical Characteristic Test.....	8
4.1 Emission Bandwidth.....	8
4.2 Field strength emissions.....	10
4.3 Frequency Stability.....	18
APPENDIX A – Test Equipment Used For Tests .....	20

 <b>CTK Co., Ltd.</b> <i>The Prime Leader of Global Regulatory Certification</i>	<b>CTK Co., Ltd.</b> (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-02336 Page (4) / (20) Pages	
---	---	--	--

## 1. General Product Description

### 1.1 Applicant Information

<b>Company</b>	Aptiv Connection Systems Korea LLC
<b>Contact Point</b>	38, Gongdan-ro 140beon-gil, Gunpo-si, Gyeonggi-do, Republic of Korea
<b>Contact Person</b>	Name : Maeng, MinKyung E-mail : min-kyung.maeng@aptiv.com Tel : +82-52-255-0351

### 1.2 Product Information

<b>FCC ID</b>	2A29I-35703750
<b>IC</b>	29623-35703750
<b>Product Description</b>	Single Coil WPC Type 2 NFC
<b>Model name</b>	35703750
<b>Variant Model name</b>	-
<b>FVIN</b>	N/A
<b>Operating Frequency Range</b>	13.56 MHz
<b>RF Output Power</b>	82.1 dBuV/m @ 3m
<b>Antenna Type</b>	PCB antenna(Loop antenna)
<b>Type of Modulation</b>	ASK
<b>Power Source</b>	DC 12 V
<b>Hardware Rev</b>	1.00
<b>Software Rev</b>	1.00

### 1.3 Antenna Information

<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input checked="" type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input type="checkbox"/>	External antenna (dedicated antennas)



## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-02336  
Page (5) / (20) Pages

## 2. Accreditations

### 2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	CN : 8737A CAB ID : KR0025
KOREA	NRRA	KR0025

### 2.2 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-02336  
Page (6) / (20) Pages

### 3. Test Specifications

#### 3.1 Standards

FCC Part Section(s)	RSS Section(s)	Requirement(s)	Status (Note 1)
15.203	RSS-Gen 6.8	Antenna Requirement	C
15.215(c)	RSS-Gen 6.7	Emission Bandwidth	C
15.225 (a)(b)(c)(d)	RSS-210 Annex B.6(a)	Field strength emissions	C
15.225(e)	RSS-210 Annex B.6(B)	Frequency tolerance	C
15.207	RSS-Gen 8.8	AC Power line Conducted Emissions	NA(Note 4)

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

Note 3: The sample was tested according to the following specification: ANSI C63.10-2013.

Note 4: The equipment is operated on battery power only


### 3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments. During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests. The results are only attached worst cases.

#### Test mode

Transmit Status
-----------------

#### Indication of the position of the EUT to be measured

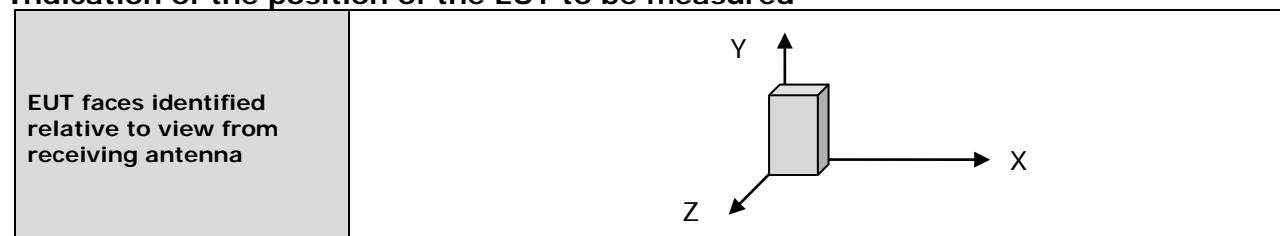

### 3.3 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter. Coverage factor  $k = 2$ , Confidence levels of 95 %

Description	Uncertainty
Unwanted Emission(conducted)	3.0 dB (C.L.: Approx. 95 %, $k = 2$ )
Radiated Emissions ( $f \leq 1$ GHz)	3.88 dB (C.L.: Approx. 95 %, $k = 2$ )

### 3.4 Test Software

Radiated Test	ES10 Ver. 2022.04.000
---------------	-----------------------

## 4. Technical Characteristic Test

### 4.1 Emission Bandwidth

#### Requirement

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the "x dB bandwidth" is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

#### Test Procedures

For the emission bandwidth refer ANSI C63.10-2013, clause 6.9(Occupied bandwidth).

#### Test Setup

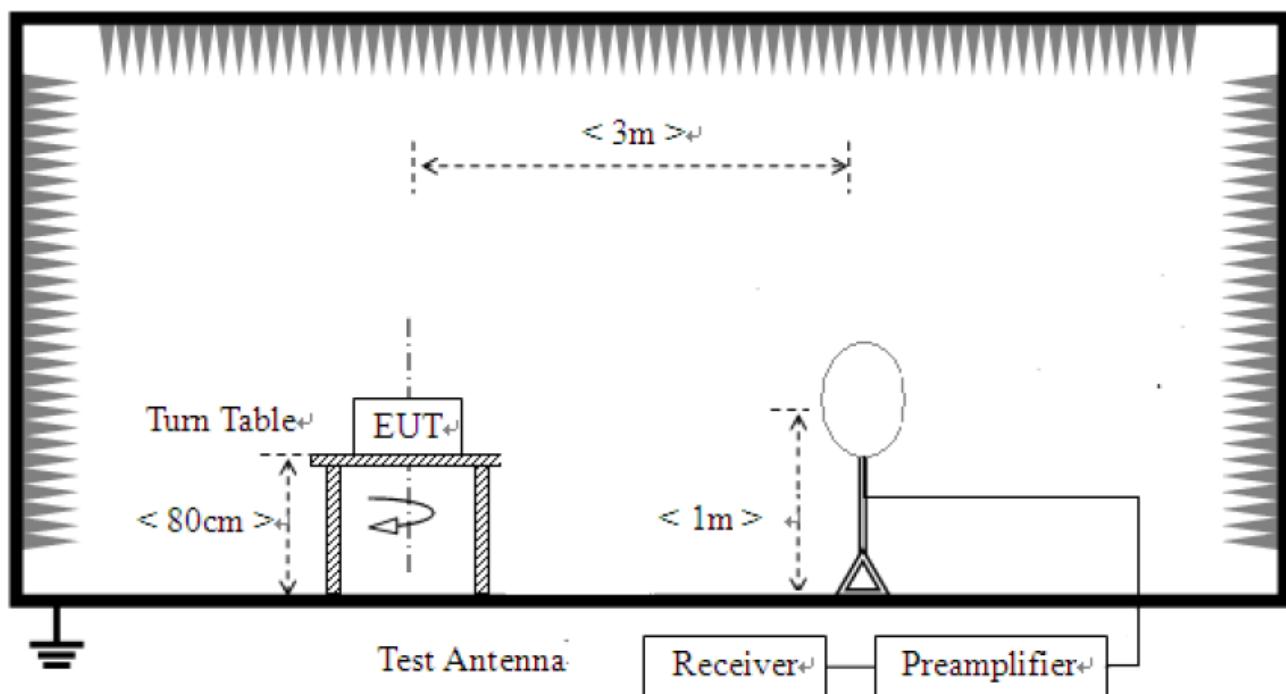

## Test results

Emission Bandwidth	Result	Limit
20dB Bandwidth	1.39 kHz	N/A
99% Bandwidth	2.51 kHz	N/A

### Emission Bandwidth Plot 20dB Bandwidth



### Emission Bandwidth Plot 99% Bandwidth





**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-02336  
Page (10) / (20) Pages

## 4.2 Field strength emissions

### Requirement

(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

Frequency(MHz)	Field Strength uV/m@30m	Field Strength dBuV/m@30m	Field Strength dBuV/m@3m
13.553-13.567	15,848	84.0	124.0

(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

Frequency(MHz)	Field Strength uV/m@30m	Field Strength dBuV/m@30m	Field Strength dBuV/m@3m
13.410-13.553	334	50.5	90.5
13.567-13.710	334	50.5	90.5

© Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

Frequency(MHz)	Field Strength uV/m@30m	Field Strength dBuV/m@30m	Field Strength dBuV/m@3m
13.110-13.410	106	40.5	80.5
13.710-14.010	106	40.5	80.5

(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209(RSS-GEN).



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-02336  
Page (11) / (20) Pages

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m	Field Strength dBuV/m	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	48.5 – 13.8	300
0.490-1.705	24000/F(kHz)	33.8 – 23	30
1.705-30	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3

\*\* Except as provided in 15.209(g). fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note : The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-02336  
Page (12) / (20) Pages

## Test Location

10 m SAC (test distance :  10 m,  3 m)

## Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2013, clause 6.4(Radiated emissions from unlicensed wireless devices below 30 MHz).
<input checked="" type="checkbox"/>	Radiated emission tests shall be performed in the frequency range of 9 kHz to 30 MHz, using a calibrated loop antenna. <input checked="" type="checkbox"/> When perpendicular to the ground plane, the lowest height of the magnetic antenna shall be 1 m above the ground and shall be positioned at the specified distance from the EUT. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor(40 dB/decade).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2013, clause 6.5(Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz).
<input checked="" type="checkbox"/>	In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) is used. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.
<input checked="" type="checkbox"/>	Emissions more than 20 dB below the limit do not need to be reported.

## Measuring instrument Settings


Frequency Range	9 kHz – 1 000 MHz
RBW	200 Hz (9 kHz – 150 kHz) 9 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1 000 MHz)
VBW	$\geq$ RBW
Sweep time	auto couple
Detector function	CISPR quasi-peak(below 1 000 MHz)

## Test Setup

1) For field strength of emissions from 9 kHz to 30 MHz

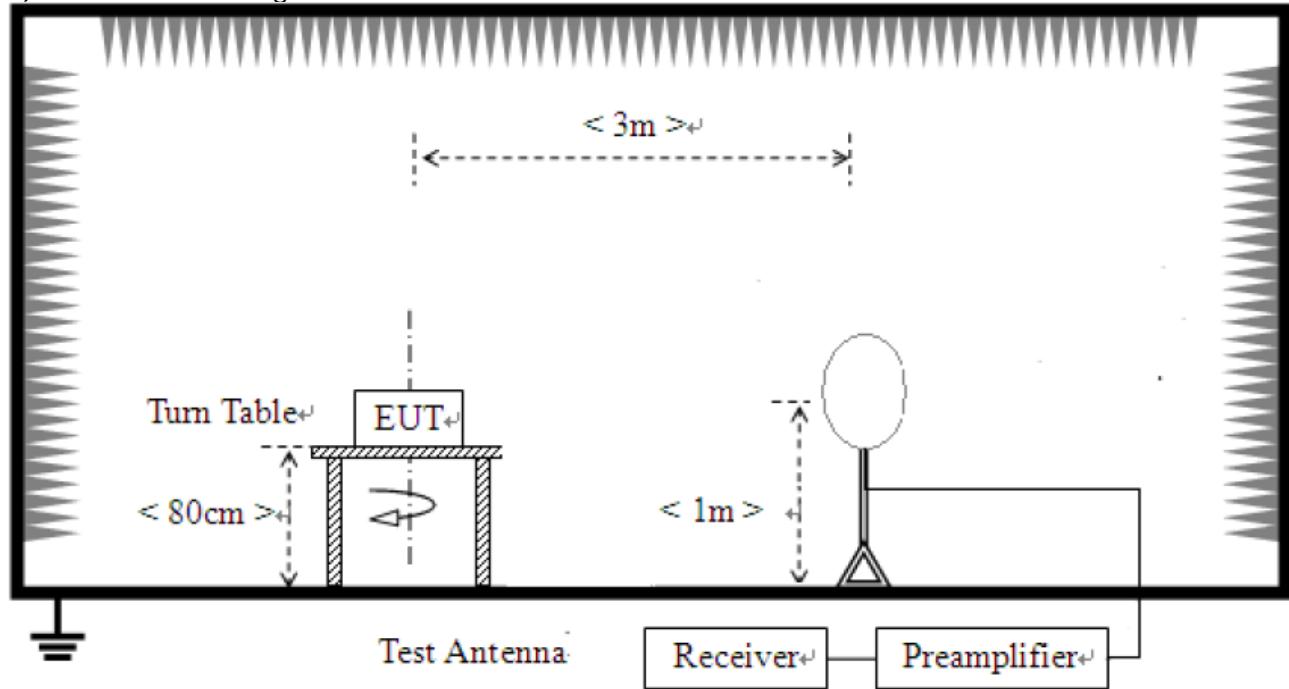

2) For field strength of emissions from 30 MHz to 1 GHz

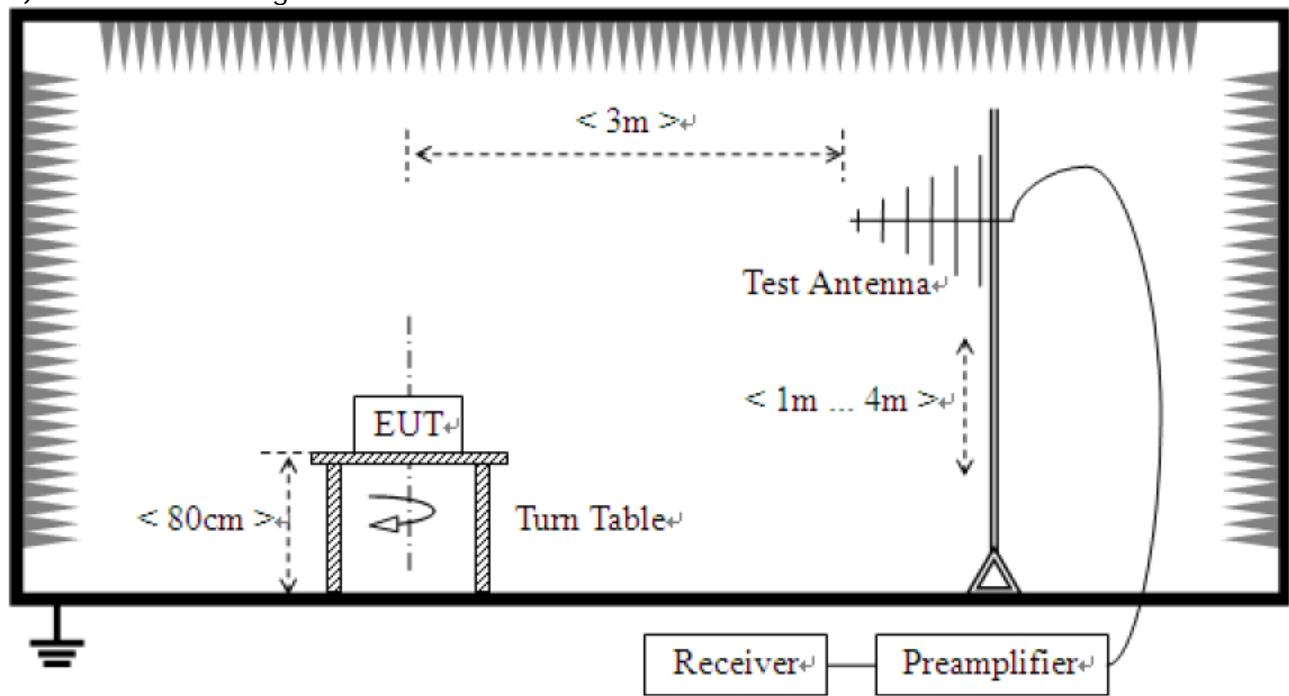



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501


Report No.:  
CTK-2023-02336  
Page (14) / (20) Pages

## Test results

### 1) Radiated emissions within the band 13.110-14.010 MHz

The requirements are:

Complies

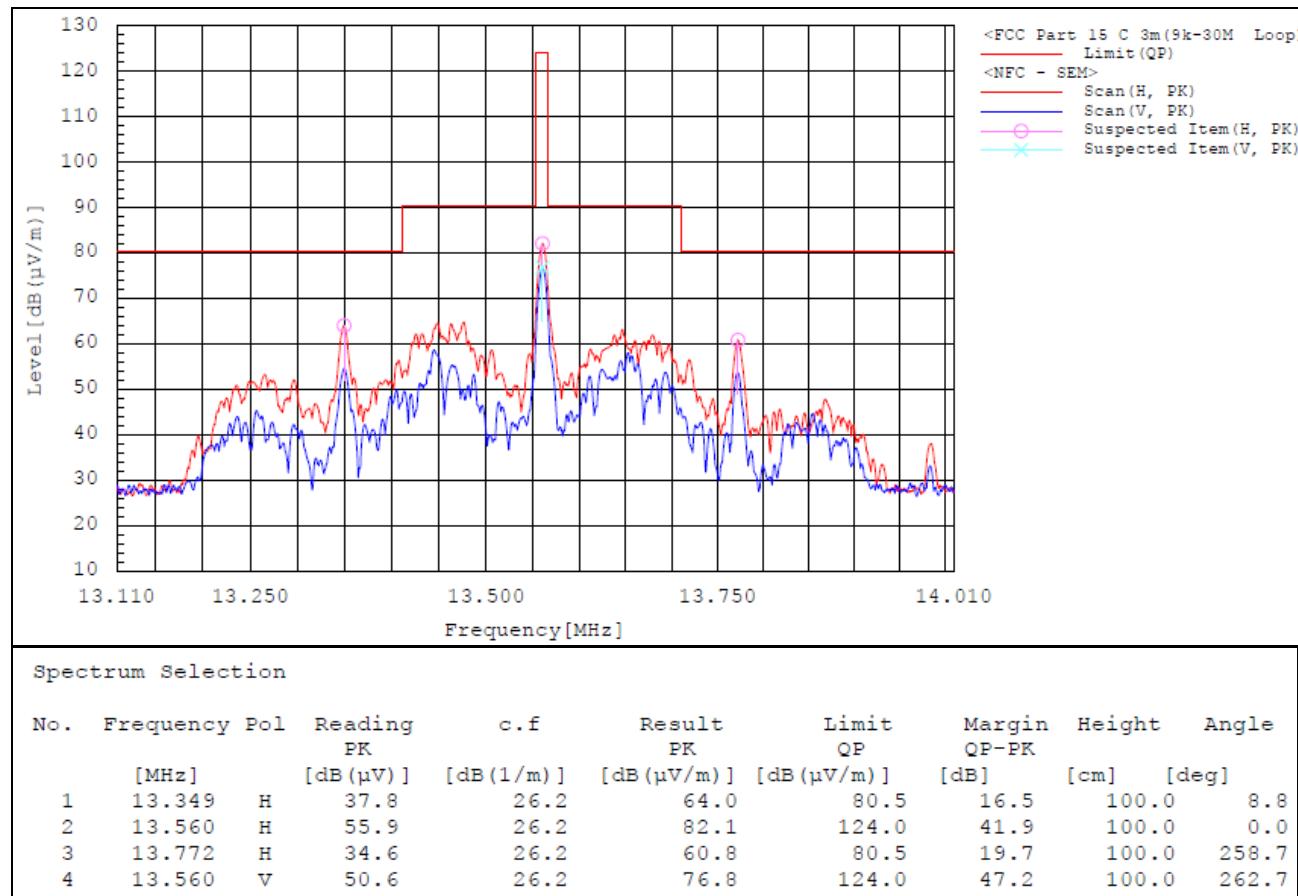

#### Remark :

1. Result = Reading + c.f (correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
3. The test result in peak detector is less than quasi-peak limit.


**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-02336  
Page (15) / (20) Pages

**2) Field strength of any emissions appearing outside of the 13.110-14.010 MHz****Frequency range : 9 kHz – 13.110 MHz**

The requirements are:

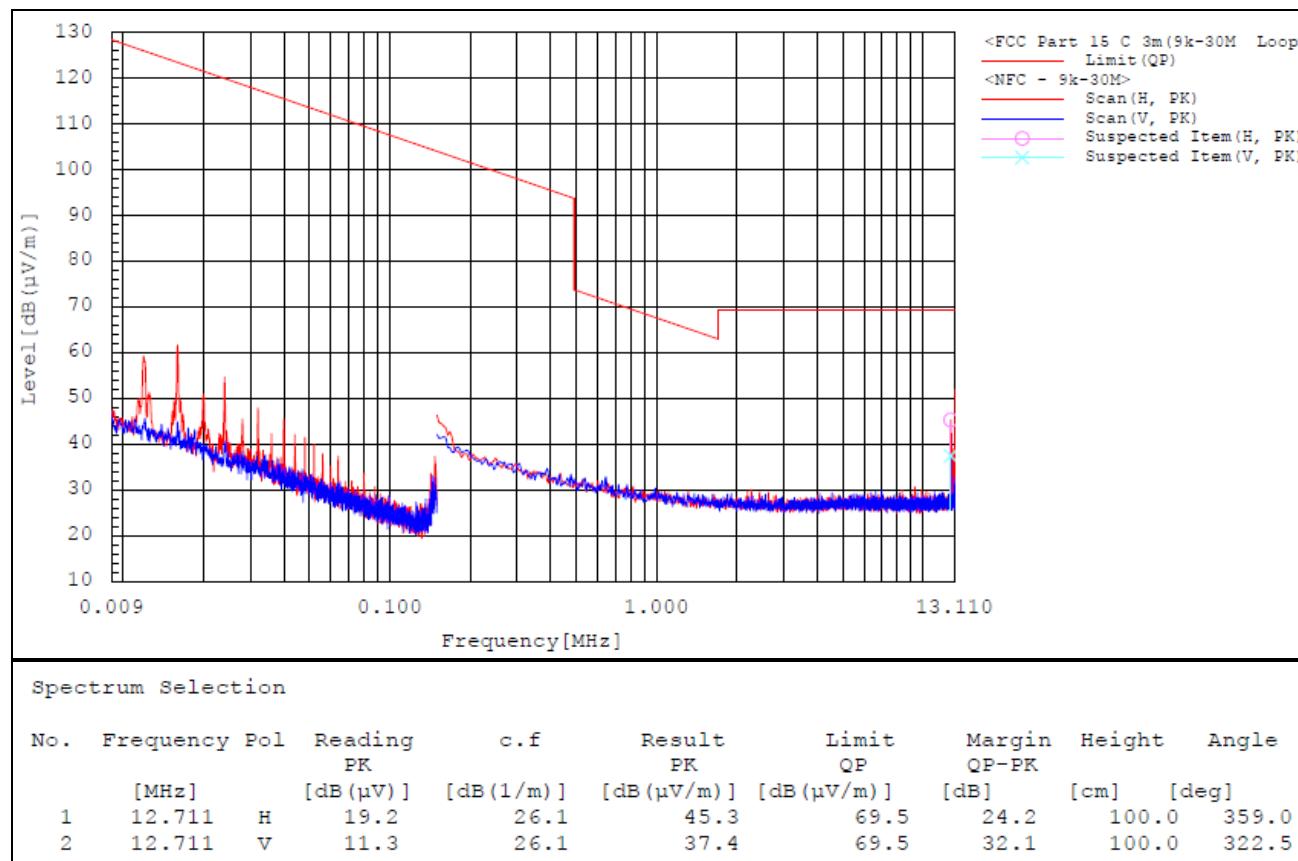 Complies**Remark :**

1. Result = Reading + c.f (correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
3. The test result in peak detector is less than quasi-peak limit.

**CTK Co., Ltd.**


(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-02336  
Page (16) / (20) Pages

**Frequency range : 14.010 MHz – 30 MHz**

The requirements are:

Complies

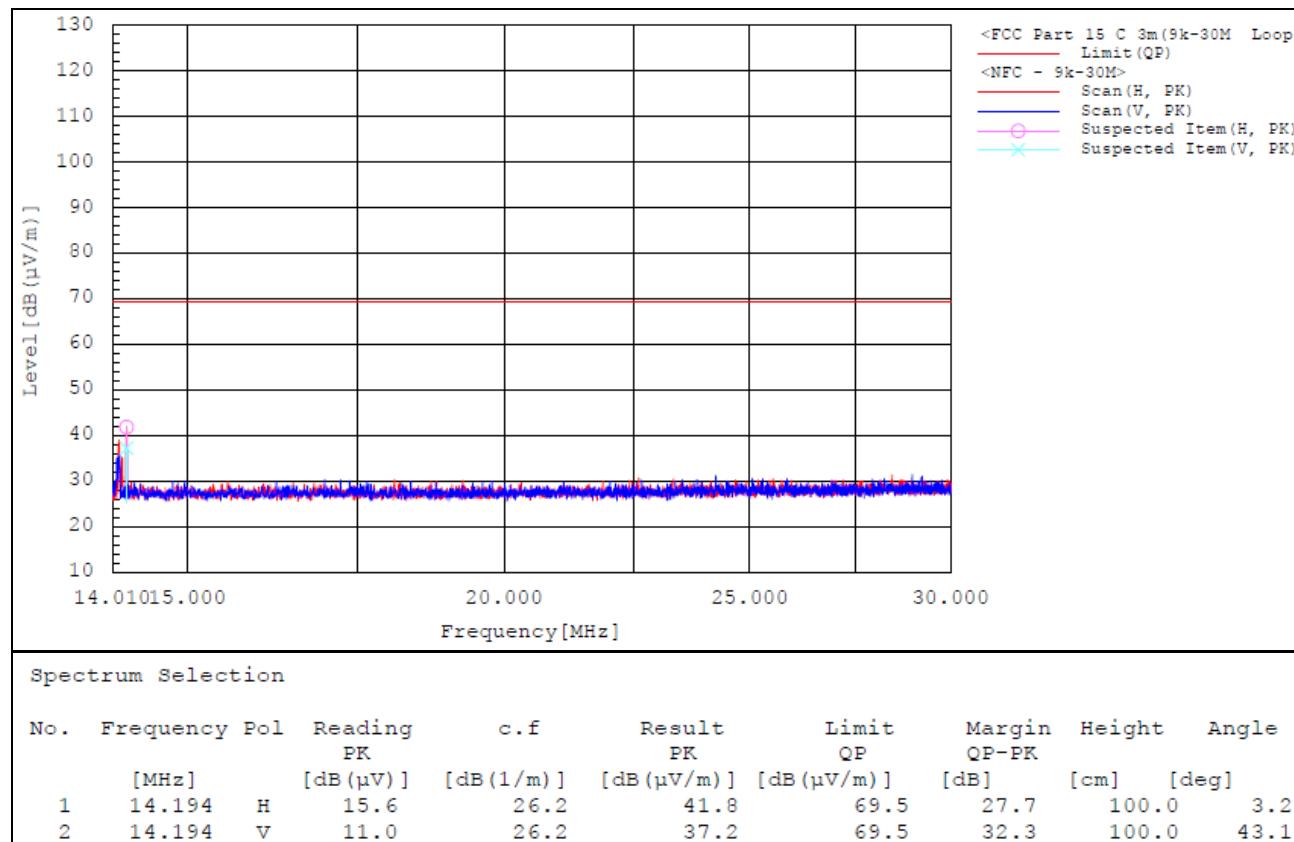
**Remark :**

1. Result = Reading + c.f (correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
3. The test result in peak detector is less than quasi-peak limit.

### 3) Radiated emissions in the range of 30 MHz to 1 000 MHz band

The requirements are:

Complies

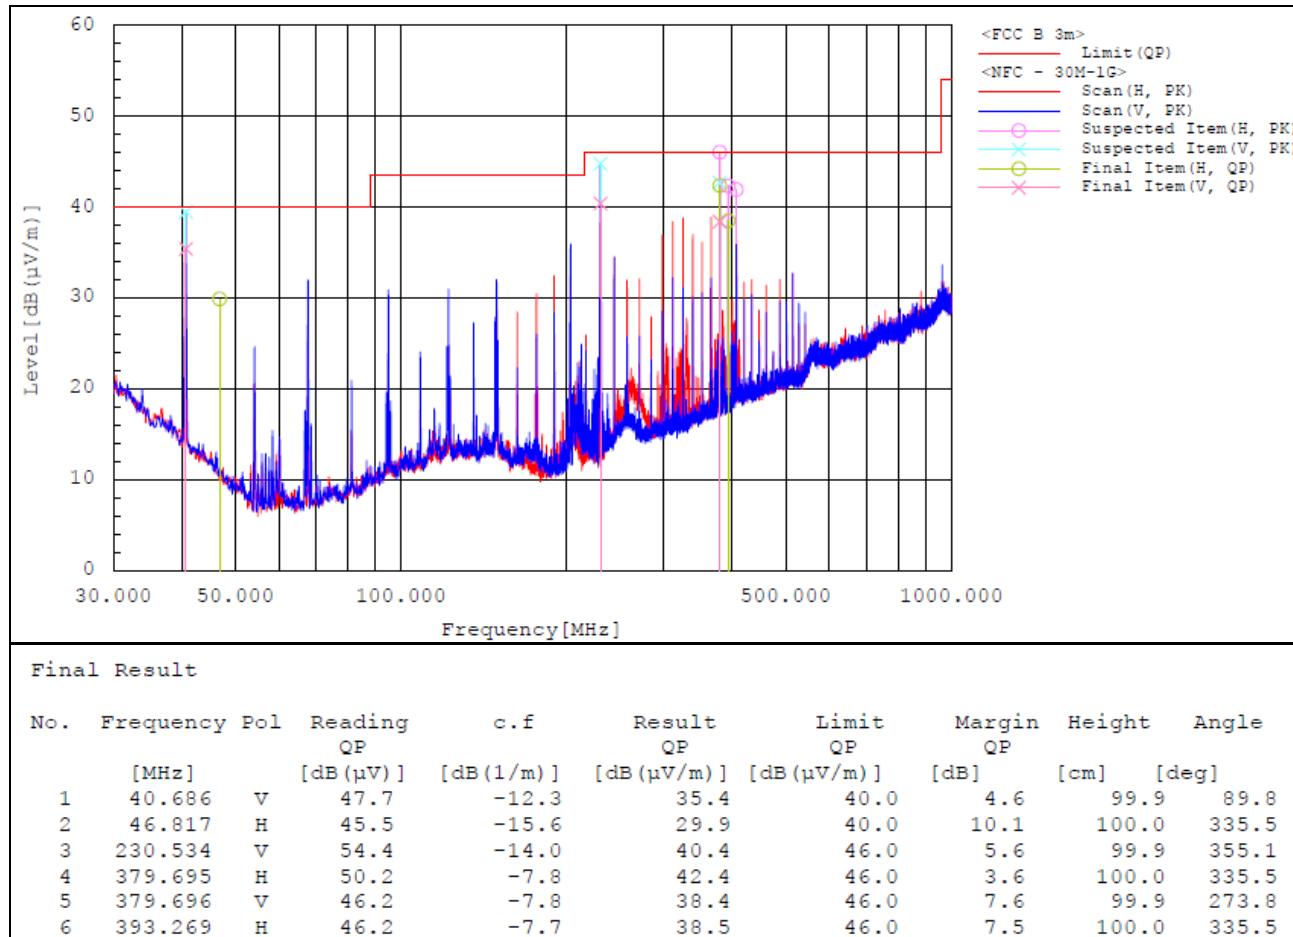

#### Remark :

1. Result = Reading + c.f(Correction factor)
2. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

## 4.3 Frequency Stability


### Requirement

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+ 50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from  $85\%$  to  $115\%$  of the rated supply voltage at a temperature of  $20$  degrees C.

### Test Procedures

For the emission bandwidth refer ANSI C63.10-2013, clause 6.8(Frequency stability tests).

### Test Setup

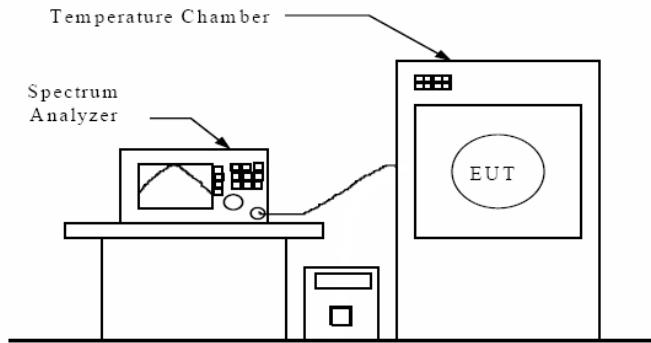



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2023-02336  
Page (19) / (20) Pages

## Test Results

The requirements are:

Complies

<b>Condition</b>		<b>Measurement Frequency (MHz)</b>	<b>Frequency Stability (ppm)</b>
<b>Temperature (°C)</b>	<b>Voltage (V)</b>		
50	12	13.560 596	-14.97
40	12	13.560 669	-9.59
30	12	13.560 727	-5.31
20	12	13.560 799	Reference
10	12	13.560 857	4.28
0	12	13.560 929	9.59
-10	12	13.560 958	11.72
-20	12	13.560 973	12.83
20	85%	13.560 741	-4.28
20	115%	13.560 755	-3.24
Limit(ppm)		-	±100

 <b>CTK Co., Ltd.</b> <i>The Prime Leader of Global Regulatory Certification</i>	<b>CTK Co., Ltd.</b> (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2023-02336 Page (20) / (20) Pages	
---	---	---	--

## APPENDIX A – Test Equipment Used For Tests

	<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Date of Calibration</b>	<b>Due Date</b>
1	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2023-05-03	2024-05-03
2	BILOG ANTENNA	TESEQ	CBL6111D	60654	2023-08-21	2025-08-21
3	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2022-04-15	2024-04-15
4	6dB Attenuator	PASTERNACK	PE7AP006-06	L20210504000023	2023-08-04	2024-08-04
5	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2023-08-04	2024-08-04
6	Dual-Tracking DC Power Supply	Topward Electric Instruments Co.,Ltd.	6303D	692130	2023-04-19	2024-04-19
7	Temp&Humi Chamber	ESPEC CORP.	SH-241	92000872	2023-01-20	2024-01-20
8	DC Power supply	Agilent	E3632A	MY40009327	2023-03-27	2024-03-27
9	Signal Analyzer	Rohde & Schwarz	FSV30	100925	2023-01-03	2024-01-03

	<b>Cable</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Check Date</b>
1	RF Cable (Conducted)	Junkosha Inc.	MWX221	1512S151	2023-09-19
2	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2023-03-06
3	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	L-5D2W	N/A	2023-03-06

-END-