

TEST REPORT



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-03151
Page (1) / (10) Pages

1. Applicant

- Name : Aptiv Connection Systems Korea LLC
- Address : 3, Hyundaiakia-ro, Paltan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea
- Date of Receipt : 2022-08-24

2. Manufacturer

- Name : Aptiv Connection Systems Korea LLC
- Address : 3, Hyundaiakia-ro, Paltan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea

3. Use of Report : For FCC Certification

4. Test Sample / Model : Wireless Power Charger / SX2 WPC without NFC

5. Date of Test : 2022-12-05



6. Test Standard(method) used : FCC 47 CFR part 2 subpart J 2.1091

7. Testing Environment: Temp.: (29 ± 1) °C, Humidity: (34 ± 3) % R.H

8. Test Results : Compliance

9. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing (Address : 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by	Technical Manager
	Bong-seok Kim: (Signature) 	Young-taek Lee: (Signature) 

Remark. This report is not related to KOLAS accreditation and relevant regulation.

2022-12-07

CTK Co., Ltd.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-03151
Page (2) / (10) Pages

REPORT REVISION HISTORY

Date	Revision	Page No
2022-12-07	Issued (CTK-2022-03151)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.

CONTENTS

- 1. General Product Description 4
 - 1.1 Client Information 4
 - 1.2 Product Information..... 4
- 2. Accreditations 5
 - 2.1 Laboratory Accreditations and Listings 5
 - 2.2 Calibration Details of Equipment Used for Measurement 5
- 3. RF Exposure Assessment 6
 - 3.1 Maximum Permissible Exposure..... 6
- APPENDIX A – Test Equipment Used For Tests 9
- APPENDIX B – Test Photos 10

 CTK Co., Ltd. <small>The Power Leader of Global Regulatory Certification</small>	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2022-03151 Page (4) / (10) Pages	
---	---	--	--

1. General Product Description

1.1 Client Information

Company	Aptiv Connection Systems Korea LLC
Contact Point	3, Hyundaiakia-ro, Paltan-myeon, Hwaseong-si, Gyeonggi-do, Republic of Korea
Contact Person	Name : Maeng, MinKyung E-mail : min-kyung.maeng@aptiv.com Tel : +82-31-350-1799

1.2 Product Information

FCC ID	2A29I-SX2WPC
Product Description	Wireless Power Charger
Model name	SX2 WPC without NFC
Variant Model name	-
Charging Frequency	128 kHz
RF Output Power	94.9 dBuV/m @ 3m
Power Transfer Method	Magnetic induction and only single primary coil coupling secondary coil
Output power from each primary coil	< 15 W
That may have multiple primary coils	No
Antenna Type	Coil
Charging Method	Directly contact
Power Source	DC 12 V

2. Accreditations

2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A
KOREA	NRRA	KR0025

2.2 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

3. RF Exposure Assessment

3.1 Maximum Permissible Exposure

Limit

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500	-	-	f/300	6
1,500-100,000	-	-	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500	-	-	f/1500	30
1,500-100,000	-	-	1.0	30

Note 1 : f = frequency in MHz; *Plane-wave equivalent power density
 Note 2 : For the applicable limit, see FCC 1.1310


Test method

- Performed aggregate both leakage E-field and H-field at surrounding the device from all simultaneous transmitting coils.
- During testing, the EUT was placed on a non-conductive table top and the ancillary equipment (e.g., mobile phone) was placed on the EUT for charging. Maximum E-field and H-field measurement were tested 15cm from each side of the EUT. Along the side of the EUT to side of E-field probe and H-field probe were positioned at the location to search maximum field strength.

The Worst Condition

Ancillary Equipment	Charging Condition
WPT Load(10 W)	Charging Mode

Test Setup

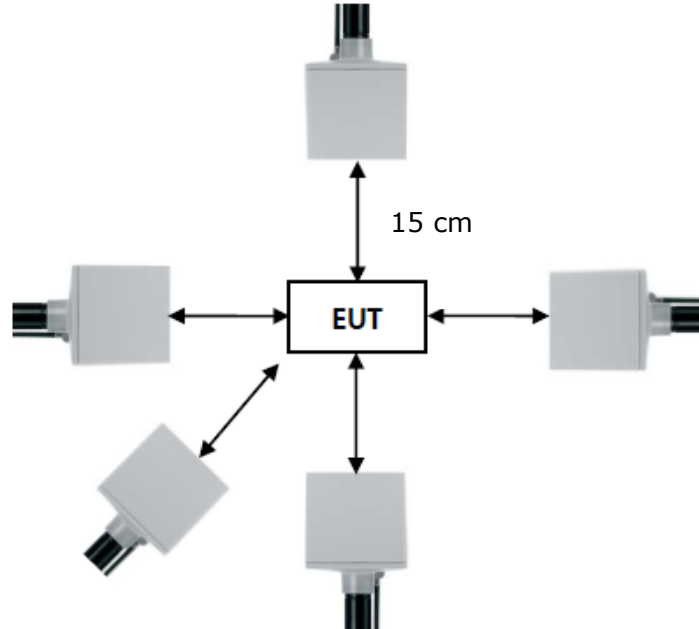

Equipment approval considerations item 5.b) of KDB 680106 D01 v03r01

※ Equipment approval considerations (Some requirements are not met.)

(1) Power transfer frequency is less than 1 MHz.

- Meet the requirements.

DC 12 V, 128 kHz (single frequency)

(2) Output power from each primary coil is less than or equal to 15 watts.

- Meet the requirements.

<15 W

(3) The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.

- Meet the requirements.

Magnetic induction and only single primary coil coupling secondary coil

(4) Client device is placed directly in contact with the transmitter.

- Meet the requirements.

Client device is placed directly in contact with the transmitter.

(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

- Not Applicable.

(6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.

- Meet the requirements. Refer to following test result.

Test results

Maximum Permissible Exposure				
Charging Condition	Separation	Probe from EUT Side	E-field (V/m)	H-field (A/m)
Operating	15 cm	right	2.18	0.39
Operating	15 cm	bottom	2.19	0.30
Operating	15 cm	left	1.93	0.34
Operating	15 cm	top	3.06	0.24
Operating	15 cm	Y-axis above EUT	5.52	0.79
Limit			614	1.63
Margin Limit(Measurement value / Limit * 100)(%)			0.9 %	48.5 %

Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
Coverage factor $k = 2$, Confidence levels of 95 %

item	Uncertainty
H-field	15 % (C.L. : Approx. 95 %, $k = 2$)
E-field	15 % (C.L. : Approx. 95 %, $k = 2$)




CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-03151
Page (9) / (10) Pages

APPENDIX A – Test Equipment Used For Tests

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Electric and Magnetic Field Analyzer	Narda	EHP-200AC	170WX91010	2022-10-14	2023-10-14
2	EHP200-TS Software	Narda	EHP200-TS	650.000.207	-	-
3	Note Computer	HP	15-bs563TU	CND7253QRM	-	-

APPENDIX B – Test Photos

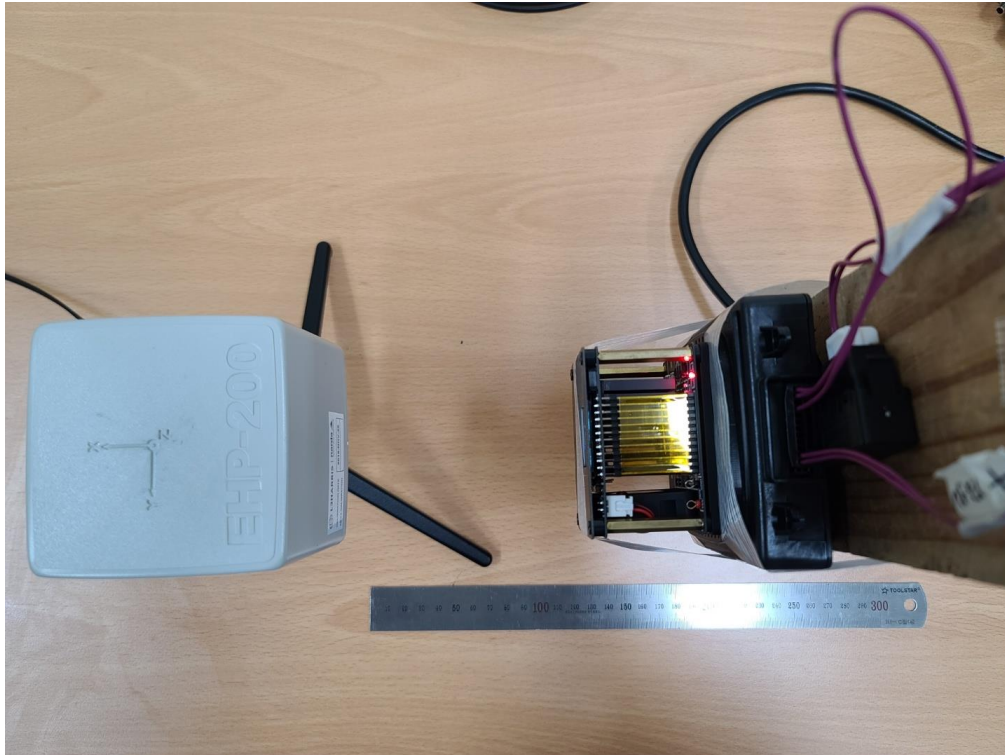

-END-