

# Test Report

## FCC ID:2A2BP-HMSP-700

Report Number..... : ZKT-220419L2525E-2

Date of Test..... May 31 to June 10, 2022

Date of issue ..... : June 10, 2022

Total number of pages ..... 72

Test Result ..... : PASS

Testing Laboratory..... : Shenzhen ZKT Technology Co., Ltd.

Address ..... : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name ..... : **Shenzhen Huimei Shangpin Technology Co., Ltd.**

Address ..... : 201, Block A, Huafeng Smart Innovation Port, Gushu 2nd Road, Gushu Community, Xixiang Street, Baoan District, Shenzhen

Manufacturer's name ..... : **Shenzhen Huimei Shangpin Technology Co., Ltd.**

Address ..... : 201, Block A, Huafeng Smart Innovation Port, Gushu 2nd Road, Gushu Community, Xixiang Street, Baoan District, Shenzhen

Test specification:

Standard..... : FCC CFR Title 47 Part 15 Subpart C Section 15.407  
ANSI C63.10:2013  
KDB 789033 D02 v01r02

Test procedure..... : /

Non-standard test method ..... : N/A

Test Report Form No. .... : TRF-EL-113\_V0

Test Report Form(s) Originator .... : ZKT Testing

Master TRF ..... : Dated: 2022-06-10

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : Wireless CarPlay Adapter

Trademark ..... : Casoda

Model/Type reference ..... :

hmsp-700, hmsp-710, hmsp-720, hmsp-730, hmsp-740, hmsp-750,  
hmsp-760, hmsp-770, hmsp-780, hmsp-790, hmsp-800, hmsp-810,  
hmsp-820, hmsp-830, hmsp-840

Ratings..... : DC 5V from adapter, AC 120V/60Hz for adapter

Testing procedure and testing location:

Testing Laboratory .....: Shenzhen ZKT Technology Co., Ltd.

Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community  
Industrial Avenue, Fuhai Street, Bao'an District,  
Shenzhen, China

Tested by (name + signature) .....: Alen He



Reviewer (name + signature).....: Joe Liu



Approved (name + signature) .....: Lake Xie



## Table of Contents

## Page

<b>2.SUMMARY OF TEST RESULTS</b>	<b>6</b>
2.1 1TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
<b>3.1GENERAL INFORMATION</b>	<b>8</b>
3.1 1.1GENERAL DESCRIPTION OF EUT	8
3.3 1.2BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
<b>4.EMC EMISSION TEST</b>	<b>12</b>
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 1.2.1TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	16
4.2.1 APPLICABLE STANDARD	16
4.2.2 CONFORMANCE LIMIT	16
4.2.3 MEASURING INSTRUMENTS	16
4.2.4 TEST CONFIGURATION	17
4.2.5 TEST PROCEDURE	18
4.2.6 TEST RESULT	19
<b>5. RADIATED RESTRICTED BAND EDGE MEASUREMENT</b>	<b>27</b>
APPLIED PROCEDURES / LIMIT	27
TEST PROCEDURE	27
DEVIATION FROM STANDARD	27
TEST RESULTS	28
<b>6.POWER SPECTRAL DENSITY TEST</b>	<b>32</b>
6.1 APPLIED PROCEDURES / LIMIT	32
6.2 TEST PROCEDURE	33
6.3 DEVIATION FROM STANDARD	33
6.4 TEST SETUP	33
6.5 EUT OPERATION CONDITIONS	33
6.6 TEST RESULTS	34
<b>7. 26DB &amp; 6DB &amp; 99% EMISSION BANDWIDTH</b>	<b>39</b>
7.1 APPLIED PROCEDURES / LIMIT	39

Table of Contents	Page
7.2 TEST PROCEDURE	39
7.3 EUT OPERATION CONDITIONS	39
7.4 TEST RESULTS	40
8.MAXIMUM CONDUCTED OUTPUT POWER	45
8.1 PPLIED PROCEDURES / LIMIT	45
8.2 TEST PROCEDURE	45
8.3 DEVIATION FROM STANDARD	46
8.4 TEST SETUP	46
8.5 EUT OPERATION CONDITIONS	46
8.6 TEST RESULTS	47
9.OUT OF BAND EMISSIONS	49
9.1 APPLICABLE STANDARD	49
9.2 TEST PROCEDURE	49
9.3 DEVIATION FROM STANDARD	49
9.4 TEST SETUP	49
9.5 EUT OPERATION CONDITIONS	50
9.6 TEST RESULTS	50
10.SPURIOUS RF CONDUCTED EMISSIONS	58
10.1 CONFORMANCE LIMIT	58
10.2 MEASURING INSTRUMENTS	58
10.3 TEST SETUP	58
10.4 TEST PROCEDURE	58
10.5 TEST RESULTS	58
11.FREQUENCY STABILITY MEASUREMENT	64
11.1 LIMIT	64
11.2 TEST PROCEDURES	64
11.3 TEST SETUP LAYOUT	64
11.4 EUT OPERATION DURING TEST	64
11.5 TEST RESULTS	64
12.ANTENNA REQUIREMENT	71
13. TEST SETUP PHOTO	72
14. EUT CONSTRUCTIONAL DETAILS	72

## 1. VERSION

Report No.	Version	Description	Approved
ZKT-220607L3775E-2	Rev.01	Initial issue of report	June 10, 2022

## 2.SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	Spurious Radiated Emissions	PASS	
FCC Part15.207	Conducted Emission	PASS	
15.407 (a)(1) 15.407 (a)(3)	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

## 2.1 1TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue , Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

## 2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$  , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of  $k=2$  , providing a level of confidence of approximately 95 % .

No	te	ncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emiss on(1GHz-18GHz)	U 4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3 34dB
4	Conducted Adjacent channel power	U=1.3 dB
	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59℃
9	Radiated disturbance(30MHz-1000MHz)	U=4.8dB
10	Radiated disturbance(1GHz-6GHz)	U=4.9dB
11	Radiated disturbance(1GHz-18GHz)	U=5.0dB



### 3.1 GENERAL INFORMATION

#### 3.1.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless CarPlay Adapter	
Trade Name	Casoda	
Model Name	hmsp-700, hmsp-710, hmsp-720, hmsp-730, hmsp-740, hmsp-750, hmsp-760, hmsp-770, hmsp-780, hmsp-790, hmsp-800, hmsp-810, hmsp-820, hmsp-830, hmsp-840	
Model Difference	All the same except colour and model name.	
Product Description	IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a/n (20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n (40MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11ac(80MHz channel bandwidth)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT80):NSS1, MCS0-MCS9
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	<input checked="" type="checkbox"/> 5745-5825 MHz for 802.11a/n(HT20); 5755-5795 MHz for 802.11n(HT40); 5775MHz for 802.11 ac80;
	Number of Channels	5 channels for 802.11 a20/n20 in the 5745-5825MHz band 2 channels for 802.11 n40/ in the 5755-5795 MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
Channel List	Please refer to the Note 2.	
Power	DC 5V from adapter, AC 120V/60Hz for adapter	
hardware version	HV1.0	
Software version	SV1.0	
Serial number	N/A	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



Frequency and Channel list for 802.11a/n(20 MHz) band IV (5745-5825MHz):

802.11a/n( 20 MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n(40MHz) band IV (5755-5795MHz):

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

802.11ac 80MHz Carrier Frequency Channel	
Channel	Frequency (MHz)
155	5775

Tx Antenna

Antenna	Antenna Type	Antenna Gain(dBi)
Antenna 1	PCB antenna	0
Antenna 2	PCB antenna	0

### 3.2 DESCRIPTION OF TEST MODES

Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Pretest Mode	Description
Mode 1	802.11a /n 20 CH149/ CH157/ CH 165
Mode 2	802.11n 40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 155
Mode 4	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

Additional Instructions

Test Software	Special test command provided by manufacturer
Power level setup	Default


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a /n 20 CH149/ CH157/ CH 165
Mode 2	802.11n 40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 155
Mode 4	Link Mode

Note:


(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

### 3.3 1.2BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission



Radiated Emission



Conducted Spurious



### 3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless CarPlay Adapter	Casoda	hmsp-700	N/A	EUT
E-2	Adapter	N/A	HNT-520	N/A	Supply by Lab

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.8M	DC Line

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

### 3.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

#### Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY45109572	Sep. 22, 2021	Sep. 21, 2022
2	Spectrum Analyzer (1GHz-40GHz)	Agilent	E4446A	100363	Sep. 22, 2021	Sep. 21, 2022
3	Test Receiver (9kHz-7GHz)	R&S	ESC17	101169	Sep. 22, 2021	Sep. 21, 2022
4	Bilog Antenna (30MHz-1400MHz)	Schwarzbeck	VULB9168	00877	Sep. 22, 2021	Sep. 21, 2022
5	Horn Antenna (1GHz-18GHz)	SCHWARZBEC K	BBHA9120D	1541	Sep. 22, 2021	Sep. 21, 2022
6	Horn Antenna (18GHz-40GHz)	A.H. System	SAS-574	588	Sep. 22, 2021	Sep. 21, 2022
7	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	N/A	Sep. 22, 2021	Sep. 21, 2022
8	Amplifier (1GHz-40GHz)	全聚达	DLE-161	097	Sep. 22, 2021	Sep. 21, 2022
9	Loop Antenna (9KHz-30MHz)	SCHWARZBEC K	FMZB1519B	014	Sep. 22, 2021	Sep. 21, 2022
10	RF cables1 (9kHz-30MHz)	N/A	9kHz-30MHz	N/A	Sep. 22, 2021	Sep. 21, 2022
11	RF cables2 (30MHz-1GHz)	N/A	30MHz-1GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
12	RF cables3 (1GHz-40GHz)	N/A	1GHz-40GHz	N/A	Sep. 22, 2021	Sep. 21, 2022
13	CMW500 Test	R&S	CMW500	106504	Sep. 22, 2021	Sep. 21, 2022
14	ESG Signal Generator	Agilent	E4421B	GB40051203	Sep. 22, 2021	Sep. 21, 2022
15	Signal Generator	Agilent	N5182A	MY47420215	Sep. 22, 2021	Sep. 21, 2022
16	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
17	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

#### Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Sep. 22, 2021	Sep. 21, 2022
2	LISN	CYBERTEK	EM5040A	E1850400149	Sep. 22, 2021	Sep. 21, 2022
3	Test Cable	N/A	C01	N/A	Sep. 22, 2021	Sep. 21, 2022
4	Test Cable	N/A	C02	N/A	Sep. 22, 2021	Sep. 21, 2022
5	EMI Test Receiver	R&S	ESRP3	101946	Sep. 22, 2021	Sep. 21, 2022
6	Absorbing Clamp	DZ	ZN23201	N/A	Sep. 22, 2021	Sep. 21, 2022

## 4.EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

#### 4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) \*Decreases with the logarithm of the frequency.


#### 4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

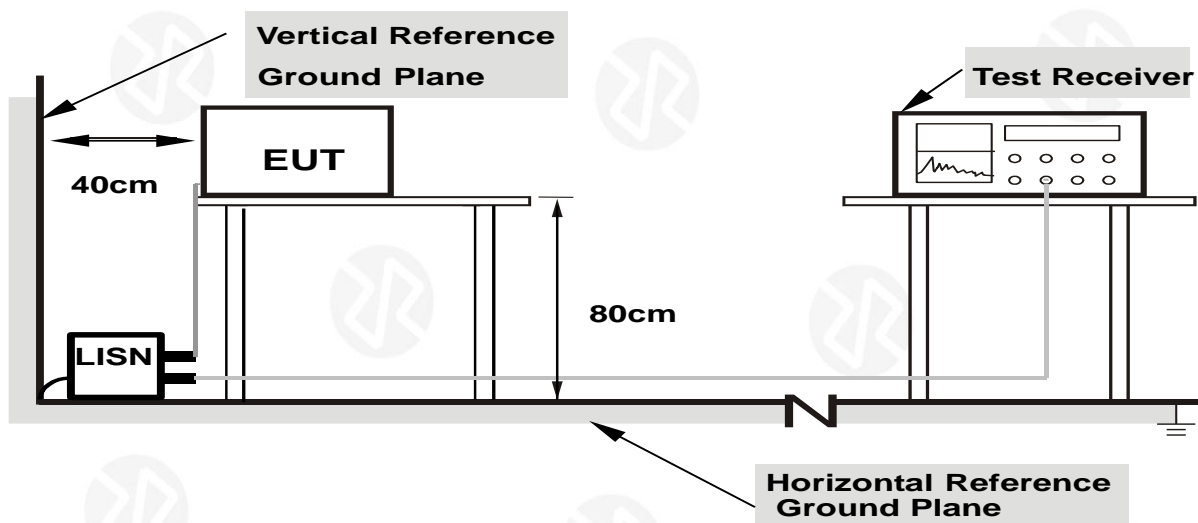

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**


#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

#### 4.1.6 1.2.1 TEST RESULTS

Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

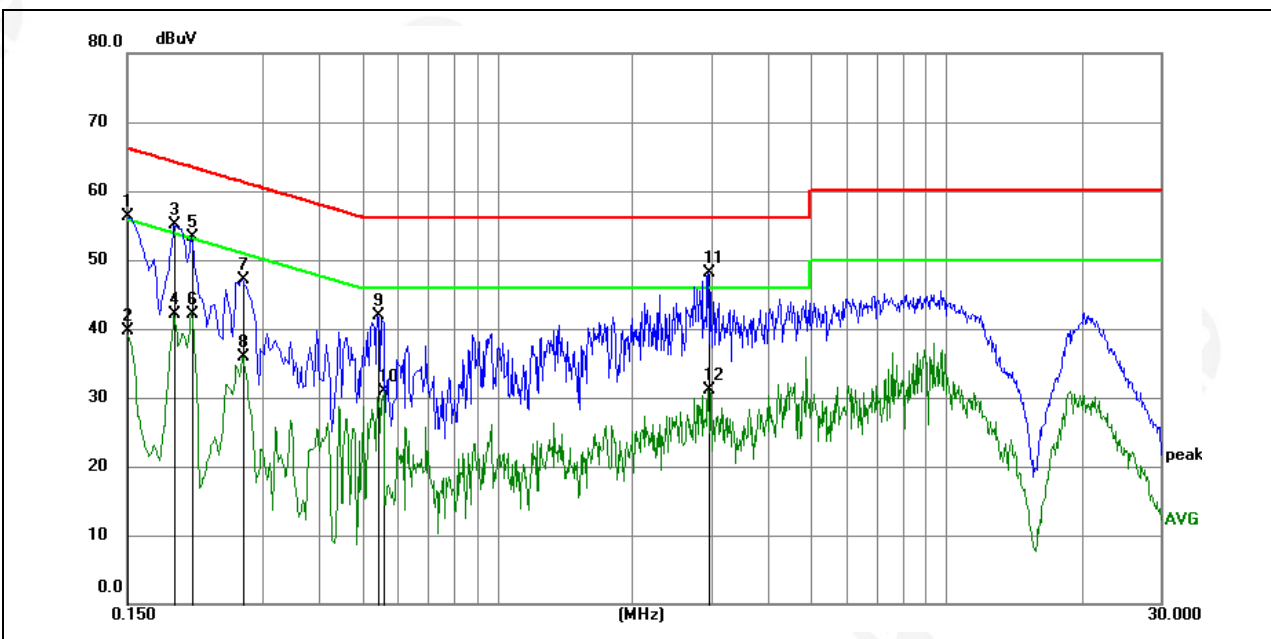


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	43.22	13.01	56.23	66.00	-9.77	QP	P
2	0.1500	26.61	13.01	39.62	56.00	-16.38	AVG	P
3	0.1905	42.89	12.13	55.02	64.01	-8.99	QP	P
4	0.1905	29.93	12.13	42.06	54.01	-11.95	AVG	P
5	0.2085	41.48	11.88	53.36	63.26	-9.90	QP	P
6	0.2085	30.32	11.88	42.20	53.26	-11.06	AVG	P
7	0.2714	35.53	11.59	47.12	61.07	-13.95	QP	P
8	0.2714	24.24	11.59	35.83	51.07	-15.24	AVG	P
9	0.5415	31.42	10.53	41.95	56.00	-14.05	QP	P
10	0.5595	20.40	10.53	30.93	46.00	-15.07	AVG	P
11	2.9580	38.07	9.95	48.02	56.00	-7.98	QP	P
12	2.9580	21.21	9.95	31.16	46.00	-14.84	AVG	P

#### Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor



Temperature :	26℃	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

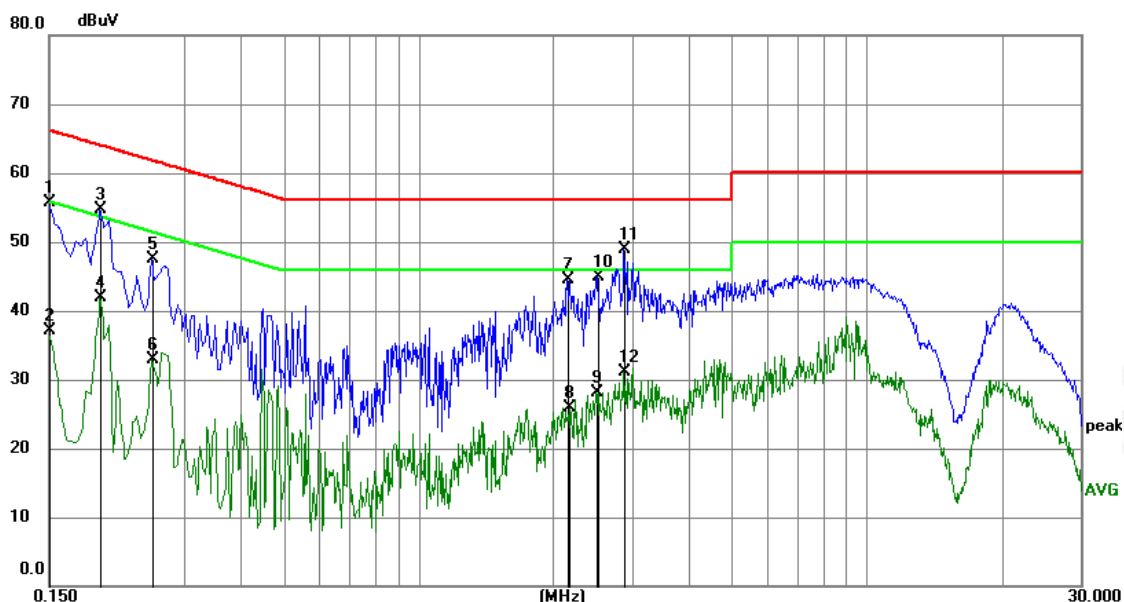

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	42.78	13.01	55.79	66.00	-10.21	QP	P
2	0.1500	24.03	13.01	37.04	56.00	-18.96	AVG	P
3	0.1949	42.71	12.03	54.74	63.83	-9.09	QP	P
4	0.1949	29.85	12.03	41.88	53.83	-11.95	AVG	P
5	0.2535	35.80	11.67	47.47	61.64	-14.17	QP	P
6	0.2535	21.20	11.67	32.87	51.64	-18.77	AVG	P
7	2.1479	34.32	10.15	44.47	56.00	-11.53	QP	P
8	2.1704	15.66	10.15	25.81	46.00	-20.19	AVG	P
9	2.4900	17.96	10.07	28.03	46.00	-17.97	AVG	P
10	2.5035	34.79	10.06	44.85	56.00	-11.15	QP	P
11	2.8770	38.91	9.97	48.88	56.00	-7.12	QP	P
12	2.8770	21.16	9.97	31.13	46.00	-14.87	AVG	P

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

### 4.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

### 4.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

#### 4.2.4 TEST CONFIGURATION


##### 1.For radiated emissions below 30MHz

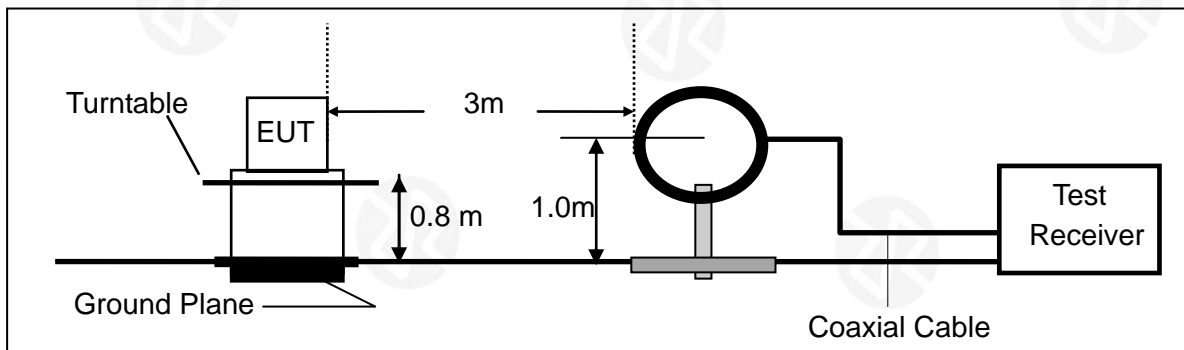

##### 2.For radiated emissions from 30MHz to 1000MHz

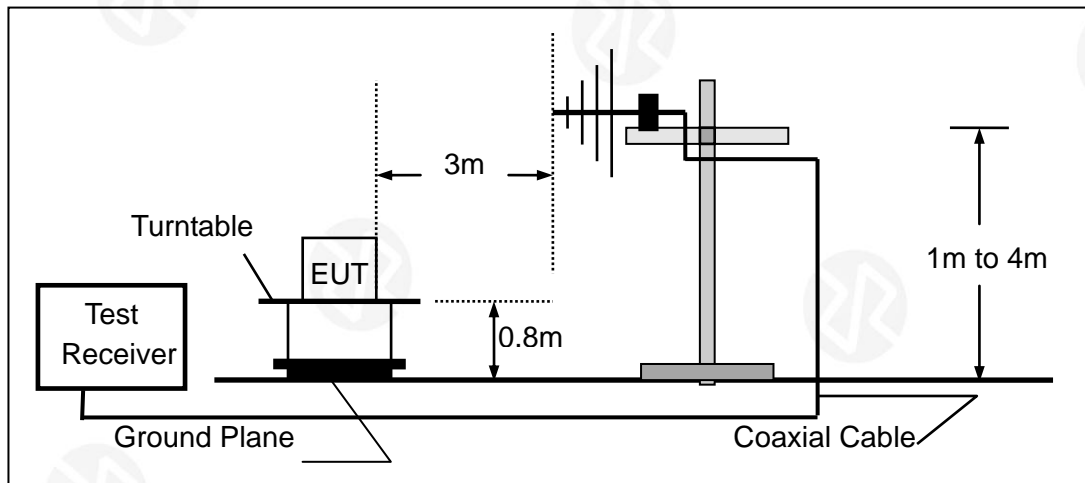

##### 3. Radiated Emission Test-Up Frequency Above 1GHz

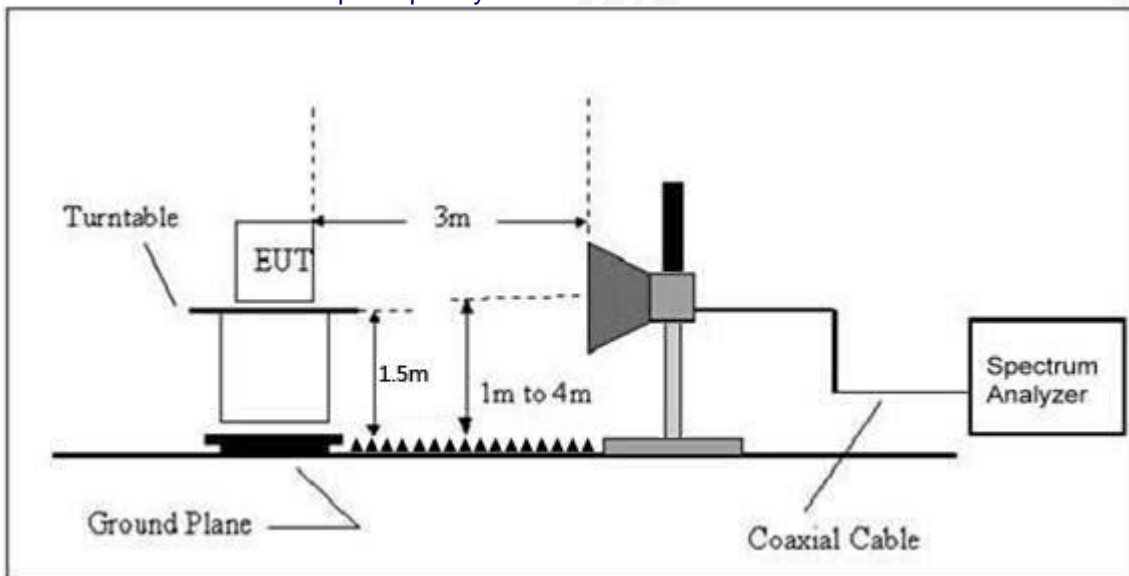

#### 4.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz]/\text{narrower RBW [kHz]})$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.


#### 4.2.6 TEST RESULT

Between 9KHz – 30MHz


The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

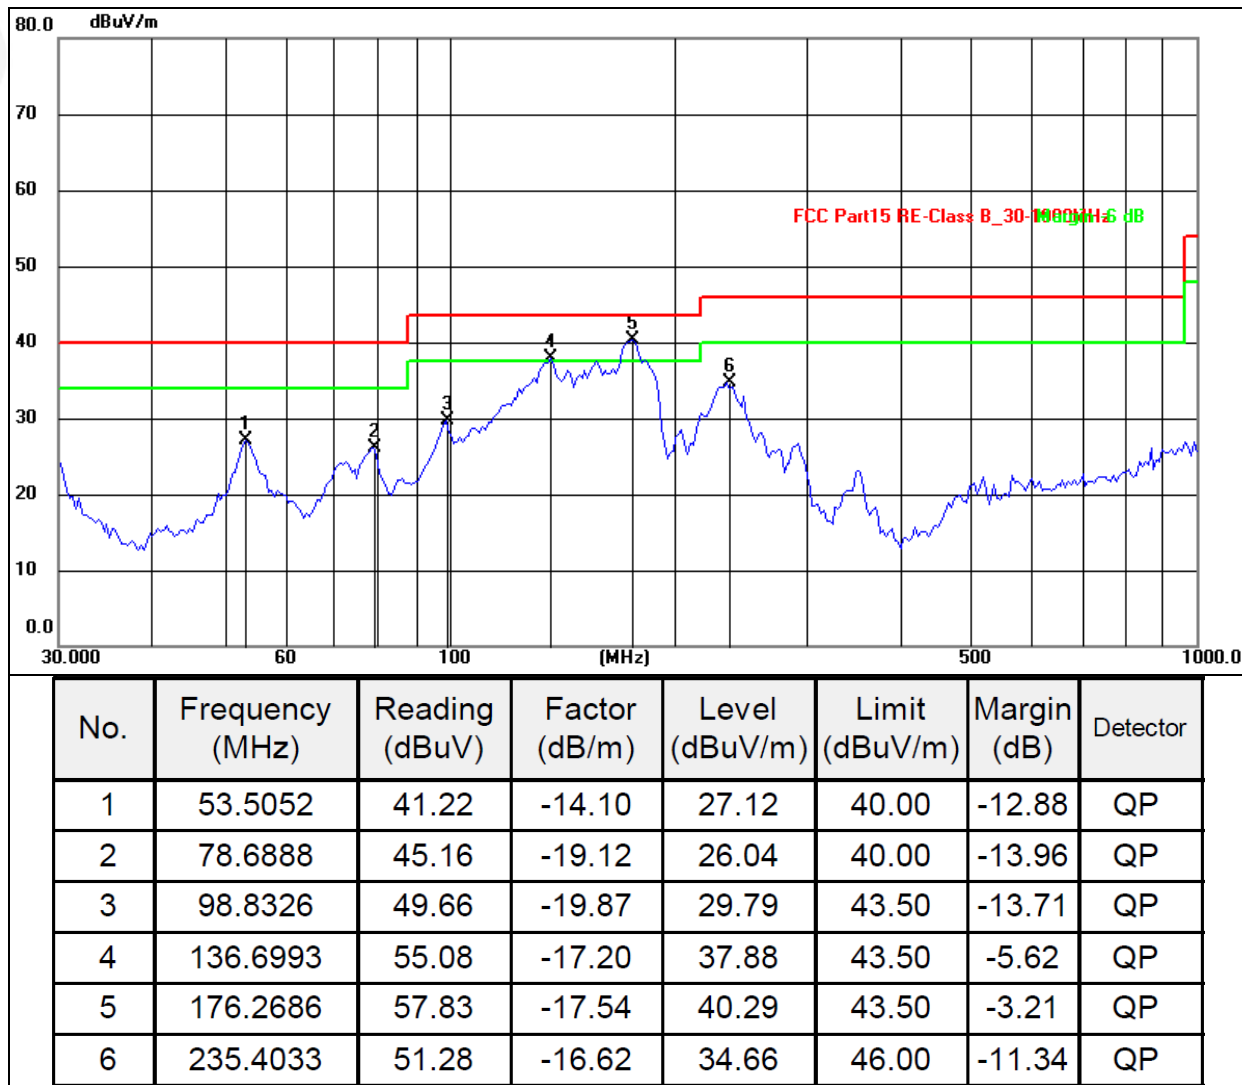

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

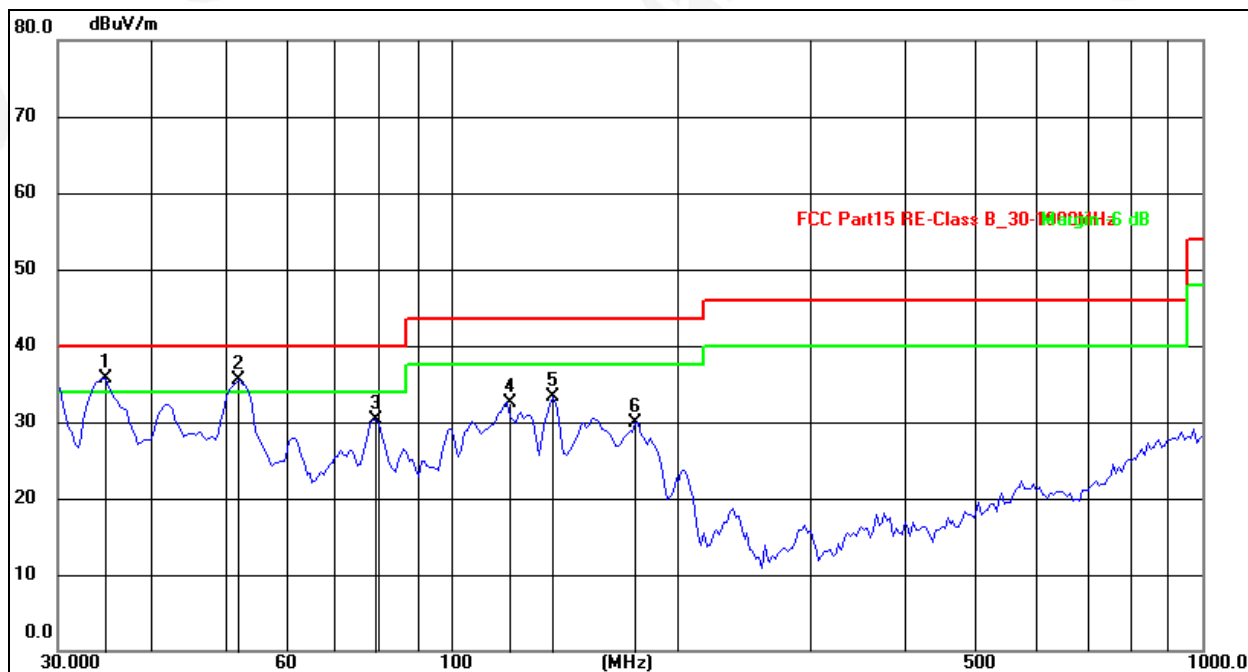

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	34.5173	53.37	-17.69	35.68	40.00	-4.32	QP
2	52.1164	53.03	-17.51	35.52	40.00	-4.48	QP
3	78.6888	51.92	-21.53	30.39	40.00	-9.61	QP
4	118.8095	53.87	-21.37	32.50	43.50	-11.00	QP
5	136.6993	54.35	-21.01	33.34	43.50	-10.16	QP
6	176.2686	49.80	-19.91	29.89	43.50	-13.61	QP

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11a mode

Between 1GHz – 40GHz

Shenzhen ZKT Technology Co., Ltd.

1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

+86-400-000-9970

+86-755-2233 6688

zkt@zkt-lab.com

www.zkt-lab.com



Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX (5.8G) -- 802.11 a-ANT1-Worst case		

802.11a

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	51.75	30.55	5.77	24.66	51.63	74.00	-22.37	PK
V	11490.00	41.61	30.55	5.77	24.66	41.49	54.00	-12.51	AV
V	17235.00	49.84	30.33	6.32	24.55	50.38	74.00	-23.62	PK
V	17235.00	42.32	30.33	6.32	24.55	42.86	54.00	-11.14	AV
V	22980.00	50.34	30.85	7.45	24.69	51.63	74.00	-22.37	PK
V	22980.00	42.22	30.85	7.45	24.69	43.51	54.00	-10.49	AV
V	28725.00	50.44	31.02	8.99	25.57	53.98	74.00	-20.02	PK
V	28725.00	42.22	31.02	8.99	25.57	45.76	54.00	-8.24	AV
H	11490.00	52.09	30.55	5.77	24.66	51.97	74.00	-22.03	PK
H	11490.00	41.94	30.55	5.77	24.66	41.82	54.00	-12.18	AV
H	17235.00	50.73	30.33	6.32	24.55	51.27	74.00	-22.73	PK
H	17235.00	41.99	30.33	6.32	24.55	42.53	54.00	-11.47	AV
H	22980.00	50.73	30.85	7.45	24.69	52.02	74.00	-21.98	PK
H	22980.00	41.99	30.85	7.45	24.69	43.28	54.00	-10.72	AV
H	28725.00	50.73	31.02	8.99	25.57	54.27	74.00	-19.73	PK
H	28725.00	40.99	31.02	8.99	25.57	44.53	54.00	-9.47	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	50.89	30.55	5.77	24.66	50.77	74.00	-23.23	PK
V	11570.00	41.78	30.55	5.77	24.66	41.66	54.00	-12.34	AV
V	17355.00	49.42	30.33	6.32	24.55	49.96	74.00	-24.04	PK
V	17355.00	41.46	30.33	6.32	24.55	42.00	54.00	-12.00	AV
V	23140.00	49.49	30.85	7.45	24.69	50.78	74.00	-23.22	PK
V	23140.00	41.46	30.85	7.45	24.69	42.75	54.00	-11.25	AV
V	28925.00	49.39	31.02	8.99	25.57	52.93	74.00	-21.07	PK
V	28925.00	41.46	31.02	8.99	25.57	45.00	54.00	-9.00	AV
H	11570.00	52.25	30.55	5.77	24.66	52.13	74.00	-21.87	PK
H	11570.00	41.81	30.55	5.77	24.66	41.69	54.00	-12.31	AV
H	17355.00	52.96	30.33	6.32	24.55	53.50	74.00	-20.50	PK
H	17355.00	41.59	30.33	6.32	24.55	42.13	54.00	-11.87	AV
H	23140.00	52.96	30.85	7.45	24.69	54.25	74.00	-19.75	PK
H	23140.00	41.59	30.85	7.45	24.69	42.88	54.00	-11.12	AV
H	28925.00	53.46	31.02	8.99	25.57	57.00	74.00	-17.00	PK
H	28925.00	41.59	31.02	8.99	25.57	45.13	54.00	-8.87	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampli fier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:5825MHz									
V	11650.00	50.58	30.55	5.77	24.66	50.46	74.00	-23.54	PK
V	11650.00	42.12	30.55	5.77	24.66	42.00	54.00	-12.00	AV
V	17475.00	53.09	30.33	6.32	24.55	53.63	74.00	-20.37	PK
V	17475.00	42.44	30.33	6.32	24.55	42.98	54.00	-11.02	AV
V	23300.00	53.09	30.85	7.45	24.69	54.38	74.00	-19.62	PK
V	23300.00	42.93	30.85	7.45	24.69	44.22	54.00	-9.78	AV
V	29125.00	53.09	31.02	8.99	25.57	56.63	74.00	-17.37	PK
V	29125.00	42.33	31.02	8.99	25.57	45.87	54.00	-8.13	AV
H	11650.00	50.67	30.55	5.77	24.66	50.55	74.00	-23.45	PK
H	11650.00	42.34	30.55	5.77	24.66	42.22	54.00	-11.78	AV
H	17475.00	52.26	30.33	6.32	24.55	52.80	74.00	-21.20	PK
H	17475.00	42.60	30.33	6.32	24.55	43.14	54.00	-10.86	AV
H	23300.00	52.86	30.85	7.45	24.69	54.15	74.00	-19.85	PK
H	23300.00	42.70	30.85	7.45	24.69	43.99	54.00	-10.01	AV
H	29125.00	52.76	31.02	8.99	25.57	56.30	74.00	-17.70	PK
H	29125.00	42.70	31.02	8.99	25.57	46.24	54.00	-7.76	AV

**Remark:**

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11490.00	52.09	30.55	5.77	24.66	51.97	74.00	-22.03	PK
V	11490.00	41.95	30.55	5.77	24.66	41.83	54.00	-12.17	AV
V	17235.00	50.18	30.33	6.32	24.55	50.72	74.00	-23.28	PK
V	17235.00	42.66	30.33	6.32	24.55	43.20	54.00	-10.80	AV
V	22980.00	50.68	30.85	7.45	24.69	51.97	74.00	-22.03	PK
V	22980.00	42.56	30.85	7.45	24.69	43.85	54.00	-10.15	AV
V	28725.00	50.78	31.02	8.99	25.57	54.32	74.00	-19.68	PK
V	28725.00	42.56	31.02	8.99	25.57	46.10	54.00	-7.90	AV
H	11490.00	52.43	30.55	5.77	24.66	52.31	74.00	-21.69	PK
H	11490.00	42.28	30.55	5.77	24.66	42.16	54.00	-11.84	AV
H	17235.00	51.07	30.33	6.32	24.55	51.61	74.00	-22.39	PK
H	17235.00	42.33	30.33	6.32	24.55	42.87	54.00	-11.13	AV
H	22980.00	51.07	30.85	7.45	24.69	52.36	74.00	-21.64	PK
H	22980.00	42.33	30.85	7.45	24.69	43.62	54.00	-10.38	AV
H	28725.00	51.07	31.02	8.99	25.57	54.61	74.00	-19.39	PK
H	28725.00	41.33	31.02	8.99	25.57	44.87	54.00	-9.13	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:5785MHz									
V	11570.00	51.57	30.55	5.77	24.66	51.45	74.00	-22.55	PK
V	11570.00	42.46	30.55	5.77	24.66	42.34	54.00	-11.66	AV
V	17355.00	50.10	30.33	6.32	24.55	50.64	74.00	-23.36	PK
V	17355.00	42.14	30.33	6.32	24.55	42.68	54.00	-11.32	AV
V	23140.00	50.17	30.85	7.45	24.69	51.46	74.00	-22.54	PK
V	23140.00	42.14	30.85	7.45	24.69	43.43	54.00	-10.57	AV
V	28925.00	50.07	31.02	8.99	25.57	53.61	74.00	-20.39	PK
V	28925.00	42.14	31.02	8.99	25.57	45.68	54.00	-8.32	AV
H	11570.00	52.93	30.55	5.77	24.66	52.81	74.00	-21.19	PK
H	11570.00	42.49	30.55	5.77	24.66	42.37	54.00	-11.63	AV
H	17355.00	53.64	30.33	6.32	24.55	54.18	74.00	-19.82	PK
H	17355.00	42.27	30.33	6.32	24.55	42.81	54.00	-11.19	AV
H	23140.00	53.64	30.85	7.45	24.69	54.93	74.00	-19.07	PK
H	23140.00	42.27	30.85	7.45	24.69	43.56	54.00	-10.44	AV
H	28925.00	54.14	31.02	8.99	25.57	57.68	74.00	-16.32	PK
H	28925.00	42.27	31.02	8.99	25.57	45.81	54.00	-8.19	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
High Channel:5825MHz									
V	11650.00	50.46	30.55	5.77	24.66	50.34	74.00	-23.66	PK
V	11650.00	42.00	30.55	5.77	24.66	41.88	54.00	-12.12	AV
V	17475.00	52.97	30.33	6.32	24.55	53.51	74.00	-20.49	PK
V	17475.00	42.32	30.33	6.32	24.55	42.86	54.00	-11.14	AV
V	23300.00	52.97	30.85	7.45	24.69	54.26	74.00	-19.74	PK

V	23300.00	42.81	30.85	7.45	24.69	44.10	54.00	-9.90	AV
V	29125.00	52.97	31.02	8.99	25.57	56.51	74.00	-17.49	PK
V	29125.00	42.21	31.02	8.99	25.57	45.75	54.00	-8.25	AV
H	11650.00	50.55	30.55	5.77	24.66	50.43	74.00	-23.57	PK
H	11650.00	42.22	30.55	5.77	24.66	42.10	54.00	-11.90	AV
H	17475.00	52.14	30.33	6.32	24.55	52.68	74.00	-21.32	PK
H	17475.00	42.48	30.33	6.32	24.55	43.02	54.00	-10.98	AV
H	23300.00	52.74	30.85	7.45	24.69	54.03	74.00	-19.97	PK
H	23300.00	42.58	30.85	7.45	24.69	43.87	54.00	-10.13	AV
H	29125.00	52.64	31.02	8.99	25.57	56.18	74.00	-17.82	PK
H	29125.00	42.58	31.02	8.99	25.57	46.12	54.00	-7.88	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac80

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-ampl ifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:5745MHz									
V	11550.00	51.18	30.55	5.77	24.66	51.06	74.00	-22.94	PK
V	11550.00	41.04	30.55	5.77	24.66	40.92	54.00	-13.08	AV
V	17325.00	49.27	30.33	6.32	24.55	49.81	74.00	-24.19	PK
V	17325.00	41.75	30.33	6.32	24.55	42.29	54.00	-11.71	AV
V	23100.00	49.77	30.85	7.45	24.69	51.06	74.00	-22.94	PK
V	23100.00	41.65	30.85	7.45	24.69	42.94	54.00	-11.06	AV
V	28875.00	49.87	31.02	8.99	25.57	53.41	74.00	-20.59	PK
V	28725.00	41.65	31.02	8.99	25.57	45.19	54.00	-8.81	AV
H	11550.00	51.52	30.55	5.77	24.66	51.40	74.00	-22.60	PK
H	11550.00	41.37	30.55	5.77	24.66	41.25	54.00	-12.75	AV
H	17325.00	50.16	30.33	6.32	24.55	50.70	74.00	-23.30	PK
H	17325.00	41.42	30.33	6.32	24.55	41.96	54.00	-12.04	AV
H	23100.00	50.16	30.85	7.45	24.69	51.45	74.00	-22.55	PK
H	23100.00	41.42	30.85	7.45	24.69	42.71	54.00	-11.29	AV
H	28875.00	50.16	31.02	8.99	25.57	53.70	74.00	-20.30	PK
H	28725.00	40.42	31.02	8.99	25.57	43.96	54.00	-10.04	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

## 5. RADIATED RESTRICTED BAND EDGE MEASUREMENT

### APPLIED PROCEDURES / LIMIT

*Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (4) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (5) The provisions of §15.205 apply to intentional radiators operating under this section. (6) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

### TEST PROCEDURE

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 5150 MHz Upper Band Edge: 5350 MHz
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold

For Band edge



Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 5700 to 5725 MHz Upper Band Edge: 5850 to 5870 MHz
RB / VB (emission in restricted band)	1000 KHz/3000 KHz
Trace-Mode:	Max hold

### DEVIATION FROM STANDARD

No deviation.



## TEST RESULTS

Ant 1+2 802.11 a

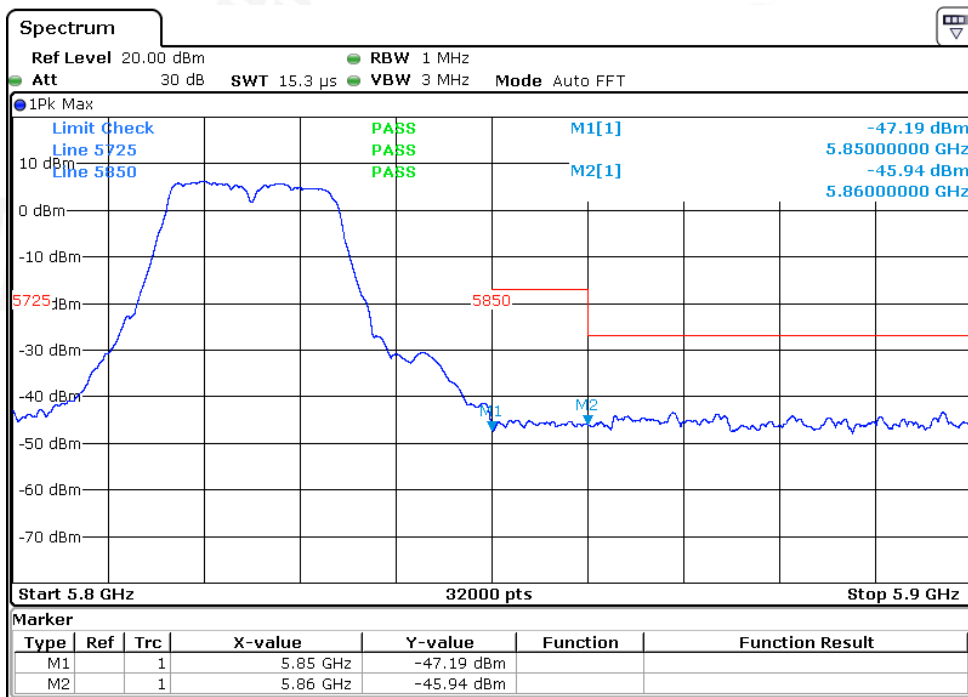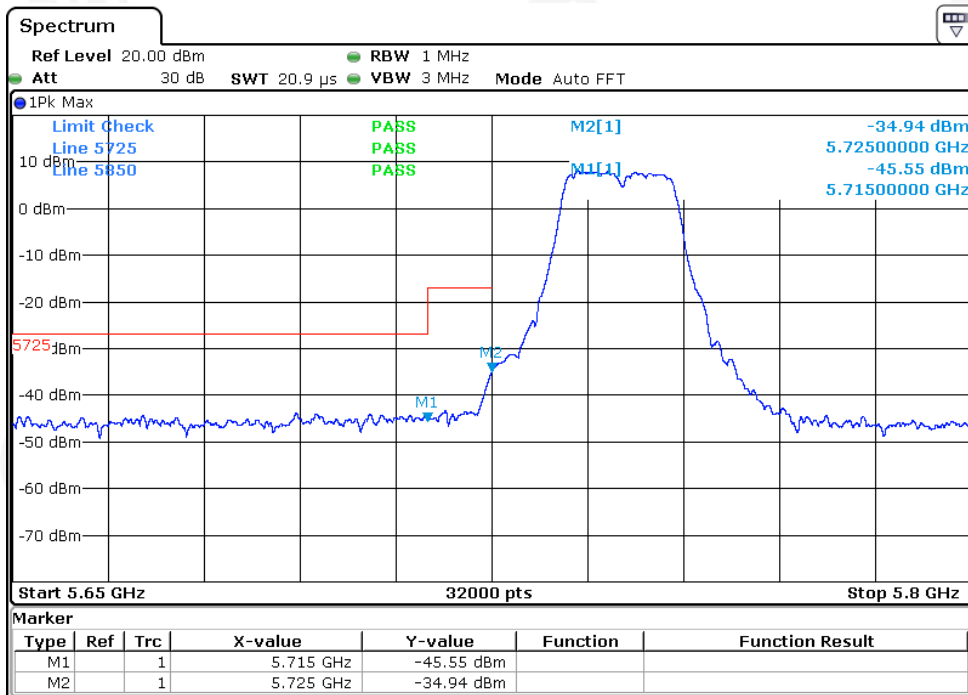





### Ant 1+2 802.11 n20

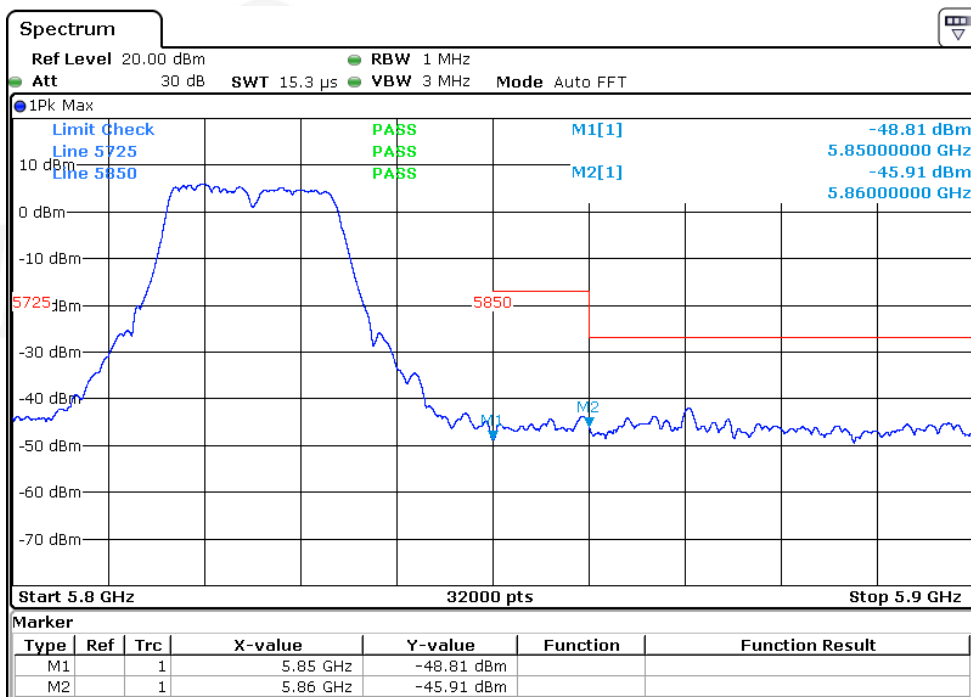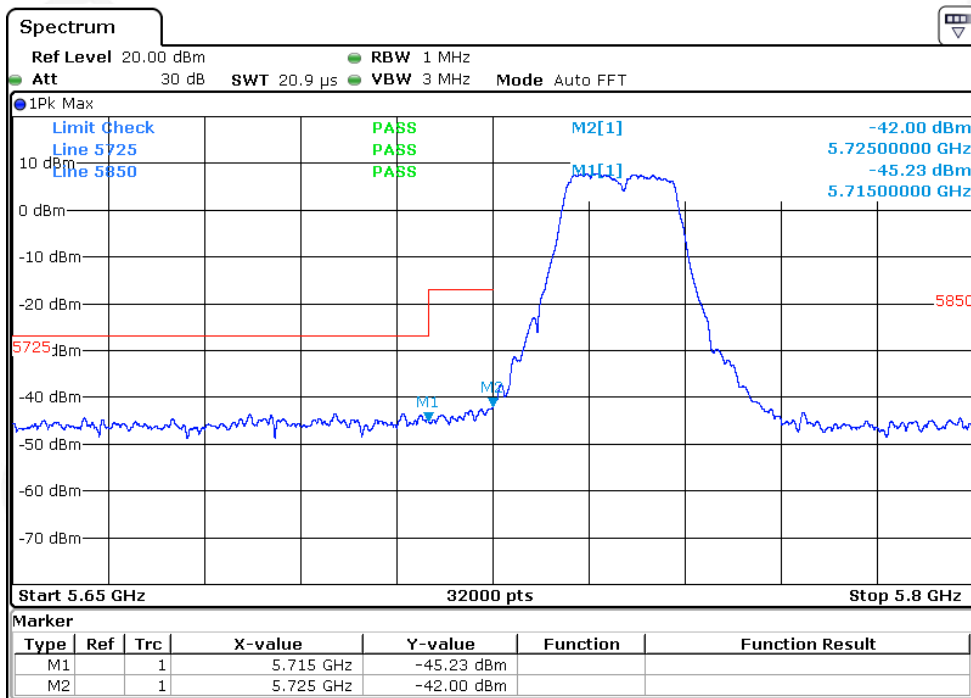




### Ant 1+2 802.11 n40

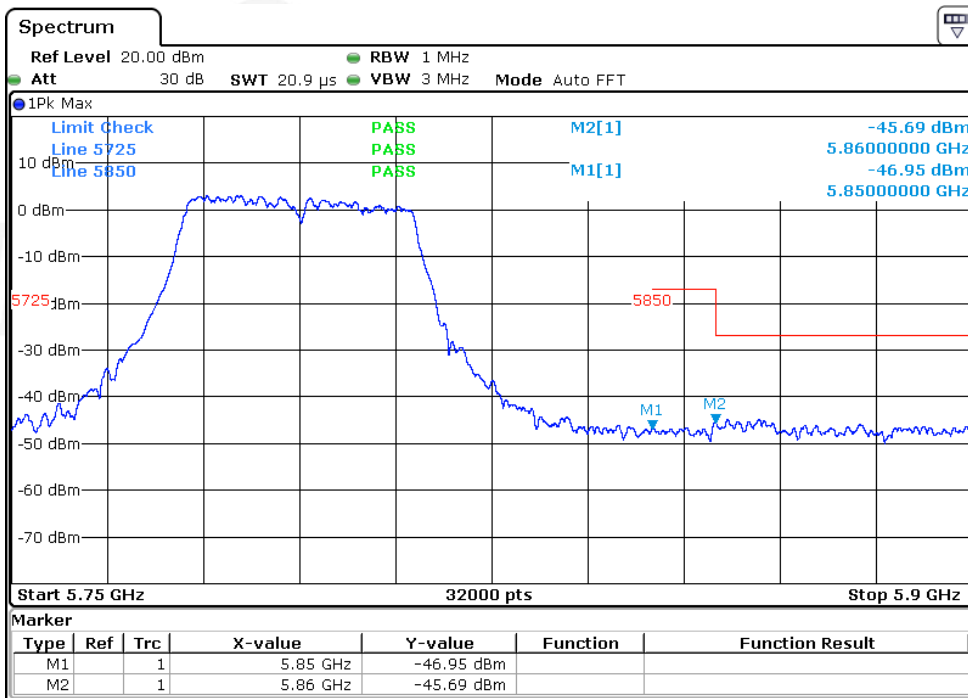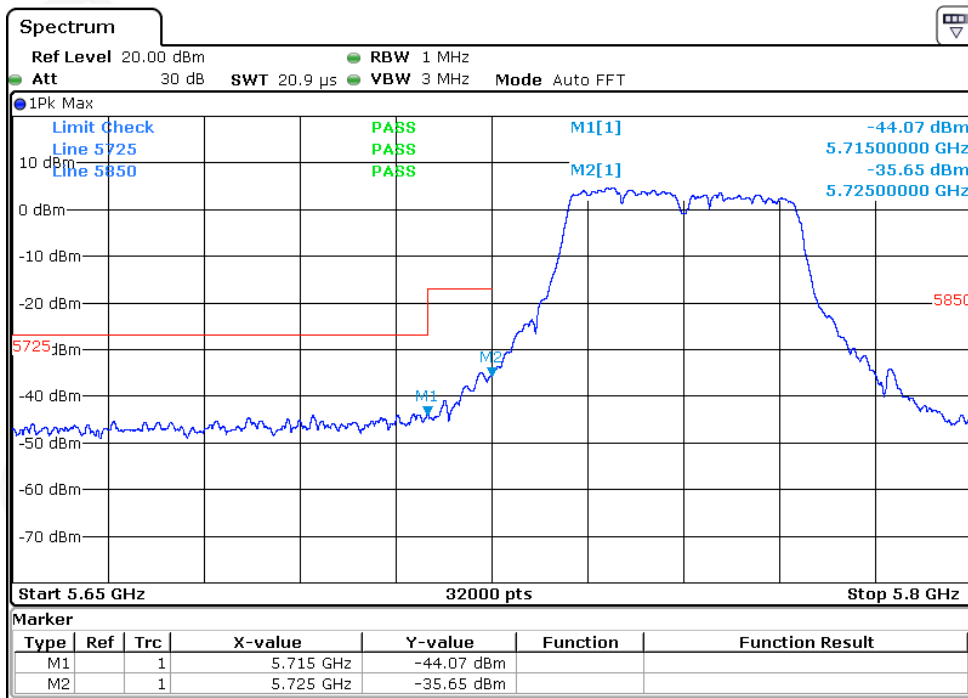

Ant 1+2 802.11 ac80

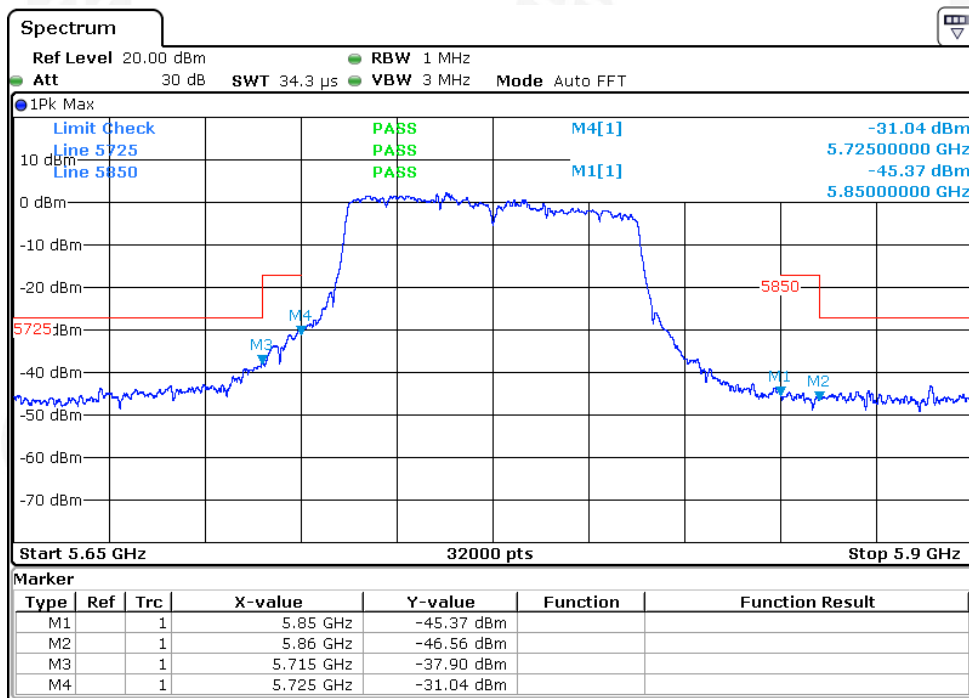

## 6. POWER SPECTRAL DENSITY TEST

### 6.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(3)

Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

## 6.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:


- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 510 KHz for the sections 5.c) and 5.d) above, since RBW=510 KHZ is available on nearly all spectrum analyzers.

## 6.3 DEVIATION FROM STANDARD

No deviation.

## 6.4 TEST SETUP

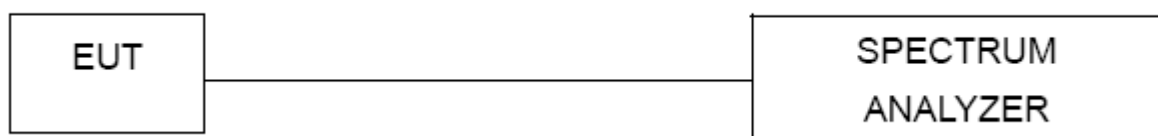

## 6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.


## 6.6 TEST RESULTS

Temperature :	26 ℃	Relative Humidity :	54%
Pressure :	1015 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency Band IV (5745-5825MHz)		


Mode	Frequency	Measured Power Density (dBm/500kHz)		Measured Power Density (mW)		Total Power Density (dBm/500kHz)	Limit (dBm/500kHz)
		ANT1	ANT2	ANT1	ANT2		
802.11 a	5745 MHz	2.955	-3.222	/	/	/	30
	5785 MHz	2.515	-3.601	/	/	/	30
	5825 MHz	2.254	-2.491	/	/	/	30
802.11 n20	5745 MHz	3.03	-2.475	2.009	0.566	4.108	30
	5785 MHz	2.683	-2.867	1.855	0.517	3.751	30
	5825 MHz	2.649	-2.616	1.840	0.548	3.780	30
802.11 n40	5755 MHz	0.054	-7.755	1.013	0.168	0.722	30
	5795 MHz	-0.629	-8.453	0.865	0.143	0.035	30
802.11 AC80	5775 MHz	-4.05	-12.214	/	/	/	30

ANT1


(802.11a) PSD plot on channel 149

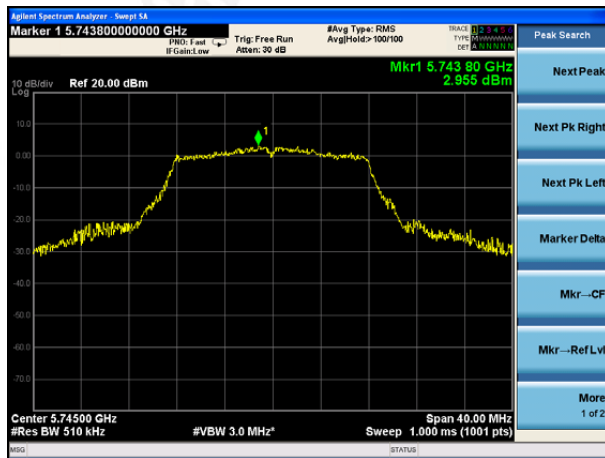


(802.11n20) PSD plot on channel 149

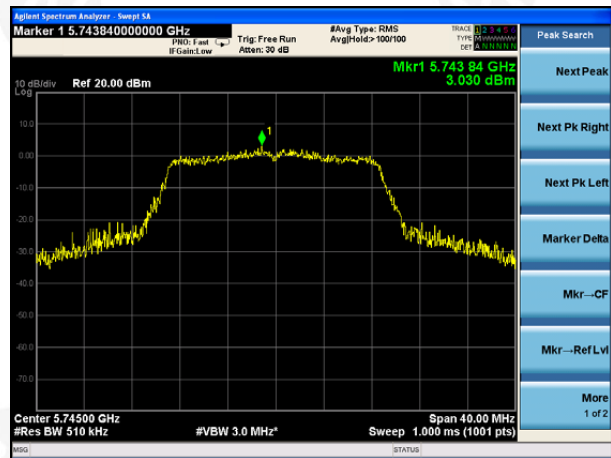


(802.11a) PSD plot on channel 157

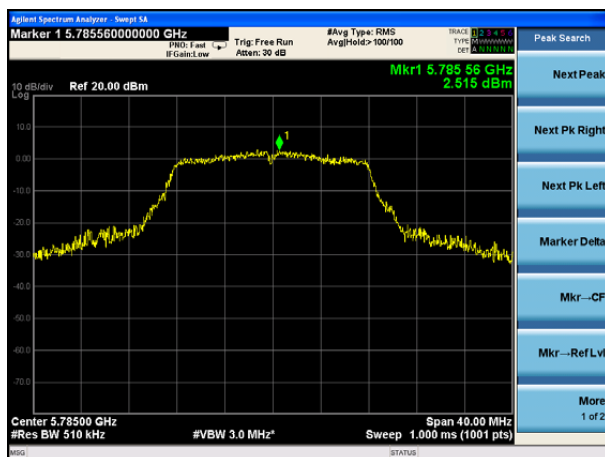


(802.11n20) PSD plot on channel 157

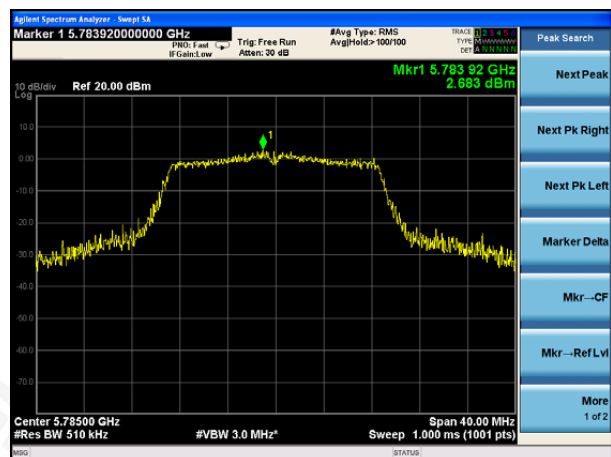

(802.11a) PSD plot on channel 165

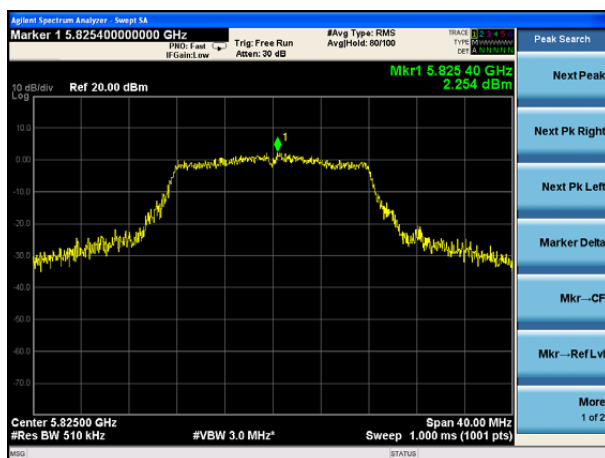


(802.11n20) PSD plot on channel 165

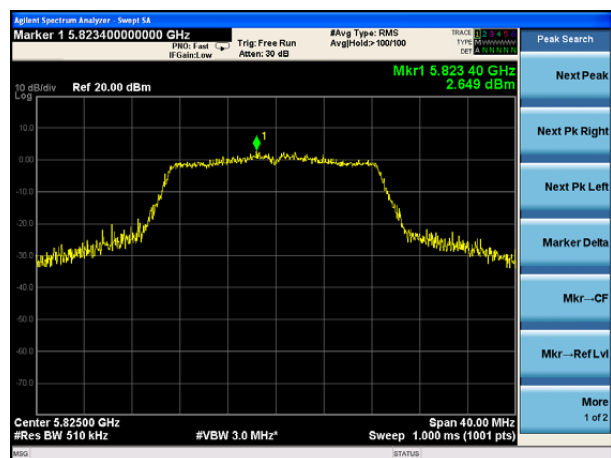





(802.11n40) PSD plot on channel 151

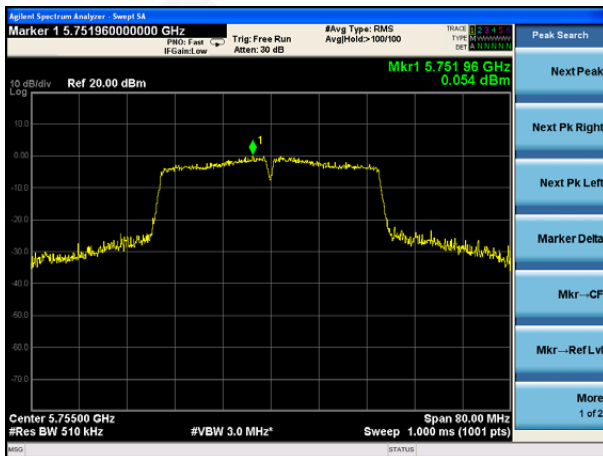

(802.11ac80) PSD plot on channel 155

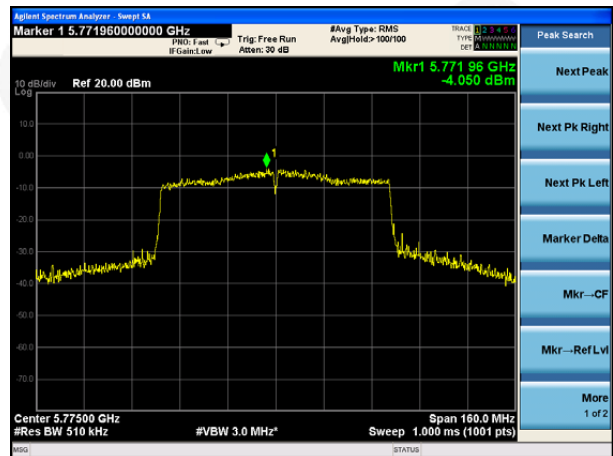

(802.11n40) PSD plot on channel 159

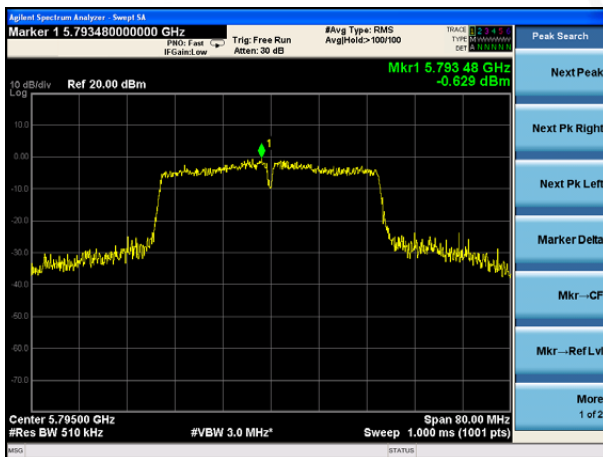



ANT2

(802.11a) PSD plot on channel 149




(802.11n20) PSD plot on channel 149



(802.11a) PSD plot on channel 157



(802.11n20) PSD plot on channel 157

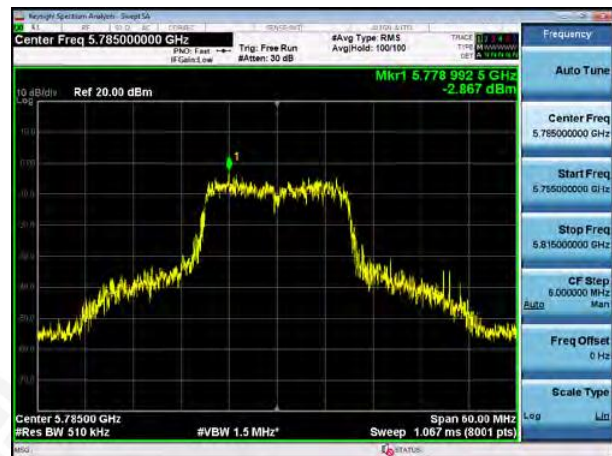


(802.11a) PSD plot on channel 165



(802.11n20) PSD plot on channel 165



(802.11n40) PSD plot on channel 151

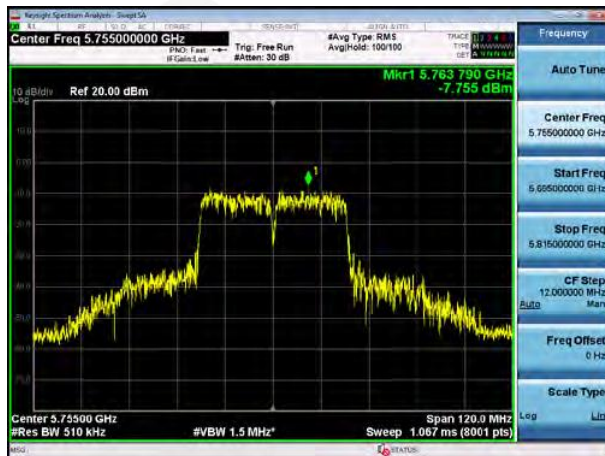

(802.11ac80) PSD plot on channel 155



(802.11n40) PSD plot on channel 159



## 7. 26DB & 6DB & 99% EMISSION BANDWIDTH

### 7.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band, the minimum bandwidth 6 dB bandwidth of U-NII devices shall be at least 500KHz. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

### 7.2 TEST PROCEDURE

- a) Set RBW = 100KHz.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 \cdot$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

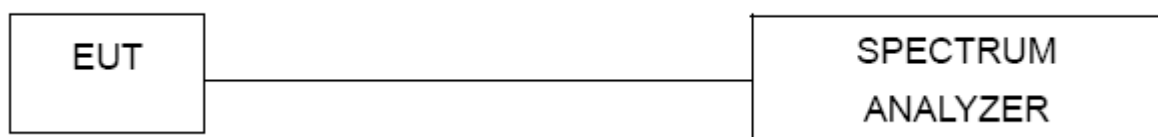

### 7.3 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

#### 7.4 TEST RESULTS

Temperature :	26 ℃	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency Band IV (5745-5825MHz)		

##### ANT-1


Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	6dB bandwidth (MHz)	Result
802.11a	CH149	5745	16.475	15.80	Pass
	CH157	5785	16.488	16.44	Pass
	CH165	5825	16.415	16.13	Pass
802.11 n20	CH149	5745	17.634	16.53	Pass
	CH157	5785	17.607	16.85	Pass
	CH165	5825	17.585	16.22	Pass
802.11 n40	CH151	5755	36.180	35.47	Pass
	CH159	5795	35.979	35.51	Pass
802.11 AC80	CH155	5775	75.709	75.35	Pass

##### ANT-2

Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	6dB bandwidth (MHz)	Result
802.11a	CH149	5745	16.515	16.40	Pass
	CH157	5785	16.462	16.00	Pass
	CH165	5825	16.465	16.36	Pass
802.11 n20	CH149	5745	17.67	16.76	Pass
	CH157	5785	17.655	17.65	Pass
	CH165	5825	17.629	17.66	Pass
802.11 n40	CH151	5755	36.201	35.43	Pass
	CH159	5795	36.049	35.26	Pass
802.11 AC80	CH155	5775	75.782	75.38	Pass

Test plot-ANT1

(802.11a) 99%Bandwidth plot on channel 149

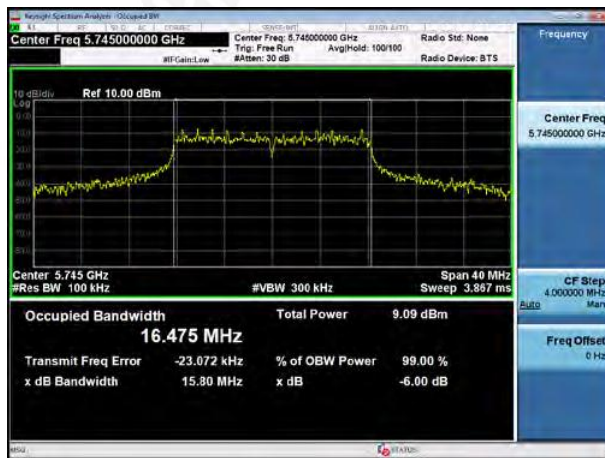

(802.11 n20) 99%Bandwidth plot on channel 149



(802.11a) 99%Bandwidth plot on channel 157




(802.11 n20) 99%Bandwidth plot on channel 157



(802.11a) 99%Bandwidth plot on channel 165




(802.11 n20) 99%Bandwidth plot on channel 165

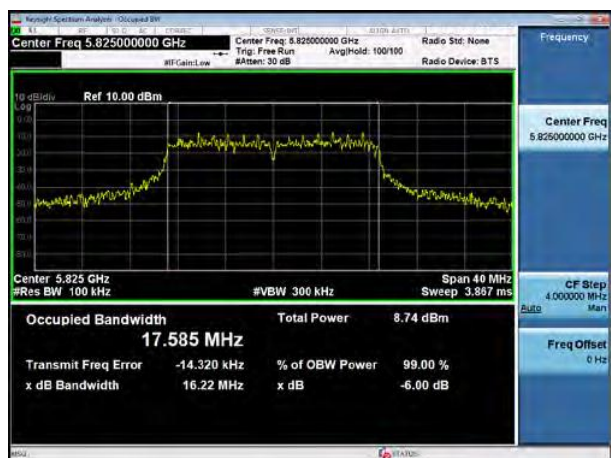


### Test plot-ANT1

(802.11 n40) 99%Bandwidth plot on channel 151

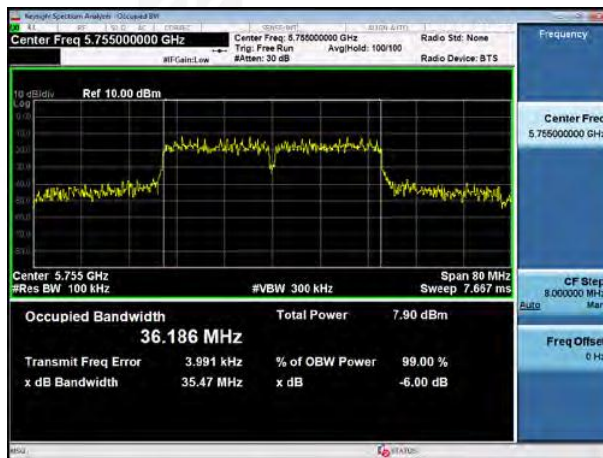

(802.11 AC80) 99%Bandwidth plot on channel 155

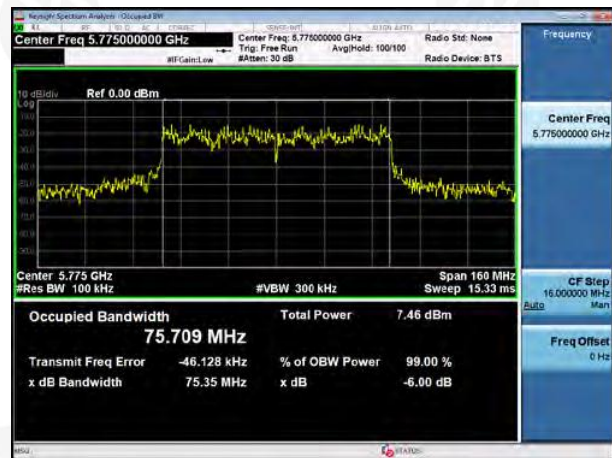


(802.11 n40) 99%Bandwidth plot on channel 159





Test plot-ANT2

(802.11a) 99%Bandwidth plot on channel 149

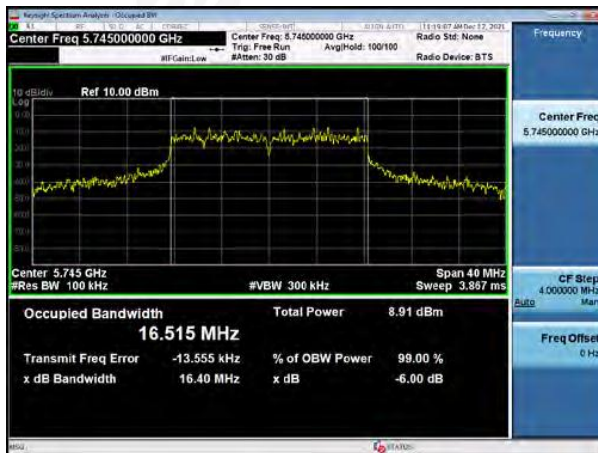

(802.11 n20) 99%Bandwidth plot on channel 149



(802.11a) 99%Bandwidth plot on channel 157




(802.11 n20) 99%Bandwidth plot on channel 157



(802.11a) 99%Bandwidth plot on channel 165




(802.11 n20) 99%Bandwidth plot on channel 165

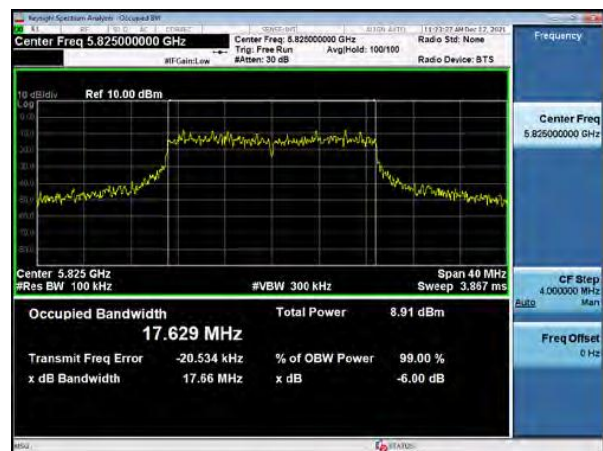


### Test plot-ANT2


(802.11 n40) 99%Bandwidth plot on channel 151

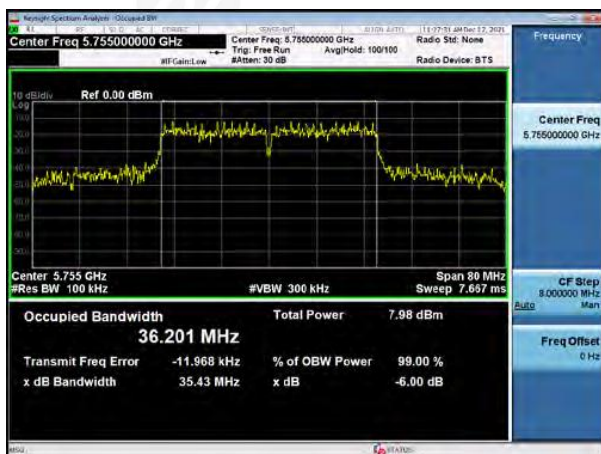

(802.11 AC80) 99%Bandwidth plot on channel 155

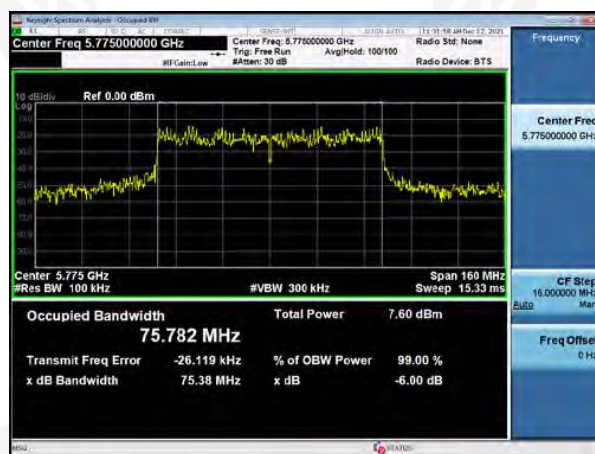

(802.11 n40) 99%Bandwidth plot on channel 159

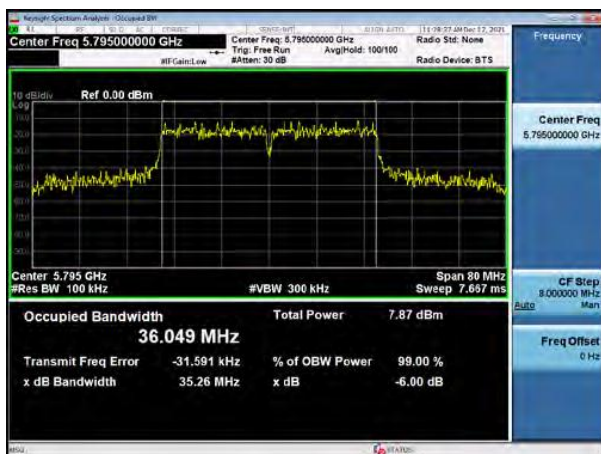



## 8. MAXIMUM CONDUCTED OUTPUT POWER

### 8.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

### 8.2 TEST PROCEDURE

The EUT was directly connected to the Power meter

#### 1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

#### 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.<sup>1</sup> However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle  $\geq 98$  percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2$  percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW  $\geq 3$  MHz.

(iv) Number of points in sweep  $\geq 2$  Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle  $< 98$  percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98$  percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP



### 8.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 8.6 TEST RESULTS


Temperature :	26 ℃	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX (5G) Mode Frequency Band IV (5725-5825MHz)		

Test Channel	Frequency	Maximum output power.					LIMIT	Result
		ANT1	ANT2	ANT1	ANT2	Total		
	(MHz)	(dBm)	(dBm)	(mW)	(mW)	(dBm)	dBm	
TX 802.11a Mode								
CH 149	5745	10.27	9.20	/	/	/	30	Pass
CH 157	5785	10.16	9.13	/	/	/	30	Pass
CH 165	5825	10.35	9.08	/	/	/	30	Pass
TX 802.11 n20M Mode								
CH 149	5745	9.44	8.74	8.79	7.48	12.11	30	Pass
CH 157	5785	9.65	8.25	9.22	6.68	12.01	30	Pass
CH 165	5825	9.27	8.35	8.45	6.83	11.84	30	Pass
TX 802.11 n40M Mode								
CH 151	5755	8.16	7.42	8.24	5.52	11.38	30	Pass
CH 159	5795	9.58	7.06	9.07	5.08	11.50	30	Pass
TX 802.11 AC80M Mode								
CH 155	5775	7.26	5.87	/	/	/	30	Pass


Duty Cycly:

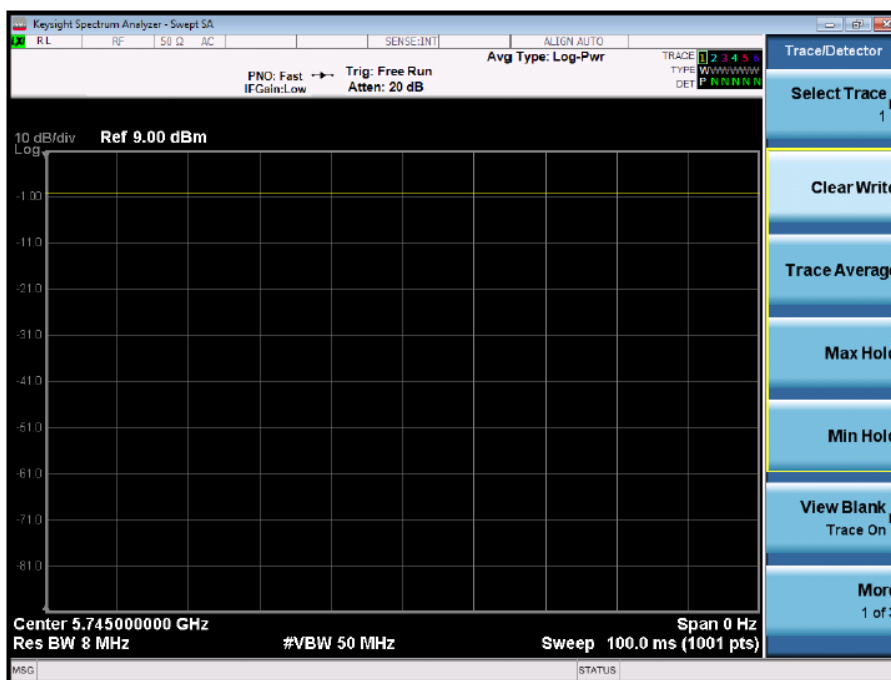

Ton	Tp	Duty cycly(%)	Duty factor(dB)
100.00	100.00	100.00%	0.00

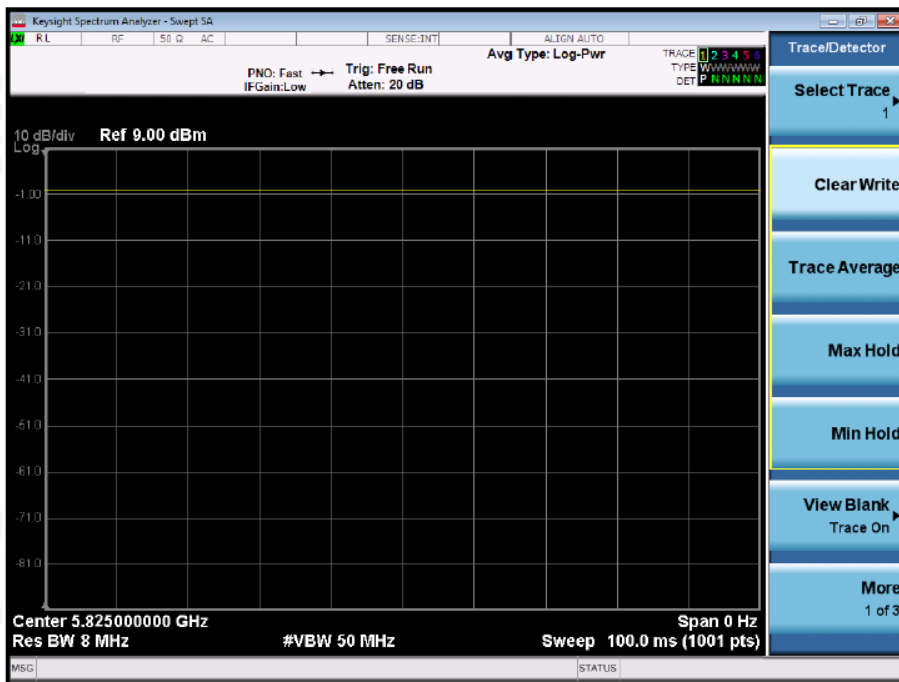

Ton	Tp	Duty cyclcy(%)	Duty factor(dB)
100.00	100.00	100.00%	0.00

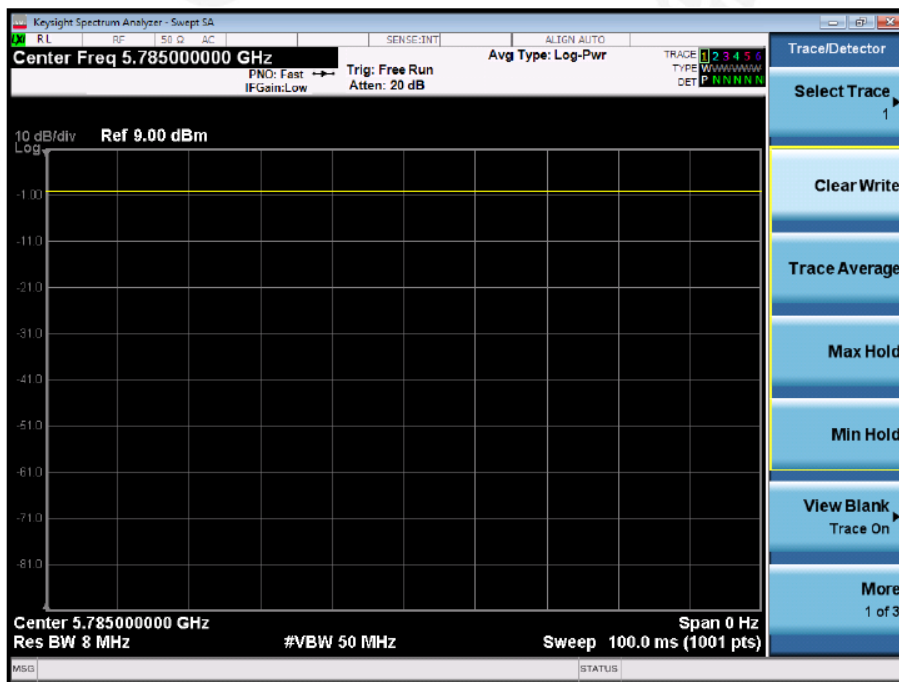

Ton	Tp	Duty cyclcy(%)	Duty factor(dB)
100.00	100.00	100.00%	0.00



## 9.OUT OF BAND EMISSIONS

### 9.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.


### 9.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP

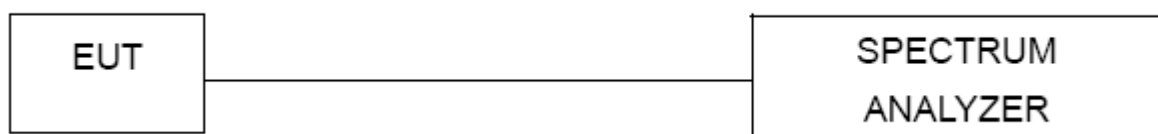

## 9.5 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 9.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz

Out of Band edge

For the frequency band 5.725-5.850GHz (802.11a)-ANT1

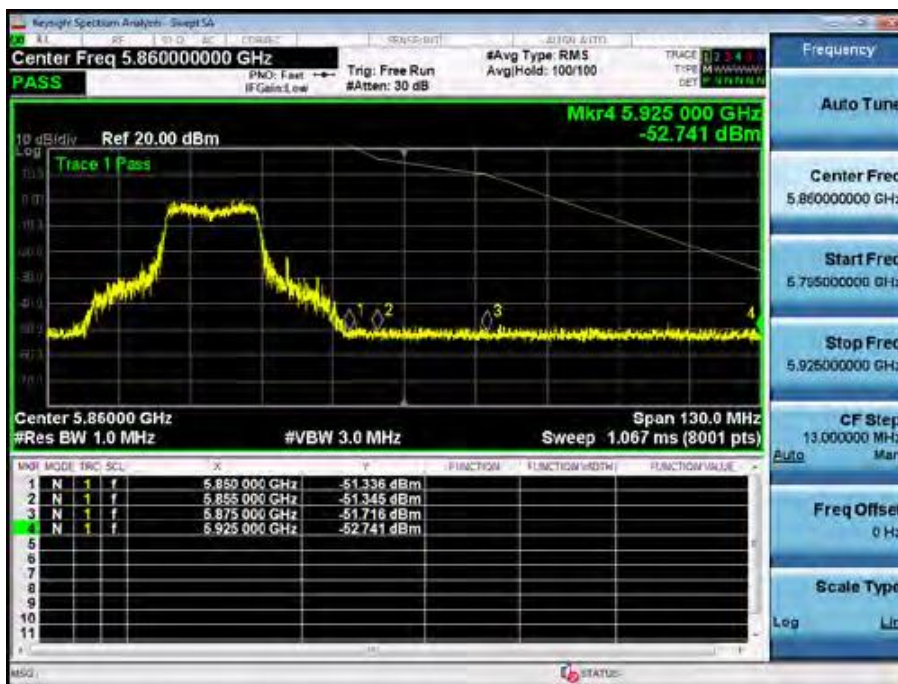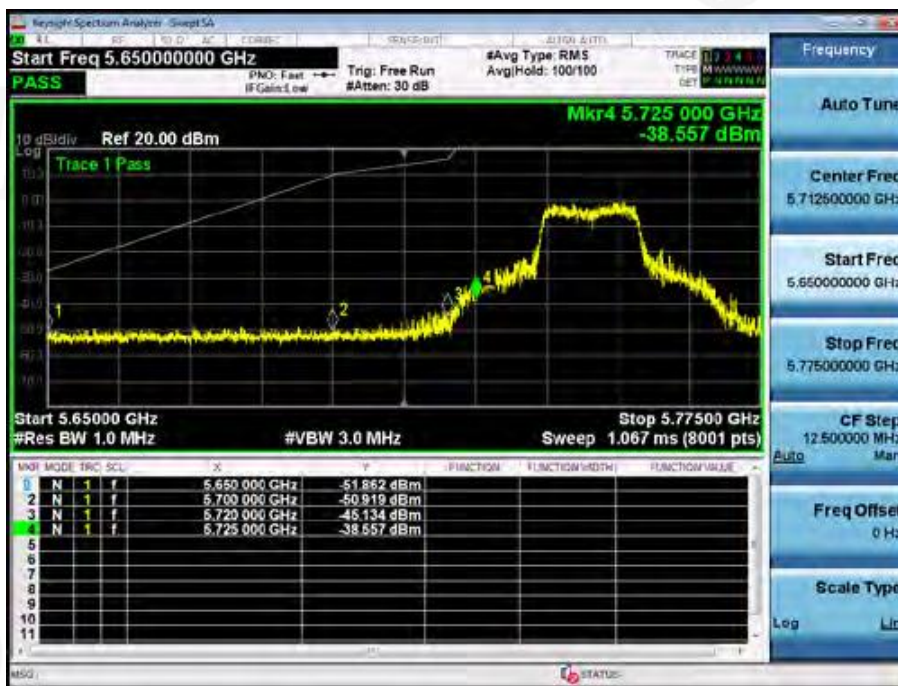


For the frequency band 5.725-5.850GHz (802.11n20)-ANT1






For the frequency band 5.725-5.850GHz (802.11n40)-ANT1

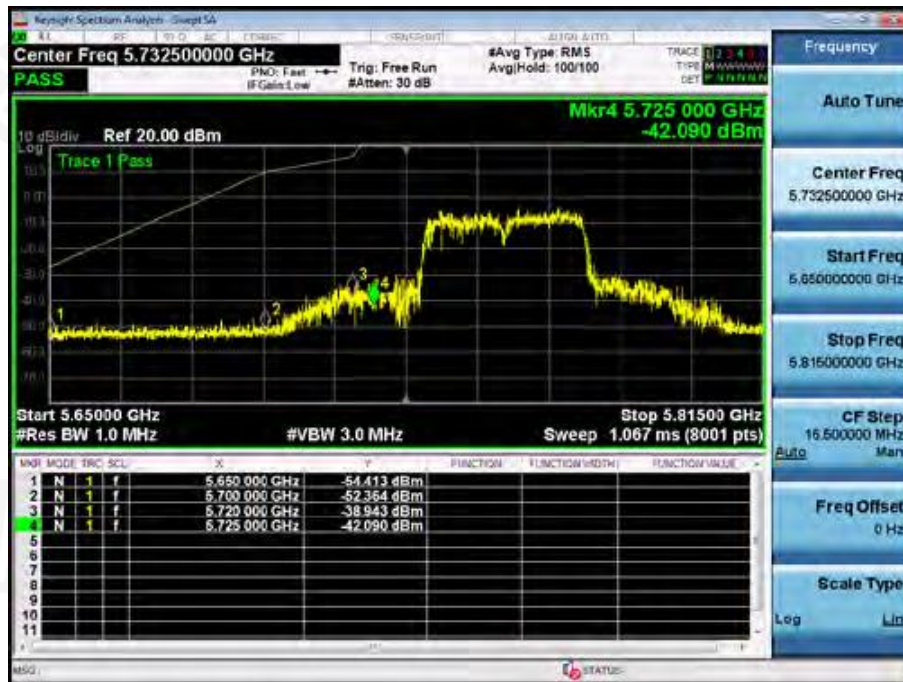


For the frequency band 5.725-5.850GHz (802.11ac80)-ANT1

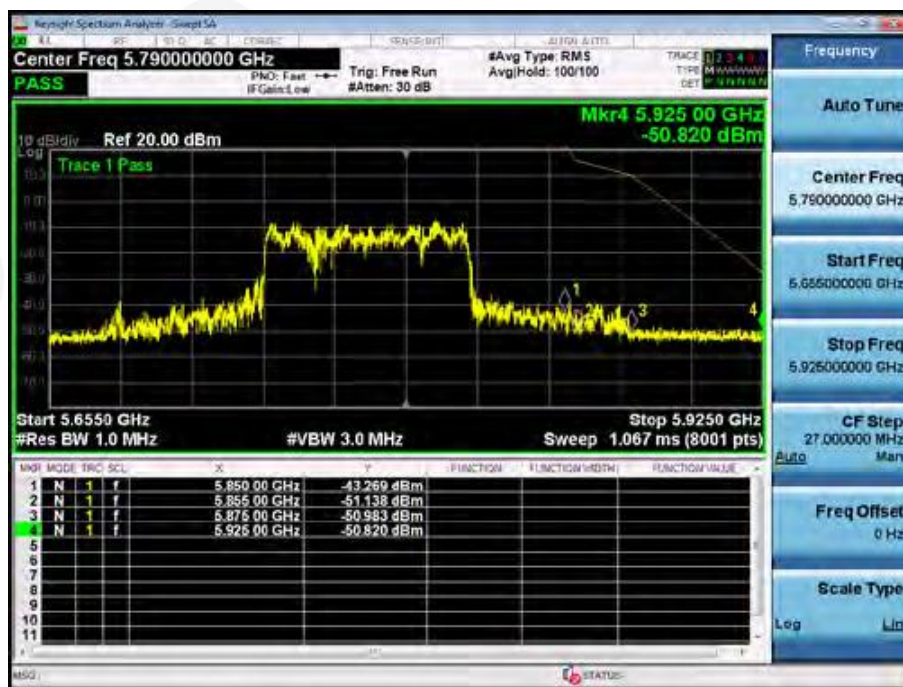




For the frequency band 5.725-5.850GHz (802.11a)-ANT2


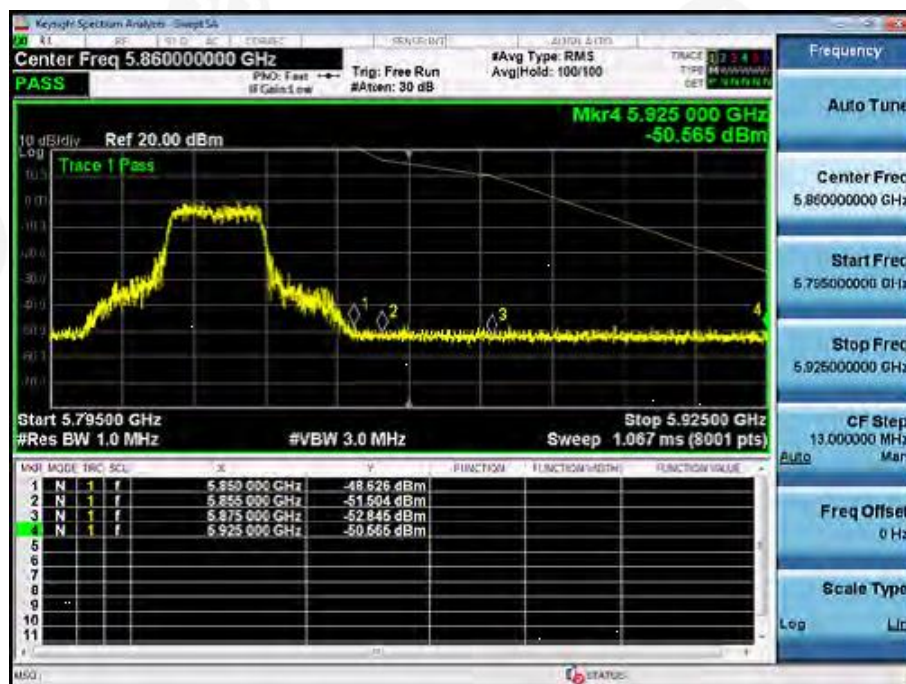




For the frequency band 5.725-5.850GHz (802.11n20)-ANT2

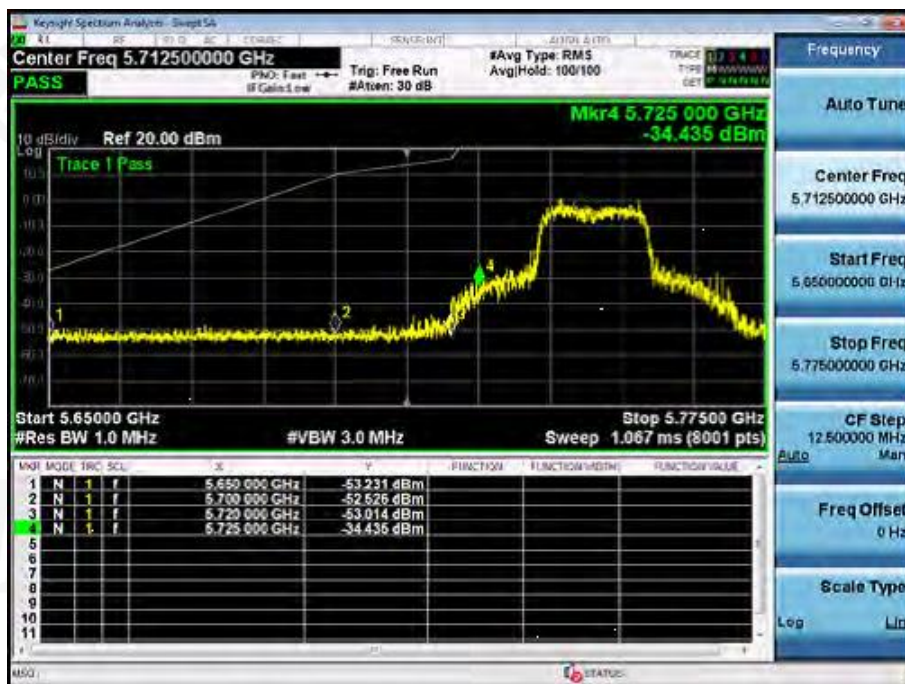


For the frequency band 5.725-5.850GHz (802.11n40)-ANT2

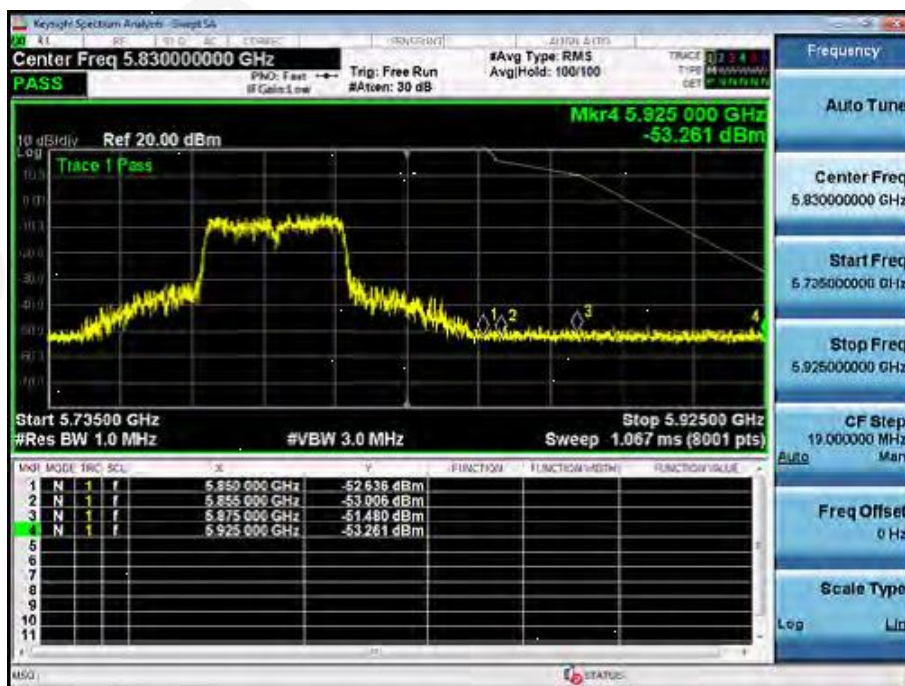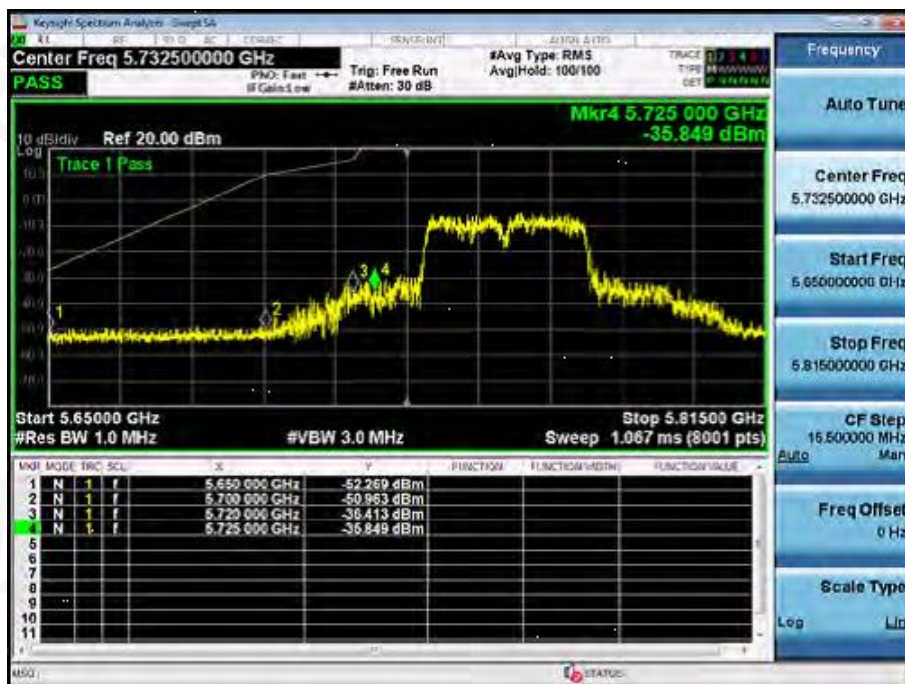



For the frequency band 5.725-5.850GHz (802.11ac80)-ANT2

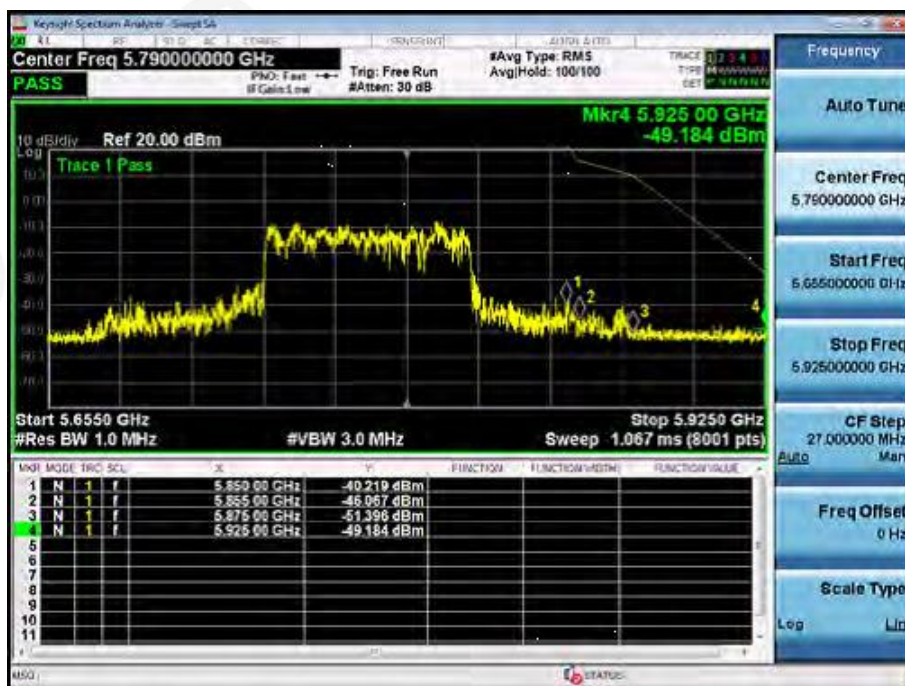

## 10.SPURIOUS RF CONDUCTED EMISSIONS


### 10.1 CONFORMANCE LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### 10.2 MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.

### 10.3 TEST SETUP

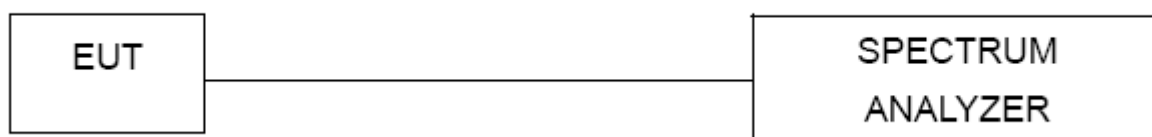

### 10.4 TEST PROCEDURE


The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and mwasure frequency range from 9KHz to 26.5GHz.

### 10.5 TEST RESULTS


Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

### Test Plot

#### 802.11a on channel 149

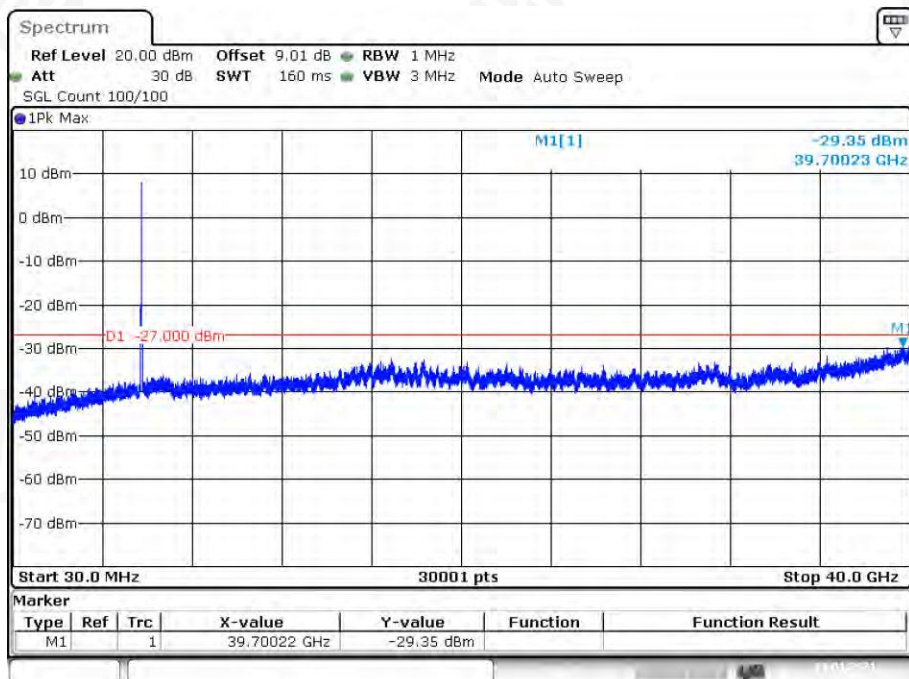


#### 802.11a on channel 157

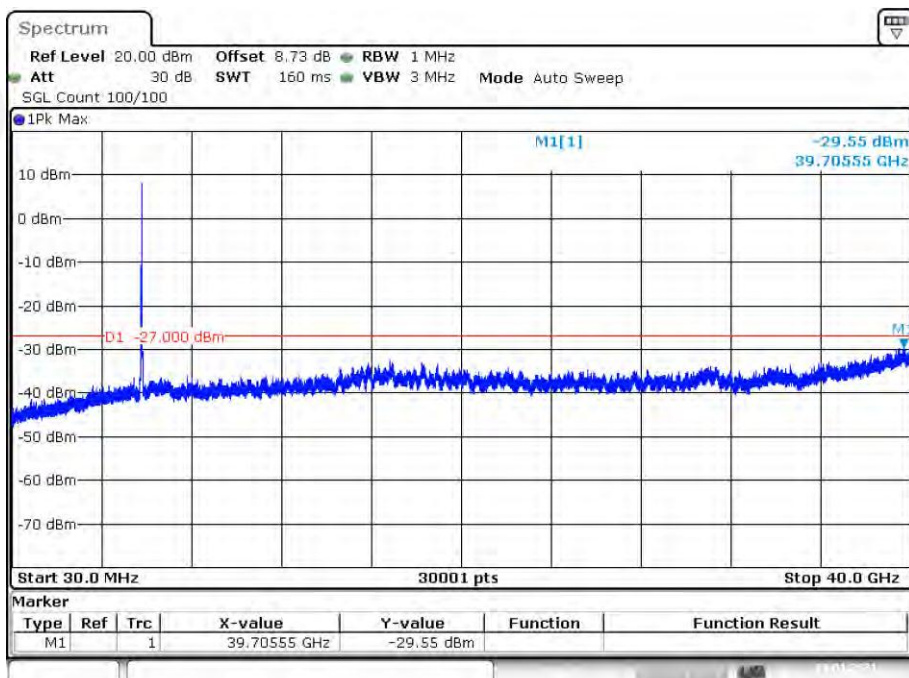




### Test Plot

802.11a on channel 165

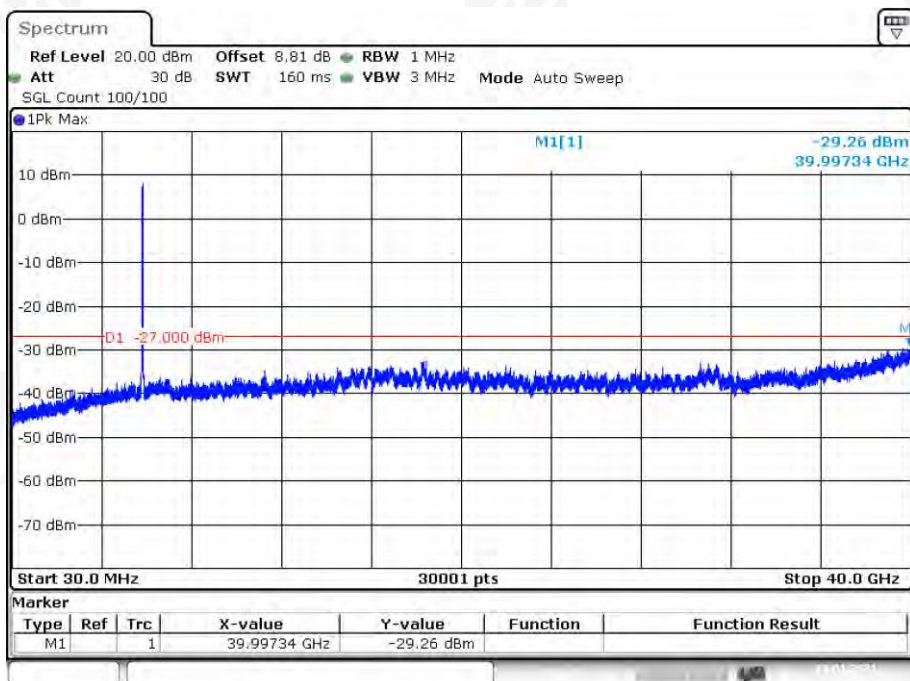


802.11n20 on channel 149

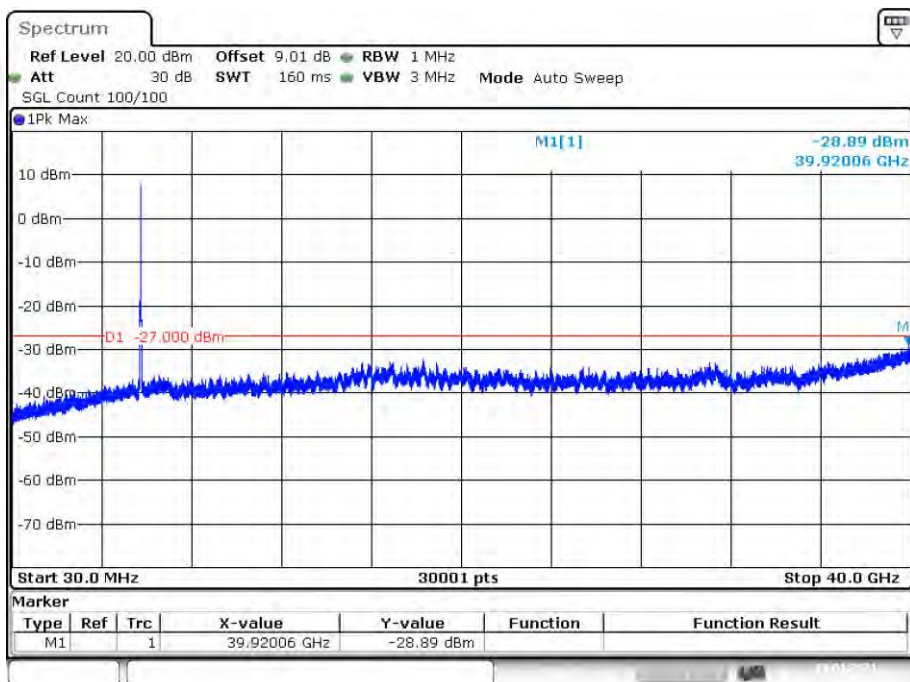




## Test Plot

802.11n20 on channel 157

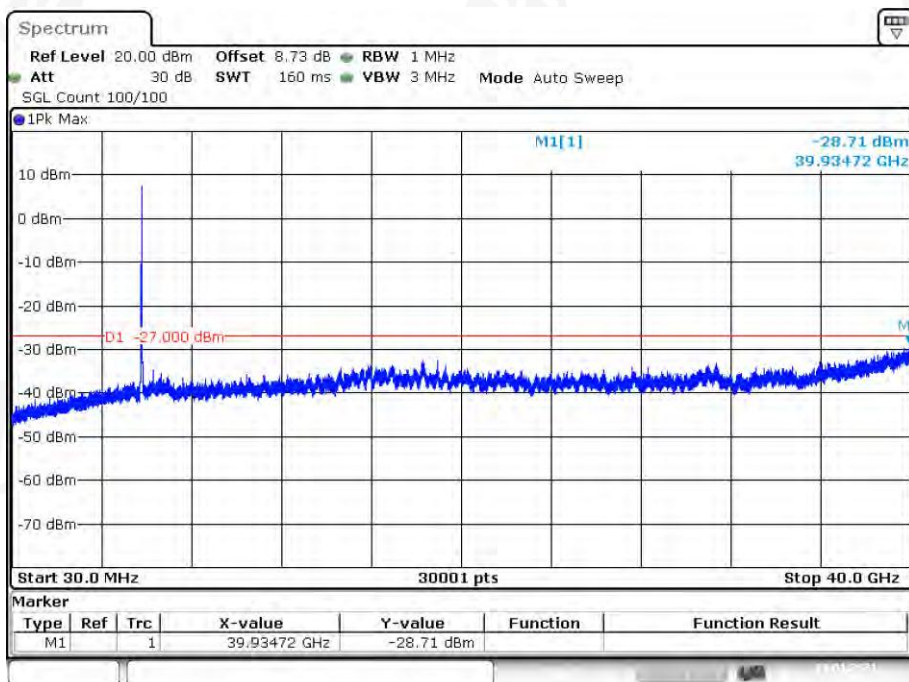


802.11n20 on channel 165

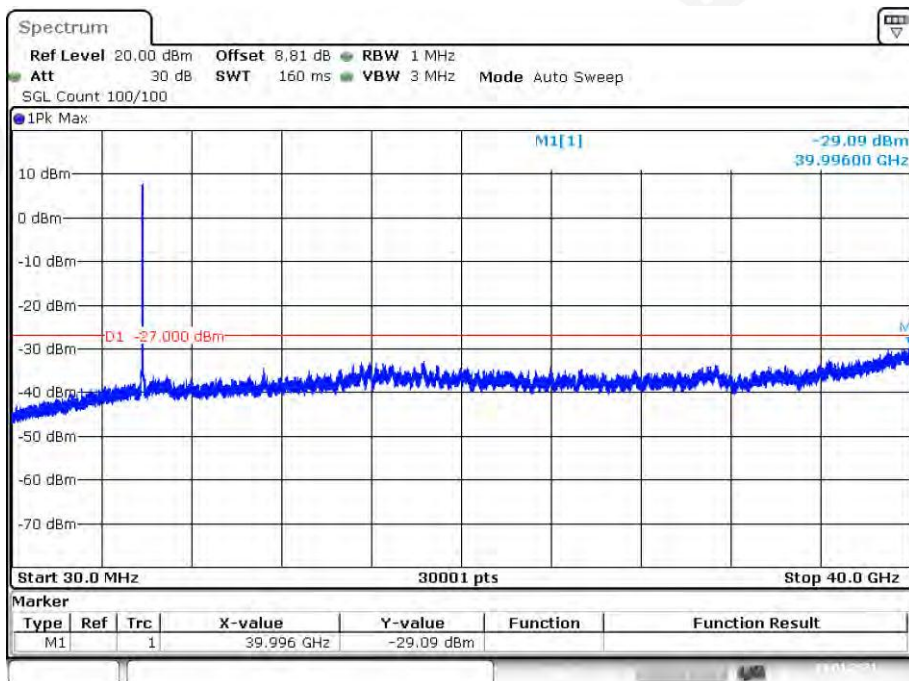


### Test Plot

802.11n40 on channel 151

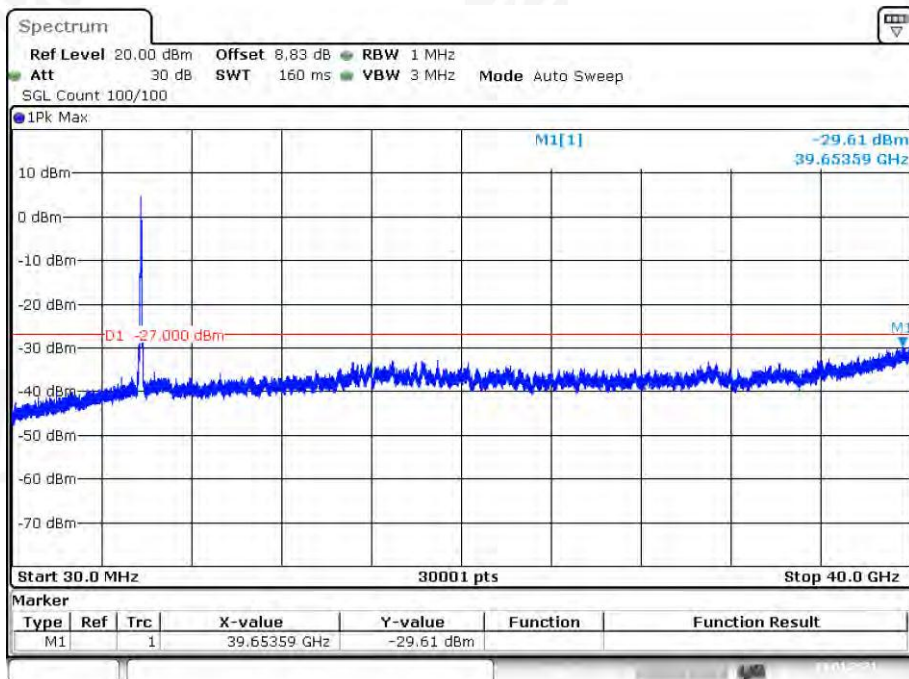


802.11n40 on channel 159

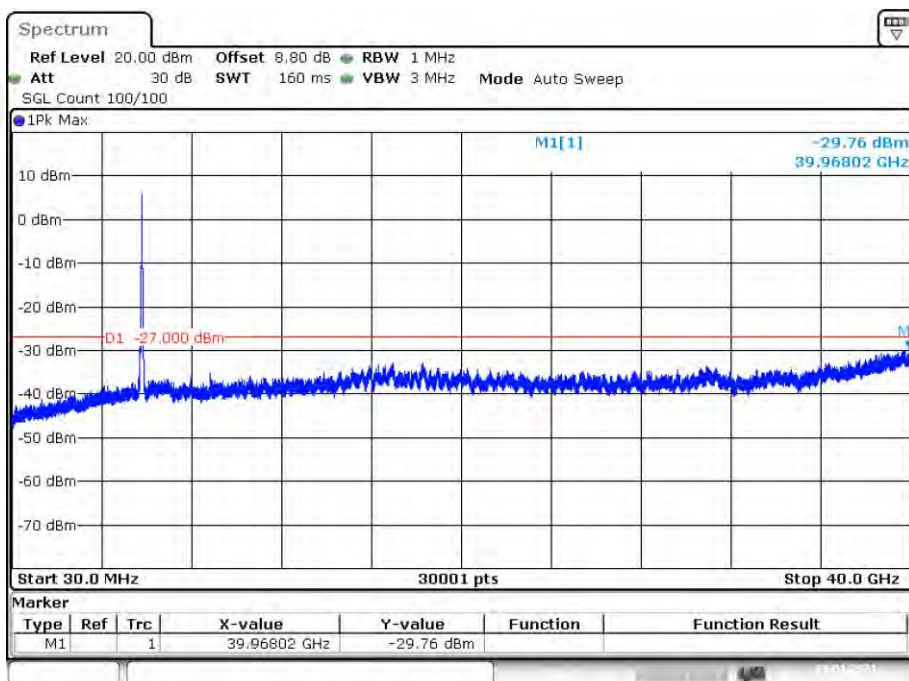

### Test Plot

802.11ac80 on channel 155

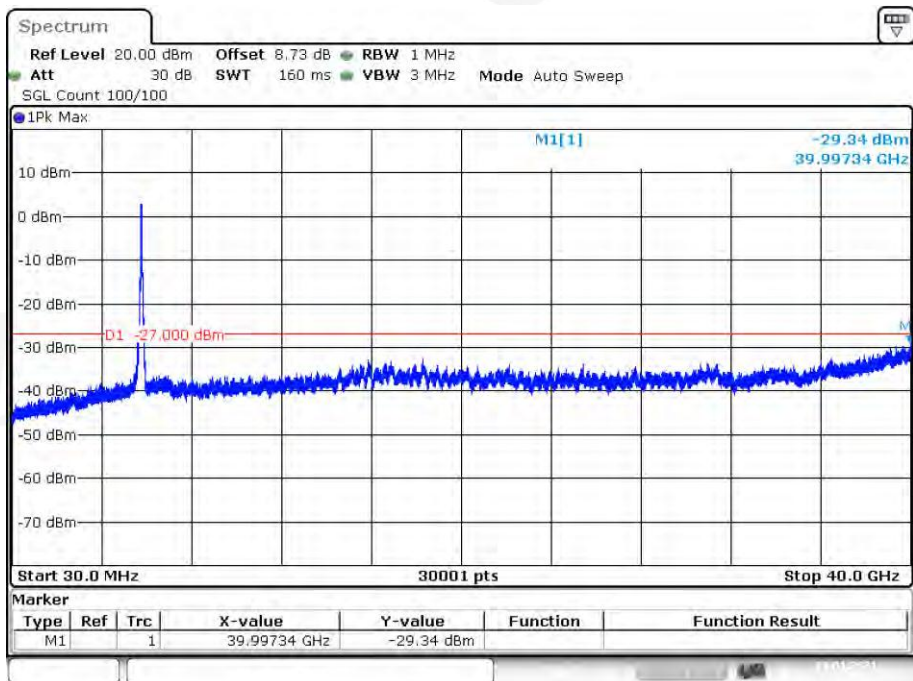

## 11. Frequency Stability Measurement

### 11.1 LIMIT


Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 11.2 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature is  $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$ .

### 11.3 TEST SETUP LAYOUT

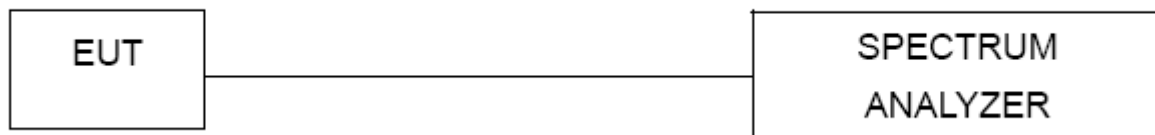

### 11.4 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

### 11.5 TEST RESULTS



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency(5745-5850MHz)-ANT1		

5745-5825MHz

802.11a\_HT20

Reference Frequency(Middle Channel): 5785 MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	120	26	0.00449
40	120	34	0.00588
30	120	27	0.00467
20	120	55	0.00951
10	120	68	0.01175
0	120	42	0.00726
-10	120	71	0.01227
-20	120	36	0.00622
-30	120	17	0.00294

802.11n\_HT20

Reference Frequency(Middle Channel): 5785MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	120	27	0.00467
40	120	54	0.00933
30	120	68	0.01175
20	120	30	0.00519
10	120	50	0.00864
0	120	21	0.00363
-10	120	40	0.00691
-20	120	18	0.00311
-30	120	39	0.00674

802.11n\_HT40

Reference Frequency(Middle Channel): 5795MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	120	59	0.01018
40	120	62	0.01070
30	120	43	0.00742
20	120	20	0.00345
10	120	11	0.00190
0	120	65	0.01122
-10	120	26	0.00449
-20	120	31	0.00535
-30	120	40	0.00690

802.11ac80

Reference Frequency(Middle Channel): 5775MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	120	34	0.00589
40	120	31	0.00537
30	120	29	0.00502
20	120	17	0.00294
10	120	48	0.00831
0	120	39	0.00675
-10	120	27	0.00468
-20	120	14	0.00242
-30	120	35	0.00606

So, Frequency Stability Versus Input Voltage is:  
5745-5825MHz  
802.11a\_HT20

Reference Frequency(Middle Channel): 5785 MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	108	24	0.00415
	120	15	0.00259
	132	37	0.00640

802.11n\_HT20

Reference Frequency(Middle Channel): 5785 MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	108	68	0.01175
	120	77	0.01331
	132	20	0.00346

802.11n\_HT40

Reference Frequency(Middle Channel): 5795 MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	108	25	0.00431
	120	38	0.00656
	132	19	0.00328

802.11ac80

Reference Frequency(Middle Channel): 5775 MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	108	52	0.00900
	120	48	0.00831
	132	59	0.01022

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency(5745-5850MHz)-ANT2		

5745-5825MHz

802.11a\_HT20

Reference Frequency(Middle Channel): 5785 MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	120	37	0.00640
40	120	65	0.01124
30	120	54	0.00933
20	120	49	0.00847
10	120	25	0.00432
0	120	61	0.01054
-10	120	39	0.00674
-20	120	22	0.00380
-30	120	61	0.01054

802.11n\_HT20

Reference Frequency(Middle Channel): 5785MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	120	24	0.00415
40	120	17	0.00294
30	120	54	0.00933
20	120	35	0.00605
10	120	62	0.01072
0	120	48	0.00830
-10	120	66	0.01141
-20	120	29	0.00501
-30	120	72	0.01245



802.11n\_HT40

Reference Frequency(Middle Channel): 5795MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	120	52	0.00897
40	120	49	0.00846
30	120	63	0.01087
20	120	48	0.00828
10	120	55	0.00949
0	120	42	0.00725
-10	120	70	0.01208
-20	120	68	0.01173
-30	120	32	0.00552

802.11ac80

Reference Frequency(Middle Channel): 5775MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		MCF	Error (ppm)
50	120	55	0.00952
40	120	42	0.00727
30	120	63	0.01091
20	120	36	0.00623
10	120	27	0.00468
0	120	56	0.00970
-10	120	43	0.00745
-20	120	20	0.00346
-30	120	50	0.00866

So, Frequency Stability Versus Input Voltage is:  
5745-5825MHz  
802.11a\_HT20

Reference Frequency(Middle Channel): 5785 MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	108	71	0.01227
	120	65	0.01124
	132	64	0.01106

802.11n\_HT20

Reference Frequency(Middle Channel): 5785 MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	108	52	0.00899
	120	60	0.01037
	132	84	0.01452

802.11n\_HT40

Reference Frequency(Middle Channel): 5795 MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	108	32	0.00552
	120	75	0.01294
	132	64	0.01104

802.11ac80

Reference Frequency(Middle Channel): 5775 MHz			
Environment Temperature (°C)	Power Supplied (VAC)	Frequency Measure with Time Elapsed	
		Frequency	Error (ppm)
20	108	61	0.01056
	120	42	0.00727
	132	57	0.00987

## 12.ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 / RSS-Gen.6.8
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antennas are PCB antenna, the best case gain of the antennas are 0dBi, reference to the appendix II for details	

### 13. TEST SETUP PHOTO

Reference to the appendix I for details.

### 14. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

\*\*\*\*\* END OF REPORT \*\*\*\*\*