




PROJECT
AZIO CASCADE 98 SLIM

DOCUMENT
Cascade Quick Start Guide
AZIO-CASCADE 98 Slim-QSG-V03

BY
Tanc Peng
tanc@aziocorp.com

DATE
2023.02.23

AZIO CASCADE 98 SLIM QUICK START GUIDE

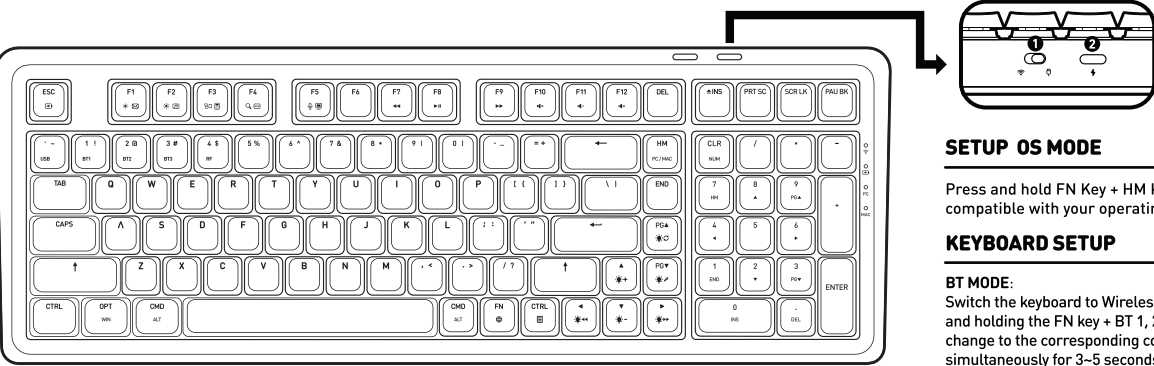

HOT KEYS LEGENDS

| Keys | MacOS | PC | Keys | MacOS & PC | Keys | MacOS & PC |
|------|--------------------------------|----------------------|------|-------------------|--------------------|------------------------|
| F1 | ☀️ Increase Display Brightness | ✉️ Email Application | F7 | ⏮️ Previous Track | HM | PC / MAC |
| F2 | 🌙 Decrease Display Brightness | 🎵 Media Player | F8 | ⏸️ Play / Pause | PG UP | 🌈 Backlight Modes |
| F3 | 📄 Exposé | 🧮 Calculator | F9 | ⏭️ Next Track | PG DN | 🌈 Backlight Color |
| F4 | 🔍 Search | 🌐 Web Browser | F10 | 🔇 Mute Volume | Arrow UP/DN | 🌈 Backlight Brightness |
| F5 | 🗣️ Voice Contort | 💻 My Computer | F11 | 🔊 Decrease Volume | Left & Right Arrow | 🌈 Backlight Speed |
| F6 | None | None | F12 | 🔊 Increase Volume | ESC | 🔋 Battery Level |

* To trigger the hot keys, please check your operating system

1. WIRELESS MODE / WIRED MODE

2. USB-C PORT

* To turn off the keyboard, switch the keyboard to Wired mode and unplug the USB cable.

SETUP OS MODE

Press and hold FN Key + HM Key to MAC or PC to set the keyboard to the mode compatible with your operating system.

KEYBOARD SETUP

BT MODE:
Switch the keyboard to Wireless Mode. Activate the Bluetooth profile process by pressing and holding the FN key + BT 1, 2, or 3 key together. The connection indicator light color will change to the corresponding color. Press and hold the FN key + BT 1, 2, or 3 key simultaneously for 3-5 seconds and it'll go into pairing mode. Once the keyboard is in pairing mode, the indicator light will flash quickly. Please pair your device with the name "Cascade98 5 1.0."


RF MODE:
Switch the keyboard to Wireless mode. Pressing and holding the FN Key + RF key to RF Mode. Using the RF dongle located at the bottom of the keyboard and insert it to your device's available USB port. Once the 2.4G Wireless Receiver is set up, the keyboard is ready to use.

USB MODE:
Switch the keyboard to Wired mode. Connect the Cascade 98 keyboard to your computer's available USB port with the included USB Type-C Cable. Press and hold the FN key + USB Key to enter USB Mode. The Keyboard is ready for use.

CHECK BATTERY LEVEL

Press and hold the FN Key + ESC Key to check battery level. Battery level will display through F1 to F10.
The battery indicator light: Red = Battery low / Blue = Charging / Green = 100% charged


USING HOT-SWAPPABLE SWITCHES

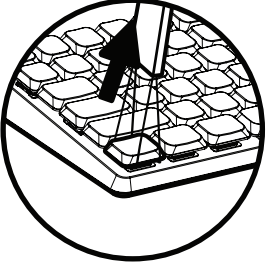

STEP 1. REMOVE KEYCAP

You will need the Keycap & Switch Puller provided in the package to begin removing your switches.


Use the rectangular side of the puller to pull and wiggle the keycaps off gently. Please make sure not to yank the keycaps out as you may damage the switch.



STEP 2. REMOVE SWITCHES

With the keycap off, you should see the switch underneath. Use the long side of the puller to hook underneath the switch, pushing down onto the two plastic tabs on the top and bottom of the switches.

Now you may gently pull and wiggle the switches out. Please avoid yanking on the switch when extracting.

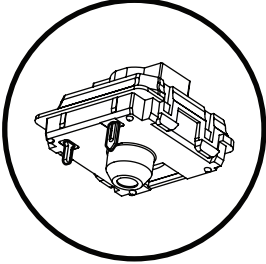


STEP 3. INSTALL SWITCHES

When you are ready to install new switches, please make sure the pins on your new switches are straight.

Start by lining up the switch pins with the sockets on the keyboard and gently press down until the switch sides into place, the switch should settle in and feel securely in place if properly lined up.

FCC Statement
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television

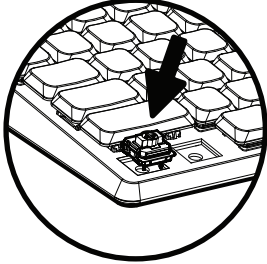


STEP 4. TEST KEYS

Once you've installed all the switches, please test the keys to make sure they are functioning properly.

If any of the keys are not working, you may have a bent pin on your switch. Take out the problematic switch, straighten out the pins with the switch puller, then re-install the switch.

reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help
This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



If you need additional support

Scan the QR code to view the full user guide of **CASCADE 98 SLIM**. Visit www.aziocorp.com/support for any additional questions or support needs.

T. +1.909.468.1198
F. +1.909.468.3066
19933 Harrison Ave
City of Industry, CA 91789

This document contains confidential, copyrighted, and privileged information. If you are not the intended recipient or believe that you have received this document in error, please inform AZIO Corporation immediately and delete this document from your possession. Please do not print, copy, retransmit or otherwise use of this document without permission and consent of AZIO Corporation.

Copyrighted © 2023