






Installation

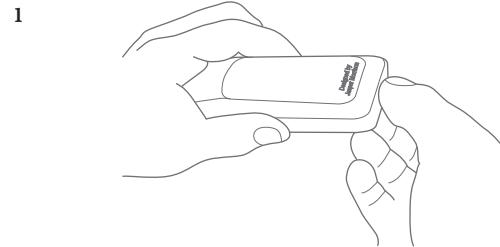


1

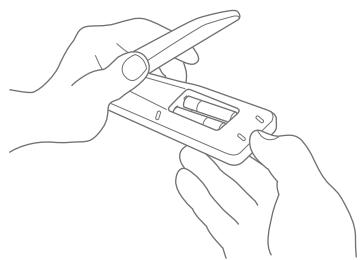


2

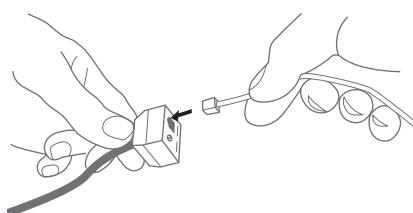


3

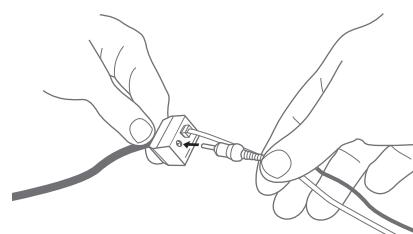

4

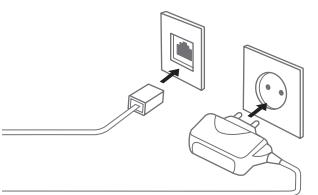

5

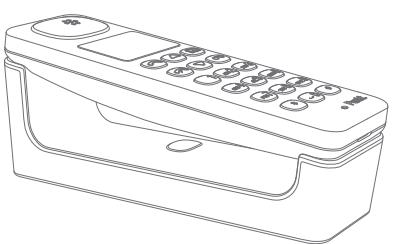


6

- 1 Remove back of phone
- 2 Insert batteries into the handset, then replace back
- 3 Insert phone cable
- 4 Insert power cable
- 5 Connect to phone and power sockets.
- 6 Place the handset on the base for charging

Display icons & function keys

- A Select (/Send/Yes)
B Cancel (/End/No/Backspace)
(Power On/Off - hold for 5 seconds)
C Scroll up and scroll down
D Phone Book
E Answer phone
F Signal Power
G Number of answer phone message(s)
H Battery Power
(flashes on charging, static when full)
I Keypad

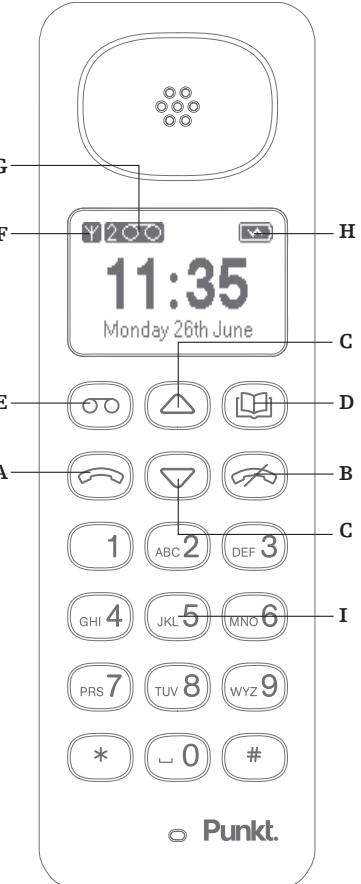

Basic usage of the phone

Change language:

- Press select "Handset settings" and press
- Select "Language" and press
- Select required language
- Press to confirm.

Set time/date:

- Press select "Time/Date" and press
- Enter time and press
- Enter date and press
- Press to confirm

Change ringtone:

- Press select sounds and press
- Select ringtone and press
- Press to select favorite sound
- Press to confirm

Make a phone call:

- Enter the number using the key pad
- Press to start call
- Press to end the call

Make a phone call using the phone book:

- Press to open phone book
- Use to browse your contacts
- Press to select the desired contact
- Use to browse the phone numbers
- Press to start the call
- Press to end the call

Hands free mode:

- When in call press on handsfree to toggle on/off

Volume control:

- When in call press select "Volume"
- Press
- Press to adjust the volume.
- Press or wait 3 secs to return to incall menu

Enter a new contact in the phone book:

- Press to open phone book
- Press to select "New"
- Use the keypad to enter the name, operates as backspace
- Press
- Press to confirm
- Press to select the option you want to assign a number
- Press to select
- Enter the number using the keypad
- Press
- Press to confirm

Activate/deactivate answering machine:


- Press to open answer phone
- Press and select "Settings"
- Press
- Press to toggle answering machine On/Off

Listen to all new messages:

- Press
- Press
- Press to play all

Listen to a selected new message:

- Press
- Press
- Press to browse the messages
- Press to select
- Press to play

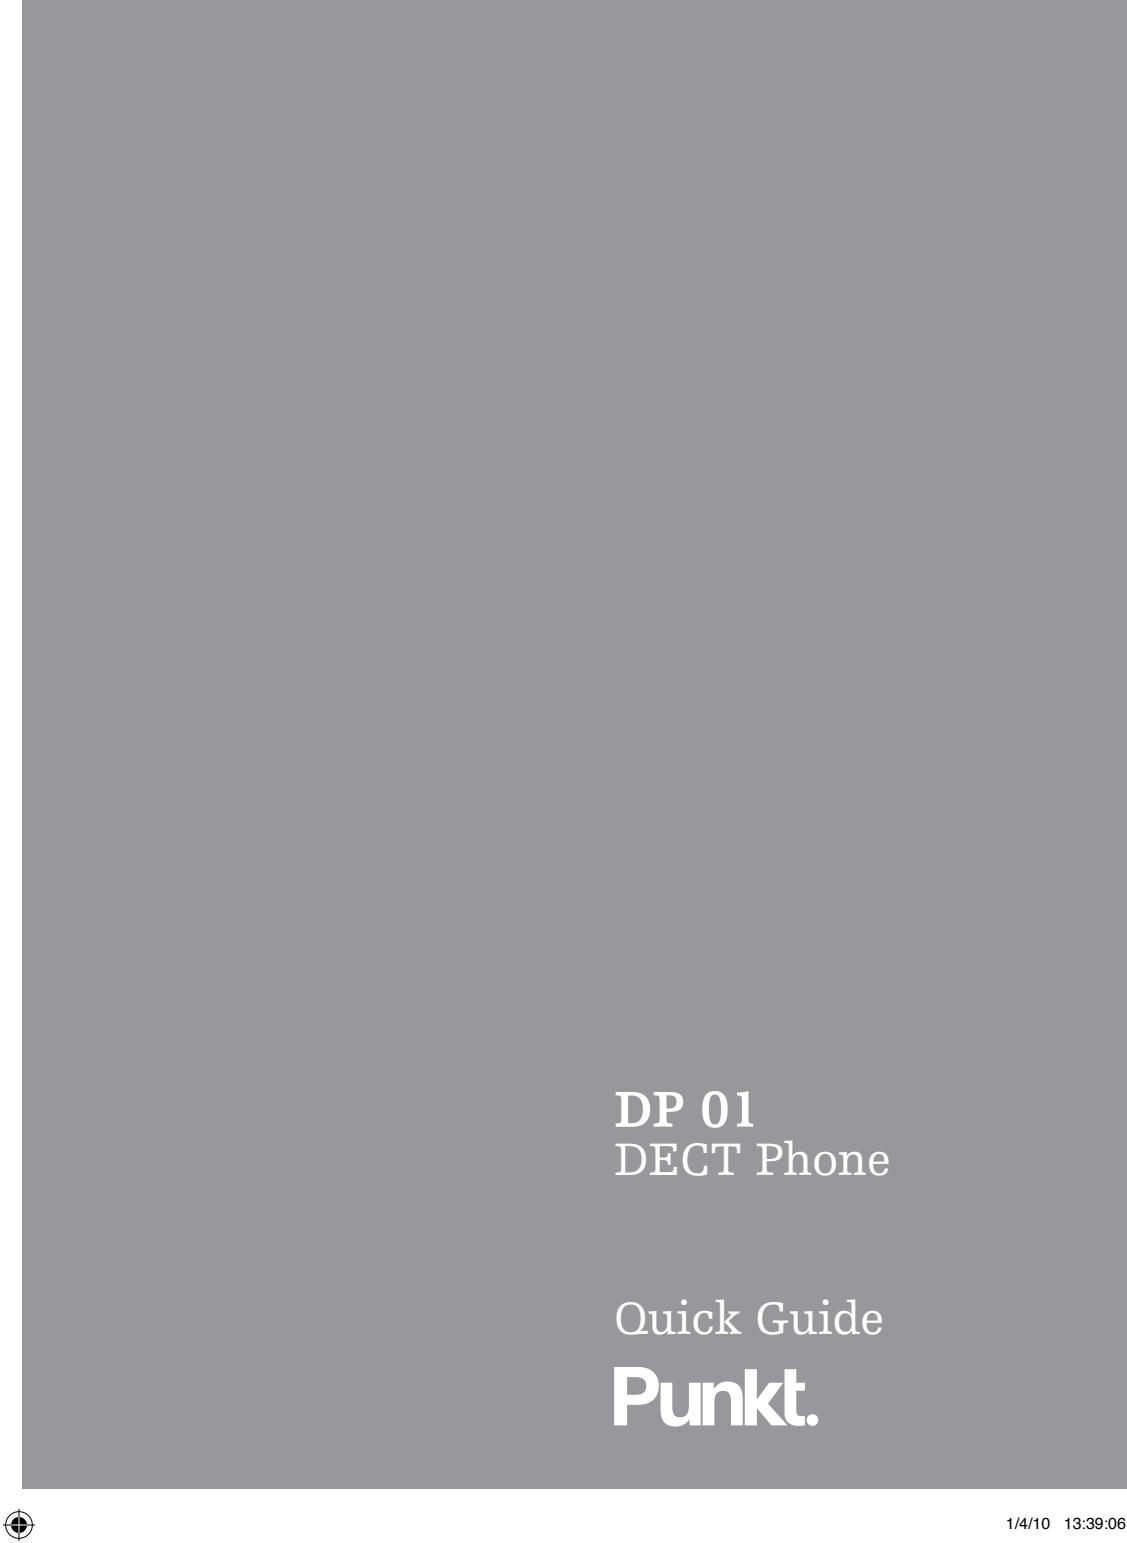

DP 01
DECT Phone

Quick Guide
Punkt.

**PUNKT DP01 - DP01S:
TECHNICAL, SAFETY & COMPLIANCE INFORMATION (ver 1.0)**

SAVE THESE INSTRUCTIONS!

Important Safety Instructions!

When using your telephone equipment, basic safety precautions should always be followed to reduce the risk of fire, electric shock and injury to persons, including the following:

- **This unit is NOT waterproof.** DO NOT expose it to rain or moisture.
- Keep batteries out of reach of children.
- Do not use this product near water, for example, near a bath tub, wash bowl, kitchen sink or laundry tub, in a wet basement or near a swimming pool.
- Avoid sources of noise and heat, such as motors, fluorescent lighting, microwave ovens, heating appliances and direct sunlight.
- Avoid using a telephone (other than a cordless type) during an electrical storm. There may be a remote risk of electric shock from lightning.
- Do not use the telephone to report a gas leak in the vicinity of the leak.
- Use only the power cord and batteries indicated in the "Technical information" section of this information sheet.
- Do not dispose of batteries in a fire. They may explode. Check with local codes for possible special disposal instructions.
- Do not place the handset in any charging cradle without the batteries installed and the battery cover securely in place.

IMPORTANT: Because cordless phones operate on electricity, you should have at least one phone in your home that isn't cordless, in case the power in your home goes out.

Technical Information

AC-DC Power Adapter Information

AC-DC Adapter for the Base (DP01) and Handset Charger (DP01S)	
Adapter model	DYS052-050070W-1
Input voltage	100-240V AC, 50/60Hz
Output voltage	5.0V ; 0.7 A

- Use only the supplied AC adapter.
- Do not place the unit in direct sunlight or subject it to high temperatures.

Batteries Information

Rechargeable batteries (with normal use)	
Number of batteries	2
Battery type	Ni-MH "AAA" size rechargeable batteries
Capacity	1.2V, 650 mAh
Talk time	about 10 hours
Standby time	about 100 hours
Time required for first charging	about 16 hours
Time required for the next charging cycles	about 8 hours

- Use only 2 Ni-MH type, "AAA" size, 1.2V 650mAh rechargeable batteries, as the ones provided in this package or with identical mechanical and electrical specifications.
- **Leave the handset located on the base unit (for DP01 model) or battery charger (for DP01S model) for 16 hours before using the DP01 handset for the first time. After that time, the batteries will be fully charged and the handset can be used to make and receive phone calls. Next charging cycles will take around 8 hours (from full discharge).**
- Keep batteries out of reach of children.
- When the batteries charging level gets low, the handset beeps and shows a low battery alert; recharge the batteries.

Rechargeable Battery Warning


- This equipment contains 2 rechargeable Nickel-Metal-Hydride (Ni-MH) batteries.
- Nickel is a chemical known to the state of California to cause cancer.
- Do not short-circuit the batteries.
- The batteries in this equipment may explode if disposed of in a fire.
- Do not charge the batteries in any charger other than the original DP01(DP01S) handsets itself. Using another charger may damage the battery or cause it to explode.



CAUTION! Risk of explosion if battery is replaced by an incorrect type! Rechargeable batteries must be recycled or disposed of properly. Do not open or mutilate the batteries. Remove the batteries from the handset before shipping this product.

Telephone Jack Requirements

To use this phone, you need an RJ11C type modular telephone jack, which might look like the one pictured here, installed in your home. If you don't have a modular jack, call your local phone company to find out how to get one installed.

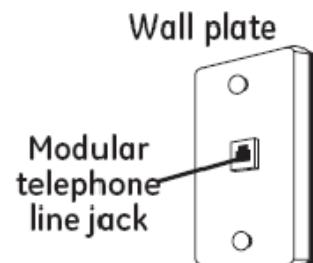

General product care

Cleaning the product

Wipe the base and the handset with a damp cloth (do not use solvent) or an antistatic cloth. Never use a dry cloth.

Contact with liquids

In case the handset should come into contact with liquids:

- Switch off the handset and remove the batteries immediately.
- Allow the liquid to drain from the handset.
- Pat all parts dry, then place the handset with the battery compartment open and the keypad facing down in a dry, warm place for at least 72 hours (not in microwave, oven, etc...).
- Do not switch on the handset again it's completely dry.
- Once fully dried out, in many cases it will be possible to use the handset again even if some problems could show up.
- Oxidations caused by liquids such as water penetrated into the phone can cause serious functional problems. Such problems are not covered by warranty service.

Product transportation

In case of transportation of this product, make sure to use the original packaging of the product in order to protect it from potential damages.

Wall-mounting solution

If you wish, you can also mount the base station on the wall. A magnet located on the base station next to the charging contacts allows to hold the handset in vertical position during the charging phase. In order to avoid any detachment of the phone from its base and consequent crash on the floor, please make sure that the handset is **well located (stable)** on the base station before leaving your hand from the handset. Crashes and/or broken parts due to user's negligence in this phase are **not** covered under warranty conditions.

Compliance Information

FCC Part 68 Information (valid for "DP01" model only)

NOTE: The base unit of the "DP01S" model ("slave unit") should be connected **ONLY** to the electrical mains, by using the power adaptor provided in its original package.

The base unit of the "DP01S" model ("slave unit") acts only as a battery charger for the DP01 Handset units. For this reason, it should NOT be connected to the PSTN (analogue telephone line) network!

- 1) The "DP01" model complies with Part 68 of the FCC rules and the requirements adopted by the ACTA. On the bottom of this equipment is a label that contains,

among other information, a product identifier in the format US: **A2TW401BDP01**. If requested, this number must be provided to the phone company.

- 2) The "DP01" model uses the RJ-11 Universal Service Order Code (USOC) jack.
- 3) A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product ("DP01" model only). It is designed to be connected to a compatible modular jack that is also compliant. See installation instructions for details.
- 4) On the "DP01" model, the REN information is used to determine the number of devices that may be connected to a phone line. Excessive RENs on a phone line may result in devices not ringing in response to an incoming call. In most but not all areas, the sum of RENs should not exceed five (5.0). To be certain of the number of devices that may be connected to a line, as determined by the total RENs, contact the telephone provider. For products approved after July 23rd, 2001 (including this product), the REN value is part of the product identifier that has the format US:A2TW401BDP01. The digits represented by ## are the REN without a decimal point (e.g., 03 is a REN of 0.3). For earlier products, the REN is separately shown on the label.
- 5) If this equipment ("DP01" model only) causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. But if advance notice isn't practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary.
- 6) The telephone company may make changes in its facilities, equipment, operations or procedures that could affect the operation of the equipment. If this happens the telephone company will provide advance notice in order for you to make necessary modifications to maintain uninterrupted service.
- 7) If trouble is experienced with this equipment, for repair or warranty information, please contact the Punkt point of sale nearest you, or contact us via the form available on the Punkt web site, at www.punktgroup.com. If the equipment is causing harm to the telephone network, the telephone company may request that you disconnect the equipment until the problem is resolved.
- 8) This equipment contains no user serviceable parts. For repair and warranty information, contact the Punkt point of sale nearest you, or contact us via the form available on the Punkt web site, at www.punktgroup.com.
- 9) Connection to party line service is subject to state tariffs. Contact the state public utility commission, public service commission or corporation commission for information. This equipment is hearing aid compatible. If you experience trouble with this equipment, contact the manufacturer (see the cover of this manual for contact information) or an authorized agent.
- 10) If the equipment is causing harm to the telephone network, the telephone company may request that you disconnect the equipment until the problem is resolved.
- 11) If your home has wired alarm equipment connected to a phone line, be sure that installing the system does not disable your alarm equipment. If you have questions about what will disable alarm equipment, contact your telephone company or a qualified installer.

CAUTION/WARNING:

- Any changes or modifications to this product not expressly approved by the manufacturer or other party responsible for compliance could void not only your authority to operate this product, but also the limited warranty.
- According to telephone company reports, AC electrical surges, typically resulting from lightning strikes, are very destructive to telephone equipment connected to AC power sources. To minimize damage from these types of surges, a surge arrestor is recommended.

Hearing Aid Compatibility (HAC)

This telephone system meets FCC standards for Hearing Aid Compatibility.

FCC Part 15 & SAR Information

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. Privacy of communications may not be ensured when using this phone.

FCC PART 15.105(b): Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna (that is, the antenna for radio or television that is “receiving” the interference).
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for additional suggestions.

FCC RF Exposure Compliance Information

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment under the following conditions:

- The base must be placed to allow a minimum of 20 cm (8 inches) between the antenna and all persons during normal operation.
- The base must not be collocated or operated in conjunction with any other antenna or transmitter.
- The handset is designed for body-worn operation and meets FCC RF exposure

guidelines when used with any belt clip, carrying case, or other accessory supplied with this product (all necessary accessories are included in the package; any additional or optional accessories are not required for compliance with the guidelines.)

- Third party accessories (unless approved by the manufacturer) should be avoided as these might not comply with FCC RF exposure guidelines.

SAR Tests & Measurement

The SAR ("Specific Absorption Rate") tests are performed in positions and locations (eg., at the ear) as required by the FCC for each model. The SAR value for this handset when tested for use at ear is 0.054 mW/kg.

Any questions regarding this compliance information statement should be directed to: Please contact the Punkt point of sale nearest you, or contact us via the form available on the Punkt web site, at www.punktgroup.com.

RoHS Compliance declaration

Punkt. Tronics AG certifies our lead free products delivered to our customers conform to the RoHS requirements, in which six banned substances are not detected or are under the limitation. The Restriction of Hazardous Substances Directive (**RoHS**) 2002/95/EC was adopted in February 2003 by the European Union. This directive restricts the use of six hazardous materials in the manufacture of various types of electronic and electrical equipment. The RoHS directive is closely linked with the Waste Electrical and Electronic Equipment Directive (WEEE) 2002/96/EC which sets collection, recycling, and recovery targets for electrical goods and is part of a legislative initiative to solve the problem of toxic E-Waste. This declaration is based on Punkt. Tronics AG's understanding of the RoHS directive and knowledge of the materials that go into Punkt. Tronics AG RoHS applicable products as of the date of disclosure information.

Full user manual download link

You can download the full version of the user manual for this product (as PDF file format) from the following website: <http://www.punktgroup.com> (check for the "**DP01**" area → "Manuals" section).