

## RF RADIATION HAZARD ANALYSIS

### Exhibit #B

Antenna Diameter, (D) =	1.45 meters /	4.75745 Feet
Antenna Surface Area (Sa) =	1.6513 sq meters	
Subreflector Diameter (Ds) =	0.0000 centimeters	
Ku Wavelength at 14.250 GHz (LAMBDA) =	0.21038067 meters	
Power output of VPC Flange=	20.969 dB	
Path Loss to OMT (IL) =	0.6 dB	
Power at OMT, (P) =	108.87 Watts	
Antenna Gain at 14.250GHz (G) =	45.90 dBi (2 port antenna gain)	
Antenna Gain given in Power Ratio, (Ges) =	3.89E+04	
Antenna Aperture Efficiency (N) =	0.670	

<u>Region</u>			<u>Radition Level</u>		<u>Hazard Assessment</u>
Far Field, (Rf) =	5.996 meters /	19.67 Feet	937.427	mW/cm sq	Potential Hazard
Near Field, (Wf) =	2.498 meters /	8.197 Feet	17.669	mW/cm sq	Potential Hazard
Transition Region (Rt) Ru<Rt<Rf			equal to or less than 17.669	mW/cm sq	Potential Hazard
Between Main Reflector and Subreflector (Ws)			N/A (no subreflector)		
Main Reflector Region (Wm)			13.186	mW/cm sq	Potential Hazard
Power Density Between Reflector and Ground			6.593	mW/cm sq	Potential Hazard
Far Field Off Axis (WF)			9.374	mW/cm sq	Potential Hazard
Near Field Off Axis (WN)			0.177	mW/cm sq	Meets ANSI Requirements


**Conclusion:** Based on the above analysis, harmful areas of Radiation do exist in the areas around the antenna and in the path of the antenna toward the satellite that it is pointed at. The Area occupied by the general public will not exceed the ANSI limit of 1mW cm sq. because the antenna is mounted on top of the truck, which is at least 8 feet above the ground, and safety increases with look angles used by the Satellites in the United States on Dom. Sat. arch. The areas on the ground and behind the antenna are 100 times less power (20dB) when at a min. of the dia. of the reflector. This is reflected in the Off Axis figures as seen above (WF) & (WN). The SNG will be marked with the standard radiation hazard warnings, and on the antenna itself. The warning signs will warn personnel to avoid the area around and in front of the reflector when the transmitter is operating. To ensure compliance with safety limits, the earth station transmitter will be turned off and marked to remain off whenever maintenance and repair personnel are required to work in the areas of potential hazard as defined in the above study. Additionally, the earth station personnel will be trained to ensure that the antenna path is clear at all times while the transmitter is in operation. The only access to the roof of the truck is a ladder that is not accessible by the general public.

Note: See Exhibit #Ba for how the above calculations were made.

**Exhibit Ba Analysis on Non-ionizing Radiation**

Antenna Diameter, (D) =	D =	1.45 meters	D*3.281 =	4.757	Feet
Antenna Surface Area, (Sa) =	Sa =	$p * \frac{D * D}{4}$	Sa =	1.651	sq meters
Subreflector Diameter, (Ds) =	Ds =	0 cm	Ds*.3937	0.000	Inches
Area of Subreflector, (As) =	As =	$p * \frac{Ds * Ds}{4}$	As =	0.000	sq meters
Center Frequency, (Cf) =	Cf =	14.250 GHz			
Wavelength at (Cf), (Lambda) =	Lambda =	0.2103806709 meters			
Transmit Power at HPA or VPC Flange, (P1) =	P1 =	125.00 watts	P2 =	20.969	dB
Path Loss from HPA or VPC to OMT, (IL) =	Loss =	0.6	P3 =	20.369	OMT Pwr in dB
	P3 = P2-Loss		P =	108.870	OMT Pwr in watts
	P =	$10 \frac{P3}{10}$			
Antenna Gain at (Cf), (Gain) =	Gain =	45.90 dBi			
Antenna Gain Converted to Power Ratio (Ges) =	Ges =	$10 \frac{Gain}{10}$	Ges =	3.89E+04	Ratio
Antenna Aperture Efficiency, (n) =	n =	0.6700			
<hr/>					
Far Field (Rf) =	Rf =	$\frac{.60 * (D * D)}{Lambda}$	Rf =	5.996	meters
			Rf*3.281 =	19.674	feet
Far Field Power Density (Wf) =	Wf =	$4 * \frac{Ges * P}{p * (Rf * Rf)} * .1$	Wf =	937.427	mw sq cm
Near Field (Rn) =	Rn =	$\frac{(D * D)}{4 * Lambda}$	Rn =	2.498	meters
			Rf*3.281 =	8.197	feet
Near Field Power Density (Wn) =	Wn =	$p * \frac{16 * n * P}{(D * D)} * .1$	Wn =	17.669	mw sq cm
Transition Region (Rt) =	Rt =	Wn*1	Rt =	17.669	mw sq cm (Equal to or less than)
Pwr Density at Sub Reflector (Ws) =	Ws =	$\frac{2 * P}{As} * 1000$	Ws =	N/A	
Main Reflector Region Pwr Density (Wm) =	Wm =	$\frac{2 * P}{Sa} * .1$	Wm =	13.186	mw sq cm
Pwr Density between main reflector and ground (Wg) =	Wg =	$\frac{P}{Sa} * .1$	Wg =	6.593	mw sq cm
Far Field Off Axis (WF) =	WF =	Wf*.01	WF =	9.374	mw sq cm
Near Field Off Axis (WN) =	WN =	Wn*.01	WN =	0.177	mw sq cm

EXHIBIT E-1  
DIGITAL SATELLITE  
VAN AND ANTENNA PROFILE  
**VERMONT PUBLIC BROADCASTING SERVICE**  
SEPTEMBER 2014

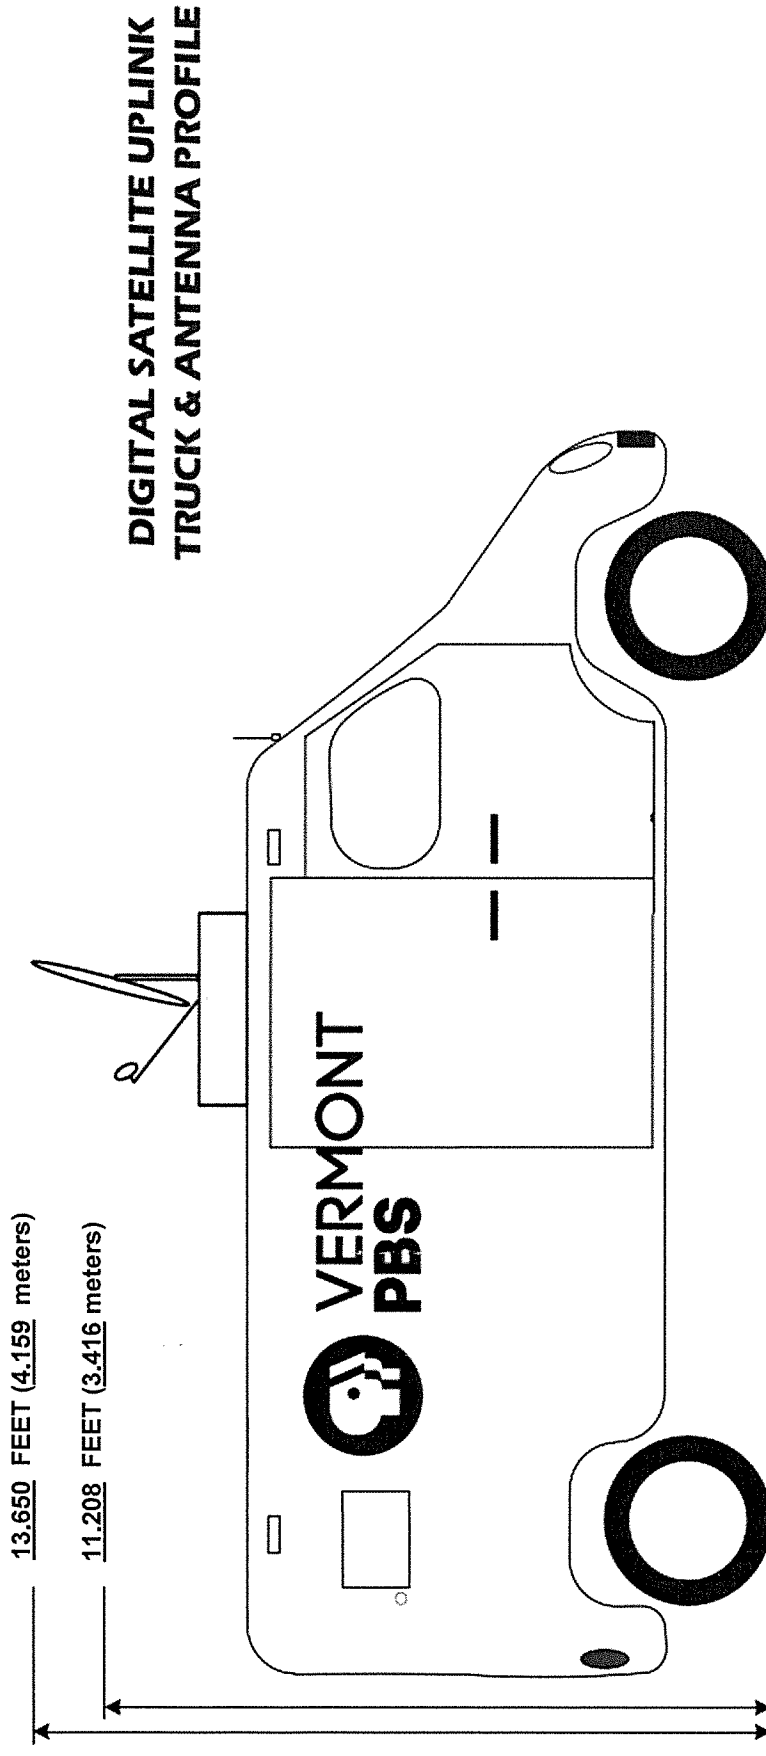



**ACCELERATED**  
MEDIA TECHNOLOGIES

## Variable Data

Project number:	2896
Customer:	Vermont Public Television
Customer Contact:	Glenn Dudley
Date:	8/19/2014

Required Data	
<i>Antenna Model</i>	Sat-Lite 1411 Peloris
<i>Amplifier Model</i>	Advantech SSPBM-K125-CRE
Antenna Diameter (D)	1.45 meters
Subreflector Diameter (Ds)	0 cm
Center Frequency (Cf)	14.250 GHz (14.250 GHz for Ku-Band)
Transmit Power at HPA or VPC Flange (P1)	125.00 watts
Path Loss from HPA or VPC to OMT (IL)	0.6 dB (0.6 for Hub Mount, 2.0 for Rack Mount)
Antenna Gain at (Cf) (Gain)	45.90 dBi
Antenna Aperture Efficiency (η)	0.67
Bandwidth of Transmission	9 MHz



**ACCELERATED**  
MEDIA TECHNOLOGIES

## Form 312 Blocks Information

Project number:	2896
Customer:	Vermont Public Television
Customer Contact:	Glenn Dudley
Date:	8/19/2014

Enter this information in the following FCC Form 312 Blocks		
Nomenclature	Value	Unit of Measure
Power at OMT	108.870	watts
Total EIRP	66.27	dBw
Maximum EIRP Density toward the Horizon	-4.03	dBw/4KHz
Maximum EIRP per Carrier	62.15	dBw
Maximum EIRP Density per Carrier	22.60	dBw/4KHz
		Form 312 Block
		B5(g)
		B5(h)
		B6(i)
		B7(f)
		B7(g)