



Appendix A. Test Result of AC Power Line Conducted Emission

for Adapter:

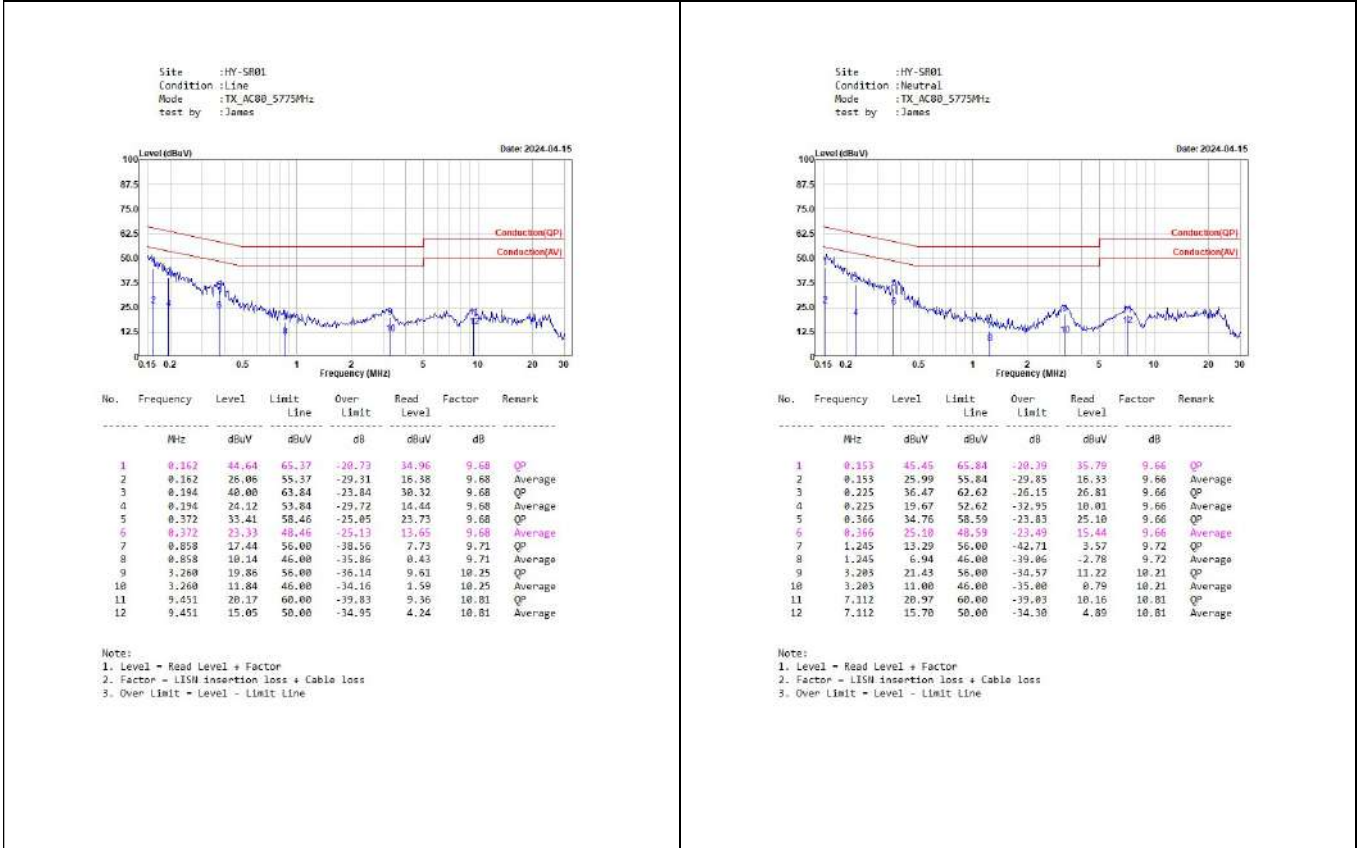

for PoE:

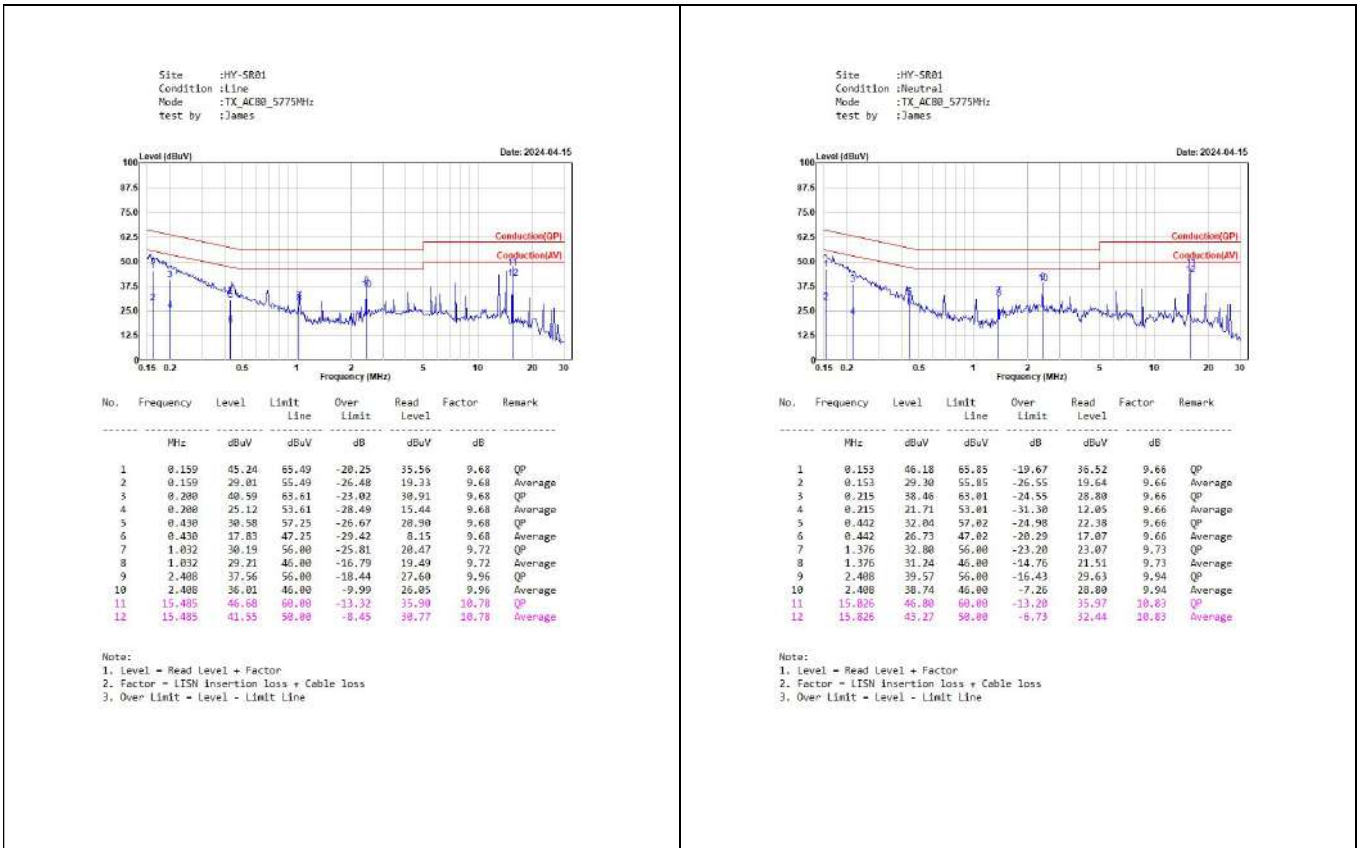

Appendix B. Test Result of Emission Bandwidth

Master+Slave

Modulation	Frequency (MHz)	6dB Bandwidth (kHz)		Limit (kHz)
		Chain A	Chain B	DTS Bandwidth
802.11a	5745	16264	15105	>500
	5785	15105	15065	>500
	5825	15105	15105	>500

Modulation	Frequency (MHz)	6dB Bandwidth (kHz)		Limit (kHz)
		Chain A	Chain B	DTS Bandwidth
802.11ac (20 MHz)	5745	15664	15105	>500
	5785	15664	15105	>500
	5825	15105	15105	>500


Modulation	Frequency (MHz)	6dB Bandwidth (kHz)		Limit (kHz)
		Chain A	Chain B	DTS Bandwidth
802.11ac (40 MHz)	5755	35085	35085	>500
	5795	35085	35085	>500

Modulation	Frequency (MHz)	6dB Bandwidth (kHz)		Limit (kHz)
		Chain A	Chain B	DTS Bandwidth
802.11ac (80 MHz)	5775	74965	73846	>500

For 6dB Bandwidth:


Spectrum plot of worst value

802.11a / Chain B / 5785 MHz

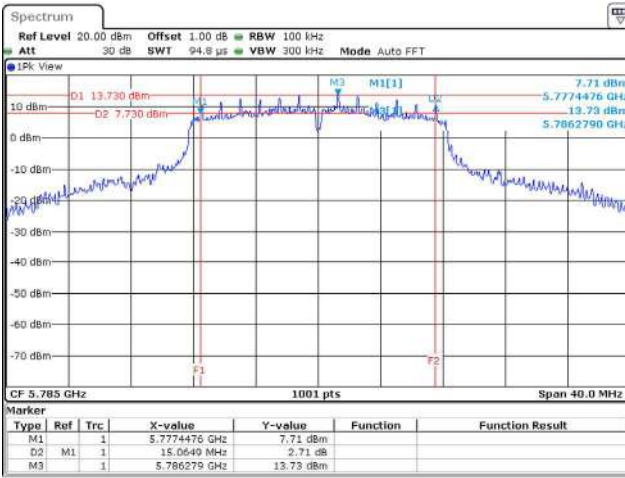


Date: 20.MAR.2024 16:30:33

802.11ac (20 MHz) / Chain B / 5745 MHz

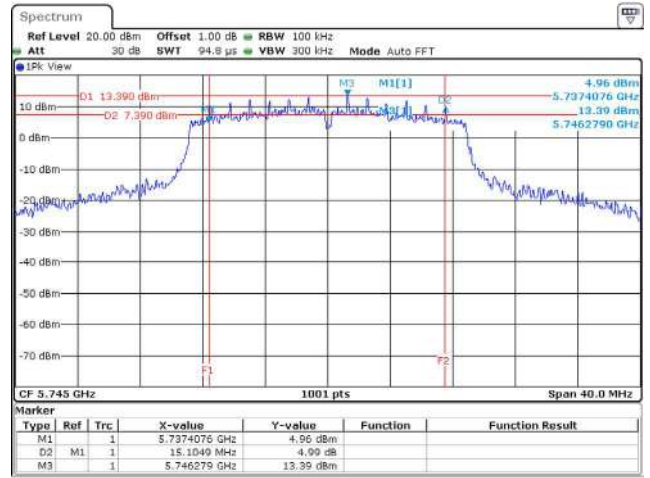


Date: 20.MAR.2024 17:06:52

802.11ac (40 MHz) / Chain A / 5755 MHz

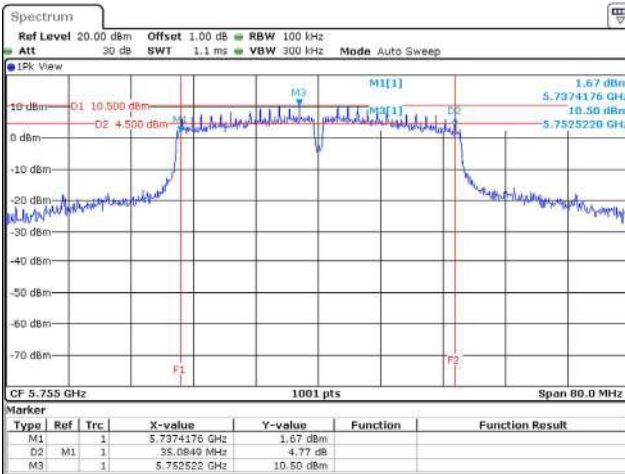

Date: 20.MAR.2024 17:45:35

802.11ac (80 MHz) / Chain B / 5775 MHz

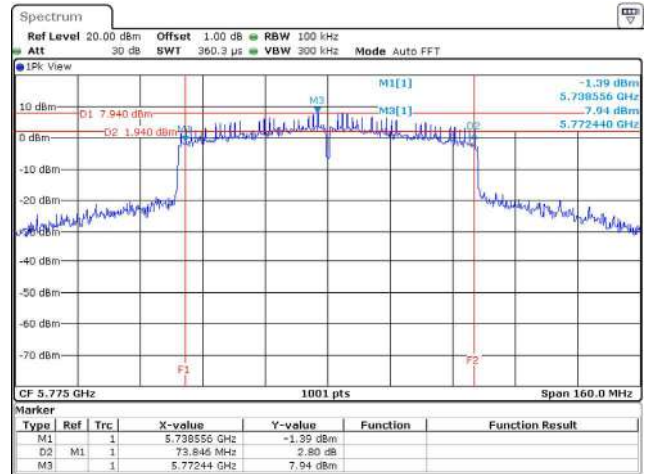

Date: 20.MAR.2024 18:50:55

Appendix C. Test Result of Maximum Conducted Output Power

Master

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11a	5180	--	20.91	20.40	--	23.67	30	--
	5220	--	23.36	22.60	--	26.01	30	--
	5240	--	23.39	22.52	--	25.99	30	--
	5745	--	24.83	25.99	--	28.46	30	--
	5785	--	24.91	25.79	--	28.38	30	--
	5825	--	25.02	25.52	--	28.29	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11n (20 MHz)	5180	--	20.73	19.51	--	23.17	30	--
	5220	--	22.22	21.49	--	24.88	30	--
	5240	--	22.37	21.52	--	24.98	30	--
	5745	--	23.97	25.28	--	27.68	30	--
	5785	--	24.01	25.13	--	27.62	30	--
	5825	--	24.19	25.36	--	27.82	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11n (40 MHz)	5190	--	17.05	16.31	--	19.71	30	--
	5230	--	22.17	21.34	--	24.79	30	--
	5755	--	24.59	25.71	--	28.20	30	--
	5795	--	25.13	26.02	--	28.61	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11ac (20 MHz)	5180	--	20.91	19.62	--	23.32	30	--
	5220	--	22.44	21.62	--	25.06	30	--
	5240	--	22.59	21.73	--	25.19	30	--
	5745	--	24.09	25.43	--	27.82	30	--
	5785	--	24.12	25.23	--	27.72	30	--
	5825	--	24.37	25.54	--	28.00	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11ac (40 MHz)	5190	--	17.17	16.40	--	19.81	30	--
	5230	--	22.34	21.55	--	24.97	30	--
	5755	--	24.77	25.83	--	28.34	30	--
	5795	--	25.27	26.15	--	28.74	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11ac (80 MHz)	5210	--	14.19	13.49	--	16.86	30	--
	5775	--	23.21	24.48	--	26.90	30	--

Note:

1. Output Power Value (dBm) = $10 \cdot \log(\text{Chain A(mW)} + \text{Chain B(mW)})$

Slave

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11a	5180	--	20.91	20.40	--	23.67	24	--
	5220	--	18.13	18.39	--	21.27	24	--
	5240	--	18.38	18.46	--	21.43	24	--
	5745	--	24.83	25.99	--	28.46	30	--
	5785	--	24.91	25.79	--	28.38	30	--
	5825	--	25.02	25.52	--	28.29	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11n (20 MHz)	5180	--	20.73	19.51	--	23.17	24	--
	5220	--	18.27	18.44	--	21.37	24	--
	5240	--	18.03	18.25	--	21.15	24	--
	5745	--	23.97	25.28	--	27.68	30	--
	5785	--	24.01	25.13	--	27.62	30	--
	5825	--	24.19	25.36	--	27.82	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11n (40 MHz)	5190	--	17.05	16.31	--	19.71	24	--
	5230	--	21.15	20.29	--	23.75	24	--
	5755	--	24.59	25.71	--	28.20	30	--
	5795	--	25.13	26.02	--	28.61	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11ac (20 MHz)	5180	--	20.91	19.62	--	23.32	24	--
	5220	--	18.34	18.67	--	21.52	24	--
	5240	--	18.17	18.39	--	21.29	24	--
	5745	--	24.09	25.43	--	27.82	30	--
	5785	--	24.12	25.23	--	27.72	30	--
	5825	--	24.37	25.54	--	28.00	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11ac (40 MHz)	5190	--	17.17	16.40	--	19.81	24	--
	5230	--	21.28	20.37	--	23.86	24	--
	5755	--	24.77	25.83	--	28.34	30	--
	5795	--	25.27	26.15	--	28.74	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11ac (80 MHz)	5210	--	14.19	13.49	--	16.86	24	--
	5775	--	23.21	24.48	--	26.90	30	--

Note:

1. Output Power Value (dBm) = $10 \cdot \log(\text{Chain A(mW)} + \text{Chain B(mW)})$

Appendix D. Test Result of Maximum Power Spectral Density

Master

Modulation	Frequency (MHz)	Data Rate (Mbps)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)
802.11a	5180	6	A	7.43	0.17	9.96	16.70
			B	6.02			
	5220	6	A	10.09	0.17	12.79	16.70
			B	9.08			
	5240	6	A	10.16	0.17	12.80	16.70
			B	9.00			
	5745	6	A	9.40	0.17	13.08	28.23
			B	10.34			
	5785	6	A	9.37	0.17	13.12	28.23
			B	10.44			
	5825	6	A	9.71	0.17	12.99	28.23
			B	9.90			

Note:

1. Total PSD/MHz = $10 \cdot \log(\text{Chain A(mW)} + \text{Chain B(mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Data Rate (Mbps)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)
802.11ac (20 MHz)	5180	MCS0	A	7.61	0.35	10.08	16.7
			B	5.60			
	5220	MCS0	A	9.39	0.35	12.10	16.7
			B	7.96			
	5240	MCS0	A	10.03	0.35	12.91	16.7
			B	9.00			
	5745	MCS0	A	8.85	0.35	12.74	28.23
			B	9.85			
	5785	MCS0	A	8.56	0.35	12.52	28.23
			B	9.68			
	5825	MCS0	A	8.74	0.35	12.22	28.23
			B	8.96			

Note:

1. Total PSD/MHz = $10 \cdot \text{LOG}(\text{Chain A(mW)} + \text{Chain B(mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Data Rate (Mbps)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)
802.11ac (40 MHz)	5190	MCS0	A	0.90	0.63	4.08	16.7
			B	-0.08			
	5230	MCS0	A	6.40	0.63	9.46	16.7
			B	5.15			
	5755	MCS0	A	6.50	0.63	10.50	28.23
			B	7.19			
5795	MCS0	A	6.89	0.63	10.77	28.23	
		B	7.34				

Note:

1. Total PSD/MHz = $10 \cdot \text{LOG}(\text{Chain A(mW)} + \text{Chain B(mW)}) + \text{Duty factor}$.


Modulation	Frequency (MHz)	Data Rate (Mbps)	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PPSD/MHz (dBm)	Required Limit (dBm)
802.11ac (80 MHz)	5210	MCS0	A	-3.73	1.12	-0.25	16.7
			B	-5.13			
	5775	MCS0	A	2.48	1.12	7.30	28.23
			B	3.77			

Note:

1. Total PSD/MHz = $10 \cdot \text{LOG}(\text{Chain A(mW)} + \text{Chain B(mW)}) + \text{Duty factor}$.


Spectrum plot of worst value

802.11a / Chain B / 5785 MHz

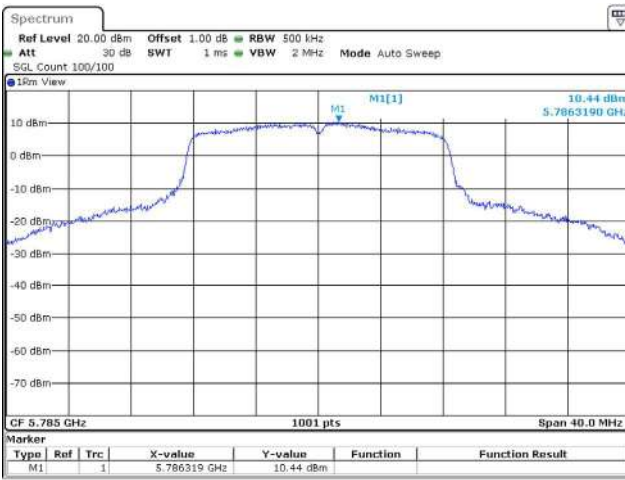


Date: 20.MAR.2024 16:30:49

802.11ac (20 MHz) / Chain A / 5240 MHz

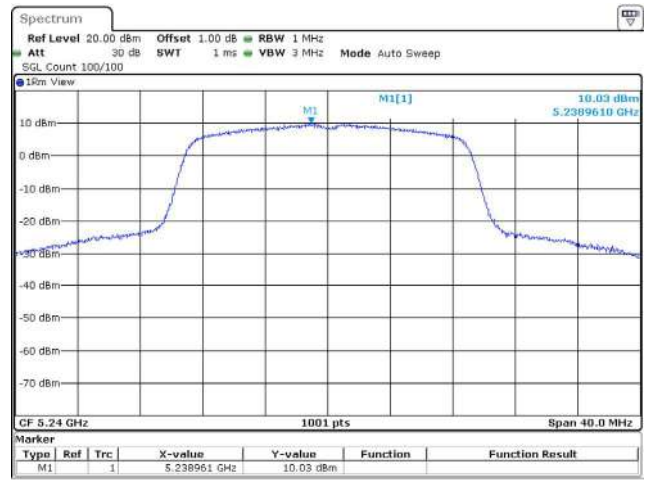


Date: 20.MAR.2024 17:01:38

802.11ac (40 MHz) / Chain B / 5795 MHz

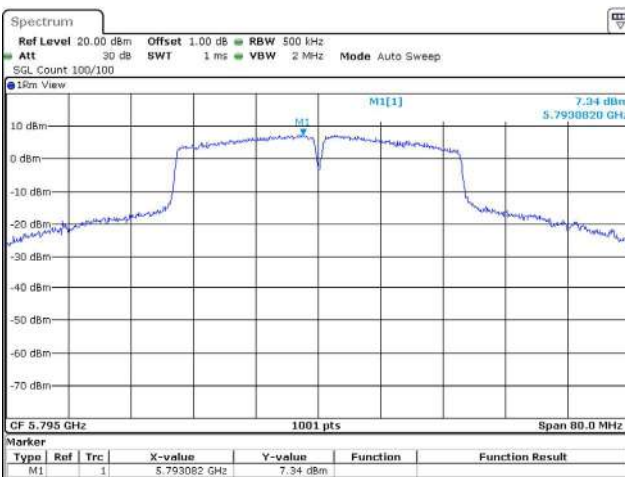

Date: 20.MAR.2024 17:52:53

802.11ac (80 MHz) / Chain B / 5775 MHz

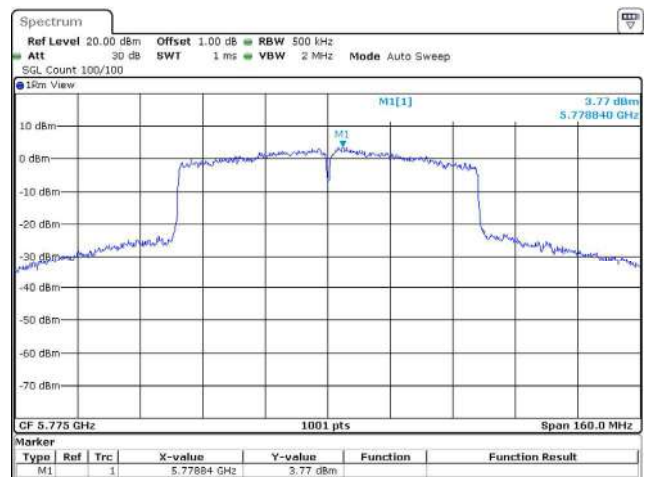

Date: 20.MAR.2024 18:51:12

Slave

Modulation	Frequency (MHz)	Data Rate (Mbps)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)
802.11a	5180	6	A	7.43	0.17	9.96	10.70
			B	6.02			
	5220	6	A	7.85	0.17	10.55	10.70
			B	6.83			
	5240	6	A	7.86	0.17	10.54	10.70
			B	6.79			
	5745	6	A	9.40	0.17	13.08	28.23
			B	10.34			
	5785	6	A	9.37	0.17	13.12	28.23
			B	10.44			
	5825	6	A	9.71	0.17	12.99	28.23
			B	9.90			

Note:

1. Total PSD/MHz = $10 \cdot \log(\text{Chain A(mW)} + \text{Chain B(mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Data Rate (Mbps)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)
802.11ac (20 MHz)	5180	MCS0	A	7.61	0.35	10.08	10.70
			B	5.60			
	5220	MCS0	A	7.85	0.35	10.66	10.70
			B	6.65			
	5240	MCS0	A	7.84	0.35	10.62	10.70
			B	6.58			
	5745	MCS0	A	8.85	0.35	12.74	28.23
			B	9.85			
	5785	MCS0	A	8.56	0.35	12.52	28.23
			B	9.68			
	5825	MCS0	A	8.74	0.35	12.22	28.23
			B	8.96			

Note:

1. Total PSD/MHz = $10 \cdot \text{LOG}(\text{Chain A(mW)} + \text{Chain B(mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Data Rate (Mbps)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)
802.11ac (40 MHz)	5190	MCS0	A	0.90	0.63	4.08	10.70
			B	-0.08			
	5230	MCS0	A	6.20	0.63	9.09	10.70
			B	4.52			
	5755	MCS0	A	6.50	0.63	10.50	28.23
			B	7.19			
5795	MCS0	A	6.89	0.63	10.77	28.23	
		B	7.34				

Note:

1. Total PSD/MHz = $10 \cdot \text{LOG}(\text{Chain A(mW)} + \text{Chain B(mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Data Rate (Mbps)	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PPSD/MHz (dBm)	Required Limit (dBm)
802.11ac (80 MHz)	5210	MCS0	A	-3.73	1.12	-0.25	10.70
			B	-5.13			
	5775	MCS0	A	2.48	1.12	7.30	28.23
			B	3.77			

Note:

1. Total PSD/MHz = $10 \cdot \text{LOG}(\text{Chain A(mW)} + \text{Chain B(mW)}) + \text{Duty factor}$.


Spectrum plot of worst value

802.11a / Chain A / 5240 MHz



Date: 21.MAR.2024 15:24:09

802.11ac (20 MHz) / Chain A / 5220 MHz

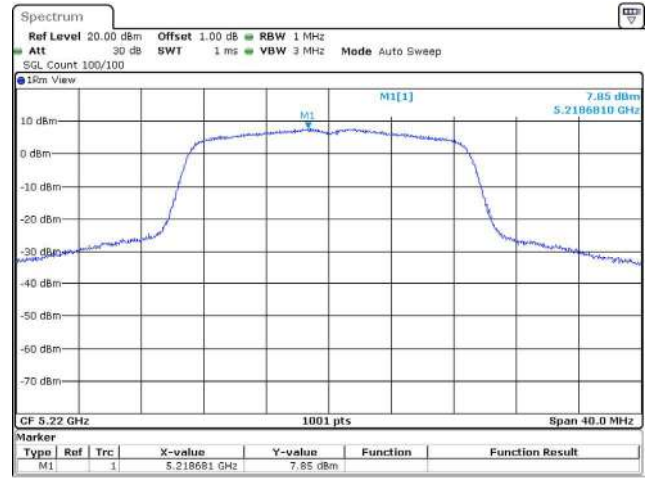


Date: 21.MAR.2024 15:32:06

802.11ac (40 MHz) / Chain A / 5230 MHz



Date: 21.MAR.2024 16:21:44




802.11ac (80 MHz) / Chain B / 5775 MHz

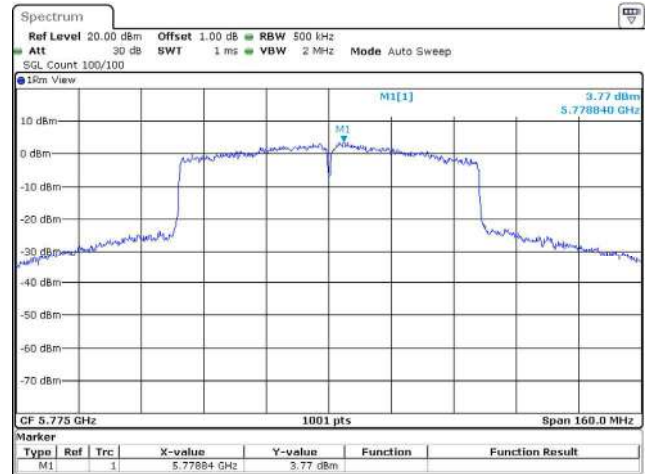


Date: 20.MAR.2024 18:51:12

Appendix E. Test Result of Transmitter Radiated Spurious Emission

<p>Site :HY-CB03 Condition :3m HORIZONTAL Mode :TX_a_5180MHz Test BY :Bob</p> <p>Date: 2024.03.13</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10368.000</td> <td>55.98</td> <td>68.22</td> <td>-12.24</td> <td>60.06</td> <td>-4.08</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15548.000</td> <td>52.17</td> <td>74.00</td> <td>-21.83</td> <td>52.13</td> <td>0.04</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10368.000	55.98	68.22	-12.24	60.06	-4.08	Peak	2	15548.000	52.17	74.00	-21.83	52.13	0.04	Peak	<p>Site :HY-CB03 Condition :3m VERTICAL Mode :TX_a_5180MHz Test BY :Bob</p> <p>Date: 2024.03.13</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10368.000</td> <td>56.38</td> <td>68.22</td> <td>-11.84</td> <td>60.46</td> <td>-4.08</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15548.000</td> <td>52.34</td> <td>74.00</td> <td>-21.66</td> <td>52.30</td> <td>0.04</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10368.000	56.38	68.22	-11.84	60.46	-4.08	Peak	2	15548.000	52.34	74.00	-21.66	52.30	0.04	Peak																
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	10368.000	55.98	68.22	-12.24	60.06	-4.08	Peak																																																																										
2	15548.000	52.17	74.00	-21.83	52.13	0.04	Peak																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	10368.000	56.38	68.22	-11.84	60.46	-4.08	Peak																																																																										
2	15548.000	52.34	74.00	-21.66	52.30	0.04	Peak																																																																										
<p>Site :HY-CB03 Condition :3m HORIZONTAL Mode :TX_a_5220MHz Test BY :Bob</p> <p>Date: 2024.03.13</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10448.000</td> <td>57.33</td> <td>68.22</td> <td>-10.89</td> <td>61.26</td> <td>-3.93</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15668.000</td> <td>42.93</td> <td>54.00</td> <td>-11.07</td> <td>42.96</td> <td>0.07</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15668.000</td> <td>55.17</td> <td>74.00</td> <td>-18.83</td> <td>55.10</td> <td>0.07</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10448.000	57.33	68.22	-10.89	61.26	-3.93	Peak	2	15668.000	42.93	54.00	-11.07	42.96	0.07	Average	3	15668.000	55.17	74.00	-18.83	55.10	0.07	Peak	<p>Site :HY-CB03 Condition :3m VERTICAL Mode :TX_a_5220MHz Test BY :Bob</p> <p>Date: 2024.03.13</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10448.000</td> <td>58.11</td> <td>68.22</td> <td>-10.11</td> <td>62.04</td> <td>-3.93</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15668.000</td> <td>42.83</td> <td>54.00</td> <td>-11.17</td> <td>42.76</td> <td>0.07</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15668.000</td> <td>54.12</td> <td>74.00</td> <td>-19.88</td> <td>54.05</td> <td>0.07</td> <td>Peak</td> </tr> </tbody> </table> <p>Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	10448.000	58.11	68.22	-10.11	62.04	-3.93	Peak	2	15668.000	42.83	54.00	-11.17	42.76	0.07	Average	3	15668.000	54.12	74.00	-19.88	54.05	0.07	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	10448.000	57.33	68.22	-10.89	61.26	-3.93	Peak																																																																										
2	15668.000	42.93	54.00	-11.07	42.96	0.07	Average																																																																										
3	15668.000	55.17	74.00	-18.83	55.10	0.07	Peak																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																											
1	10448.000	58.11	68.22	-10.11	62.04	-3.93	Peak																																																																										
2	15668.000	42.83	54.00	-11.17	42.76	0.07	Average																																																																										
3	15668.000	54.12	74.00	-19.88	54.05	0.07	Peak																																																																										

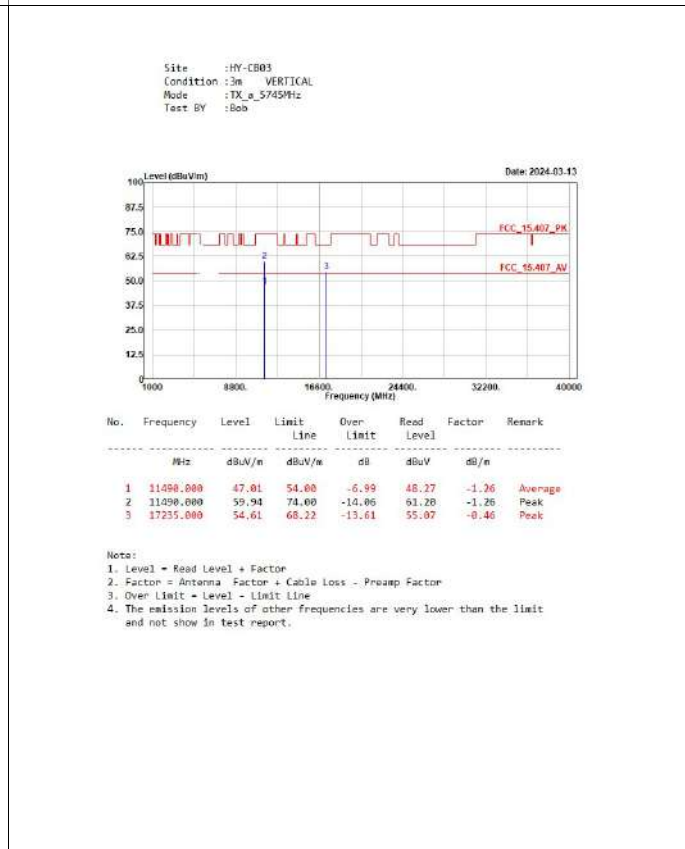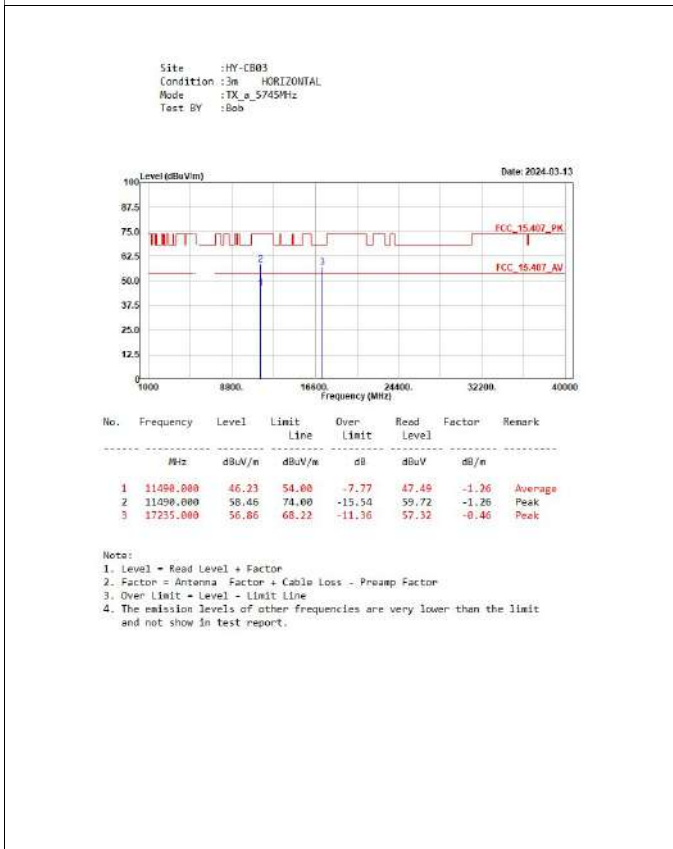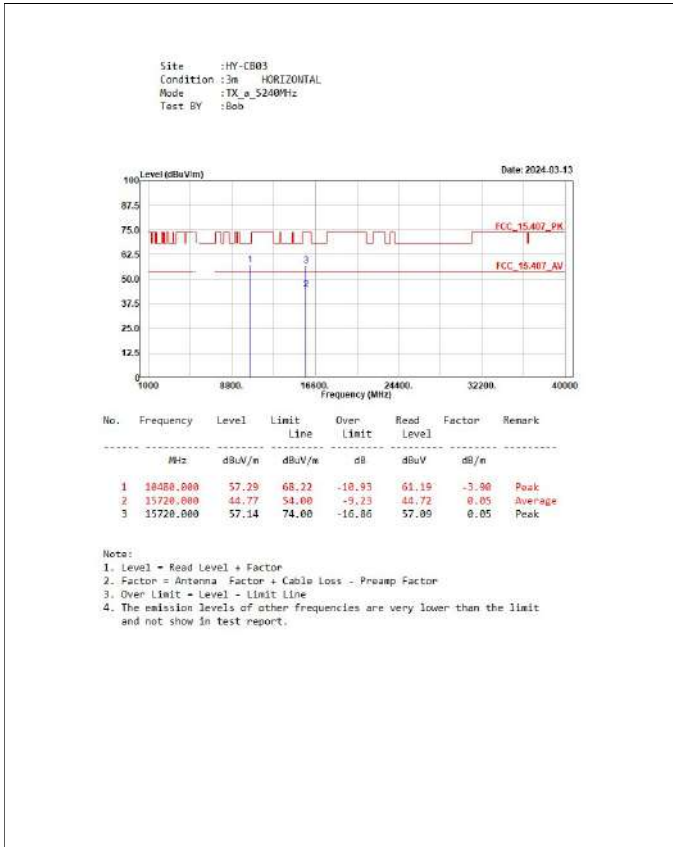


Site :HY-CB03
 Condition :3m HORIZONTAL
 Mode :TX_a_5785MHz
 Test BY :Bob

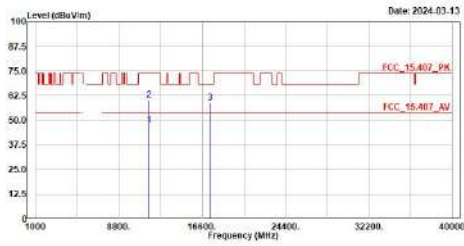

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11578.000	47.72	54.00	-6.28	48.86	-1.14	Average
2	11578.000	60.52	74.00	-13.48	61.96	-1.14	Peak
3	17355.000	59.02	68.22	-9.20	58.94	0.08	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m VERTICAL
 Mode :TX_a_5785MHz
 Test BY :Bob

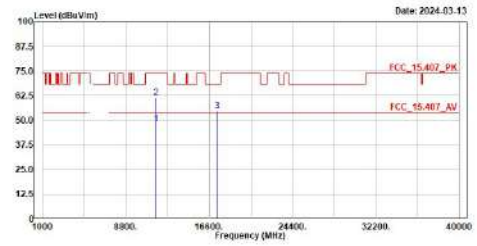

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11578.000	48.28	54.00	-5.72	49.42	-1.14	Average
2	11578.000	61.59	74.00	-12.41	62.73	-1.14	Peak
3	17355.000	54.89	68.22	-13.33	54.81	0.08	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m HORIZONTAL
 Mode :TX_a_5825MHz
 Test BY :Bob

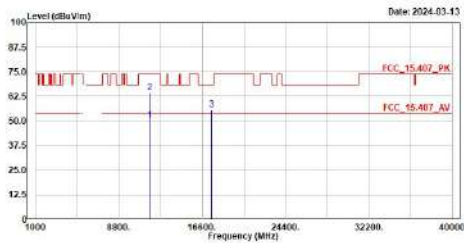

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11658.000	58.44	54.00	-3.56	51.68	-1.16	Average
2	11658.000	64.37	74.00	-9.63	65.53	-1.16	Peak
3	17475.000	55.77	68.22	-12.45	55.69	0.08	Peak





Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.



Site :HY-CB03
 Condition :3m VERTICAL
 Mode :TX_a_5825MHz
 Test BY :Bob




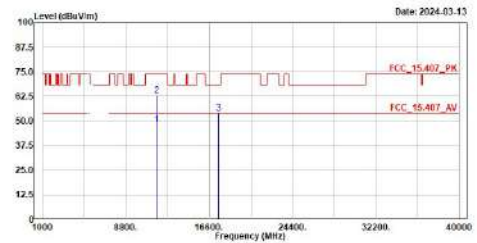


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11658.000	48.47	54.00	-5.53	49.63	-1.16	Average
2	11658.000	62.97	74.00	-11.03	64.13	-1.16	Peak
3	17475.000	53.97	68.22	-14.25	53.89	0.08	Peak


Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

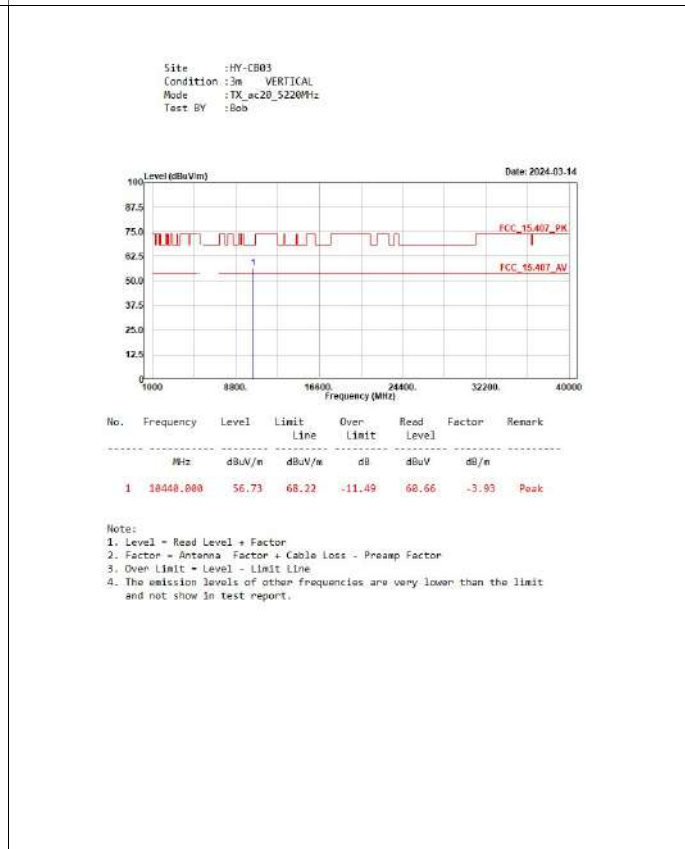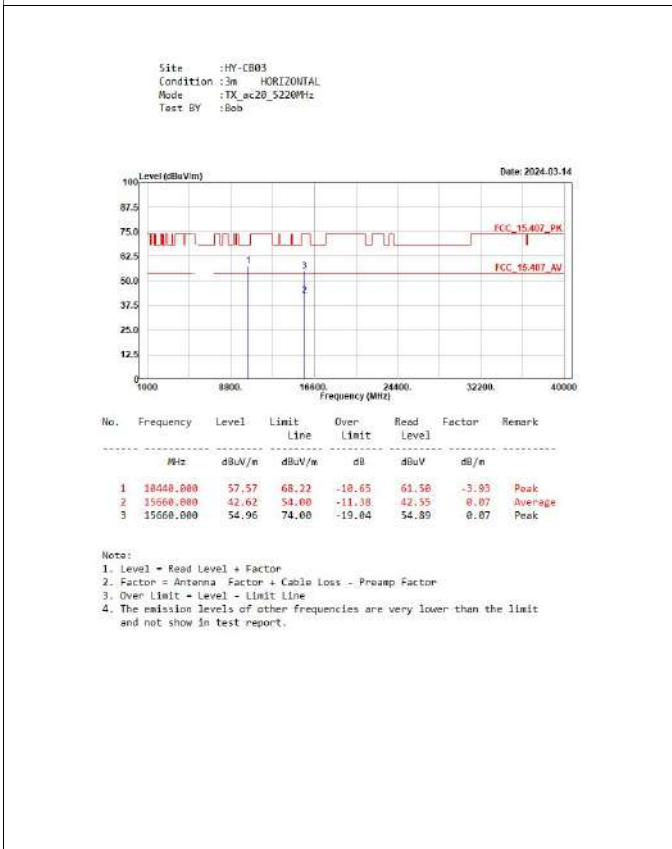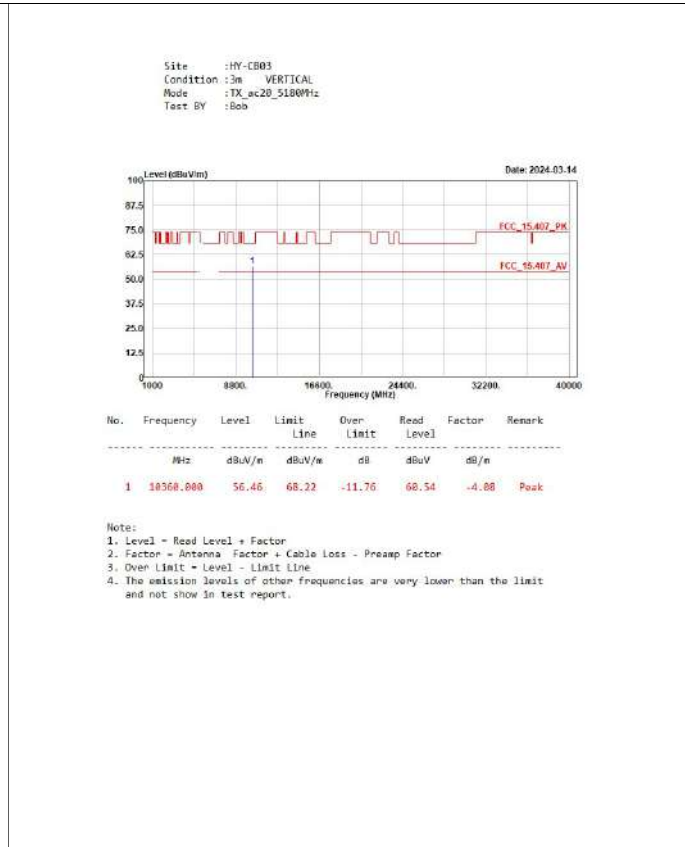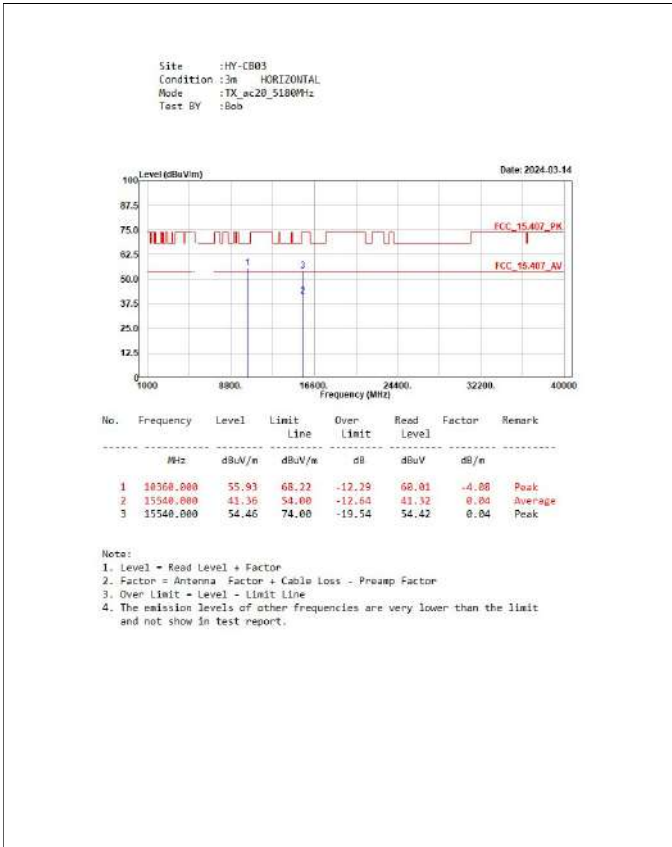

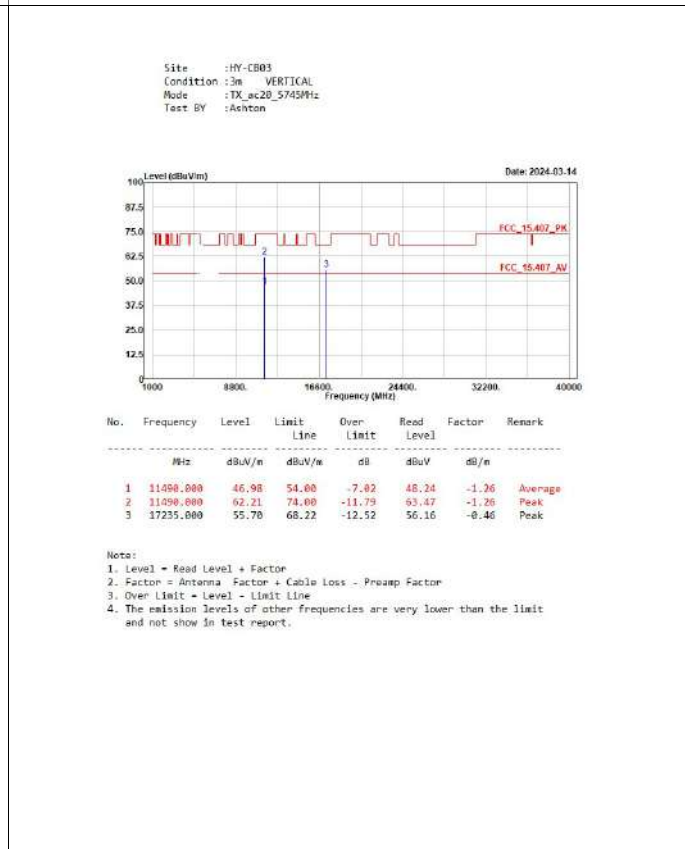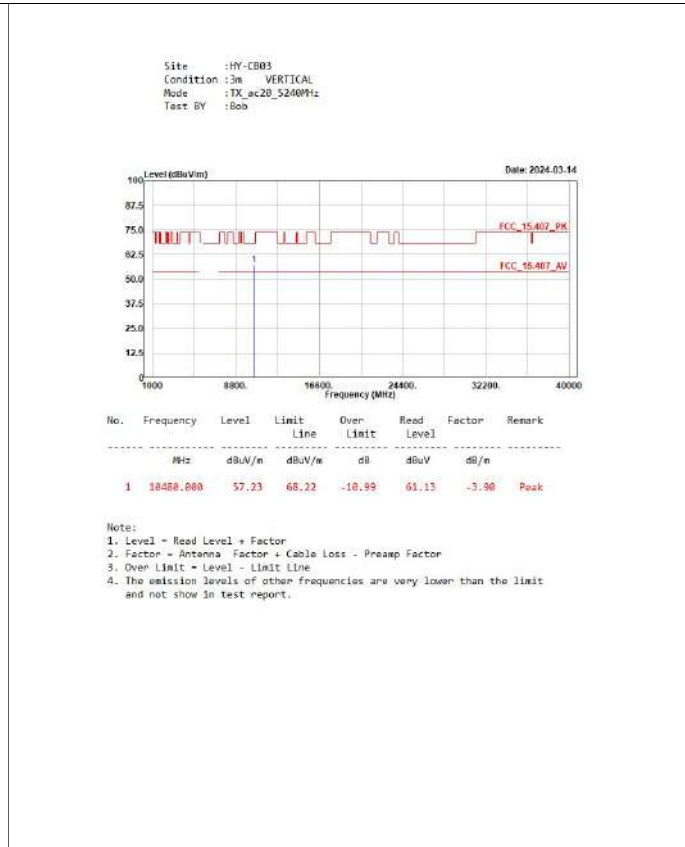

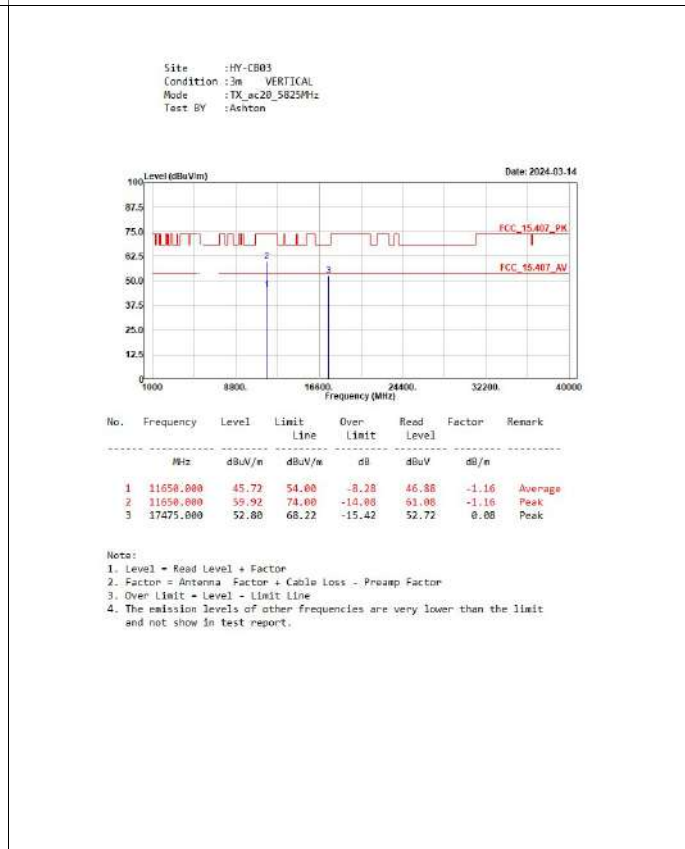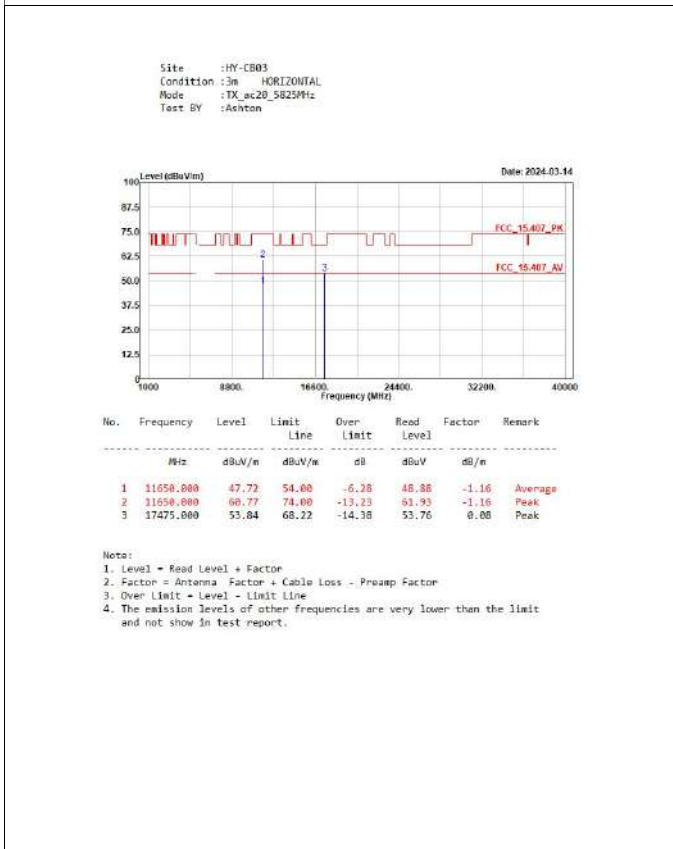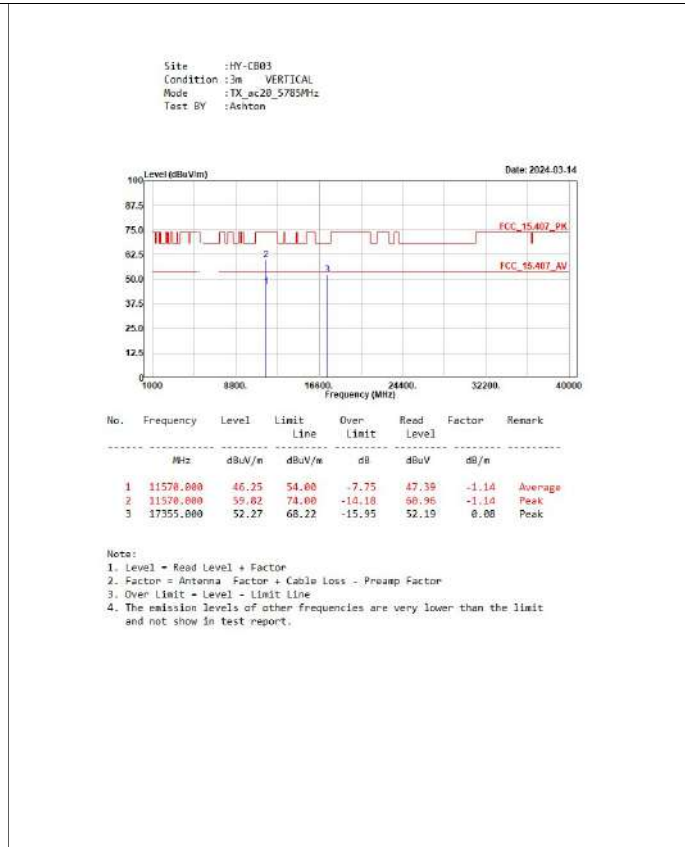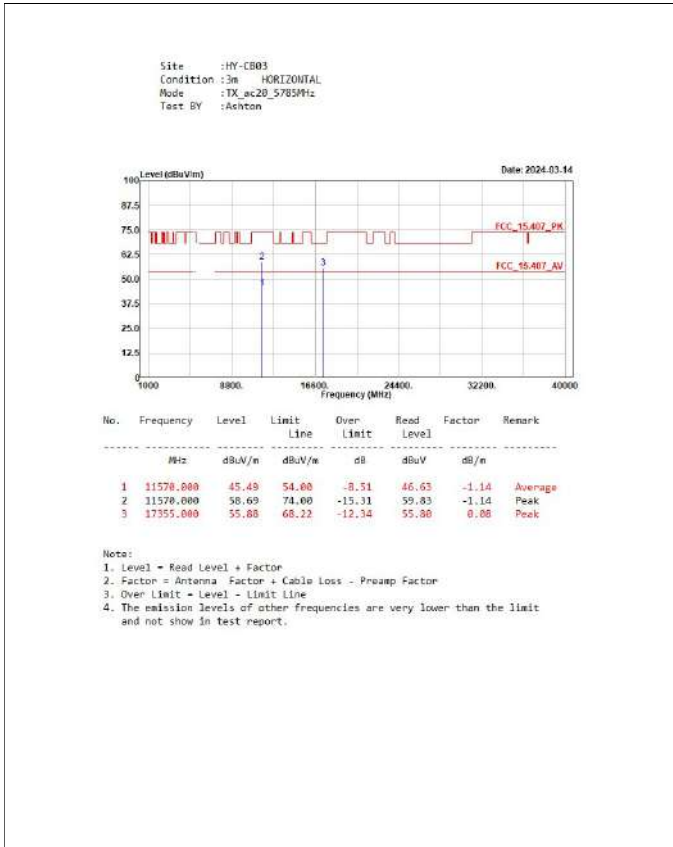


Site :HY-CB03
 Condition :3m HORIZONTAL
 Mode :TX_ac40_5190MHz
 Test BY :Ashton

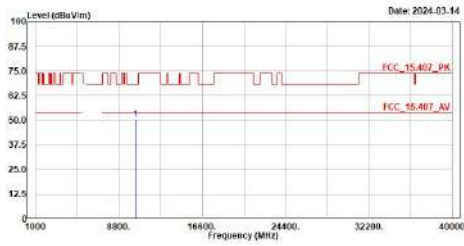

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10388.000	50.66	68.22	-17.56	54.68	-4.02	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m VERTICAL
 Mode :TX_ac40_5190MHz
 Test BY :Ashton

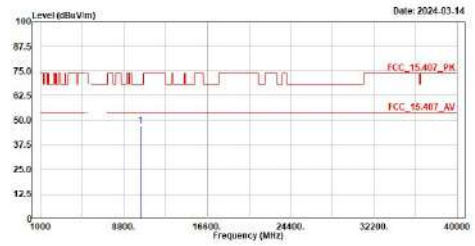

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10388.000	47.06	68.22	-21.16	51.08	-4.02	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m HORIZONTAL
 Mode :TX_ac40_5230MHz
 Test BY :Ashton

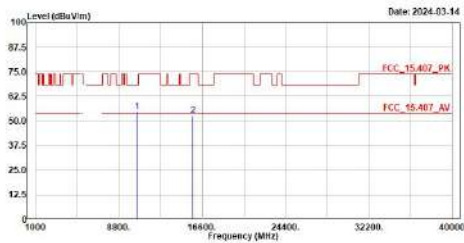

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	18468.000	54.58	68.22	-13.64	58.52	-3.94	Peak
2	15698.000	52.88	74.00	-21.12	52.88	0.00	Peak




Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.





Site :HY-CB03
 Condition :3m VERTICAL
 Mode :TX_ac40_5230MHz
 Test BY :Ashton

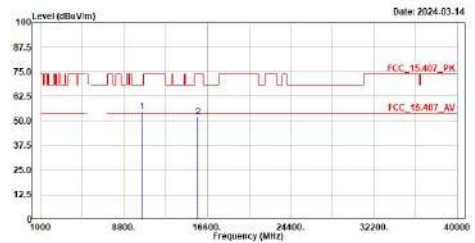


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	18468.000	54.55	68.22	-13.67	58.49	-3.94	Peak
2	15698.000	52.10	74.00	-21.90	52.10	0.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

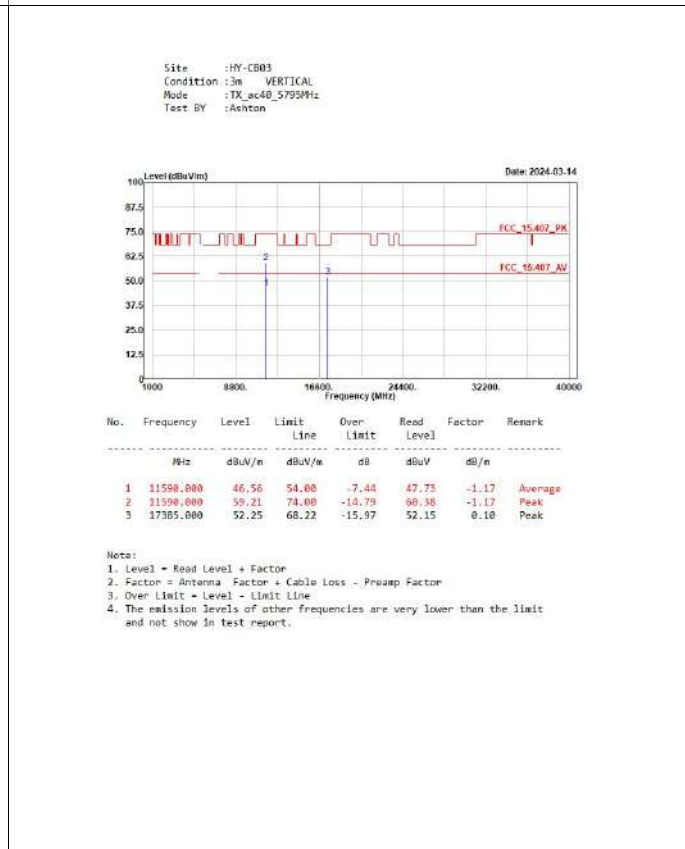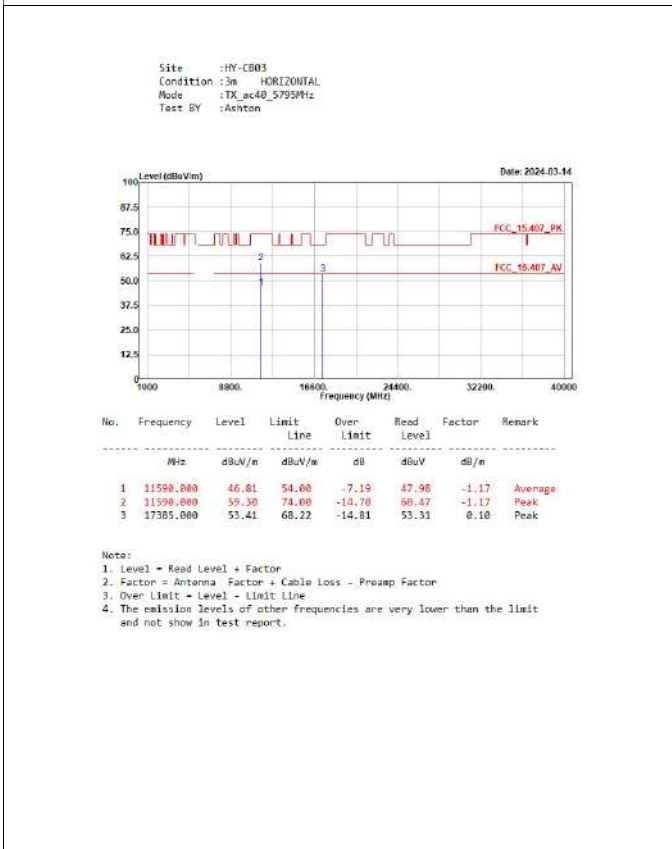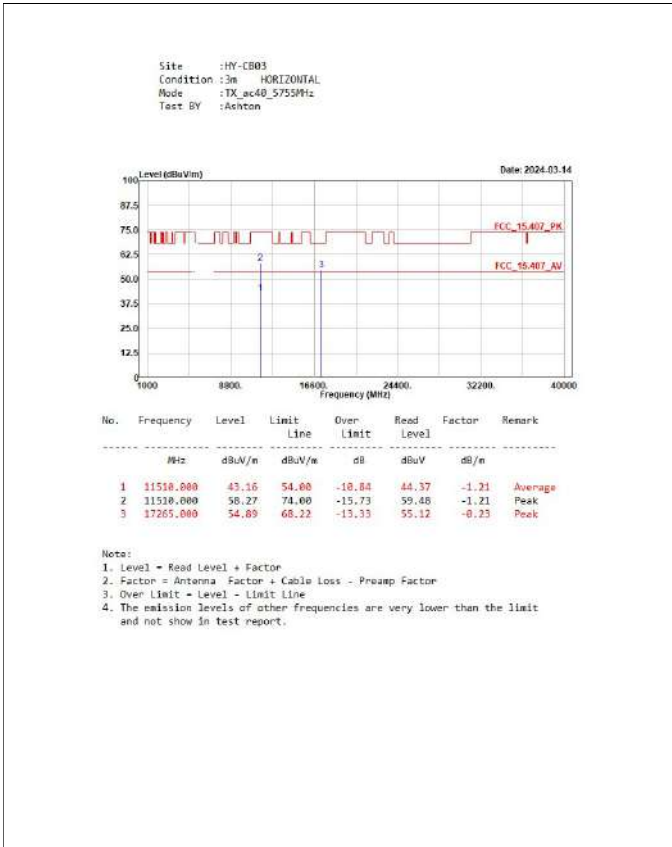


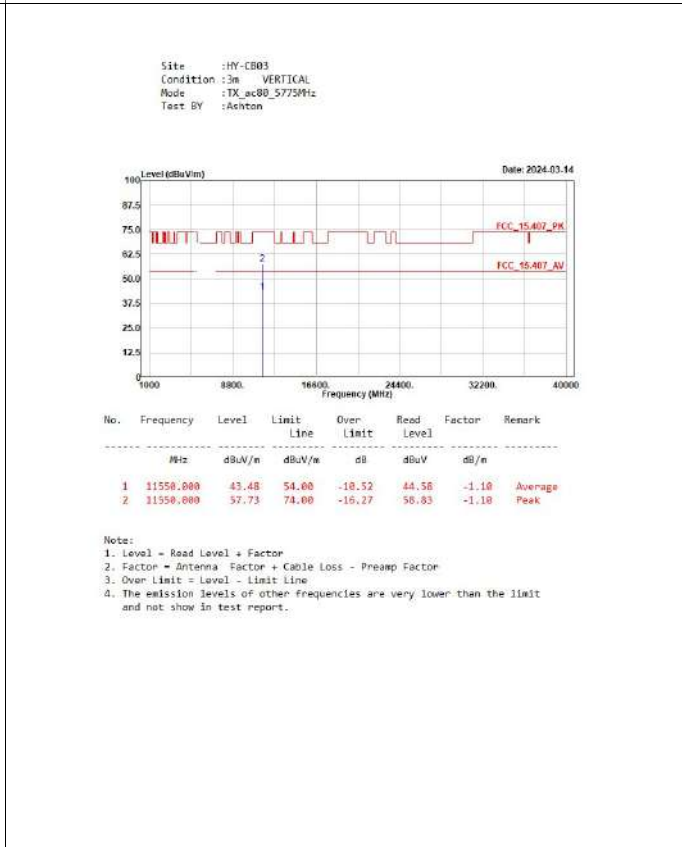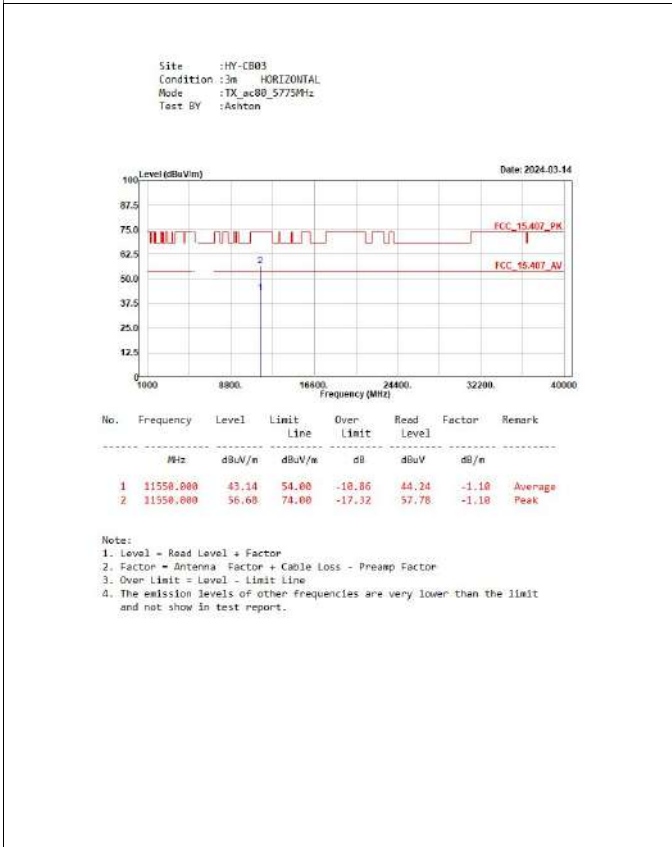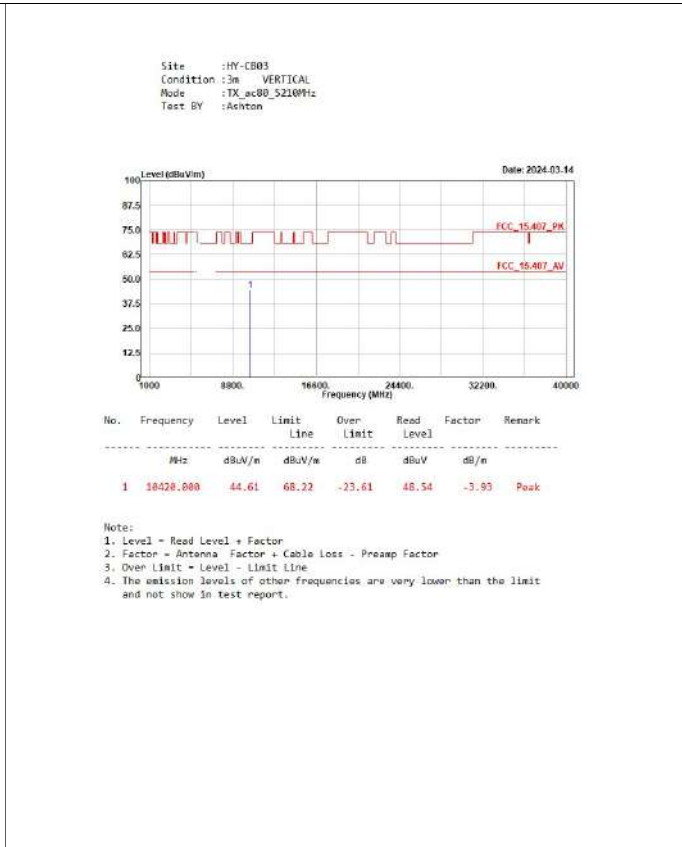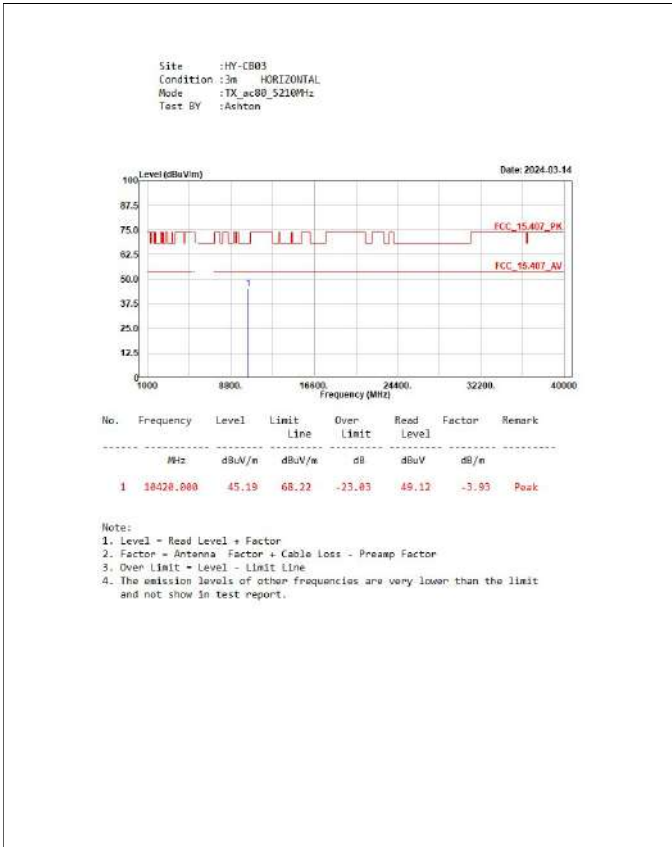


for Adapter:

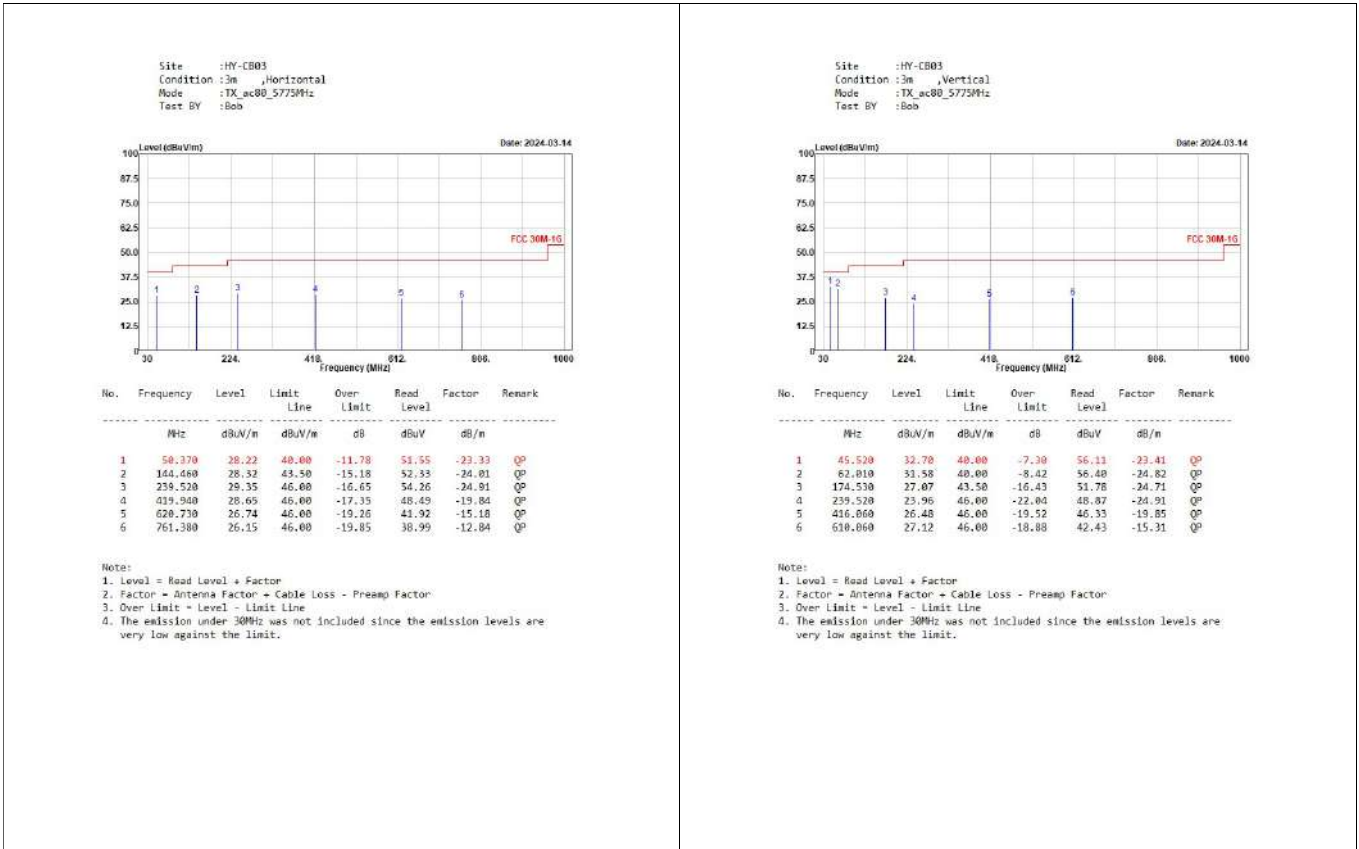


for PoE:

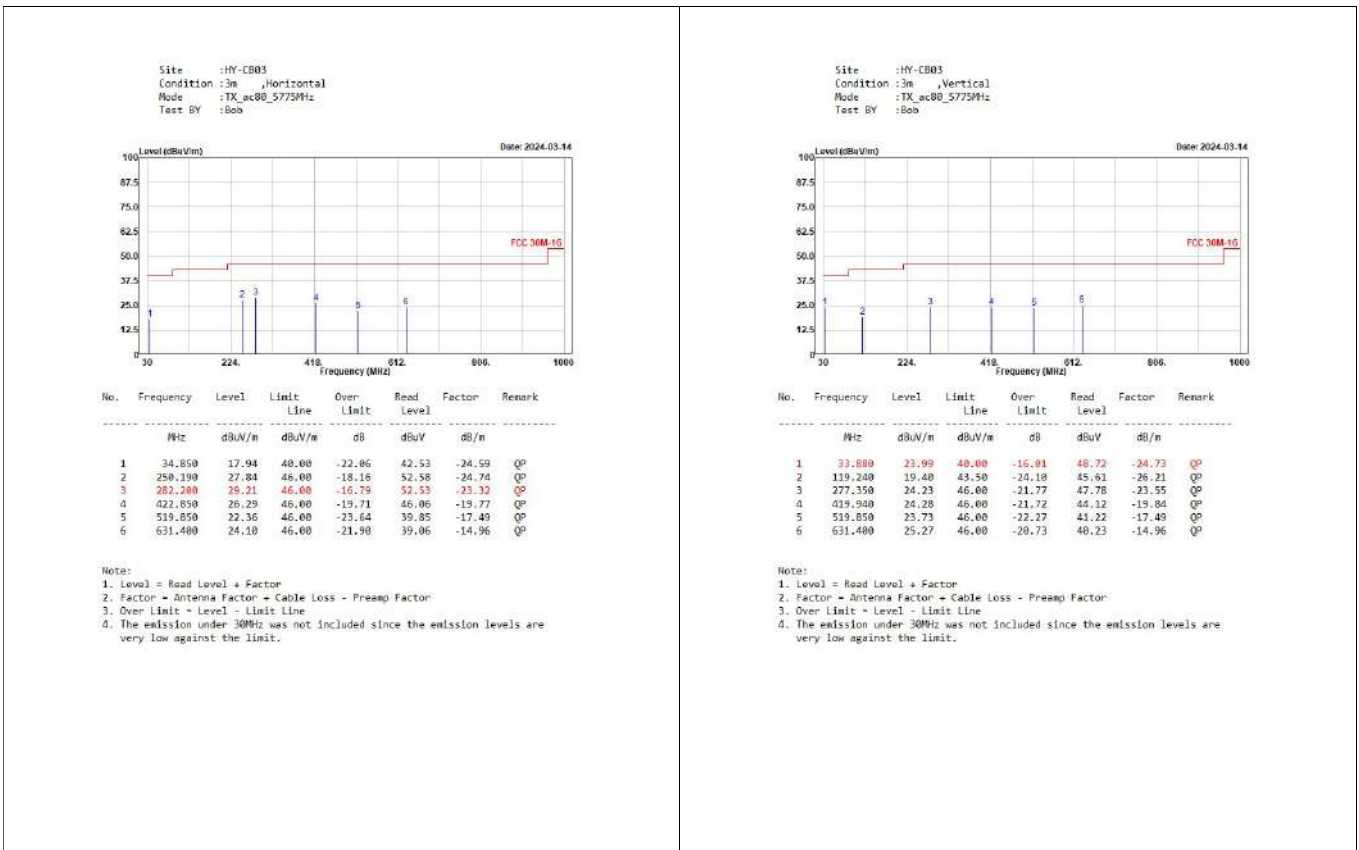

for Terminal Block:

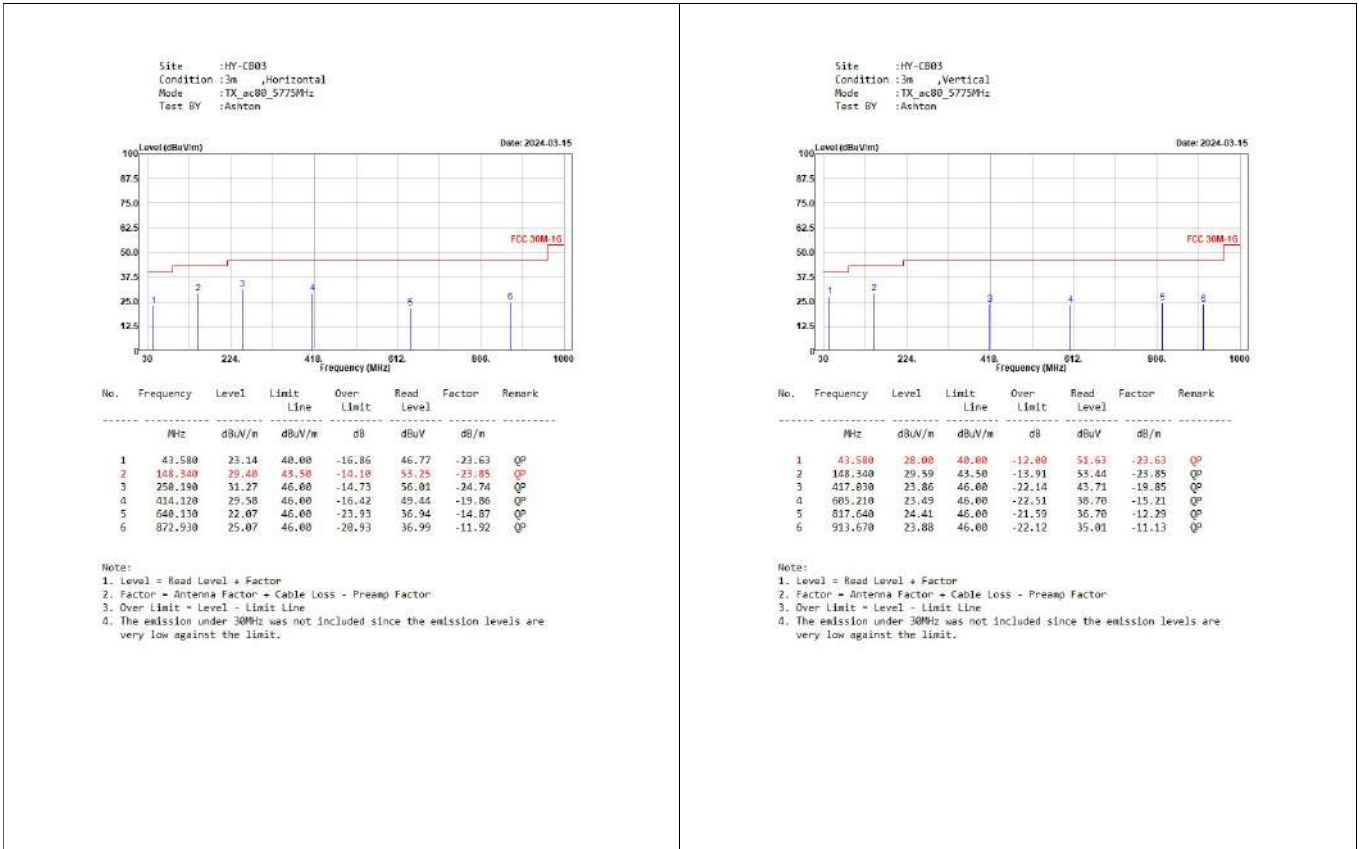


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_a_51800Hz
 Test BY :Ashton

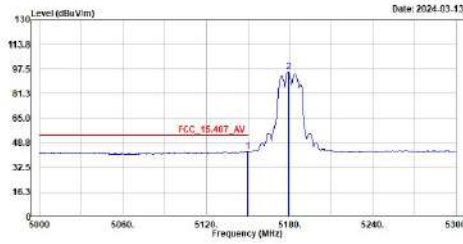

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	43.11	54.00	-10.89	27.38	15.73	Average
2	5179.180	95.82	-----	-----	79.97	15.85	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_a_51800Hz
 Test BY :Ashton

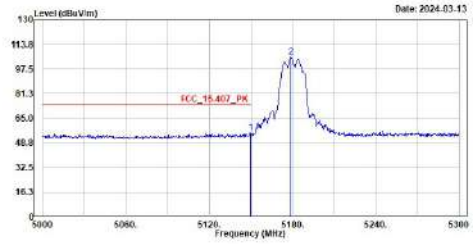

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	55.60	74.00	-18.40	36.87	15.73	Peak
2	5178.800	105.25	-----	-----	89.40	15.85	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_a_51800Hz
 Test BY :Ashton

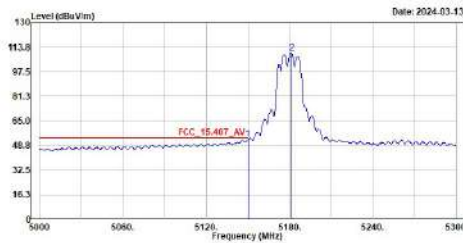

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	52.83	54.00	-1.17	37.18	15.73	Average
2	5181.200	110.11	-----	-----	94.25	15.86	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_a_51800Hz
 Test BY :Ashton

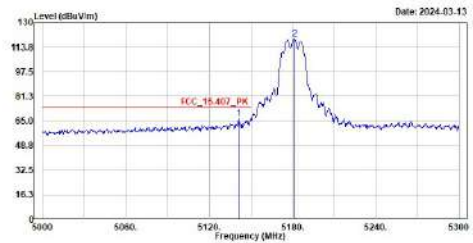

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5141.000	66.53	74.00	-7.47	50.79	15.74	Peak
2	5181.200	119.43	-----	-----	103.57	15.86	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_a_5220MHz_01
 Test BY :Ashton

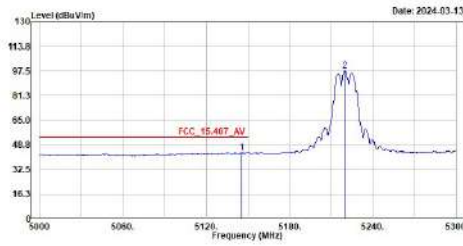

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5145.500	43.70	54.00	-10.30	37.96	15.74	Average
2	5219.000	97.82	-----	-----	81.86	15.96	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_a_5220MHz_01
 Test BY :Ashton

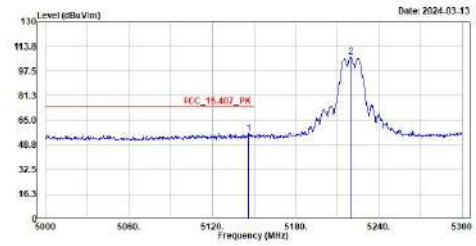

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5145.000	56.49	74.00	-17.51	48.75	15.74	Peak
2	5219.000	106.94	-----	-----	90.96	15.96	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_a_5220MHz_01
 Test BY :Ashton

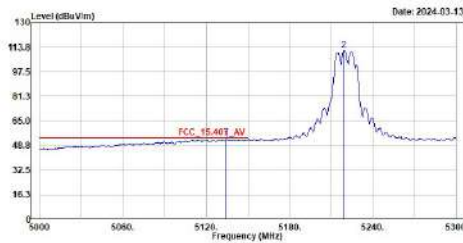

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5134.400	52.98	54.00	-1.02	37.25	15.73	Average
2	5219.000	111.96	-----	-----	96.00	15.96	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_a_5220MHz_01
 Test BY :Ashton

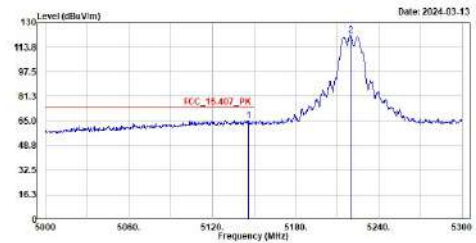

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5145.000	65.12	74.00	-8.88	49.36	15.74	Peak
2	5219.300	121.61	-----	-----	105.65	15.96	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_a_5220MHz_02
 Test BY :Ashton

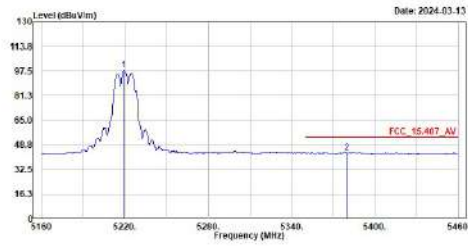

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5219.100	97.91	48.00	-10.09	81.95	15.96	Average
2	5379.600	43.91	48.00	-10.09	27.81	16.10	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_a_5220MHz_02
 Test BY :Ashton

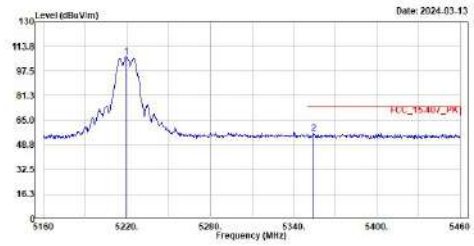

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5219.400	107.04	48.00	-17.60	91.08	15.96	Peak
2	5354.100	56.40	48.00	-17.60	40.43	15.97	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_a_5220MHz_02
 Test BY :Ashton

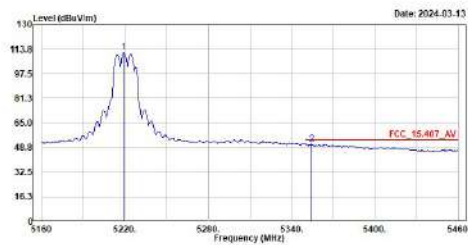

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5219.100	111.75	48.00	-3.16	95.79	15.96	Average
2	5354.400	50.84	48.00	-3.16	34.87	15.97	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_a_5220MHz_02
 Test BY :Ashton

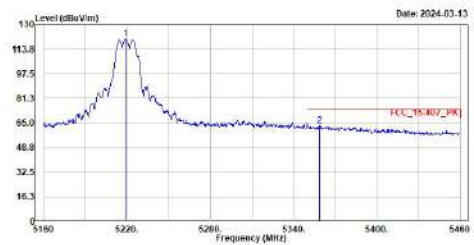

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5218.800	120.91	48.00	-10.70	104.95	15.96	Peak
2	5358.600	63.30	48.00	-10.70	47.30	16.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_a_5240MHz
 Test BY :Ashton

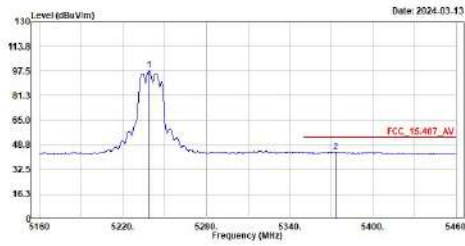

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5238.900	97.91	-----	-----	81.94	15.97	Average
2	5373.300	43.97	54.00	-10.03	27.90	16.07	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_a_5240MHz
 Test BY :Ashton

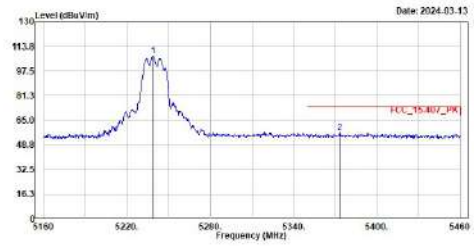

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5238.900	107.28	-----	-----	91.31	15.97	Peak
2	5373.300	56.98	74.00	-17.02	40.91	16.07	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_a_5240MHz
 Test BY :Ashton

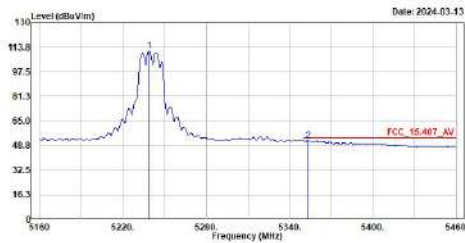

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5238.900	111.57	-----	-----	95.60	15.97	Average
2	5353.200	52.17	54.00	-1.83	36.20	15.97	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_a_5240MHz
 Test BY :Ashton

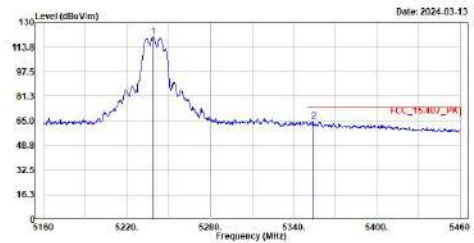

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5238.900	120.90	-----	-----	104.93	15.97	Peak
2	5354.100	64.85	74.00	-9.15	48.88	15.97	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_a_5745MHz
 Test BY :Ashton

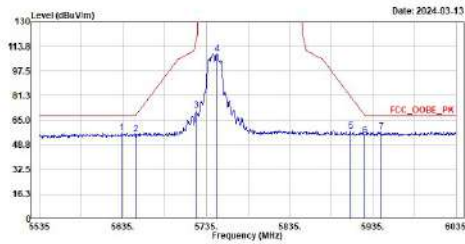

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5633.000	56.69	68.20	-11.51	39.60	17.09	Peak
2	5650.000	55.90	68.21	-12.31	38.81	17.09	Peak
3	5722.500	73.45	116.50	-45.05	53.81	17.64	Peak
4	5748.000	106.82	-----	-----	91.00	17.82	Peak
5	5900.000	57.84	80.78	-22.94	39.75	18.00	Peak
6	5925.000	54.96	68.21	-13.25	36.94	18.02	Peak
7	5945.000	57.37	68.20	-10.83	39.39	17.98	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_a_5745MHz
 Test BY :Ashton

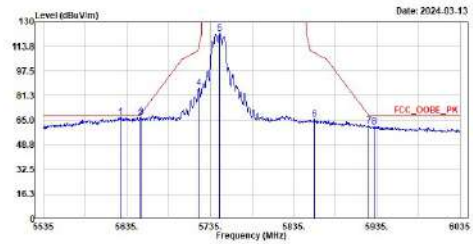

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5627.000	67.13	68.20	-1.07	58.05	17.08	Peak
2	5650.000	66.23	68.21	-1.98	49.14	17.09	Peak
3	5652.000	67.33	69.69	-2.36	50.22	17.11	Peak
4	5721.000	86.28	113.00	-26.80	66.65	17.63	Peak
5	5746.500	122.17	-----	-----	104.36	17.81	Peak
6	5860.000	65.67	100.40	-34.73	47.63	18.04	Peak
7	5925.000	63.52	68.21	-6.69	43.50	18.02	Peak
8	5931.000	61.00	68.20	-7.20	42.99	18.01	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_a_5785MHz
 Test BY :Ashton

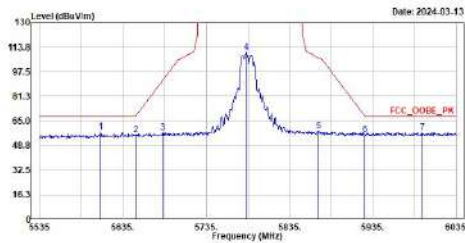

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5608.500	58.09	68.20	-10.11	41.00	17.09	Peak
2	5650.000	55.70	68.21	-12.51	38.93	17.09	Peak
3	5682.500	57.40	92.25	-34.85	40.90	17.32	Peak
4	5763.000	110.30	-----	-----	92.37	17.93	Peak
5	5869.500	58.48	106.74	-48.26	40.42	18.06	Peak
6	5925.000	55.82	68.21	-12.39	37.80	18.02	Peak
7	5994.000	57.35	68.20	-10.85	39.31	18.04	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_a_5785MHz
 Test BY :Ashton

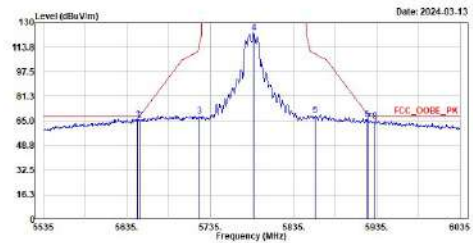

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5648.000	66.45	68.20	-1.75	49.35	17.10	Peak
2	5650.000	65.27	68.21	-2.94	48.18	17.09	Peak
3	5722.000	68.09	115.36	-47.27	50.46	17.63	Peak
4	5787.000	123.07	-----	-----	105.13	17.94	Peak
5	5860.500	66.68	100.26	-33.58	50.64	18.04	Peak
6	5922.000	66.09	70.43	-4.34	48.06	18.03	Peak
7	5925.000	64.07	68.21	-4.14	46.05	18.02	Peak
8	5932.500	64.98	68.20	-3.22	46.98	18.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_a_5025MHz
 Test BY :Ashton

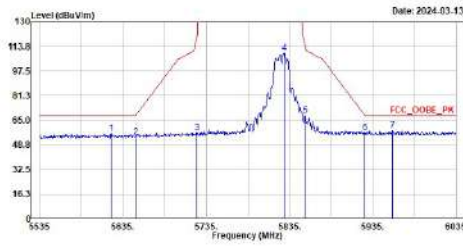

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5020.500	56.18	68.20	-12.02	39.09	17.09	Peak
2	5050.000	53.95	68.21	-14.26	36.86	17.09	Peak
3	5721.500	56.94	118.78	-61.84	39.29	17.05	Peak
4	5020.500	109.34	-----	-----	91.33	18.01	Peak
5	5050.000	68.33	114.22	-45.89	50.30	18.03	Peak
6	5925.000	57.02	68.21	-11.19	39.00	18.02	Peak
7	5958.500	58.31	68.20	-9.89	40.33	17.98	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_a_5025MHz
 Test BY :Ashton

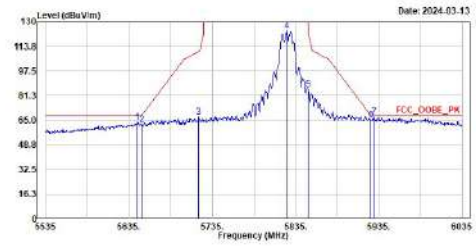

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5045.000	63.58	68.20	-4.62	46.49	17.09	Peak
2	5050.000	62.43	68.21	-5.78	45.34	17.09	Peak
3	5718.500	67.37	110.38	-43.01	49.76	17.61	Peak
4	5024.000	123.96	-----	-----	105.96	18.00	Peak
5	5050.000	85.29	122.20	-36.91	57.26	18.03	Peak
6	5925.000	65.39	68.21	-2.82	47.37	18.02	Peak
7	5929.000	67.20	68.20	-1.00	49.19	18.01	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac20_5180MHz
 Test BY :Ashton

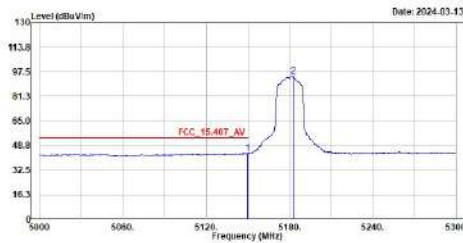

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5149.700	43.78	54.00	-10.22	38.05	15.73	Average
2	5182.400	94.53	-----	-----	78.96	15.87	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac20_5180MHz
 Test BY :Ashton

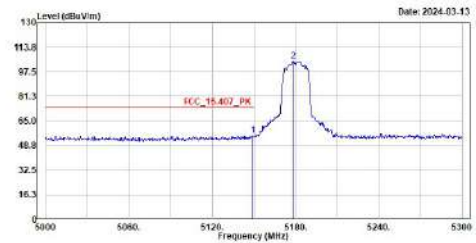

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5149.100	55.48	74.00	-18.52	39.75	15.73	Peak
2	5178.200	104.55	-----	-----	88.70	15.85	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac20_5180MHz
 Test BY :Ashton

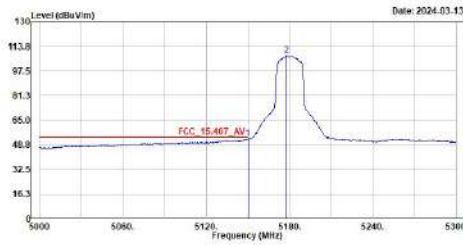

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5158.000	52.77	54.00	-1.23	37.04	15.73	Average
2	5177.500	107.82	-----	-----	91.97	15.85	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac20_5180MHz
 Test BY :Ashton

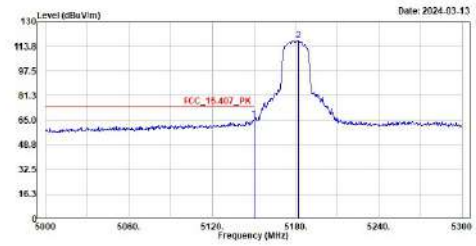

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5158.000	65.52	74.00	-8.48	49.79	15.73	Peak
2	5181.000	117.92	-----	-----	102.05	15.87	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac20_5220MHz_B1
 Test BY :Bob

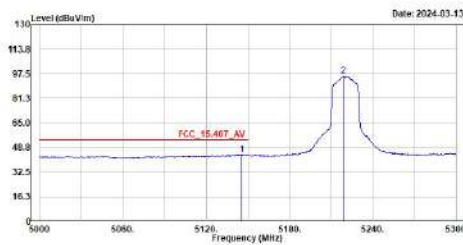

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5145.500	44.37	54.00	-9.63	28.63	15.74	Average
2	5218.700	96.10	-----	-----	80.14	15.96	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac20_5220MHz_B1
 Test BY :Bob

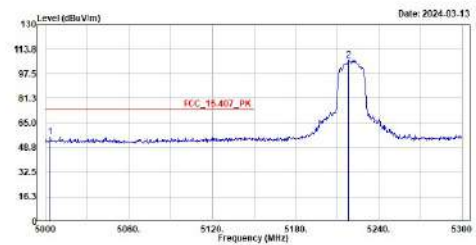

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5083.300	56.16	74.00	-17.84	48.18	16.06	Peak
2	5218.100	106.40	-----	-----	90.44	15.96	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac20_5220MHz_B1
 Test BY :Bob

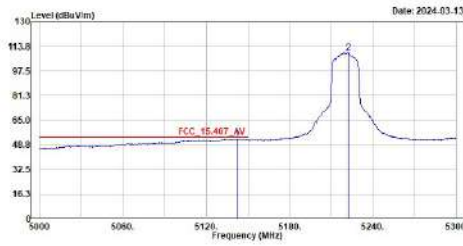

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5142.280	52.74	54.00	-1.26	37.00	15.74	Average
2	5222.300	109.60	-----	-----	93.63	15.97	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac20_5220MHz_B1
 Test BY :Bob

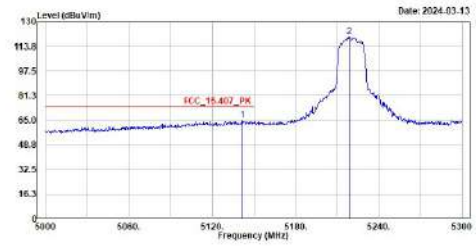

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5141.600	65.36	74.00	-8.64	49.62	15.74	Peak
2	5218.400	119.95	-----	-----	103.99	15.96	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac20_5220MHz_B2
 Test BY :Bob

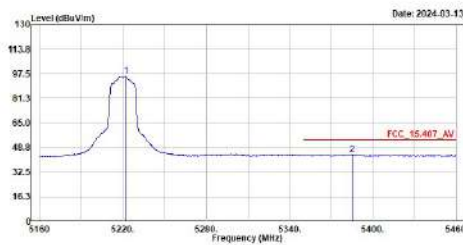

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5222.100	95.96	-----	-----	79.99	15.97	Average
2	5385.000	44.22	54.00	-9.78	28.09	16.13	Average



Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac20_5220MHz_B2
 Test BY :Bob

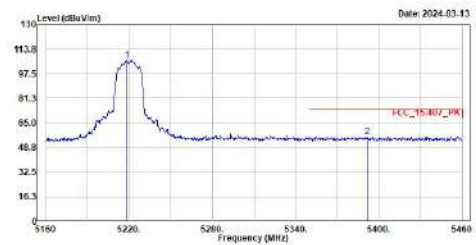


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5218.200	106.55	-----	-----	90.59	15.96	Peak
2	5391.600	56.06	74.00	-17.94	39.90	16.16	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

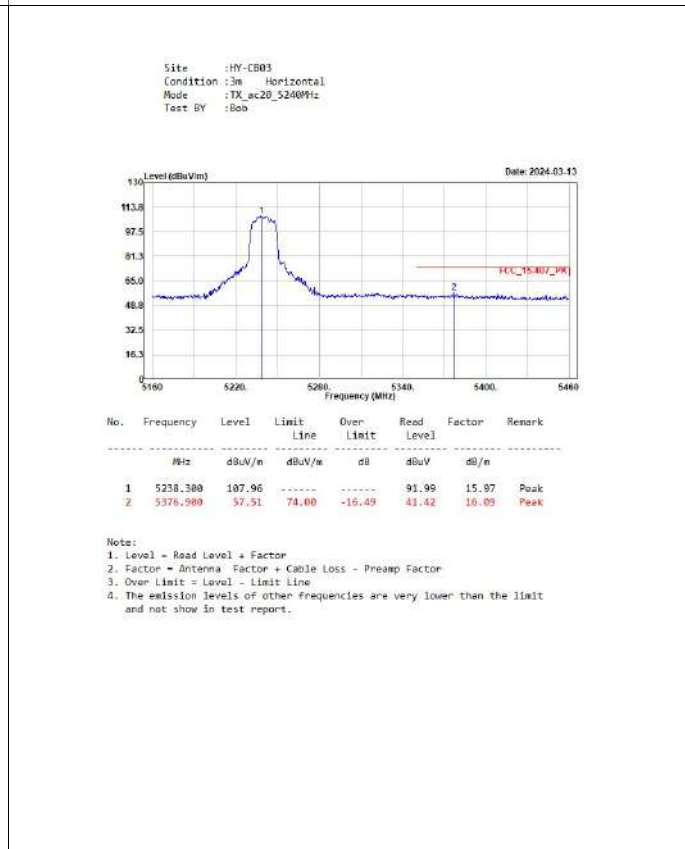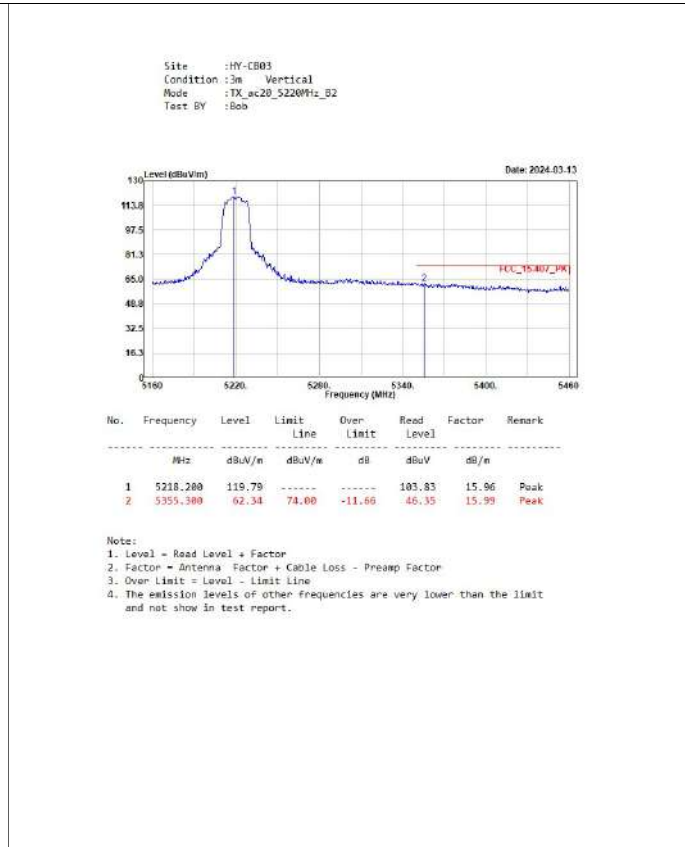


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac20_5240MHz
 Test BY :Bob

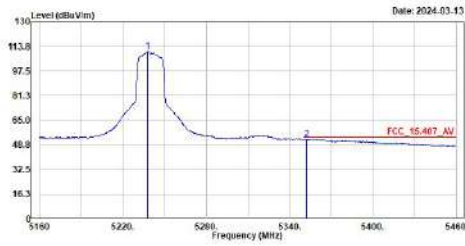

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Hz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5237.700	110.45	-----	-----	94.48	15.97	Average
2	5352.000	52.69	54.00	-1.31	36.73	15.96	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac20_5240MHz
 Test BY :Bob

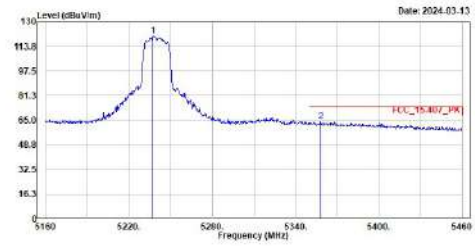

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Hz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5237.400	120.85	-----	-----	104.87	15.98	Peak
2	5358.000	64.17	74.00	-9.83	48.17	16.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac20_5745MHz
 Test BY :Bob

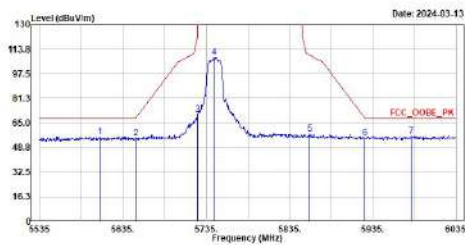

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Hz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5607.000	56.00	68.20	-12.20	38.92	17.08	Peak
2	5650.000	55.02	68.21	-13.19	37.93	17.09	Peak
3	5724.500	70.45	121.06	-50.61	52.79	17.66	Peak
4	5744.000	100.31	-----	-----	90.53	17.70	Peak
5	5859.000	57.70	109.68	-51.98	39.67	18.03	Peak
6	5925.000	54.73	68.21	-13.48	36.71	18.02	Peak
7	5981.000	56.59	68.20	-11.61	38.57	18.02	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac20_5745MHz
 Test BY :Bob

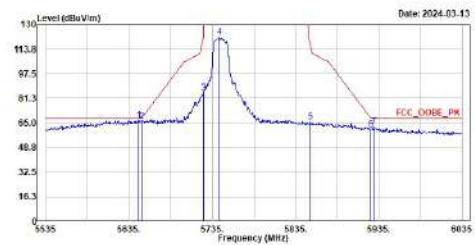

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	Hz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5646.500	66.53	68.20	-1.67	49.44	17.09	Peak
2	5650.000	66.13	68.21	-2.08	49.04	17.09	Peak
3	5725.000	84.98	122.20	-37.22	67.32	17.66	Peak
4	5743.000	121.49	-----	-----	103.71	17.70	Peak
5	5853.000	65.61	115.36	-49.75	47.58	18.03	Peak
6	5925.000	60.98	68.21	-7.23	42.96	18.02	Peak
7	5928.500	62.59	68.20	-5.61	44.57	18.02	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac20_5785MHz
 Test BY :Bob

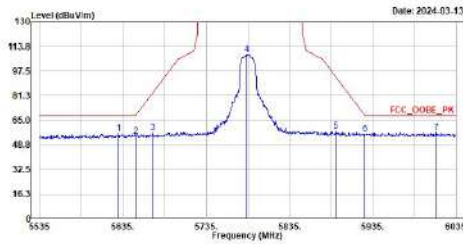

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5638.000	56.58	68.20	-11.62	39.49	17.09	Peak
2	5658.000	54.55	68.21	-13.66	37.46	17.09	Peak
3	5678.500	57.11	83.37	-26.26	39.90	17.21	Peak
4	5784.000	108.52	-----	-----	96.59	17.93	Peak
5	5899.500	58.00	93.73	-35.65	40.90	18.00	Peak
6	5925.000	55.95	68.21	-12.26	37.93	18.02	Peak
7	6011.000	56.95	68.20	-11.27	38.83	18.10	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac20_5785MHz
 Test BY :Bob

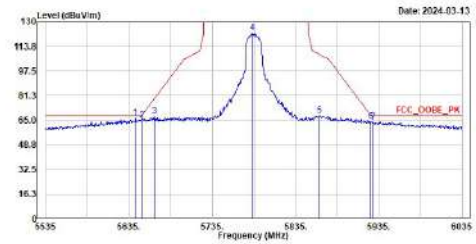

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5642.500	66.73	68.20	-1.47	45.63	17.10	Peak
2	5658.000	65.05	68.21	-3.16	47.96	17.09	Peak
3	5665.500	67.55	79.68	-12.13	50.37	17.18	Peak
4	5782.500	122.69	-----	-----	104.76	17.93	Peak
5	5863.000	60.18	100.56	-40.38	50.14	18.04	Peak
6	5925.000	64.19	68.21	-4.02	46.17	18.02	Peak
7	5928.000	63.93	68.20	-4.27	45.91	18.02	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac20_5825MHz
 Test BY :Bob

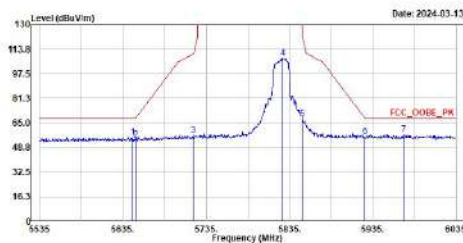

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5646.500	55.57	68.20	-12.63	38.48	17.09	Peak
2	5658.000	53.99	68.21	-14.22	36.90	17.09	Peak
3	5713.000	56.94	110.52	-53.58	39.33	17.61	Peak
4	5827.000	107.75	-----	-----	89.74	18.01	Peak
5	5858.000	67.90	122.20	-54.30	49.87	18.03	Peak
6	5925.000	55.86	68.21	-12.35	37.84	18.02	Peak
7	5971.500	57.33	68.20	-10.87	39.33	18.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac20_5825MHz
 Test BY :Bob

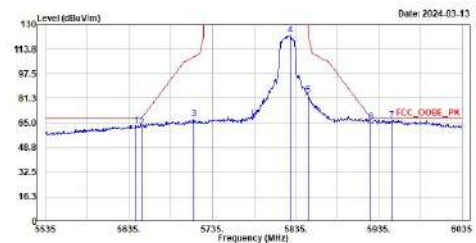

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5643.000	63.50	68.20	-4.70	46.40	17.10	Peak
2	5658.000	62.55	68.21	-5.66	45.46	17.09	Peak
3	5713.000	67.68	106.64	-41.16	50.10	17.58	Peak
4	5828.000	122.91	-----	-----	104.93	18.01	Peak
5	5858.000	83.52	122.20	-38.68	65.49	18.03	Peak
6	5925.000	65.60	68.21	-2.61	47.58	18.02	Peak
7	5958.000	66.67	68.20	-1.53	48.70	17.97	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac40_5190MHz
 Test BY :Bob

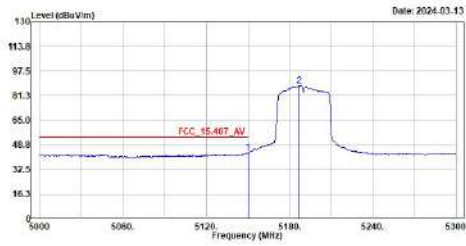

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5158.000	43.74	54.00	-10.26	38.01	15.73	Average
2	5186.600	87.91	-----	-----	72.03	15.88	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac40_5190MHz
 Test BY :Bob

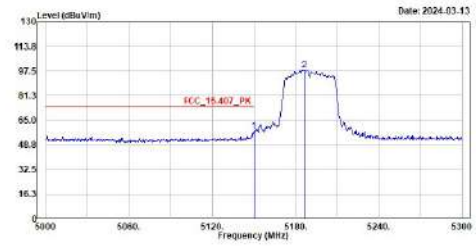

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5158.000	58.02	74.00	-15.98	42.29	15.73	Peak
2	5186.300	96.20	-----	-----	82.32	15.88	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac40_5190MHz
 Test BY :Bob

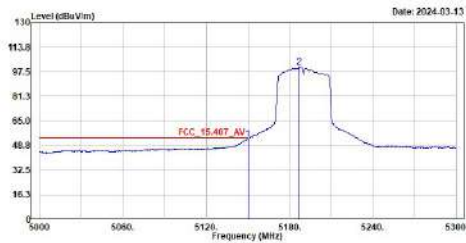

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5158.000	52.97	54.00	-1.03	37.24	15.73	Average
2	5186.600	100.55	-----	-----	84.67	15.88	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac40_5190MHz
 Test BY :Bob

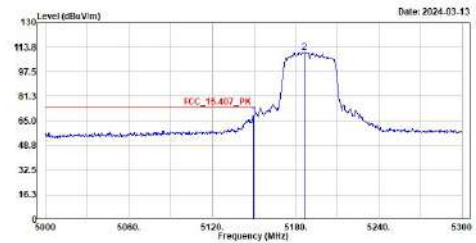

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5149.700	68.67	74.00	-5.33	52.94	15.73	Peak
2	5186.300	110.43	-----	-----	94.55	15.88	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac40_5230MHz_B1
 Test BY :Bob

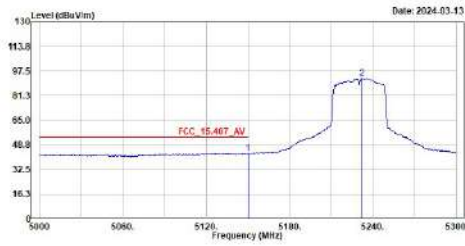

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	43.24	54.00	-10.76	37.51	15.73	Average
2	5231.500	92.75	-----	-----	76.76	15.97	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac40_5230MHz_B1
 Test BY :Bob

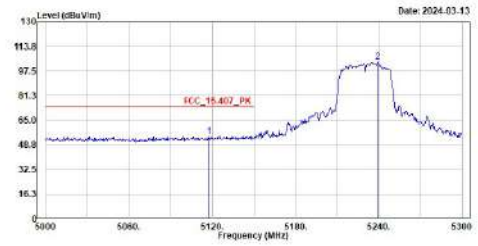

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5117.300	54.67	74.00	-19.33	38.93	15.74	Peak
2	5239.100	103.34	-----	-----	87.37	15.97	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac40_5230MHz_B1
 Test BY :Bob

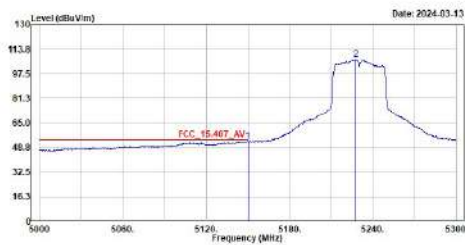

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	52.88	54.00	-1.12	37.15	15.73	Average
2	5227.400	106.71	-----	-----	90.73	15.98	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac40_5230MHz_B1
 Test BY :Bob

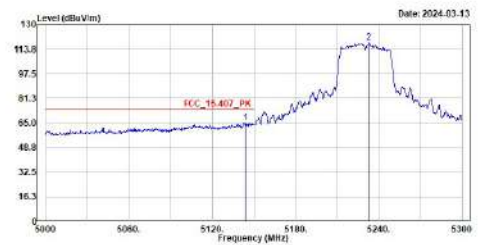

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5143.700	65.21	74.00	-8.79	49.46	15.73	Peak
2	5232.500	117.98	-----	-----	102.01	15.97	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac40_5230MHz_B2
 Test BY :Bob

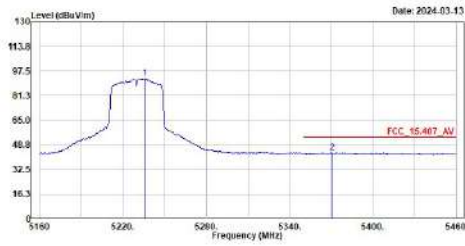

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5235.600	92.53	-----	-----	76.55	15.98	Average
2	5370.600	43.75	54.00	-10.25	27.70	16.05	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac40_5230MHz_B2
 Test BY :Bob

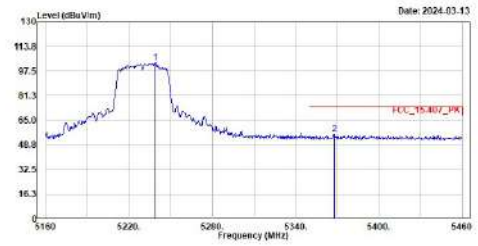

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5238.900	103.12	-----	-----	87.15	15.97	Peak
2	5367.600	55.98	74.00	-18.02	39.94	16.04	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac40_5230MHz_B2
 Test BY :Bob

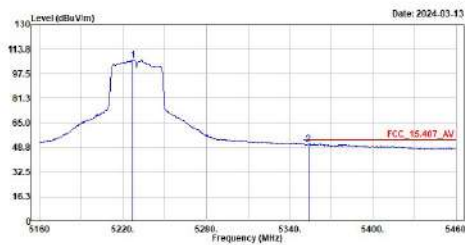

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5226.900	106.48	-----	-----	90.51	15.97	Average
2	5351.500	51.14	54.00	-2.86	35.17	15.97	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac40_5230MHz_B2
 Test BY :Bob

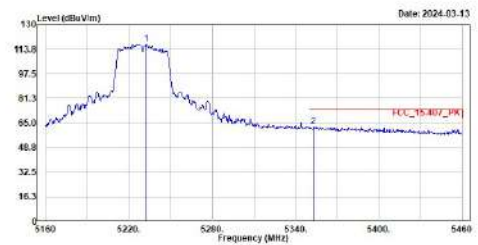

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5232.600	117.07	-----	-----	101.10	15.97	Peak
2	5352.900	62.70	74.00	-11.30	45.73	15.97	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac40_5755MHz
 Test BY :Bob

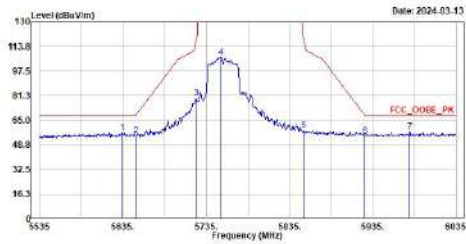

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5634.000	56.85	68.20	-11.35	39.76	17.09	Peak
2	5650.000	55.03	68.21	-13.18	37.94	17.09	Peak
3	5722.500	79.60	115.50	-36.90	61.96	17.64	Peak
4	5752.500	106.62	-----	-----	88.78	17.84	Peak
5	5851.500	58.54	118.78	-60.24	40.51	18.03	Peak
6	5925.000	54.64	68.21	-13.57	36.62	18.02	Peak
7	5979.000	57.31	68.20	-10.89	39.30	18.01	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac40_5755MHz
 Test BY :Bob

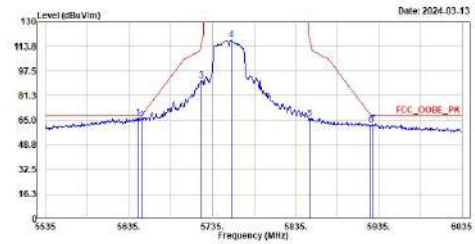

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5646.000	66.62	68.20	-1.58	45.53	17.09	Peak
2	5650.000	64.83	68.21	-3.38	47.74	17.09	Peak
3	5722.000	91.36	115.36	-24.00	73.73	17.63	Peak
4	5758.000	118.11	-----	-----	100.24	17.87	Peak
5	5851.500	66.38	118.78	-52.40	46.35	18.03	Peak
6	5925.000	61.77	68.21	-6.44	43.75	18.02	Peak
7	5927.500	62.96	68.20	-5.24	44.94	18.02	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac40_5755MHz
 Test BY :Bob

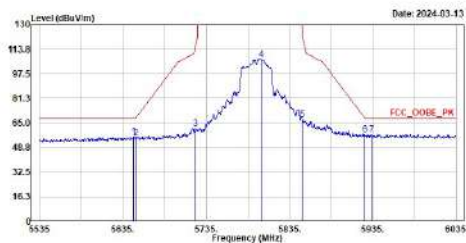

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5648.000	55.82	68.20	-12.38	38.72	17.10	Peak
2	5650.000	54.81	68.21	-13.40	37.72	17.09	Peak
3	5722.500	61.53	115.36	-53.83	43.90	17.63	Peak
4	5801.000	107.13	-----	-----	89.15	17.90	Peak
5	5850.000	67.45	122.20	-54.75	49.42	18.03	Peak
6	5925.000	57.31	68.21	-10.90	39.29	18.02	Peak
7	5933.000	57.60	68.20	-10.60	39.60	18.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac40_5755MHz
 Test BY :Bob

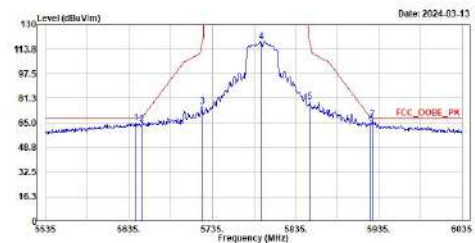

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5643.500	65.13	68.20	-3.07	48.03	17.10	Peak
2	5650.000	64.38	68.21	-3.83	47.29	17.09	Peak
3	5722.500	75.80	115.50	-40.70	56.16	17.64	Peak
4	5793.500	118.70	-----	-----	100.81	17.97	Peak
5	5852.000	79.16	117.64	-38.48	61.13	18.03	Peak
6	5925.000	64.77	68.21	-3.44	46.75	18.02	Peak
7	5927.000	67.20	68.20	-1.00	49.18	18.02	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac80_5210MHz
 Test BY :Bob

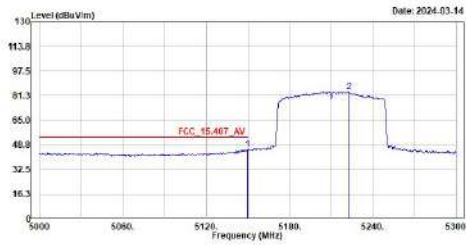

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	45.73	54.00	-8.27	30.00	15.73	Average
2	5222.600	84.06	-----	-----	68.10	15.96	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac80_5210MHz
 Test BY :Bob

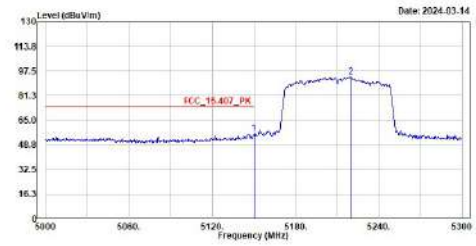

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	56.28	74.00	-17.72	48.55	15.73	Peak
2	5233.300	93.57	-----	-----	77.01	15.96	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac80_5210MHz
 Test BY :Bob

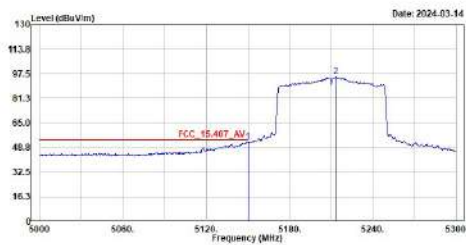

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	52.48	54.00	-1.52	36.75	15.73	Average
2	5233.300	95.67	-----	-----	79.72	15.95	Average

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac80_5210MHz
 Test BY :Bob

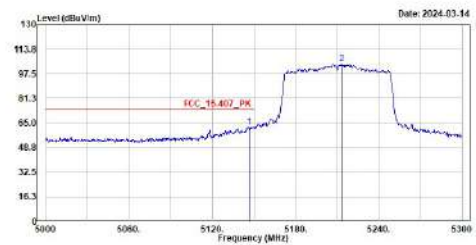

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5146.700	62.52	74.00	-11.48	46.76	15.74	Peak
2	5233.300	103.81	-----	-----	87.86	15.95	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_ac80_5775MHz
 Test BY :Bob

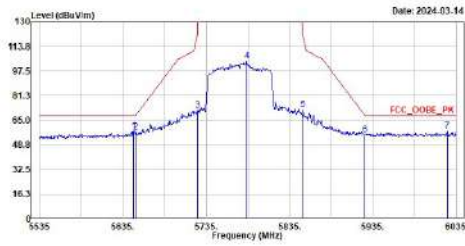

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5648.000	57.97	68.20	-10.23	48.87	17.10	Peak
2	5650.000	57.28	68.21	-10.93	48.19	17.09	Peak
3	5725.000	71.45	122.20	-50.75	53.79	17.66	Peak
4	5783.500	103.75	-----	-----	85.83	17.93	Peak
5	5851.000	71.91	119.92	-48.01	53.88	18.03	Peak
6	5925.000	55.60	68.21	-12.61	37.58	18.02	Peak
7	6024.000	57.68	68.20	-10.52	39.51	18.17	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_ac80_5775MHz
 Test BY :Bob

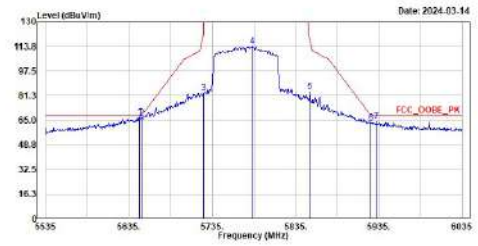


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	5647.500	67.14	68.20	-1.06	58.05	17.09	Peak
2	5650.000	66.52	68.21	-1.69	49.43	17.09	Peak
3	5724.500	82.75	121.06	-38.31	65.09	17.66	Peak
4	5783.000	113.84	-----	-----	95.91	17.93	Peak
5	5851.000	83.88	117.64	-33.76	55.85	18.03	Peak
6	5925.000	63.29	68.21	-4.92	45.27	18.02	Peak
7	5931.500	64.24	68.20	-3.96	46.24	18.00	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.





Appendix F. Test Result of Radiated Emissions Co-location


30 MHz ~ 1 GHz: for Adapter:

<p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2422MHz+TX_ac40_5795MHz+LTE_B4_20M_QPSK_IR80_CH28058 :LTE_B4_20M_QPSK_IR80_CH28388 Test BY :Ashton</p> <p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>74.539</td><td>39.11</td><td>48.00</td><td>-9.89</td><td>57.49</td><td>-27.38</td><td>QP</td></tr> <tr><td>2</td><td>156.180</td><td>28.31</td><td>43.50</td><td>-15.19</td><td>52.92</td><td>-23.71</td><td>QP</td></tr> <tr><td>3</td><td>258.198</td><td>29.11</td><td>46.00</td><td>-16.89</td><td>53.85</td><td>-24.74</td><td>QP</td></tr> <tr><td>4</td><td>419.948</td><td>30.32</td><td>46.00</td><td>-15.68</td><td>50.16</td><td>-19.84</td><td>QP</td></tr> <tr><td>5</td><td>648.139</td><td>24.89</td><td>46.00</td><td>-21.11</td><td>39.76</td><td>-14.87</td><td>QP</td></tr> <tr><td>6</td><td>883.680</td><td>26.58</td><td>46.00</td><td>-19.50</td><td>38.25</td><td>-11.75</td><td>QP</td></tr> </tbody> </table> <p>Nota: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	74.539	39.11	48.00	-9.89	57.49	-27.38	QP	2	156.180	28.31	43.50	-15.19	52.92	-23.71	QP	3	258.198	29.11	46.00	-16.89	53.85	-24.74	QP	4	419.948	30.32	46.00	-15.68	50.16	-19.84	QP	5	648.139	24.89	46.00	-21.11	39.76	-14.87	QP	6	883.680	26.58	46.00	-19.50	38.25	-11.75	QP	<p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2422MHz+TX_ac40_5795MHz+LTE_B4_20M_QPSK_IR80_CH28058 :LTE_B4_20M_QPSK_IR80_CH28388 Test BY :Ashton</p> <p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>76.569</td><td>35.25</td><td>48.00</td><td>-12.75</td><td>51.28</td><td>-27.95</td><td>QP</td></tr> <tr><td>2</td><td>148.348</td><td>30.59</td><td>43.50</td><td>-12.91</td><td>54.44</td><td>-23.85</td><td>QP</td></tr> <tr><td>3</td><td>424.798</td><td>26.23</td><td>46.00</td><td>-19.77</td><td>45.95</td><td>-19.72</td><td>QP</td></tr> <tr><td>4</td><td>538.528</td><td>25.43</td><td>46.00</td><td>-20.57</td><td>42.76</td><td>-17.33</td><td>QP</td></tr> <tr><td>5</td><td>786.688</td><td>24.48</td><td>46.00</td><td>-21.52</td><td>36.98</td><td>-12.58</td><td>QP</td></tr> <tr><td>6</td><td>982.838</td><td>25.15</td><td>46.00</td><td>-20.85</td><td>36.44</td><td>-11.29</td><td>QP</td></tr> </tbody> </table> <p>Nota: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	76.569	35.25	48.00	-12.75	51.28	-27.95	QP	2	148.348	30.59	43.50	-12.91	54.44	-23.85	QP	3	424.798	26.23	46.00	-19.77	45.95	-19.72	QP	4	538.528	25.43	46.00	-20.57	42.76	-17.33	QP	5	786.688	24.48	46.00	-21.52	36.98	-12.58	QP	6	982.838	25.15	46.00	-20.85	36.44	-11.29	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	74.539	39.11	48.00	-9.89	57.49	-27.38	QP																																																																																																																										
2	156.180	28.31	43.50	-15.19	52.92	-23.71	QP																																																																																																																										
3	258.198	29.11	46.00	-16.89	53.85	-24.74	QP																																																																																																																										
4	419.948	30.32	46.00	-15.68	50.16	-19.84	QP																																																																																																																										
5	648.139	24.89	46.00	-21.11	39.76	-14.87	QP																																																																																																																										
6	883.680	26.58	46.00	-19.50	38.25	-11.75	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	76.569	35.25	48.00	-12.75	51.28	-27.95	QP																																																																																																																										
2	148.348	30.59	43.50	-12.91	54.44	-23.85	QP																																																																																																																										
3	424.798	26.23	46.00	-19.77	45.95	-19.72	QP																																																																																																																										
4	538.528	25.43	46.00	-20.57	42.76	-17.33	QP																																																																																																																										
5	786.688	24.48	46.00	-21.52	36.98	-12.58	QP																																																																																																																										
6	982.838	25.15	46.00	-20.85	36.44	-11.29	QP																																																																																																																										
<p>Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2422MHz+TX_ac40_5795MHz+WCDMA_B4_CH1312 :LTE_B4_20M_QPSK_IR80_CH28388 Test BY :Ashton</p> <p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>75.599</td><td>29.07</td><td>48.00</td><td>-18.93</td><td>56.63</td><td>-27.56</td><td>QP</td></tr> <tr><td>2</td><td>148.348</td><td>28.48</td><td>43.50</td><td>-15.02</td><td>52.33</td><td>-23.85</td><td>QP</td></tr> <tr><td>3</td><td>258.198</td><td>30.21</td><td>46.00</td><td>-15.79</td><td>54.95</td><td>-24.74</td><td>QP</td></tr> <tr><td>4</td><td>427.788</td><td>26.94</td><td>46.00</td><td>-19.06</td><td>46.54</td><td>-19.68</td><td>QP</td></tr> <tr><td>5</td><td>648.139</td><td>24.21</td><td>46.00</td><td>-21.79</td><td>39.98</td><td>-14.87</td><td>QP</td></tr> <tr><td>6</td><td>888.698</td><td>25.88</td><td>46.00</td><td>-20.12</td><td>37.75</td><td>-11.87</td><td>QP</td></tr> </tbody> </table> <p>Nota: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	75.599	29.07	48.00	-18.93	56.63	-27.56	QP	2	148.348	28.48	43.50	-15.02	52.33	-23.85	QP	3	258.198	30.21	46.00	-15.79	54.95	-24.74	QP	4	427.788	26.94	46.00	-19.06	46.54	-19.68	QP	5	648.139	24.21	46.00	-21.79	39.98	-14.87	QP	6	888.698	25.88	46.00	-20.12	37.75	-11.87	QP	<p>Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2422MHz+TX_ac40_5795MHz+WCDMA_B4_CH1312 :LTE_B4_20M_QPSK_IR80_CH28388 Test BY :Ashton</p> <p>Date: 2024-03-22</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Frequency</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>75.599</td><td>33.54</td><td>48.00</td><td>-14.46</td><td>51.18</td><td>-27.56</td><td>QP</td></tr> <tr><td>2</td><td>98.848</td><td>31.35</td><td>43.50</td><td>-12.15</td><td>59.52</td><td>-28.17</td><td>QP</td></tr> <tr><td>3</td><td>239.528</td><td>23.59</td><td>46.00</td><td>-22.41</td><td>48.58</td><td>-24.91</td><td>QP</td></tr> <tr><td>4</td><td>425.768</td><td>26.02</td><td>46.00</td><td>-19.98</td><td>45.71</td><td>-19.69</td><td>QP</td></tr> <tr><td>5</td><td>685.218</td><td>25.41</td><td>46.00</td><td>-20.59</td><td>40.62</td><td>-15.21</td><td>QP</td></tr> <tr><td>6</td><td>878.828</td><td>25.37</td><td>46.00</td><td>-20.63</td><td>37.30</td><td>-11.93</td><td>QP</td></tr> </tbody> </table> <p>Nota: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission under 30MHz was not included since the emission levels are very low against the limit.</p>	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	75.599	33.54	48.00	-14.46	51.18	-27.56	QP	2	98.848	31.35	43.50	-12.15	59.52	-28.17	QP	3	239.528	23.59	46.00	-22.41	48.58	-24.91	QP	4	425.768	26.02	46.00	-19.98	45.71	-19.69	QP	5	685.218	25.41	46.00	-20.59	40.62	-15.21	QP	6	878.828	25.37	46.00	-20.63	37.30	-11.93	QP
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	75.599	29.07	48.00	-18.93	56.63	-27.56	QP																																																																																																																										
2	148.348	28.48	43.50	-15.02	52.33	-23.85	QP																																																																																																																										
3	258.198	30.21	46.00	-15.79	54.95	-24.74	QP																																																																																																																										
4	427.788	26.94	46.00	-19.06	46.54	-19.68	QP																																																																																																																										
5	648.139	24.21	46.00	-21.79	39.98	-14.87	QP																																																																																																																										
6	888.698	25.88	46.00	-20.12	37.75	-11.87	QP																																																																																																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																																																											
1	75.599	33.54	48.00	-14.46	51.18	-27.56	QP																																																																																																																										
2	98.848	31.35	43.50	-12.15	59.52	-28.17	QP																																																																																																																										
3	239.528	23.59	46.00	-22.41	48.58	-24.91	QP																																																																																																																										
4	425.768	26.02	46.00	-19.98	45.71	-19.69	QP																																																																																																																										
5	685.218	25.41	46.00	-20.59	40.62	-15.21	QP																																																																																																																										
6	878.828	25.37	46.00	-20.63	37.30	-11.93	QP																																																																																																																										




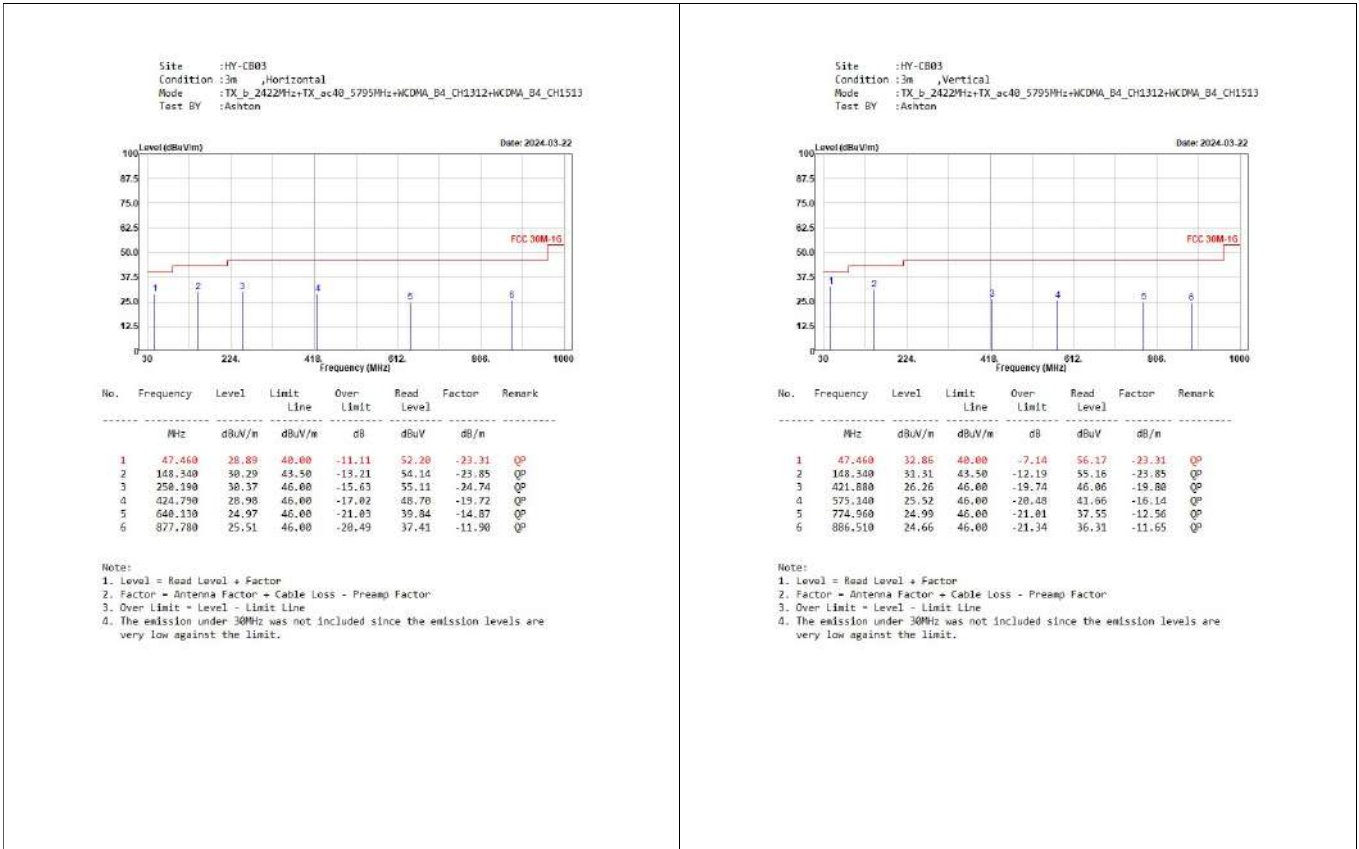



for PoE:

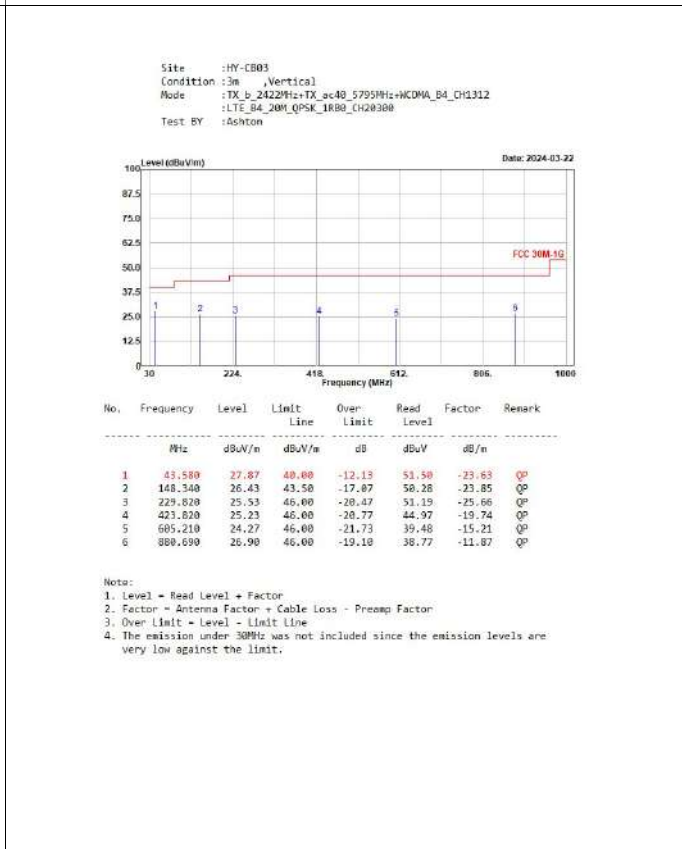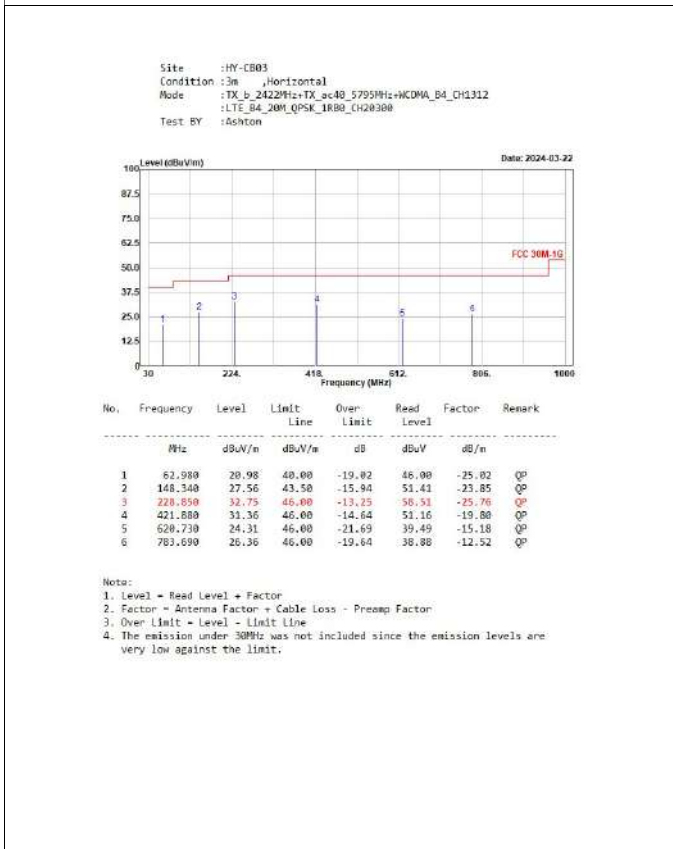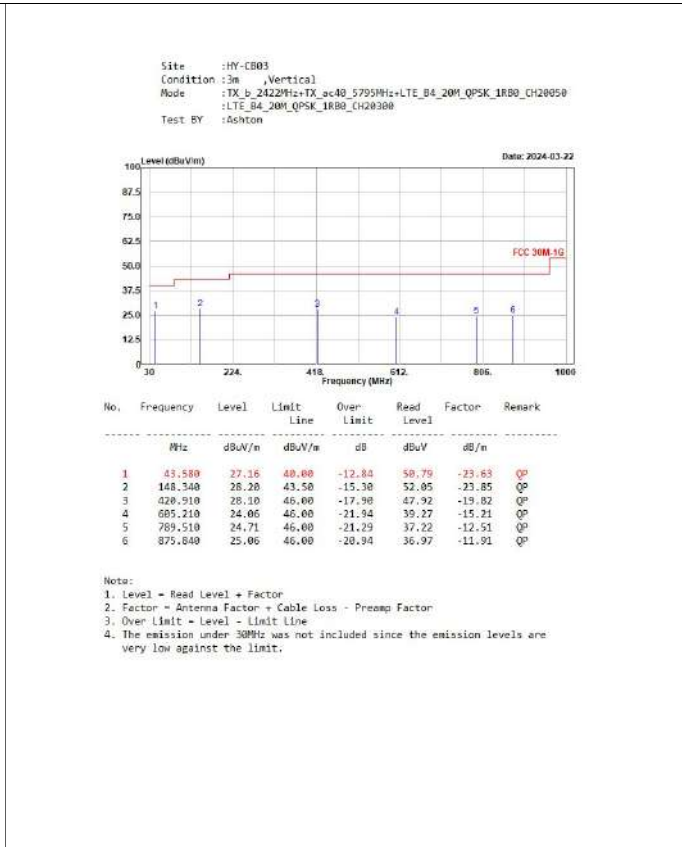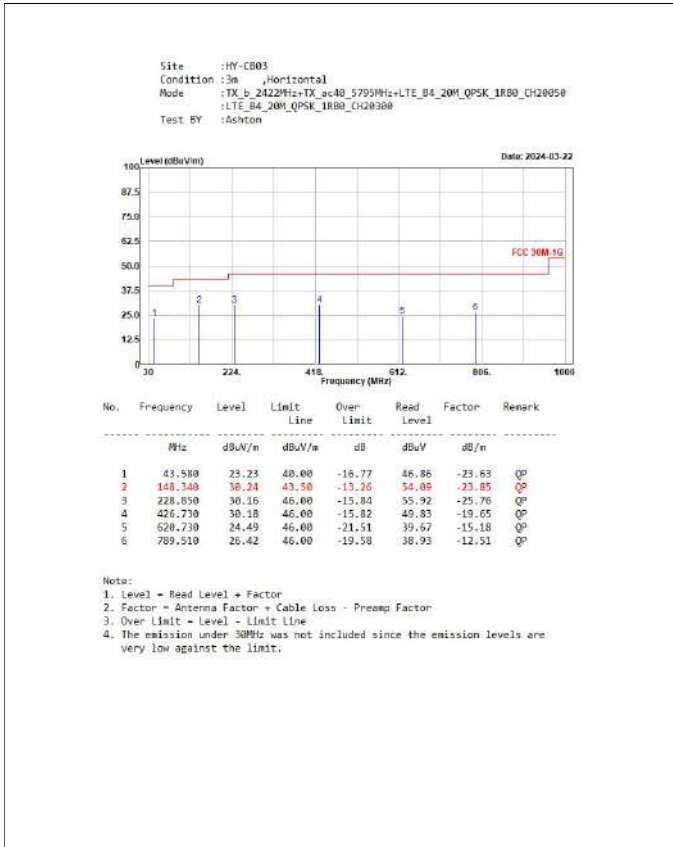

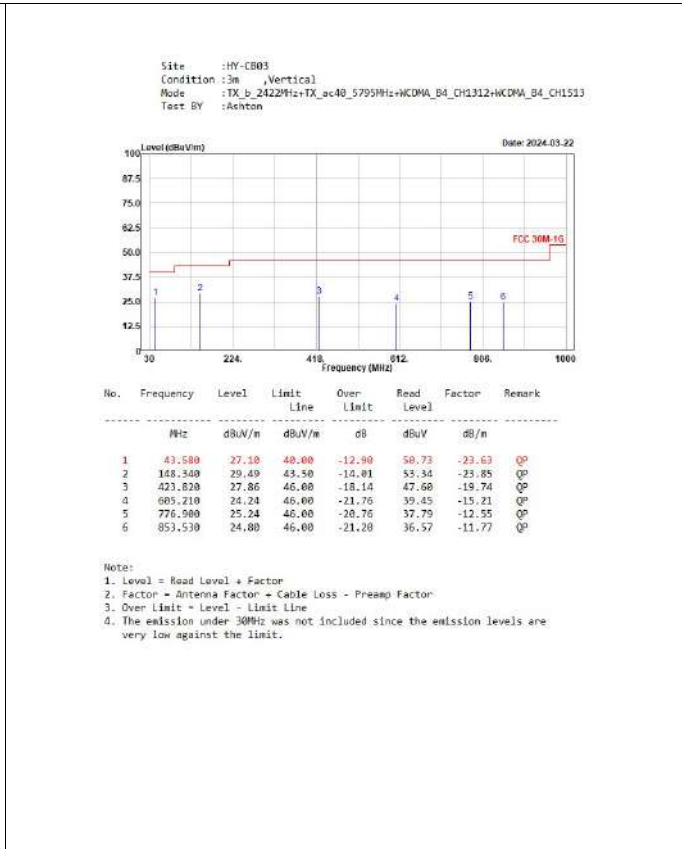


for Terminal Block:

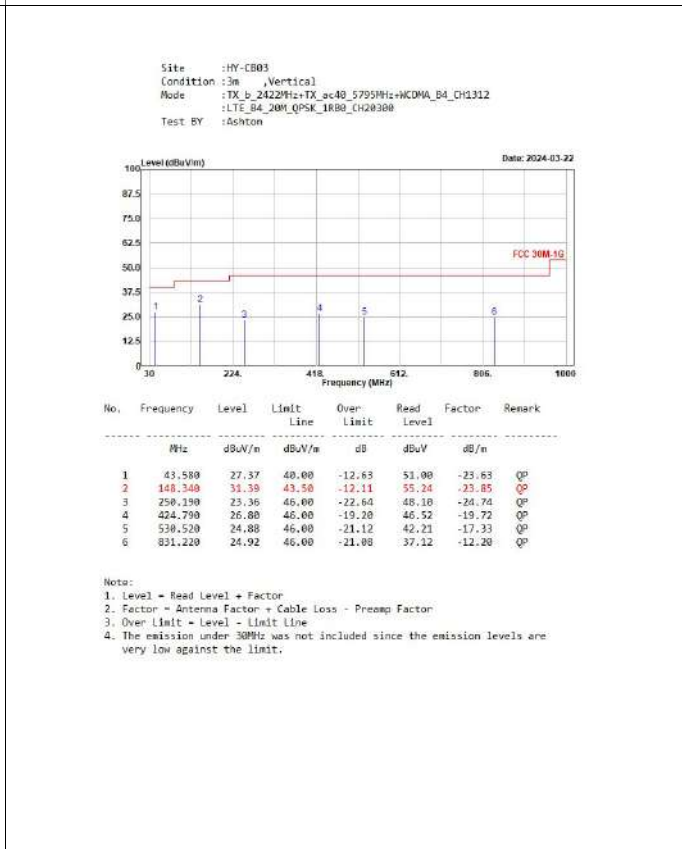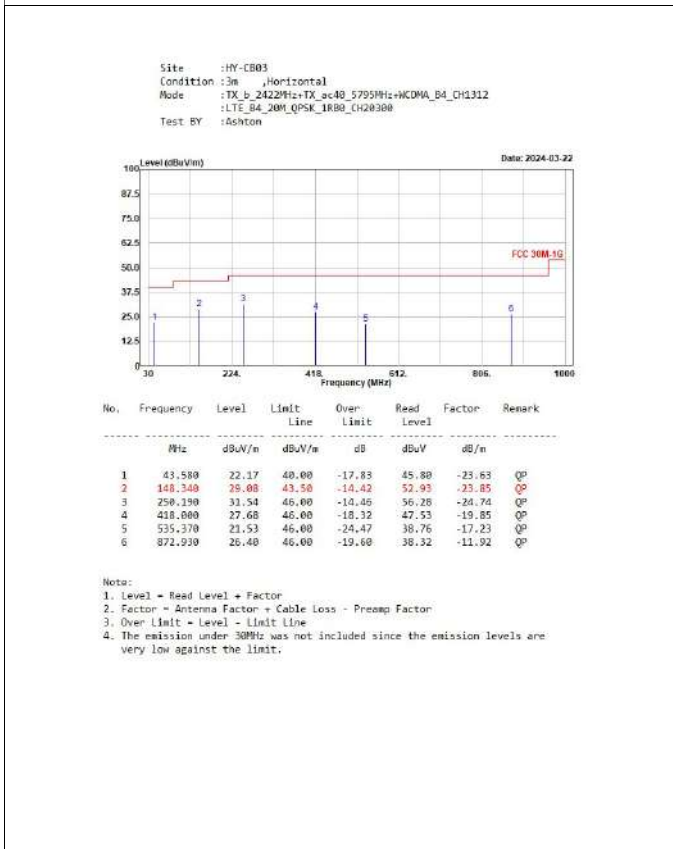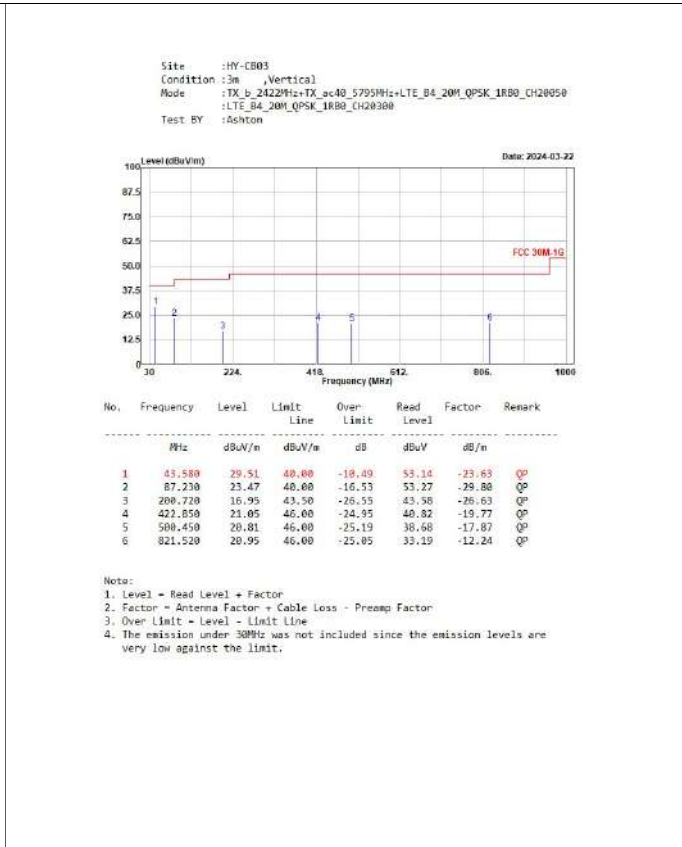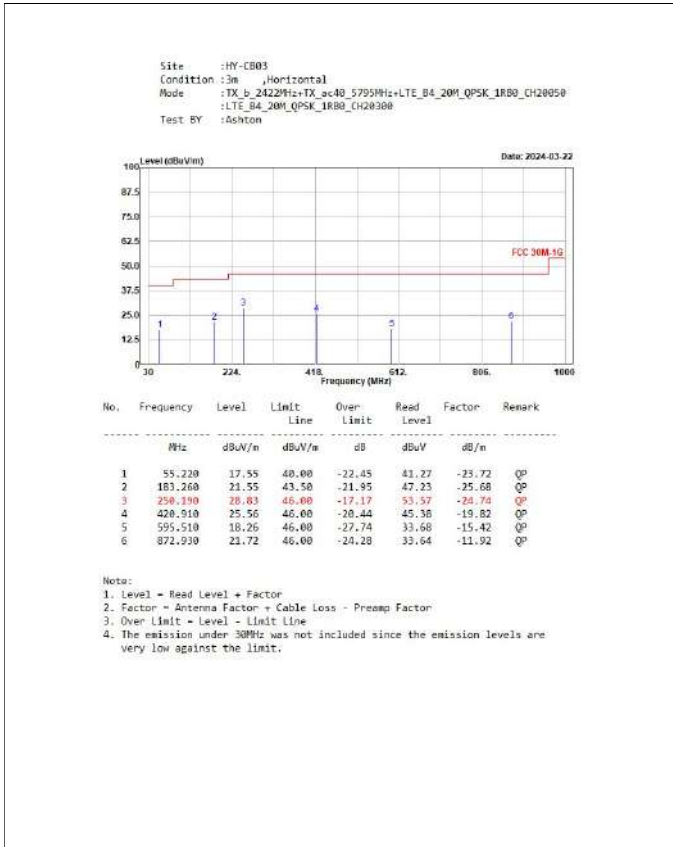

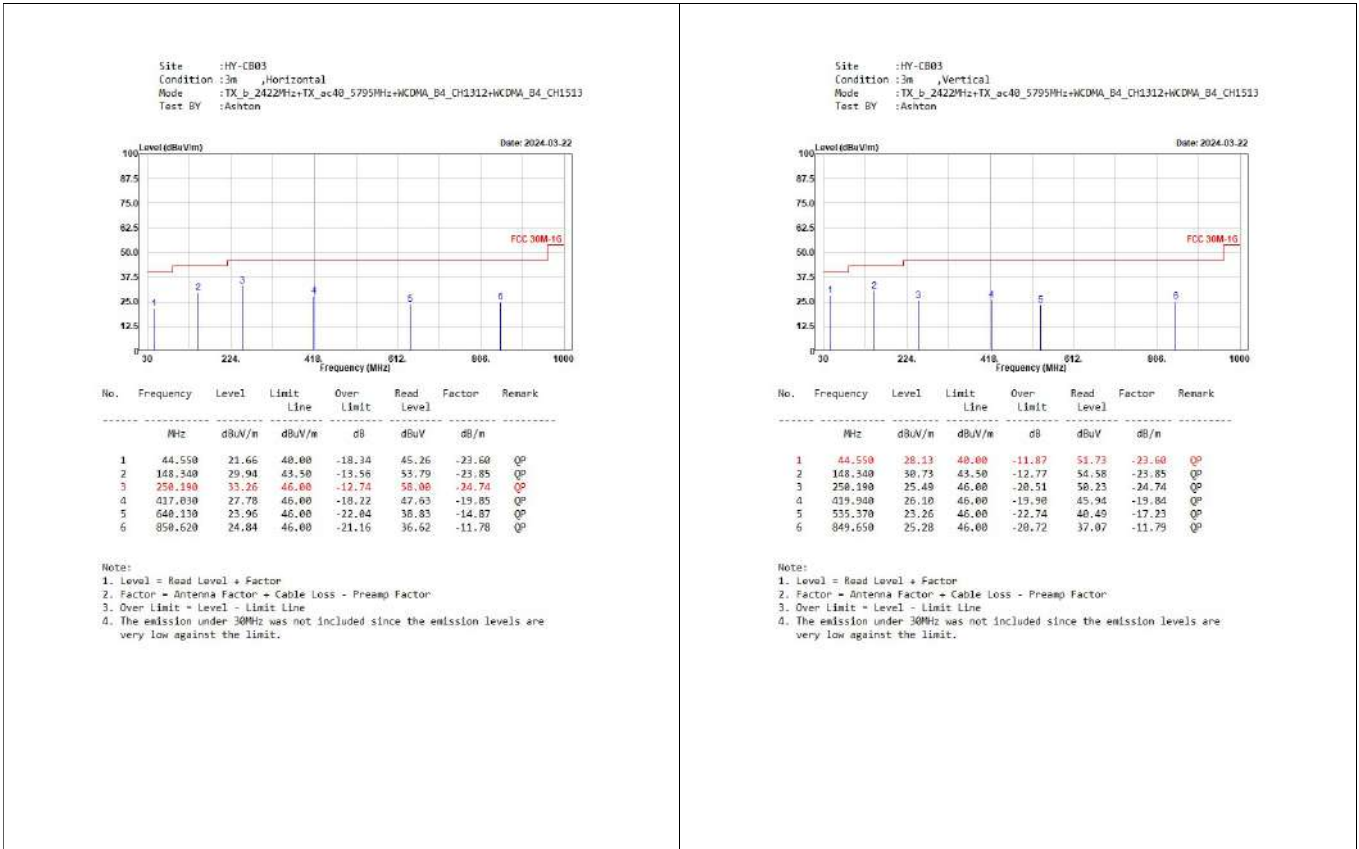

Above 1 GHz:


Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_b_2422MHz+TX_ac40_5795MHz+LTE_B4_20M_QPSK_1R80_CH28050
 :LTE_B4_20M_QPSK_1R80_CH28300
 Test BY :Bob

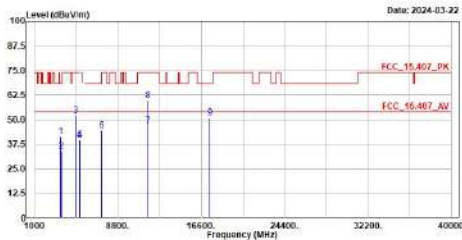

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	3400.000	41.39	68.22	-26.83	62.22	-20.83	Peak
2	3490.000	33.91	68.22	-34.31	54.48	-20.57	Peak
3	4844.000	52.12	74.00	-21.88	65.98	-13.86	Peak
4	5168.000	39.53	68.22	-28.69	52.73	-13.20	Peak
5	5235.000	39.52	68.22	-28.70	52.51	-12.99	Peak
6	7266.000	44.37	74.00	-29.63	50.70	-6.41	Peak
7	11590.000	46.78	54.00	-7.22	47.95	-1.17	Average
8	11590.000	59.44	74.00	-14.56	60.61	-1.17	Peak
9	17385.000	51.06	68.22	-17.16	58.96	0.10	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna-Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_b_2422MHz+TX_ac40_5795MHz+LTE_B4_20M_QPSK_1R80_CH28050
 :LTE_B4_20M_QPSK_1R80_CH28300
 Test BY :Bob

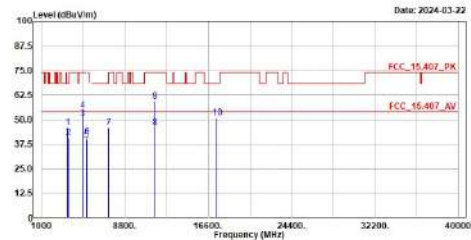

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	3400.000	46.13	68.22	-22.09	66.96	-20.83	Peak
2	3490.000	40.94	68.22	-27.28	61.51	-20.57	Peak
3	4844.000	39.68	54.00	-3.32	64.54	-13.86	Average
4	4844.000	54.57	74.00	-19.43	66.43	-13.86	Peak
5	5168.000	39.50	68.22	-28.72	52.70	-13.20	Peak
6	5235.000	41.41	68.22	-26.81	54.40	-12.99	Peak
7	7266.000	45.99	74.00	-28.01	52.40	-6.41	Peak
8	11590.000	46.12	54.00	-7.88	47.29	-1.17	Average
9	11590.000	59.29	74.00	-14.71	60.46	-1.17	Peak
10	17385.000	51.12	68.22	-17.10	51.92	0.10	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna-Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_b_2422MHz+TX_ac40_5795MHz+WCDA_B4_CH1312
 :LTE_B4_20M_QPSK_1R80_CH28300
 Test BY :Bob

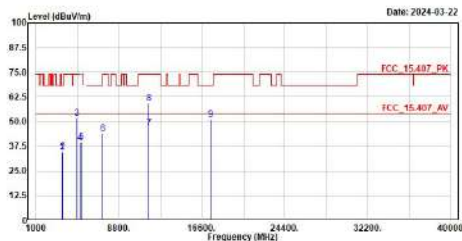

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	3424.000	34.29	68.22	-33.93	55.19	-20.90	Peak
2	3490.000	34.71	68.22	-33.51	55.28	-20.57	Peak
3	4844.000	51.51	74.00	-22.49	65.37	-13.86	Peak
4	5137.200	39.31	74.00	-34.69	52.54	-13.23	Peak
5	5235.000	39.72	68.22	-28.50	52.71	-12.99	Peak
6	7266.000	43.71	74.00	-30.29	50.12	-6.01	Peak
7	11590.000	46.80	54.00	-7.12	48.05	-1.17	Average
8	11590.000	59.12	74.00	-14.88	60.29	-1.17	Peak
9	17385.000	51.02	68.22	-17.20	50.92	0.10	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna-Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_b_2422MHz+TX_ac40_5795MHz+WCDA_B4_CH1312
 :LTE_B4_20M_QPSK_1R80_CH28300
 Test BY :Bob

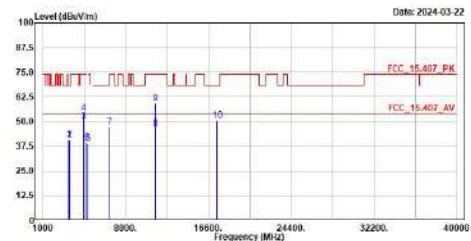

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	3424.000	40.87	68.22	-27.35	61.77	-20.90	Peak
2	3490.000	40.60	68.22	-27.62	61.17	-20.57	Peak
3	4844.000	50.33	54.00	-3.67	64.19	-13.86	Average
4	4844.000	54.35	74.00	-19.65	68.21	-13.86	Peak
5	5137.200	39.06	74.00	-34.94	52.29	-13.23	Peak
6	5235.000	38.97	68.22	-29.25	51.96	-12.99	Peak
7	7266.000	47.02	74.00	-26.98	53.43	-6.41	Peak
8	11590.000	46.49	54.00	-7.51	47.66	-1.17	Average
9	11590.000	59.15	74.00	-14.85	60.32	-1.17	Peak
10	17385.000	50.68	68.22	-17.54	50.58	0.10	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna-Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
 Condition :3m Horizontal
 Mode :TX_b_2422MHz+TX_sc40_5795MHz+WCDMA_B4_CH1312+WCDMA_B4_CH1513
 Test BY :Bob

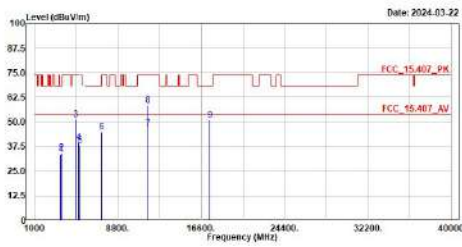

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	3424.000	33.49	68.22	-34.73	54.39	-20.90	Peak
2	3505.200	34.52	68.22	-33.70	54.96	-20.46	Peak
3	4844.000	51.28	74.00	-22.72	65.14	-13.86	Peak
4	5137.200	39.57	74.00	-34.43	52.80	-13.23	Peak
5	5257.000	38.19	68.22	-30.03	51.20	-13.01	Peak
6	7266.000	44.98	74.00	-29.02	51.39	-6.41	Peak
7	11598.000	46.83	54.00	-7.17	48.00	-1.17	Average
8	11598.000	50.57	74.00	-23.43	59.74	-14.26	Peak
9	17385.000	51.00	68.22	-17.22	50.90	0.10	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
 Condition :3m Vertical
 Mode :TX_b_2422MHz+TX_sc40_5795MHz+WCDMA_B4_CH1312+WCDMA_B4_CH1513
 Test BY :Bob

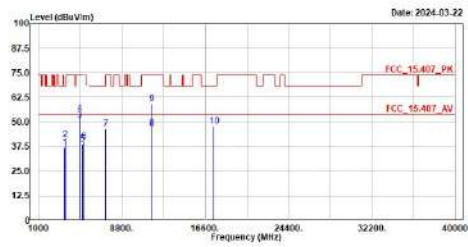

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/n	
1	3424.000	37.05	68.22	-31.17	57.95	-20.90	Peak
2	3505.200	40.95	68.22	-27.27	61.41	-20.46	Peak
3	4844.000	50.90	54.00	-3.10	64.84	-13.86	Average
4	4844.000	54.34	74.00	-19.66	68.20	-13.86	Peak
5	5137.200	38.82	74.00	-35.18	52.05	-13.23	Peak
6	5257.000	39.83	68.22	-28.39	52.84	-13.01	Peak
7	7266.000	46.44	74.00	-27.56	52.85	-6.41	Peak
8	11598.000	46.63	54.00	-7.37	47.80	-1.17	Average
9	11598.000	59.14	74.00	-14.86	60.31	-14.26	Peak
10	17385.000	47.91	68.22	-20.31	47.81	0.10	Peak

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission levels of other frequencies are very lower than the limit and not show in test report.