



FCC SAR Test Report

FCC ID: XDQG25-01

Project No. : 2403G125
Equipment : POS Terminal
Brand Name : NEXGO
Test Model : G25
Series Model : N/A
Date of Receipt : Mar. 25, 2024
Date of Test : Apr. 01, 2024 ~ Apr. 09, 2024
Issued Date : Apr. 25, 2024
Report Version : R01
Test Sample : Engineering Sample No.: SSL2024032569, SSL2024032568
Standard(s) : Please refer to page 2.
Applicant : Shenzhen Xinguodu Technology Co., Ltd.
Address : 17B JinSong Mansion, Terra Industrial & Trade Park Chegongmiao, Futian District, Shenzhen, China
Manufacturer : Shenzhen Xinguodu Technology Co., Ltd.
Address : 17B JinSong Mansion, Terra Industrial & Trade Park Chegongmiao, Futian District, Shenzhen, China
Factory : Shenzhen Xinguodu Technology Co., Ltd. Manufacture Branch.
Address : Building C, Dagang Industrial Park, Changzhen Community, Gongming Office, Guangming New District, Shenzhen, Guangdong, China.

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by : Justin Huang
Justin Huang

Approved by : Herbert Liu
Herbert Liu

Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Standard(s) : **IEEE Std C95.1:2019** IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 kHz to 300 GHz

EN IEC/IEEE 62209-1528:2021 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)

KDB447498 D04 Interim General RF Exposure Guidance v01
KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02 SAR Reporting v01r02

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . GENERAL INFORMATION	7
1.1 STATEMENT OF COMPLIANCE	7
1.2 LABORATORY ENVIRONMENT	7
1.3 GENERAL DESCRIPTION OF EUT	8
1.4 MAIN TEST INSTRUMENTS	10
2 . RF EMISSIONS MEASUREMENT	11
2.1 TEST FACILITY	11
2.2 MEASUREMENT UNCERTAINTY	11
3 . SAR MEASUREMENTS SYSTEM CONFIGURATION	13
3.1 SAR MEASUREMENT SET-UP	13
3.1.1 TEST SETUP LAYOUT	13
3.2 DASY5 E-FIELD PROBE SYSTEM	14
3.2.1 PROBE SPECIFICATION	14
3.2.2 E-FIELD PROBE CALIBRATION	15
3.2.3 OTHER TEST EQUIPMENT	16
3.2.4 SCANNING PROCEDURE	17
3.2.5 SPATIAL PEAK SAR EVALUATION	18
3.2.6 DATA STORAGE AND EVALUATION	19
3.2.7 DATA EVALUATION BY SEMCAD	20
4 . SYSTEM VERIFICATION PROCEDURE	22
4.1 TISSUE VERIFICATION	22
4.2 SYSTEM CHECK	23
4.3 SYSTEM CHECK PROCEDURE	23
5 . SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	24
5.1 SAR MEASUREMENT VARIABILITY	24
6 . OPERATIONAL CONDITIONS DURING TEST	25
6.1 GENERAL DESCRIPTION OF TEST PROCEDURES	25
6.2 SAR TEST CONFIGURATION	25
6.2.1 GSM TEST CONFIGURATION	25
6.2.2 UMTS TEST CONFIGURATION	26
6.2.3 LTE TEST CONFIGURATION	32
6.2.4 WIFI TEST CONFIGURATION	33
6.3 TEST POSITION OF PORTABLE DEVICES	34
6.3.1 HAND-HELD USAGE OF THE DEVICE TEST CONFIGURATION	34

Table of Contents	Page
7 . TEST RESULT	35
7.1 CONDUCTED POWER RESULTS	35
7.2 SAR TEST RESULTS	36
7.2.1 SAR MEASUREMENT RESULT OF LIMBS	37
7.3 MULTIPLE TRANSMITTER EVALUATION	42
7.3.1 STAND-ALONE SAR TEST EXCLUSION	42
7.3.2 SIMULTANEOUS TRANSMISSION CONDITIONS	43
APPENDIX	44
1. TEST LAYOUT	44
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate	
Appendix D. Photographs of the Test Set-Up	
Appendix E. Conducted Power Measurement Result	



REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCC SAR-1-2403G125	R00	Original Report.	Apr. 19, 2024	Invalid
BTL-FCC SAR-1-2403G125	R01	Modified the comments of TCB.	Apr. 25, 2024	Valid

1. GENERAL INFORMATION

1.1 STATEMENT OF COMPLIANCE

Mode	Highest Reported Limb SAR-10g (W/kg)
GSM850	1.269
GSM1900	1.301
UMTS B2	1.153
UMTS B4	2.313
UMTS B5	0.648
LTE B2	0.911
LTE B4	2.128
LTE B5	0.819
LTE B7	2.598
UMTS B66	1.922
WLAN 2.4G	0.672

Note: The device is in compliance with Specific Absorption Rate (SAR) for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, and had been tested in accordance with the measurement methods and procedures specified in EN IEC/IEEE 62209-1528.

1.2 LABORATORY ENVIRONMENT

Temperature	Min. = 20°C, Max. = 24°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

1.3 GENERAL DESCRIPTION OF EUT

Equipment	POS Terminal		
Brand Name	NEXGO		
Test Model	G25		
Series Model	N/A		
Model Difference(s)	N/A		
IMEI Code	866496070492650, 866496070492726		
S/N	G250W800013, G250W700013		
Hardware Version	V1.0		
Software Version	BF.00.16_231228		
Modulation	GPRS(GMSK/8PSK), UMTS(BPSK/QPSK), LTE(QPSK/16QAM), WiFi(DSSS/OFDM)		
Operation Frequency Range(s)	Band	TX (MHz)	RX (MHz)
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	UMTS B2	1852~1908	1932~1988
	UMTS B4	1712~1753	2112~2153
	UMTS B5	826~847	871~892
	LTE B2	1850~1910	1930~1990
	LTE B4	1710~1755	2110~2155
	LTE B5	824~849	869~894
	LTE B7	2500~2570	2620~2690
	LTE B66	1710~1780	2110~2180
	WLAN 2.4G	2400~2483.5	
GPRS/EDGE Multislot Class (12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA Category	14		
Power Class	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all up bits" (UMTS B2/4/5)		
	3, tested with power control "all Max" (LTE B2/4/5/7/66)		
Test Channels (low-mid-high)	128-190-251 (GSM850)		
	512-661-810 (GSM1900)		
	9262-9400-9538 (UMTS B2)		
	1312-1413-1513 (UMTS B4)		
	4132-4182-4233 (UMTS B5)		
	18700-18900-19100 (LTE B2 BW=20MHz)		
	20050-20175-20300 (LTE B4 BW=20MHz)		
	20450-20525-20600 (LTE B5 BW=10MHz)		
	20850-21100-21350 (LTE B7 BW=20MHz)		
	132072-132322-132572 (LTE B66 BW=20MHz)		
1-6-11 (WiFi 2.4G 802.11b/g/n HT20)			

Antenna Gain (dBi)	Band	4G Antenna	WiFi Antenna
	GSM 850	-1.09	/
	GSM 1900	0.47	/
	UMTS B2	0.47	/
	UMTS B4	-1.45	/
	UMTS B5	-1.62	/
	LTE B2	0.47	/
	LTE B4	-1.45	/
	LTE B5	-1.62	/
	LTE B7	1.74	/
	LTE B66	-0.45	/
	WLAN 2.4G	/	4.69
Other Information			
Battery Information	Model Name	G2-18650	
	Power Rating	DC 3.6V, 2600mAh, 9.36Wh	

Note:

- 1) The antenna gain is provided by the manufacturer.
- 2) There are two kinds of configuration products: RF is the same and NFC/WIFI/2G/3G/4G has only one module or module.
 Configuration 1: LTE(Latin America)+WIFI + non-connection + professional scanning head + ESIM (ESMI-ESMI is the SIM card of the patch, the POS machine is a dual card, one of the card slots is affixed with ESIM, the other card slots is reserved for the ordinary SIM card) + single SIM.
 Configuration 2: LTE(Latin America)+WIFI + non-connect (contactless IC card) + fingerprint + dual SIM.
- 3) According to the BTL-FCCP-5-2403G125_NFC report, the maximum electric field strength tested was 64.81 dBuV/m. This translates to 0.0009 mW. Reference KDB 447498 D04 specifies that the electric field intensity is less than 1mW. NFC can directly eliminate evaluation tests.

1.4 MAIN TEST INSTRUMENTS

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	1390	Nov. 20, 2023	1 Year
2	Data Acquisition Electronics	Speag	DAE4	1717	Apr. 10, 2023	1 Year
3	E-field Probe	Speag	EX3DV4	3809	Dec. 18, 2023	1 Year
4	E-field Probe	Speag	EX3DV4	7693	Oct. 31, 2023	1 Year
5	System Validation Dipole	Speag	D835V2	4d160	Jun. 01, 2021	3 Years
6	System Validation Dipole	Speag	D1750V2	1101	Jun. 01, 2021	3 Years
7	System Validation Dipole	Speag	D1900V2	5d179	May 31, 2021	3 Years
8	System Validation Dipole	Speag	D2450V2	919	May 28, 2021	3 Years
9	System Validation Dipole	Speag	D2600V2	1067	May 28, 2021	3 Years
10	Twin Sam Phantom	Speag	Twin Sam Phantom V5.0	1469	N/A	N/A
11	Twin Sam Phantom	Speag	Twin Sam Phantom V5.0	1896	N/A	N/A
12	Radio Communication Analyzer	Anritsu	MT8821C	6261915479	Jul. 08, 2023	1 Year
13	Wideband Radio Communication Tester	R&S	CMW500	165848	Jan. 20, 2024	1 Year
14	Power Amplifier	Mini-Circuits	ZHL-42W+	QA1333003	Jul. 08, 2023	1 Year
15	DC Source meter	Iteck	IT6154	006104126768201001	Jul. 08, 2023	1 Year
16	Vector Network Analyzer	Agilent	E5071C	MY46102965	Jan. 20, 2024	1 Year
17	Signal Generator	Agilent	N5172B	MY53050758	Jan. 20, 2024	1 Year
18	3.5mm Economy Calibration Kit	Agilent	85052D	MY43252246	Nov. 10, 2023	1 Year
19	Dielectric Assessment Kit	Speag	DAK-3.5	1226	Jan. 24, 2022	3 Years
20	Coupler	Woken	0110A05601O-10	COM5BNW1A2	Jan. 20, 2024	1 Year
21	Coupler	Woken	ATD10-400M-6G-A2	2021008	Jul. 08, 2023	1 Year
22	Digital Thermometer	TES	TES-1310	210706071	Nov. 03, 2023	1 Year

Note:

1. "N/A" denotes no model name, serial No. or calibration specified.

2.

1) Per KDB865664 D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement;
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a short block performed before measuring liquid parameters.

2. RF EMISSIONS MEASUREMENT

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is SAR room at the location of Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

BTL's Registration Number for FCC: 747969.

BTL's Designation Number for FCC: CN1377.

2.2 MEASUREMENT UNCERTAINTY

Uncertainty Budget for Frequency range of 300 MHz to 3 GHz

Symbol	Input quantity X_i (source of uncertainty)	Unc. Value	Prob. Dist.	Div.	c_i (1g)	c_i (10g)	Std.Unc. (1g) (±%)	Std.Unc. (10g) (±%)
Measurement system errors								
<i>CF</i>	Probe calibration(±%)	12.0	N	2	1	1	6.0	6.0
<i>CF</i> drift	Probe calibration drift(±%)	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
<i>LIN</i>	Probe linearity and detection limit(±%)	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
<i>BBS</i>	Broadband signal(±%)	3.0	R	$\sqrt{3}$	1	1	1.7	1.7
<i>ISO</i>	Probe isotropy(±%)	7.6	R	$\sqrt{3}$	1	1	4.4	4.4
<i>DAE</i>	Other probe and data acquisition errors(±%)	0.7	N	1	1	1	0.7	0.7
<i>AMB</i>	RF ambient and noise(±%)	1.8	N	1	1	1	1.8	1.8
<i>Dxyz</i>	Probe positioning errors(±mm)	0.006	N	1	0.14	0.14	0.08	0.08
<i>DAT</i>	Data processing errors(±%)	1.2	N	1	1	1	1.2	1.2
Phantom and device (DUT or validation antenna) errors								
<i>LIQ</i> (σ)	Conductivity (meas.)(±%)	2.5	N	1	0.78	0.71	2.0	1.8
<i>LIQ</i> (T_c)	Conductivity (temp.)(±%)	3.3	R	$\sqrt{3}$	0.78	0.71	1.5	1.4
<i>EPS</i>	Phantom Permittivity(±%)	14	R	$\sqrt{3}$	0	0	0.0	0.0
<i>DIS</i>	Distance DUT - TSL(±%)	2	N	1	2	2	4.0	4.0
<i>Dxyz</i>	Device Positioning(±%)	0.6	N	1	1	1	0.6	0.6
<i>H</i>	Device Holder(±%)	2	N	1	1	1	2.0	2.0
<i>MOD</i>	DUT Modulationm(±%)	2.4	R	$\sqrt{3}$	1	1	1.4	1.4
<i>TAS</i>	Time-average SAR(±%)	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
<i>RF</i> drift	DUT drift(±%)	1.5	N	1	1	1	1.5	1.5
<i>VAL</i>	Val Antenna Unc.(±%)	0	N	1	1	1	0.0	0.0
<i>Pin</i>	Unc. Input Power(±%)	0	N	1	1	1	0.0	0.0
Corrections to the SAR result								
<i>C</i> ($\epsilon\phi, \sigma$)	Deviation to Target(±%)	1.9	N	1	1	0.84	1.9	1.6
<i>C</i> (<i>R</i>)	SAR scaling(±%)	0	R	$\sqrt{3}$	1	1	0.0	0.0
<i>u</i> (DSAR)	Combined uncertainty						10.3	10.2
	Coverage Factor for 95%						k=2	k=2
<i>U</i>	Expanded uncertainty					<i>U</i> =	20.7	20.5
a Other probability distributions and divisors may be used if they better represent available knowledge of the quantities concerned.								

Uncertainty Budget for Frequency range of 3 GHz to 6 GHz

Symbol	Input quantity X_i (source of uncertainty)	Unc. Value	Prob. Dist.	Div.	c_i (1g)	c_i (10g)	Std.Unc. (1g) (±%)	Std.Unc. (10g) (±%)
Measurement system errors								
<i>CF</i>	Probe calibration(±%)	14.0	N	2	1	1	7.0	7.0
<i>CF</i> drift	Probe calibration drift(±%)	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
<i>LIN</i>	Probe linearity and detection limit(±%)	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
<i>BBS</i>	Broadband signal(±%)	2.6	R	$\sqrt{3}$	1	1	1.5	1.5
<i>ISO</i>	Probe isotropy(±%)	7.6	R	$\sqrt{3}$	1	1	4.4	4.4
<i>DAE</i>	Other probe and data acquisition errors(±%)	1.2	N	1	1	1	1.2	1.2
<i>AMB</i>	RF ambient and noise(±%)	1.8	N	1	1	1	1.8	1.8
<i>Dxyz</i>	Probe positioning errors(±mm)	0.005	N	1	0.29	0.29	0.15	0.15
<i>DAT</i>	Data processing errors(±%)	2.3	N	1	1	1	2.3	2.3
Phantom and device (DUT or validation antenna) errors								
<i>LIQ</i> (σ)	Conductivity (meas.)(±%)	2.5	N	1	0.78	0.71	2.0	1.8
<i>LIQ</i> (T_c)	Conductivity (temp.)(±%)	3.4	R	$\sqrt{3}$	0.78	0.71	1.5	1.4
<i>EPS</i>	Phantom Permittivity(±%)	14	R	$\sqrt{3}$	0.25	0.25	2.0	2.0
<i>DIS</i>	Distance DUT - TSL(±%)	2	N	1	2	2	4.0	4.0
<i>Dxyz</i>	Device Positioning(±%)	0.5	N	1	1	1	0.5	0.5
<i>H</i>	Device Holder(±%)	1.9	N	1	1	1	1.9	1.9
<i>MOD</i>	DUT Modulationm(±%)	2.4	R	$\sqrt{3}$	1	1	1.4	1.4
<i>TAS</i>	Time-average SAR(±%)	1.7	R	$\sqrt{3}$	1	1	1.0	1.0
<i>RF</i> drift	DUT drift(±%)	0.8	N	1	1	1	0.8	0.8
<i>VAL</i>	Val Antenna Unc.(±%)	0	N	1	1	1	0.0	0.0
<i>P</i> in	Unc. Input Power(±%)	0	N	1	1	1	0.0	0.0
Corrections to the SAR result								
<i>C</i> ($\epsilon\phi, \sigma$)	Deviation to Target(±%)	1.9	N	1	1	0.84	1.9	1.6
<i>C</i> (R)	SAR scaling(±%)	0	R	$\sqrt{3}$	1	1	0.0	0.0
<i>u</i> (DSAR)	Combined uncertainty						11.2	11.1
	Coverage Factor for 95%						k=2	k=2
<i>U</i>	Expanded uncertainty					<i>U</i> =	22.5	22.3
a Other probability distributions and divisors may be used if they better represent available knowledge of the quantities concerned.								


3. SAR MEASUREMENTS SYSTEM CONFIGURATION

3.1 SAR MEASUREMENT SET-UP

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

3.1.1 TEST SETUP LAYOUT

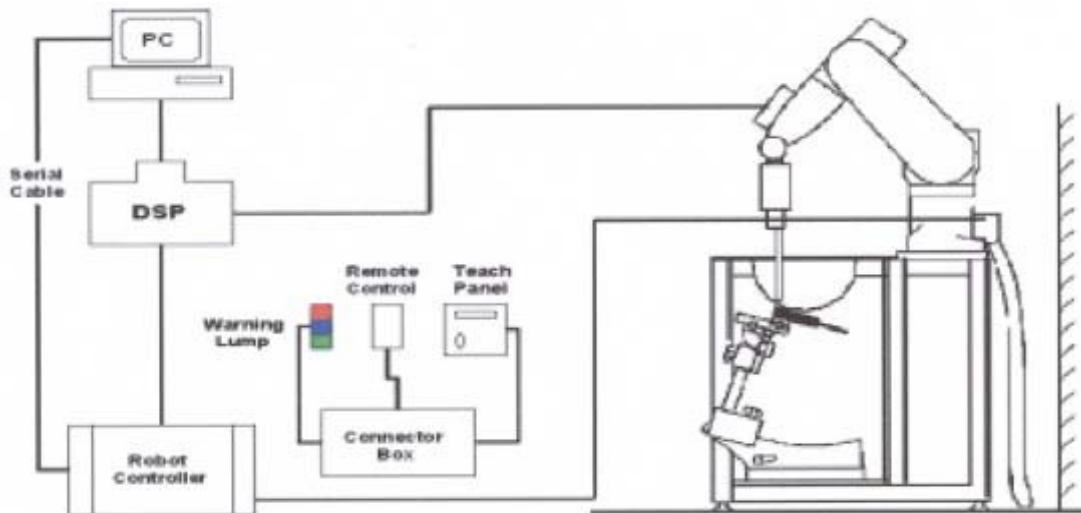


3.2 DASY5 E-FIELD PROBE SYSTEM

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

3.2.1 PROBE SPECIFICATION

EX3DV4

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm

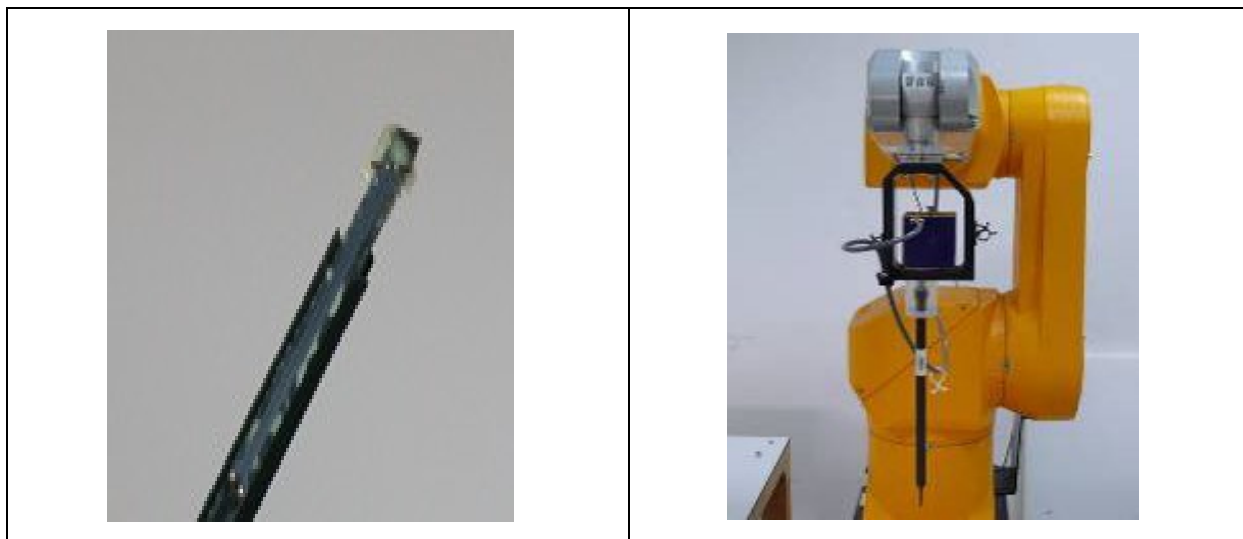

E-field Probe

3.2.2 E-FIELD PROBE CALIBRATION

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermostat-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt =Exposure time (30 seconds),

C =Heat capacity of tissue (brain or muscle),

ΔT =Temperature increase due to RF exposure.

Or
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where: σ = Simulated Tissue Conductivity,

ρ =Tissue density (kg/m³).


3.2.3 OTHER TEST EQUIPMENT

3.2.3.1. Device Holder for Transmitters

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices (e.g., laptops, cameras, etc.) It is light weight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam

3.2.3.2 Phantom

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in EN IEC/IEEE 62209-1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Shell Thickness	2 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000mm; Width: 500mm Height: adjustable feet	
Available	Special	

3.2.4 SCANNING PROCEDURE

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

- Area Scan

The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

- Zoom Scan

A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} \leq 8\text{mm}$, 2-4GHz $\leq 5\text{mm}$ and 4-6 GHz $\leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} \leq 5\text{mm}$, 3-4 GHz $\leq 4\text{mm}$ and 4-6GHz $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
$\leq 2\text{GHz}$	$\leq 15\text{mm}$	$\leq 8\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$	$\geq 30\text{mm}$
2-3GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$	$\geq 30\text{mm}$
3-4GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$	$\geq 28\text{mm}$
4-5GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 2.5\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$	$\geq 25\text{mm}$
5-6GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 2\text{mm}$	$\leq 2\text{mm}$	$\leq 1.5 \cdot \Delta z_{\text{zoom}}(n-1)$	$\geq 22\text{mm}$

3.2.5 SPATIAL PEAK SAR EVALUATION

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7 points (with 5mm horizontal resolution) or 8 x 8 x 7 points (with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting "Graph Evaluated".
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computer mathematic, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computer mathematic, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

3.2.6 DATA STORAGE AND EVALUATION

3.2.6.1 Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “DAE”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.2.7 DATA EVALUATION BY SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, ai0, ai1, ai2
	Conversion factor	ConvFi
	Diode compression point	Dcp _i
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multi meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	V_i = compensated signal of channel i	(i = x, y, z)
	U_i = input signal of channel i	(i = x, y, z)
	cf = crest factor of exciting field	(DASY parameter)
	dcp _i = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-field probes: } E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$\text{H-field probes: } H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

= conductivity in [mho/m] or [Siemens/m]

= equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total field strength in V/m

H_{tot} = total magnetic field strength in A/m

4. SYSTEM VERIFICATION PROCEDURE

4.1 TISSUE VERIFICATION

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Head 835	0.2	-	0.2	1.5	57.0	-	41.1	-
Head 1750	-	47.0	-	0.4	-	-	52.6	-
Head 1900	-	44.5	-	0.2	-	-	55.3	-
Head 2450	-	45.0	-	0.1	-	-	54.9	-
Head 2600	-	45.1	-	0.1	-	-	54.8	-

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Verification									
Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Targeted Conductivity (σ)	Targeted Permittivity (ϵ_r)	Deviation Conductivity (σ) (%)	Deviation Permittivity (ϵ_r) (%)	Date
Head	835	22.6	0.918	42.466	0.90	41.5	2.00	2.33	Apr. 02, 2024
Head	1750	22.1	1.309	41.089	1.37	40.1	-4.45	2.47	Apr. 01, 2024
Head	1900	21.8	1.352	41.148	1.40	40.0	-3.43	2.87	Apr. 05, 2024
Head	2450	22.3	1.822	39.968	1.80	39.2	1.22	1.96	Apr. 09, 2024
Head	2600	22.5	1.994	39.420	1.96	39.0	1.73	1.08	Apr. 06, 2024

Note:

- 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 SYSTEM CHECK

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to EN IEC/IEEE 62209-1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.


System Check	Date	Frequency (MHz)	Targeted SAR (W/kg)		Measured SAR (W/kg)		normalized SAR (W/kg)		Deviation (%)		Dipole S/N
			1g	10g	1g	10g	1g	10g	1g	10g	
Head	Apr. 02, 2024	835	9.52	6.14	2.35	1.53	9.40	6.12	-1.26	-0.33	4d160
Head	Apr. 01, 2024	1750	36.40	18.90	8.77	4.65	35.08	18.60	-3.63	-1.59	1101
Head	Apr. 05, 2024	1900	39.60	20.00	9.73	5.16	38.92	20.64	-1.72	3.20	5d179
Head	Apr. 09, 2024	2450	52.10	23.70	12.90	5.91	51.60	23.64	-0.96	-0.25	919
Head	Apr. 06, 2024	2600	56.90	24.90	14.00	6.31	56.00	25.24	-1.58	1.37	1067

4.3 SYSTEM CHECK PROCEDURE

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250mW (below 3GHz) or 100mW (3-6GHz). To adjust this power a power meter is used.

The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test.

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system ($\pm 10\%$).

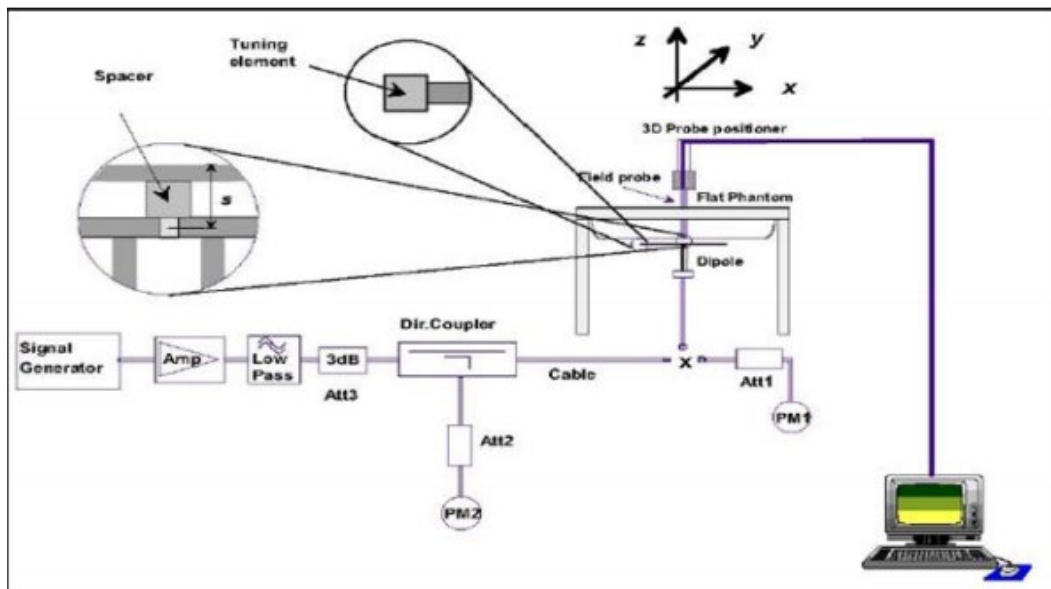

5. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

5.1 SAR MEASUREMENT VARIABILITY

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

6. OPERATIONAL CONDITIONS DURING TEST

6.1 GENERAL DESCRIPTION OF TEST PROCEDURES

Connection to the EUT is established via air interface with Anritsu MT8821C & R&S CMW500, and the EUT is set to maximum output power by Anritsu MT8821C & R&S CMW500. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. The antenna connected to the output of the base station simulator shall be placed at least 50cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30dB.

6.2 SAR TEST CONFIGURATION

6.2.1 GSM TEST CONFIGURATION

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using 8960 Series the power lever is set to "5" and "0" in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot.

The allowed power reduction in the multi-slot configuration is as following:

Number of timeslots in uplink assignment		Reduction of maximum output power (dB)		
Band	Time Slots	GPRS (GMSK)	EGPRS (GMSK)	EGPRS (8PSK)
GSM850	1 TX slot	0.0	0.0	6.4
	2 TX slots	3.0	3.0	9.4
	3 TX slots	4.8	4.8	11.2
	4 TX slots	6.0	6.0	12.4
GSM1900	1 TX slot	0.0	0.0	4.3
	2 TX slots	3.0	3.0	7.3
	3 TX slots	4.8	4.8	9.1
	4 TX slots	6.0	6.0	10.3

6.2.2 UMTS TEST CONFIGURATION

1. Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the procedures description in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Result for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) should be tabulated in the SAR report. All configuration that are not supported by the DUT or cannot be measured due to technical or equipment limitation should be clearly identified.

2. WCDMA

(1) Head SAR Measurements

SAR for next to ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR with 3.4kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

(2) Body SAR Measurements

SAR for body-worn accessory is measured using the 12.2 kbps RMC with the TPC bits configured to all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by handset with 12.2 kbps RMC as the primary mode.

3. HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HAPRQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when ΔACK , $\Delta NACK$, $\Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c / β_d ^o	β_{hs} (1) ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
 Note 2: CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
 Note 3: For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Settings of required H-Set 1 QPSK acc. to 3GPP 34.121

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

4. HSUPA

SAR for Body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is $\leq 1.2W/kg$, SAR measurement is not required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedures is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the “WCDMA Handset” and “Release 5 HSDPA Data Device” sections of 3G device.

Subtests for WCDMA Release 6 HSUPA

Sub-test ¹	β_c ²	β_d ²	β_d (SF) ³	β_c/β_d ²	β_{hs} ¹	β_{ec} ²	β_{ed} ²	β_e ² (SF) ³	β_{ed} ² (code) ³	CM ⁽²⁾ ⁴ (dB) ⁵	MP R ⁶ (dB) ⁷	AG ⁽⁴⁾ Index ⁸	E-TFC I ⁹
1 ¹	11/15 ⁽³⁾ ²	15/15 ⁽³⁾ ²	64 ³	11/15 ⁽³⁾ ²	22/15 ¹	209/225 ²	1039/225 ²	4 ³	1 ³	1.0 ⁵	0.0 ⁷	20 ⁸	75 ⁹
2 ¹	6/15 ²	15/15 ²	64 ³	6/15 ²	12/15 ¹	12/15 ²	94/75 ²	4 ³	1 ³	3.0 ⁵	2.0 ⁷	12 ⁸	67 ⁹
3 ¹	15/15 ²	9/15 ²	64 ³	15/9 ²	30/15 ¹	30/15 ²	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4 ³	2 ³	2.0 ⁵	1.0 ⁷	15 ⁸	92 ⁹
4 ¹	2/15 ²	15/15 ²	64 ³	2/15 ²	4/15 ¹	2/15 ²	56/75 ²	4 ³	1 ³	3.0 ⁵	2.0 ⁷	17 ⁸	71 ⁹
5 ¹	15/15 ⁽⁴⁾ ²	15/15 ⁽⁴⁾ ²	64 ³	15/15 ⁽⁴⁾ ²	30/15 ¹	24/15 ²	134/15 ²	4 ³	1 ³	1.0 ⁵	0.0 ⁷	21 ⁸	81 ⁹

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference⁴

Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ ²

Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ ²

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g⁴

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.⁵

HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF4	11484	5.76
	4	4	2		20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

5. DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel.5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode.

Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0 Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI"s
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Note:

1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.

2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

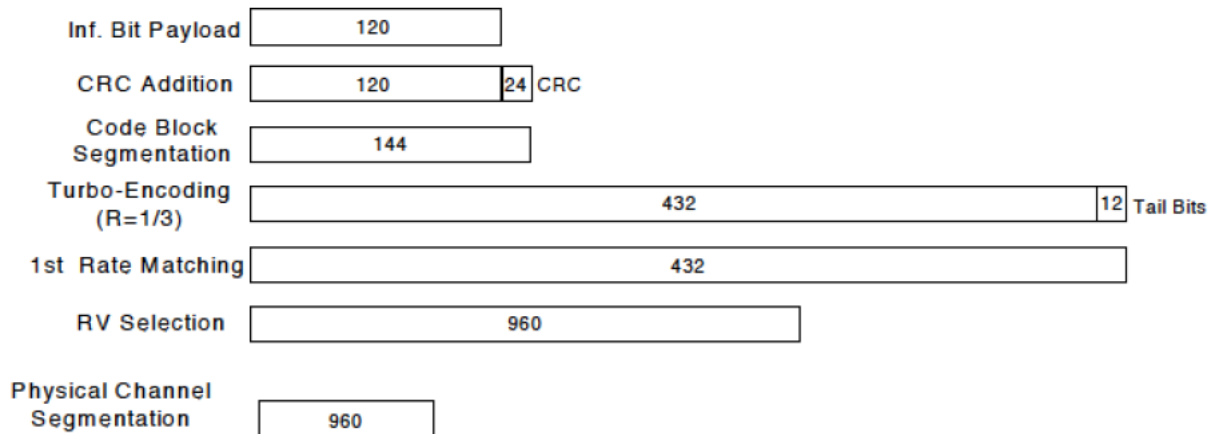


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c/β_d ^o	$\beta_{hs}(1)$ ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: Δ ACK, Δ NACK and Δ CQI=8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$

Note 2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Up commands are set continuously to set the UE to Max power.

6. HSPA+

An E-DCH call is set up according to TS 34.108 [3] 7.3.9 with the following exceptions in the RADIO BEARER SETUP messages. These exceptions allow the beta values to be set according to table C.11.1.4 and each UL physical channel to be at constant power at the start of the measurement. RF parameters are set up according to table E.5.A.1. Settings for the serving cell are defined in table 5.2E.4. Uplink SRB for DCCH mapped on E-DCH and downlink SRB for DCCH on DCH. E-DCH is configured with 2ms TTI.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{IS} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Note:

1. The Dual Carriers transmission support HSDPA and HSUPA physical channels.
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation.
4. The Dual Carriers operate in the same frequency band.
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn't support carrier aggregation for it just can operate in Release 8.

6.2.3 LTE TEST CONFIGURATION

Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The Anritsu MT8820C was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

If the power and MPR match the maximum bandwidth required by 3GPP and all modulations, the other bandwidths will only measure the maximum power.

If power reduction is supported, the power measures the maximum bandwidth of all modulations, and other bandwidths will only measure the maximum power.

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3-6.2.5 under Table 6.2.3-1.

3) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by using Network Signaling Value of "NS=01" on the base station simulator.

4) SAR test requirements

The LTE SAR test is choice the max power mode and start with the max power channel.

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

When the SAR is ≤ 1 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the 10-g SAR of a required test channel is > 1.8 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

For QPSK with 50% RB allocation, SAR is measured for the largest channel bandwidth and the maximum output power channel.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest 10-g SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 1.5 W/kg. Otherwise, SAR is measured for the highest output power channel and if the 10-g SAR is > 1.8 W/kg, the remaining required test channels must also be tested

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the 10-g SAR for the QPSK configuration is > 1.8 W/kg


B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the SAR of a configuration for the largest channel bandwidth is > 1.80 W/kg.

6.2.4 WIFI TEST CONFIGURATION

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal.

For WiFi SAR testing, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The test procedures in KDB 248227 D01 are applied.

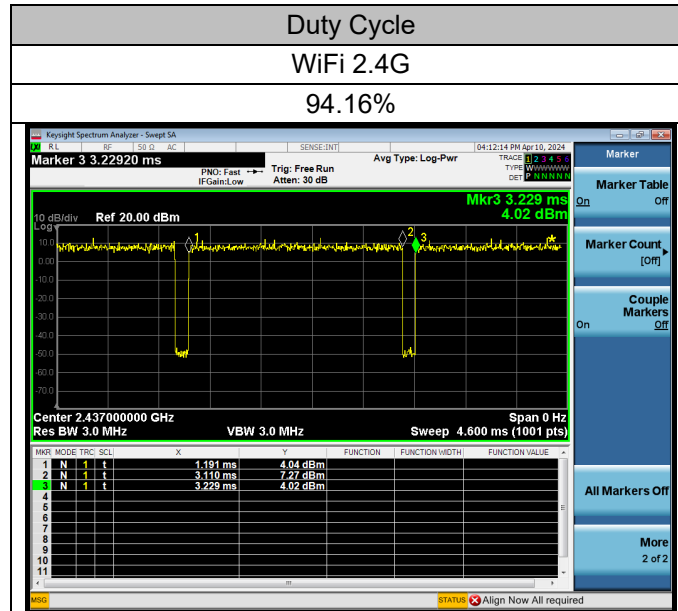

6.2.4.1 2.4G SAR Test Requirements

802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

SAR Test Requirements for OFDM configurations

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, each stand alone. And frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

6.3 TEST POSITION OF PORTABLE DEVICES

6.3.1 HAND-HELD USAGE OF THE DEVICE TEST CONFIGURATION

This device that fall into this category includes tablet type portable computers and credit card transaction authorization terminals, point-of-sale and/or inventory terminals. Where these devices may be torso or limb-supported, the same principles for body-supported devices are applied. The device uses by the hand-held and hotspot mode, so the test procedure is follow the Appendix D.

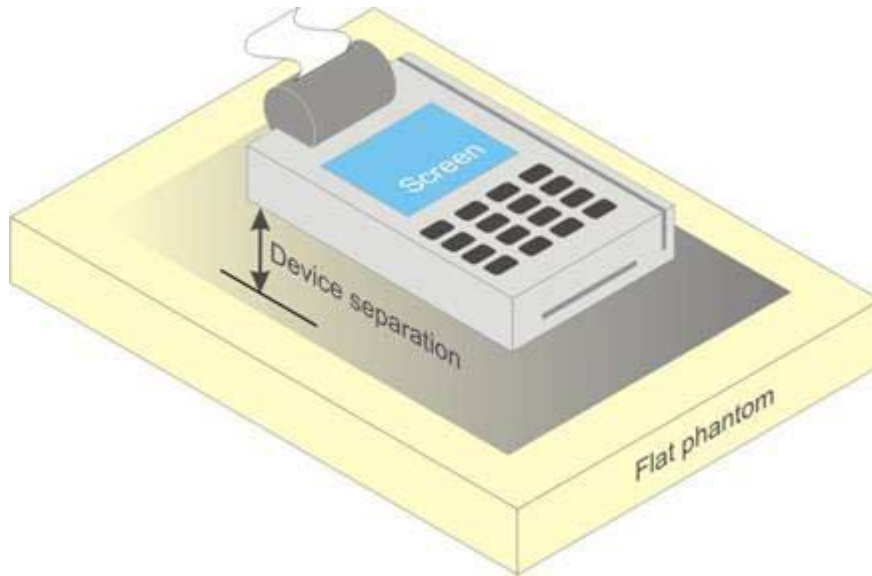


Figure: Test positions for body supported device



7. TEST RESULT

7.1 CONDUCTED POWER RESULTS

The conducted power measurement results please refer to Appendix E.

7.2 SAR TEST RESULTS

General Notes:

- 1) Per KDB447498 D04, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D04, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- 4) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing.

WLAN Notes:

1. For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 for 2.4GHz WIFI single transmission chain operations, the highest measured maximum output power Channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.1 for more information.

7.2.1 SAR MEASUREMENT RESULT OF LIMBS

1. Limbs SAR test results of GSM

Test No.	Band	Mode	Channel	Test Position	Separation Distance (mm)	SIM	Configuration Type	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR
G01	GSM 850	GPRS 2Tx	190	Front Face	0	1	1	34	33.34	-0.12	0.336	0.216	0.251
G02	GSM 850	GPRS 2Tx	190	Rear Face	0	1	1	34	33.34	-0.03	1.940	1.020	1.187
G03	GSM 850	GPRS 2Tx	190	Left Side	0	1	1	34	33.34	-0.08	0.246	0.158	0.184
G04	GSM 850	GPRS 2Tx	190	Right Side	0	1	1	34	33.34	-0.18	0.402	0.271	0.315
G05	GSM 850	GPRS 2Tx	190	Top Side 1	0	1	1	34	33.34	-0.01	0.348	0.236	0.275
G06	GSM 850	GPRS 2Tx	190	Top Side 2	0	1	1	34	33.34	-0.05	0.337	0.223	0.260
G07	GSM 850	GPRS 2Tx	128	Rear Face	0	1	1	34	33.34	0	2.070	1.090	1.269
G08	GSM 850	GPRS 2Tx	251	Rear Face	0	1	1	34	33.11	-0.07	1.780	0.932	1.144
G09	GSM 850	GPRS 2Tx	128	Rear Face	0	1	2	34	33.42	-0.17	1.690	0.883	1.009
G11	GSM 1900	GPRS 2Tx	661	Front Face	0	1	1	31	30.35	-0.11	0.186	0.109	0.127
G12	GSM 1900	GPRS 2Tx	661	Rear Face	0	1	1	31	30.35	0	2.050	1.120	1.301
G13	GSM 1900	GPRS 2Tx	661	Left Side	0	1	1	31	30.35	0.03	0.314	0.180	0.209
G14	GSM 1900	GPRS 2Tx	661	Right Side	0	1	1	31	30.35	-0.17	0.591	0.313	0.364
G15	GSM 1900	GPRS 2Tx	661	Top Side 1	0	1	1	31	30.35	0.01	0.272	0.168	0.195
G16	GSM 1900	GPRS 2Tx	661	Top Side 2	0	1	1	31	30.35	-0.03	0.768	0.440	0.511
G17	GSM 1900	GPRS 2Tx	512	Rear Face	0	1	1	31	30.35	-0.06	2.020	1.050	1.220
G18	GSM 1900	GPRS 2Tx	810	Rear Face	0	1	1	31	30.33	0.07	1.990	1.090	1.272
G19	GSM 1900	GPRS 2Tx	512	Rear Face	0	1	2	31	30.39	-0.08	1.840	0.988	1.137

Note: The value with boldface is the maximum SAR Value of each test band.

2. Limbs SAR test results of UMTS

Test No.	Band	Mode	Channel	Test Position	Separation Distance (mm)	SIM	Configuration Type	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR
U01	UMTS B2	RMC12.2K	9400	Front Face	0	1	1	23.5	22.77	0.04	0.194	0.113	0.134
U02	UMTS B2	RMC12.2K	9400	Rear Face	0	1	1	23.5	22.77	0.07	1.790	0.972	1.150
U03	UMTS B2	RMC12.2K	9400	Left Side	0	1	1	23.5	22.77	-0.19	0.049	0.028	0.033
U04	UMTS B2	RMC12.2K	9400	Right Side	0	1	1	23.5	22.77	-0.13	0.413	0.218	0.258
U05	UMTS B2	RMC12.2K	9400	Top Side 1	0	1	1	23.5	22.77	0.01	0.247	0.153	0.181
U06	UMTS B2	RMC12.2K	9400	Top Side 2	0	1	1	23.5	22.77	-0.06	0.957	0.530	0.627
U07	UMTS B2	RMC12.2K	9262	Rear Face	0	1	1	23.5	23.31	-0.02	1.780	0.949	0.991
U08	UMTS B2	RMC12.2K	9538	Rear Face	0	1	1	23.5	22.91	0.1	1.560	0.848	0.971
U09	UMTS B2	RMC12.2K	9400	Rear Face	0	1	2	23.5	22.77	-0.04	1.830	0.975	1.153
U11	UMTS B4	RMC12.2K	1413	Front Face	0	1	1	24	22.56	-0.04	0.100	0.059	0.082
U12	UMTS B4	RMC12.2K	1413	Rear Face	0	1	1	24	22.56	0.02	3.400	1.660	2.313
U13	UMTS B4	RMC12.2K	1413	Left Side	0	1	1	24	22.56	0.05	0.395	0.217	0.302
U14	UMTS B4	RMC12.2K	1413	Right Side	0	1	1	24	22.56	-0.08	0.496	0.268	0.373
U15	UMTS B4	RMC12.2K	1413	Top Side 1	0	1	1	24	22.56	-0.02	0.280	0.170	0.237
U16	UMTS B4	RMC12.2K	1413	Top Side 2	0	1	1	24	22.56	0.09	0.845	0.488	0.680
U17	UMTS B4	RMC12.2K	1312	Rear Face	0	1	1	24	23.03	0.05	3.300	1.690	2.113
U18	UMTS B4	RMC12.2K	1513	Rear Face	0	1	1	24	23.82	0.01	3.320	1.610	1.678
U19	UMTS B4	RMC12.2K	1413	Rear Face	0	1	2	24	22.56	0.01	3.250	1.570	2.187
U21	UMTS B5	RMC12.2K	4182	Front Face	0	1	1	24	23.58	-0.18	0.232	0.149	0.164
U22	UMTS B5	RMC12.2K	4182	Rear Face	0	1	1	24	23.58	-0.06	1.140	0.588	0.648
U23	UMTS B5	RMC12.2K	4182	Left Side	0	1	1	24	23.58	-0.09	0.151	0.097	0.106
U24	UMTS B5	RMC12.2K	4182	Right Side	0	1	1	24	23.58	-0.1	0.257	0.172	0.189
U25	UMTS B5	RMC12.2K	4182	Top Side 1	0	1	1	24	23.58	-0.03	0.198	0.134	0.148
U26	UMTS B5	RMC12.2K	4182	Top Side 2	0	1	1	24	23.58	0	0.219	0.142	0.156
U27	UMTS B5	RMC12.2K	4132	Rear Face	0	1	1	24	23.17	-0.14	1.020	0.523	0.633
U28	UMTS B5	RMC12.2K	4233	Rear Face	0	1	1	24	23.25	0	0.992	0.513	0.610
U29	UMTS B5	RMC12.2K	4182	Rear Face	0	1	2	24	23.58	-0.14	1.030	0.528	0.582

Note: The value with boldface is the maximum SAR Value of each test band.

3. Limbs SAR test results of LTE

Test No.	Band	Mode	Channel	RB	offset	Test Position	Separation Distance (mm)	SIM	Configuration Type	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR
L01	LTE B2	QPSK20M	18700	1	50	Front Face	0	1	1	24.5	24.37	-0.07	0.178	0.102	0.105
L02	LTE B2	QPSK20M	18700	1	50	Rear Face	0	1	1	24.5	24.37	-0.09	1.68	0.874	0.901
L03	LTE B2	QPSK20M	18700	1	50	Left Side	0	1	1	24.5	24.37	0	0.227	0.133	0.137
L04	LTE B2	QPSK20M	18700	1	50	Right Side	0	1	1	24.5	24.37	-0.06	0.319	0.171	0.176
L05	LTE B2	QPSK20M	18700	1	50	Top Side 1	0	1	1	24.5	24.37	-0.14	0.15	0.0923	0.095
L06	LTE B2	QPSK20M	18700	1	50	Top Side 2	0	1	1	24.5	24.37	-0.1	0.714	0.400	0.412
L07	LTE B2	QPSK20M	18700	50	0	Front Face	0	1	1	23.5	23.41	-0.07	0.173	0.0993	0.101
L08	LTE B2	QPSK20M	18700	50	0	Rear Face	0	1	1	23.5	23.41	0.03	1.72	0.893	0.911
L09	LTE B2	QPSK20M	18700	50	0	Left Side	0	1	1	23.5	23.41	-0.12	0.213	0.124	0.126
L10	LTE B2	QPSK20M	18700	50	0	Right Side	0	1	1	23.5	23.41	-0.16	0.341	0.183	0.187
L11	LTE B2	QPSK20M	18700	50	0	Top Side 1	0	1	1	23.5	23.41	0.05	0.161	0.0993	0.101
L12	LTE B2	QPSK20M	18700	50	0	Top Side 2	0	1	1	23.5	23.41	-0.07	0.632	0.359	0.366
L13	LTE B2	QPSK20M	18900	50	0	Rear Face	0	1	1	23.5	22.26	-0.01	1.25	0.675	0.898
L14	LTE B2	QPSK20M	19100	50	0	Rear Face	0	1	1	23.5	23.30	-0.04	1.6	0.867	0.908
L15	LTE B2	QPSK20M	18700	100	0	Rear Face	0	1	1	23.5	22.87	-0.04	1.32	0.709	0.820
L16	LTE B2	QPSK20M	18700	50	0	Rear Face	0	1	2	23.5	23.41	-0.09	1.69	0.855	0.872
L17	LTE B4	QPSK20M	20050	1	0	Front Face	0	1	1	24	23.65	0.16	0.13	0.0799	0.087
L18	LTE B4	QPSK20M	20050	1	0	Rear Face	0	1	1	24	23.65	-0.08	3.22	1.62	1.755
L19	LTE B4	QPSK20M	20050	1	0	Left Side	0	1	1	24	23.65	0.16	0.531	0.289	0.313
L20	LTE B4	QPSK20M	20050	1	0	Right Side	0	1	1	24	23.65	0.01	0.54	0.297	0.322
L21	LTE B4	QPSK20M	20050	1	0	Top Side 1	0	1	1	24	23.65	-0.11	0.321	0.197	0.213
L22	LTE B4	QPSK20M	20050	1	0	Top Side 2	0	1	1	24	23.65	-0.02	0.9	0.499	0.540
L23	LTE B4	QPSK20M	20050	50	0	Front Face	0	1	1	23	22.72	-0.07	0.11	0.0671	0.072
L24	LTE B4	QPSK20M	20050	50	0	Rear Face	0	1	1	23	22.72	0.04	2.61	1.31	1.398
L25	LTE B4	QPSK20M	20050	50	0	Left Side	0	1	1	23	22.72	0.08	0.441	0.24	0.256
L26	LTE B4	QPSK20M	20050	50	0	Right Side	0	1	1	23	22.72	0.02	0.457	0.25	0.267
L27	LTE B4	QPSK20M	20050	50	0	Top Side 1	0	1	1	23	22.72	-0.14	0.26	0.158	0.169
L28	LTE B4	QPSK20M	20050	50	0	Top Side 2	0	1	1	23	22.72	0.02	0.688	0.387	0.413
L29	LTE B4	QPSK20M	20175	1	0	Rear Face	0	1	1	24	23.12	-0.03	3.33	1.66	2.031
L30	LTE B4	QPSK20M	20300	1	0	Rear Face	0	1	1	24	23.22	-0.06	3.55	1.78	2.128
L31	LTE B4	QPSK20M	20300	100	0	Rear Face	0	1	1	23	22.41	0.02	2.76	1.36	1.559
L32	LTE B4	QPSK20M	20300	1	0	Rear Face	0	1	2	24	23.22	-0.18	2.74	1.4	1.674
L33	LTE B5	QPSK10M	20450	1	24	Front Face	0	1	1	24	23.33	-0.12	0.224	0.143	0.167
L34	LTE B5	QPSK10M	20450	1	24	Rear Face	0	1	1	24	23.33	0.01	1.34	0.701	0.819
L35	LTE B5	QPSK10M	20450	1	24	Left Side	0	1	1	24	23.33	0.07	0.17	0.109	0.127
L36	LTE B5	QPSK10M	20450	1	24	Right Side	0	1	1	24	23.33	-0.11	0.284	0.19	0.222
L37	LTE B5	QPSK10M	20450	1	24	Top Side 1	0	1	1	24	23.33	-0.11	0.217	0.15	0.175
L38	LTE B5	QPSK10M	20450	1	24	Top Side 2	0	1	1	24	23.33	0.09	0.265	0.173	0.202
L39	LTE B5	QPSK10M	20450	25	12	Front Face	0	1	1	23	22.39	-0.09	0.178	0.114	0.131
L40	LTE B5	QPSK10M	20450	25	12	Rear Face	0	1	1	23	22.39	0.02	1.06	0.545	0.627
L41	LTE B5	QPSK10M	20450	25	12	Left Side	0	1	1	23	22.39	-0.07	0.127	0.0813	0.094
L42	LTE B5	QPSK10M	20450	25	12	Right Side	0	1	1	23	22.39	-0.07	0.217	0.145	0.167
L43	LTE B5	QPSK10M	20450	25	12	Top Side 1	0	1	1	23	22.39	-0.15	0.171	0.117	0.135
L44	LTE B5	QPSK10M	20450	25	12	Top Side 2	0	1	1	23	22.39	0.01	0.227	0.146	0.168
L45	LTE B5	QPSK10M	20525	1	24	Rear Face	0	1	1	24	23.23	-0.03	1.02	0.526	0.628
L46	LTE B5	QPSK10M	20600	1	24	Rear Face	0	1	1	24	22.88	-0.06	0.848	0.44	0.569
L47	LTE B5	QPSK10M	20450	50	0	Rear Face	0	1	1	23	22.14	-0.2	0.997	0.511	0.623
L48	LTE B5	QPSK10M	20450	1	24	Rear Face	0	1	2	24	23.33	-0.07	1.12	0.581	0.678

Test No.	Band	Mode	Channel	RB	offset	Test Position	Separation Distance (mm)	SIM	Configuration Type	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR
L49	LTE B7	QPSK20M	21100	1	0	Front Face	0	1	1	25	24.88	-0.07	0.0593	0.0338	0.035
L50	LTE B7	QPSK20M	21100	1	0	Rear Face	0	1	1	25	24.88	-0.05	4.51	1.93	1.983
L51	LTE B7	QPSK20M	21100	1	0	Left Side	0	1	1	25	24.88	-0.05	0.12	0.0612	0.063
L52	LTE B7	QPSK20M	21100	1	0	Right Side	0	1	1	25	24.88	0.09	0.815	0.41	0.421
L53	LTE B7	QPSK20M	21100	1	0	Top Side 1	0	1	1	25	24.88	-0.06	0.317	0.177	0.182
L54	LTE B7	QPSK20M	21100	1	0	Top Side 2	0	1	1	25	24.88	-0.17	1.49	0.724	0.744
L56	LTE B7	QPSK20M	21100	50	0	Front Face	0	1	1	24	23.67	-0.09	0.0525	0.0304	0.033
L57	LTE B7	QPSK20M	21100	50	0	Rear Face	0	1	1	24	23.67	0.05	4.02	1.7	1.835
L58	LTE B7	QPSK20M	21100	50	0	Left Side	0	1	1	24	23.67	0.05	0.0809	0.0335	0.036
L59	LTE B7	QPSK20M	21100	50	0	Right Side	0	1	1	24	23.67	-0.01	0.736	0.37	0.399
L60	LTE B7	QPSK20M	21100	50	0	Top Side 1	0	1	1	24	23.67	0.06	0.275	0.154	0.166
L61	LTE B7	QPSK20M	21100	50	0	Top Side 2	0	1	1	24	23.67	0.04	1.37	0.659	0.711
L62	LTE B7	QPSK20M	20850	1	0	Rear Face	0	1	1	25	23.43	0	4.16	1.81	2.598
L63	LTE B7	QPSK20M	21350	1	0	Rear Face	0	1	1	25	23.68	0.06	3.36	1.43	1.938
L64	LTE B7	QPSK20M	20850	100	0	Rear Face	0	1	1	24	22.42	0	3.77	1.44	2.072
L65	LTE B7	QPSK20M	20850	1	0	Rear Face	0	1	2	25	23.43	-0.06	3.45	1.58	2.268
L66	LTE B66	QPSK20M	132072	1	0	Front Face	0	1	1	23.5	23.18	0	0.122	0.0741	0.080
L67	LTE B66	QPSK20M	132072	1	0	Rear Face	0	1	1	23.5	23.18	0.03	3.15	1.59	1.711
L68	LTE B66	QPSK20M	132072	1	0	Left Side	0	1	1	23.5	23.18	0.03	0.417	0.229	0.246
L69	LTE B66	QPSK20M	132072	1	0	Right Side	0	1	1	23.5	23.18	-0.07	0.501	0.276	0.297
L70	LTE B66	QPSK20M	132072	1	0	Top Side 1	0	1	1	23.5	23.18	0.08	0.292	0.178	0.192
L71	LTE B66	QPSK20M	132072	1	0	Top Side 2	0	1	1	23.5	23.18	0.09	0.881	0.495	0.533
L72	LTE B66	QPSK20M	132072	50	0	Front Face	0	1	1	22.5	22.41	0.01	0.103	0.0625	0.064
L73	LTE B66	QPSK20M	132072	50	0	Rear Face	0	1	1	22.5	22.41	0.05	2.51	1.26	1.286
L74	LTE B66	QPSK20M	132072	50	0	Left Side	0	1	1	22.5	22.41	-0.09	0.391	0.212	0.216
L75	LTE B66	QPSK20M	132072	50	0	Right Side	0	1	1	22.5	22.41	0.09	0.405	0.222	0.227
L76	LTE B66	QPSK20M	132072	50	0	Top Side 1	0	1	1	22.5	22.41	0.01	0.229	0.14	0.143
L77	LTE B66	QPSK20M	132072	50	0	Top Side 2	0	1	1	22.5	22.41	-0.03	0.613	0.345	0.352
L78	LTE B66	QPSK20M	132322	1	0	Rear Face	0	1	1	23.5	22.65	0.06	3.16	1.58	1.922
L79	LTE B66	QPSK20M	132572	1	0	Rear Face	0	1	1	23.5	22.16	-0.02	2.65	1.28	1.743
L80	LTE B66	QPSK20M	132322	100	0	Rear Face	0	1	1	22.5	21.74	0.08	2.47	1.25	1.489
L81	LTE B66	QPSK20M	132322	1	0	Rear Face	0	1	2	23.5	22.65	-0.04	2.6	1.33	1.618

Note: The value with boldface is the maximum SAR Value of each test band.

4. Limbs SAR test results of WiFi 2.4G


Test No.	Band	Channel	Test Position	Separation Distance (mm)	Configuration Type	Data Rate	Duty Cycle (%)	Maximum Tune-up (dBm)	Conducted Power (dBm)	Power Drift (dB)	SAR 1g (W/kg)	SAR 10g (W/kg)	Reported 10g SAR (W/kg)
W01	802.11n HT20	6	Front Face	0	1	HT0	94.16	16.50	16.41	0	0.097	0.048	0.052
W02	802.11n HT20	6	Rear Face	0	1	HT0	94.16	16.50	16.41	-0.11	0.099	0.046	0.050
W03	802.11n HT20	6	Left Side	0	1	HT0	94.16	16.50	16.41	0.16	0.114	0.053	0.057
W04	802.11n HT20	6	Right Side	0	1	HT0	94.16	16.50	16.41	-0.17	1.580	0.620	0.672
W05	802.11n HT20	6	Top Side 1	0	1	HT0	94.16	16.50	16.41	-0.09	0.087	0.046	0.049
W06	802.11n HT20	6	Top Side 2	0	1	HT0	94.16	16.50	16.41	-0.09	0.111	0.057	0.062
W07	802.11n HT20	1	Right Side	0	1	HT0	94.16	12.00	11.6	-0.07	0.730	0.286	0.333
W08	802.11n HT20	11	Right Side	0	1	HT0	94.16	13.00	12.6	0.06	0.683	0.262	0.305
W09	802.11n HT20	6	Right Side	0	2	HT0	94.16	16.50	16.41	0.07	1.270	0.501	0.543

Note: The value with boldface is the maximum SAR Value of each test band.

7.3 MULTIPLE TRANSMITTER EVALUATION

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB447498 D04 Interim General RF Exposure Guidance v01.

The location of the antennas inside the EUT is shown as below:

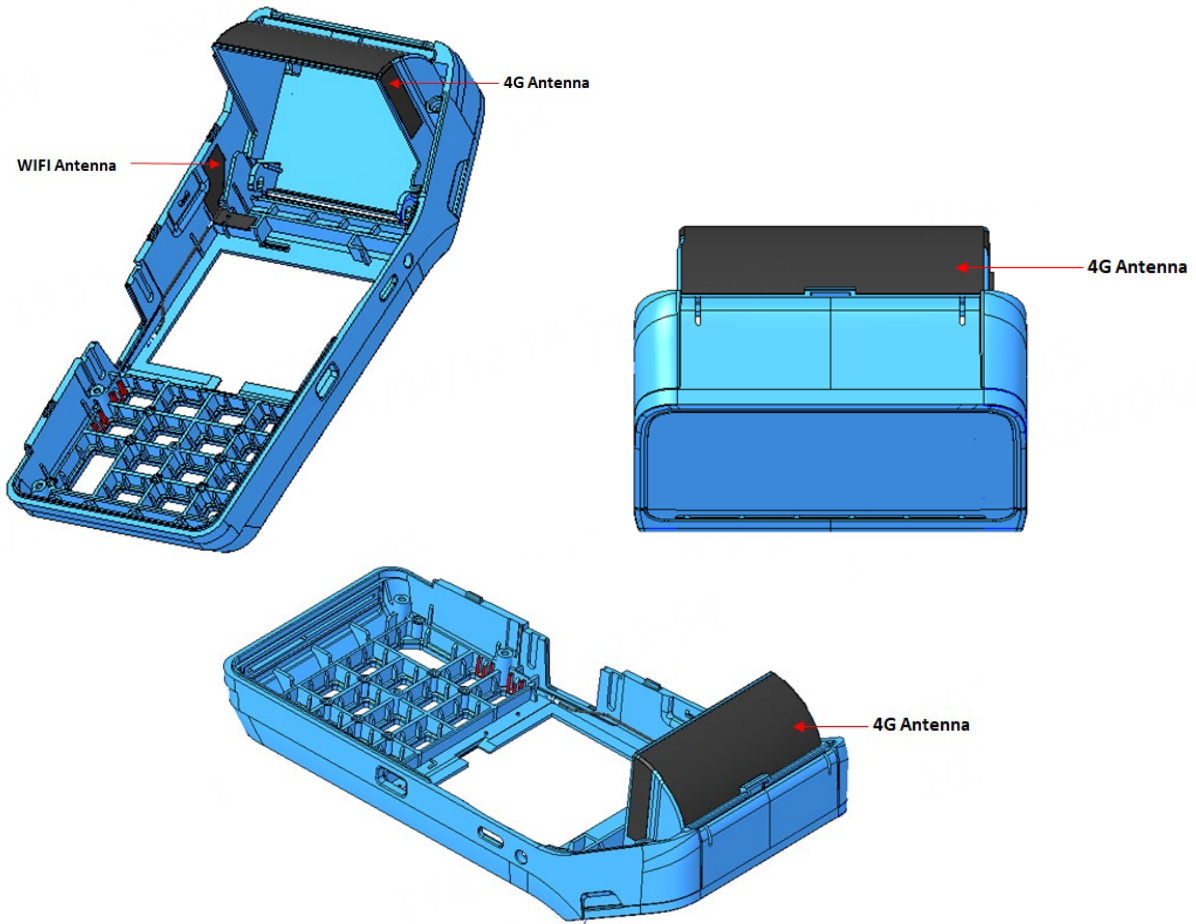

7.3.1 STAND-ALONE SAR TEST EXCLUSION

Per FCC KDB447498 D04, SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.


The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Limb
1	GPRS + WiFi 2.4G	Yes
2	UMTS + WiFi 2.4G	Yes
3	LTE + WiFi 2.4G	Yes

7.3.2 SIMULTANEOUS TRANSMISSION CONDITIONS

Test Position SAR _{10g} (W/Kg)	Front Face	Rear Face	Left Side	Right Side	Top Side 1	Top Side 2
GSM 850	0.251	1.269	0.184	0.315	0.275	0.260
GSM 1900	0.127	1.301	0.209	0.364	0.195	0.511
UMTS B2	0.134	1.153	0.033	0.258	0.181	0.627
UMTS B4	0.082	2.313	0.302	0.373	0.237	0.680
UMTS B5	0.164	0.648	0.106	0.189	0.148	0.156
LTE B2	0.105	0.911	0.137	0.187	0.101	0.412
LTE B4	0.087	2.128	0.313	0.322	0.213	0.540
LTE B5	0.167	0.819	0.127	0.222	0.175	0.202
LTE B7	0.035	2.598	0.063	0.421	0.182	0.744
LTE B66	0.080	1.922	0.246	0.297	0.192	0.533
WIFI2.4G	0.052	0.050	0.057	0.672	0.049	0.062
MAX ΣSAR_{10g}	0.303	2.648	0.370	1.093	0.324	0.806

Note: Thus SAR_{MAX.total} = 1.093 W/kg < 4.0 W/kg, it is compliant with 1999/519/EC, so Simultaneous SAR are not required for GSM/UMTS/LTE and WIFI antenna.

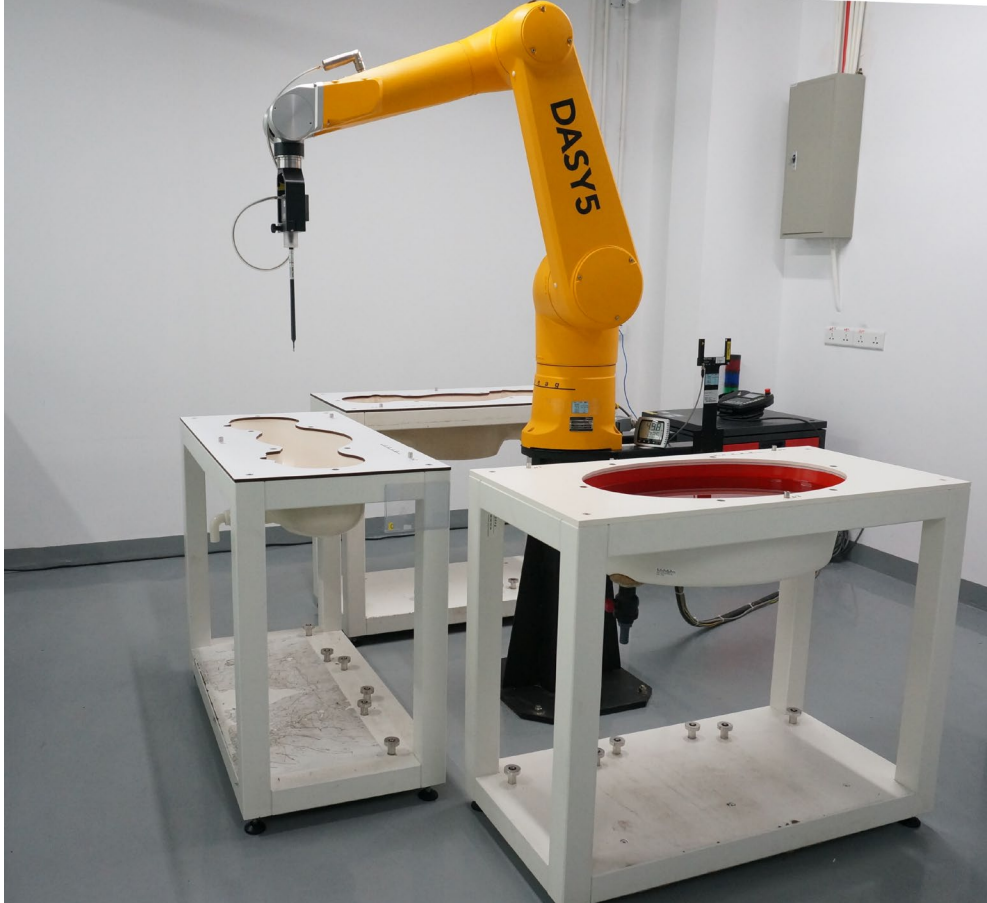
APPENDIX**1. TEST LAYOUT****Specific Absorption Rate Test Layout**

Liquid depth in the flat Phantom ($\geq 15\text{cm}$ depth)

HSL_695MHz-925MHz_Body_18.3cm HSL_1700MHz-1900MHz_Body_18.1cm



HSL_1900MHz-2300MHz_Body_18.5cm HSL_2300MHz-2700MHz_Body_18.3cm

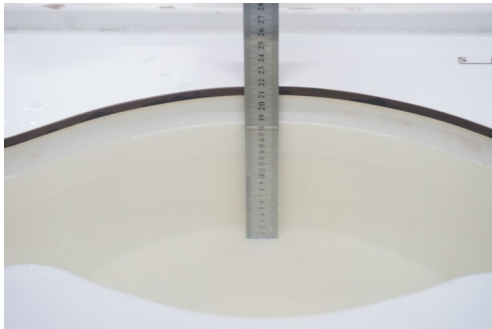

Appendix A. SAR Plots of System Verification

(Pls See BTL-FCC SAR-1-2403G125_Appendix A.)

Appendix B. SAR Plots of SAR Measurement

(Pls See BTL-FCC SAR-1-2403G125_Appendix B.)

Appendix C. Calibration Certificate

(Pls See BTL-FCC SAR-1-2403G125_Appendix C.)

Appendix D. Photographs of the Test Set-Up

(Pls See BTL-FCC SAR-1-2403G125_Appendix D.)

Appendix E. Conducted Power Measurement Result

(Pls See BTL-FCC SAR-1-2403G125_Appendix E.)

End of Test Report