

**Test Plot: 1#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/GSM 850 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.317 W/kg


**Head Left Cheek/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.064 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.462 W/kg

**SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.202 W/kg**

Maximum value of SAR (measured) = 0.352 W/kg

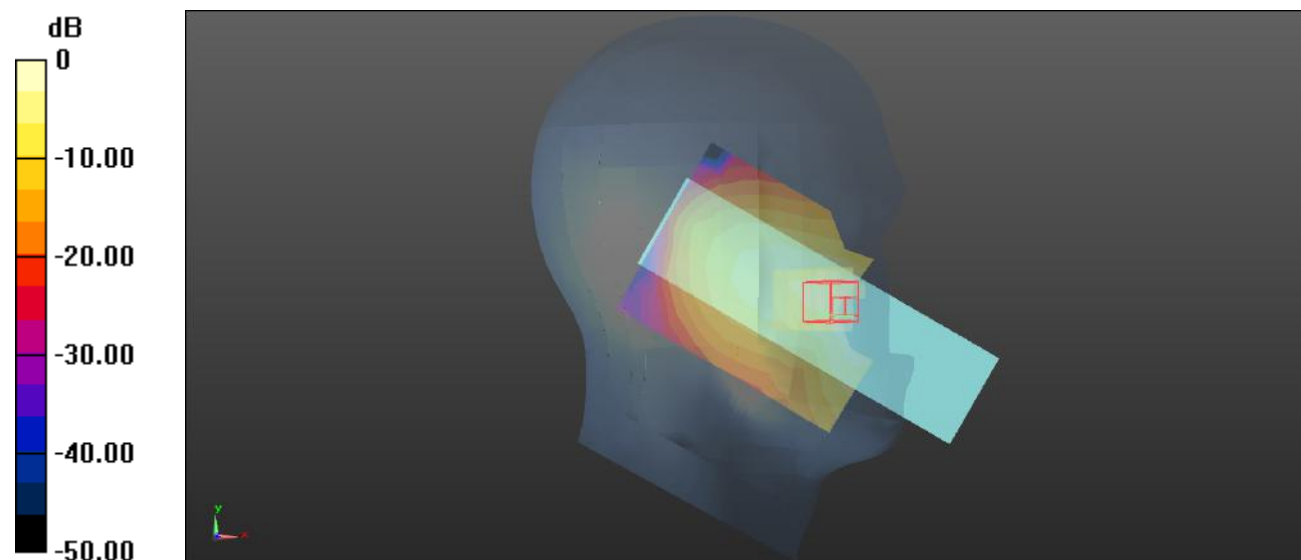

0 dB = 0.352 W/kg = -4.53 dBW/kg

**Test Plot: 2#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/GSM 850 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0773 W/kg


**Head Left Tilt/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.521 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0960 W/kg

**SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.0787 W/kg

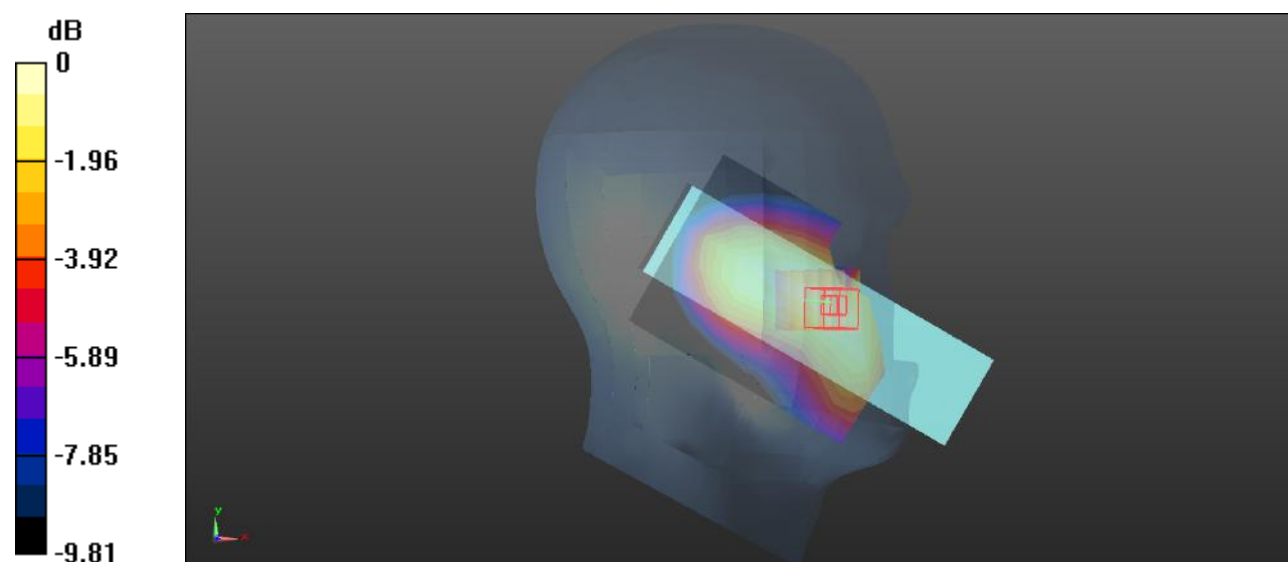

**Test Plot: 3#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/GSM 850 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.487 W/kg


**Head Right Cheek/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.037 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.741 W/kg

**SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.297 W/kg**

Maximum value of SAR (measured) = 0.506 W/kg

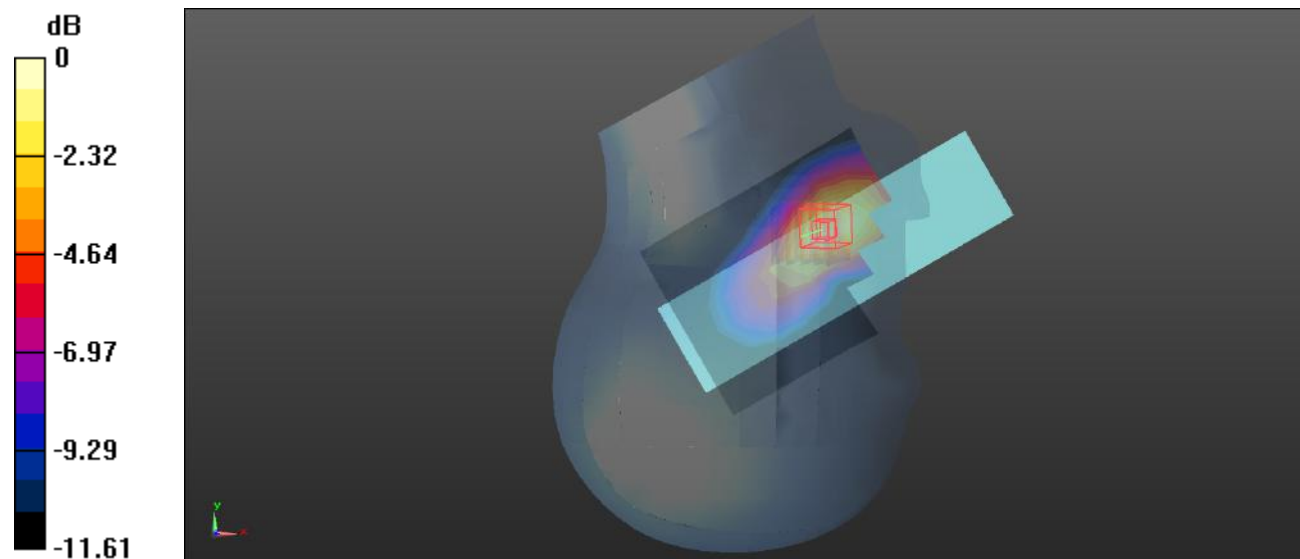

0 dB = 0.506 W/kg = -2.96 dBW/kg

**Test Plot: 4#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/GSM 850 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0936 W/kg


**Head Right Tilt/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.378 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.111 W/kg

**SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.067 W/kg**

Maximum value of SAR (measured) = 0.0919 W/kg

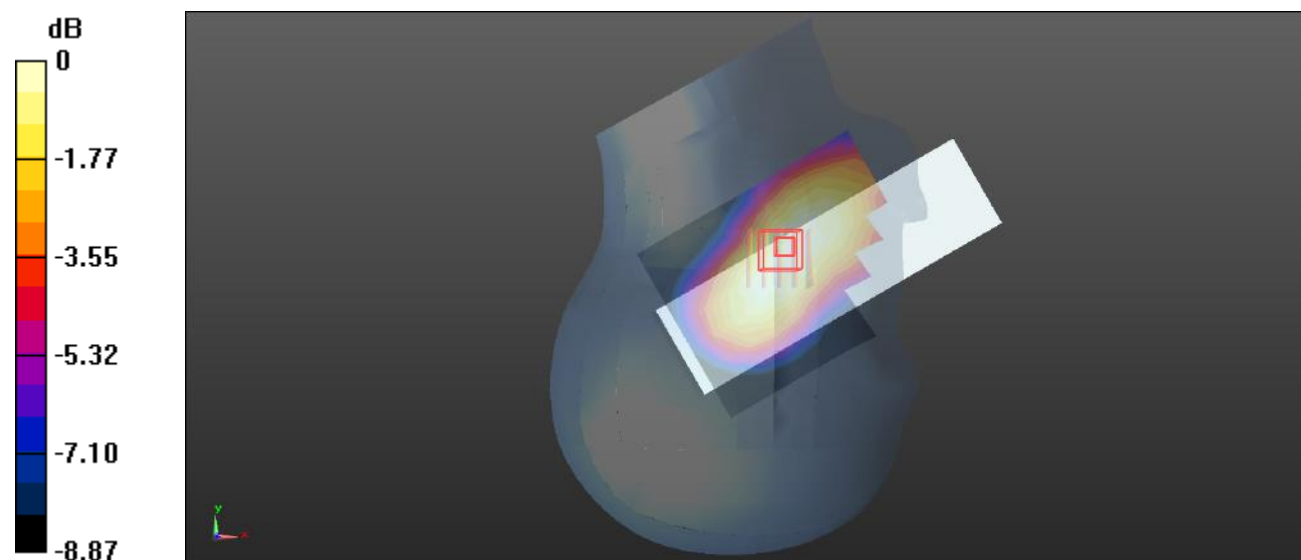

0 dB = 0.0919 W/kg = -10.37 dBW/kg

**Test Plot: 5#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1**

Communication System: UID 0, Generic GSM (0); Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.906$  S/m;  $\epsilon_r = 41.662$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 824.2 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Worn Back/GSM 850 Low/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.893 W/kg


**Body Worn Back/GSM 850 Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.14 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.878 W/kg; SAR(10 g) = 0.612 W/kg**

Maximum value of SAR (measured) = 0.936 W/kg

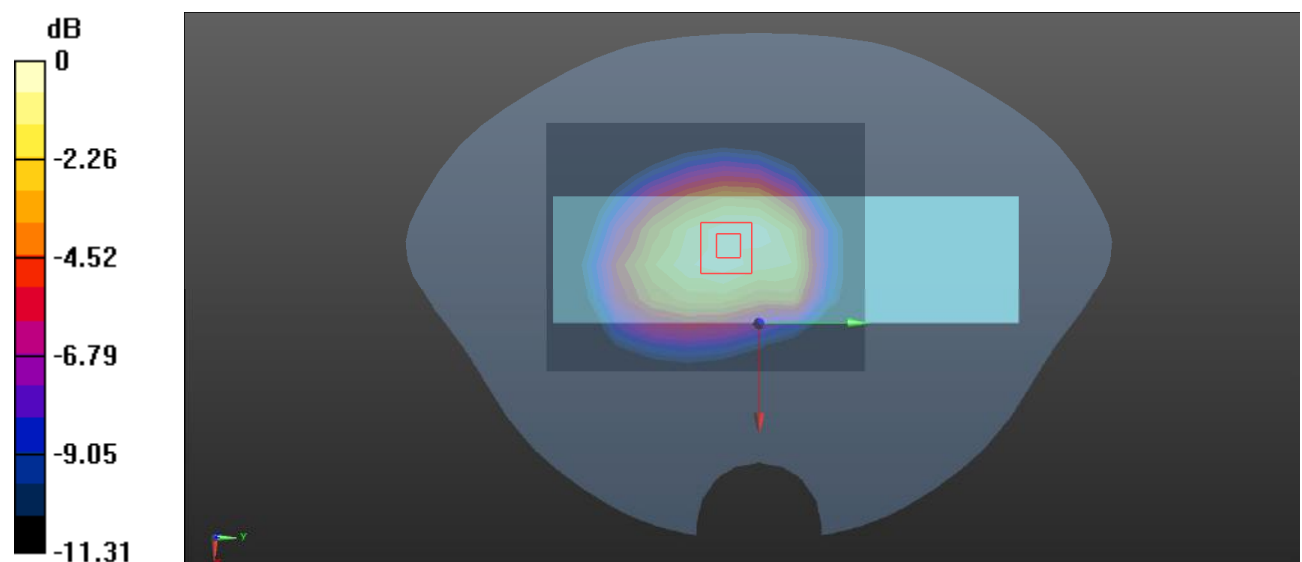

0 dB = 0.936 W/kg = -0.29 dBW/kg

**Test Plot: 6#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Worn Back/GSM 850 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.894 W/kg


**Body Worn Back/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.60 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.836 W/kg; SAR(10 g) = 0.580 W/kg**

Maximum value of SAR (measured) = 0.888 W/kg

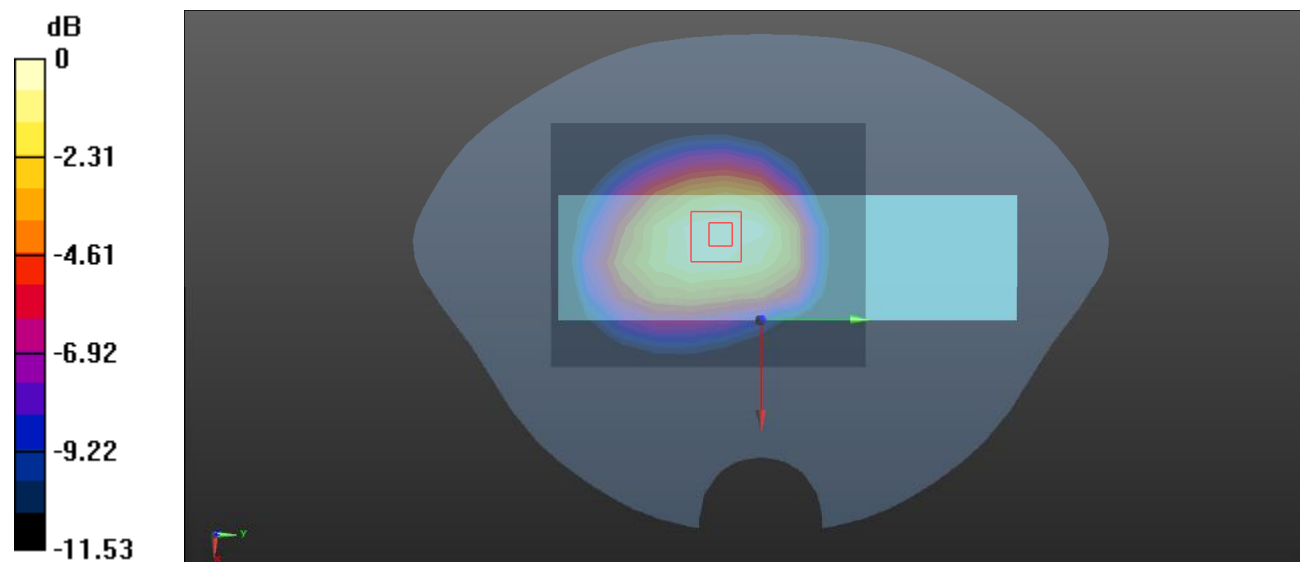

0 dB = 0.888 W/kg = -0.52 dBW/kg

**Test Plot: 7#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GSM (0); Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 0.904$  S/m;  $\epsilon_r = 41.592$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 848.8 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Worn Back/GSM 850 High/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.690 W/kg


**Body Worn Back/GSM 850 High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.76 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.933 W/kg

**SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.457 W/kg**

Maximum value of SAR (measured) = 0.690 W/kg

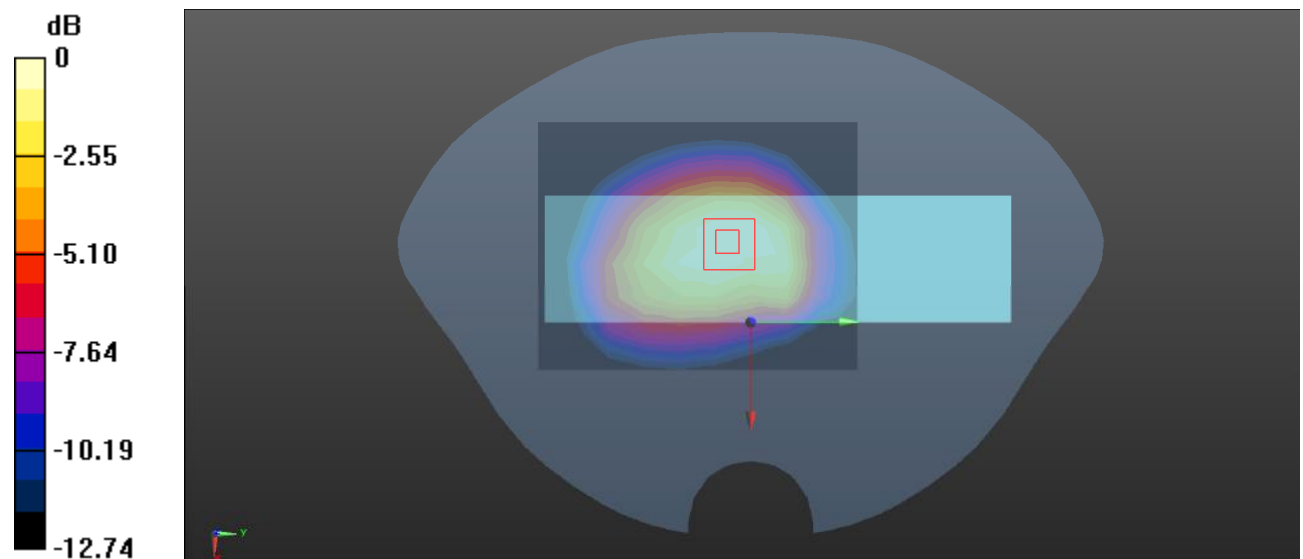

0 dB = 0.690 W/kg = -1.61 dBW/kg

**Test Plot: 8#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GPRS-2 slots (0); Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.906$  S/m;  $\epsilon_r = 41.662$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 824.2 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/GSM 850 Low/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.29 W/kg


**Body Back/GSM 850 Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.01 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.68 W/kg

**SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.814 W/kg**

Maximum value of SAR (measured) = 1.28 W/kg

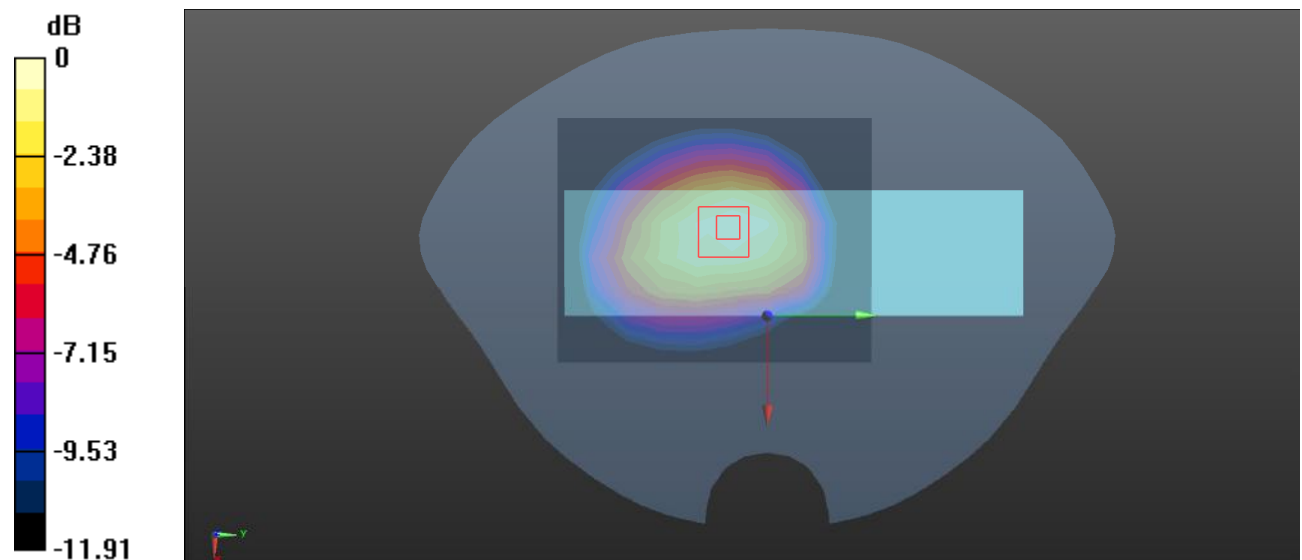

0 dB = 1.28 W/kg = 1.07 dBW/kg



**Test Plot: 9#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GPRS-2 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/GSM 850 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.24 W/kg


**Body Back/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.45 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.60 W/kg

**SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.768 W/kg**

Maximum value of SAR (measured) = 1.22 W/kg

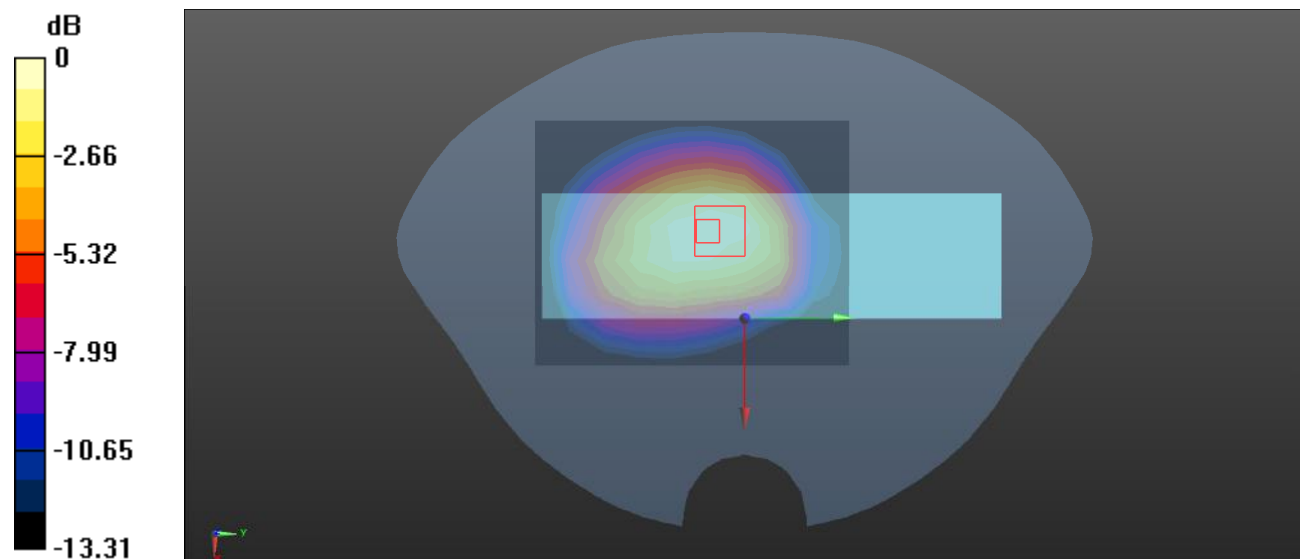

0 dB = 1.22 W/kg = 0.86 dBW/kg

**Test Plot: 10#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GPRS-2 slots (0); Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 0.904$  S/m;  $\epsilon_r = 41.592$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 848.8 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/GSM 850 High/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.12 W/kg


**Body Back/GSM 850 High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.93 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.52 W/kg

**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.761 W/kg**

Maximum value of SAR (measured) = 1.17 W/kg

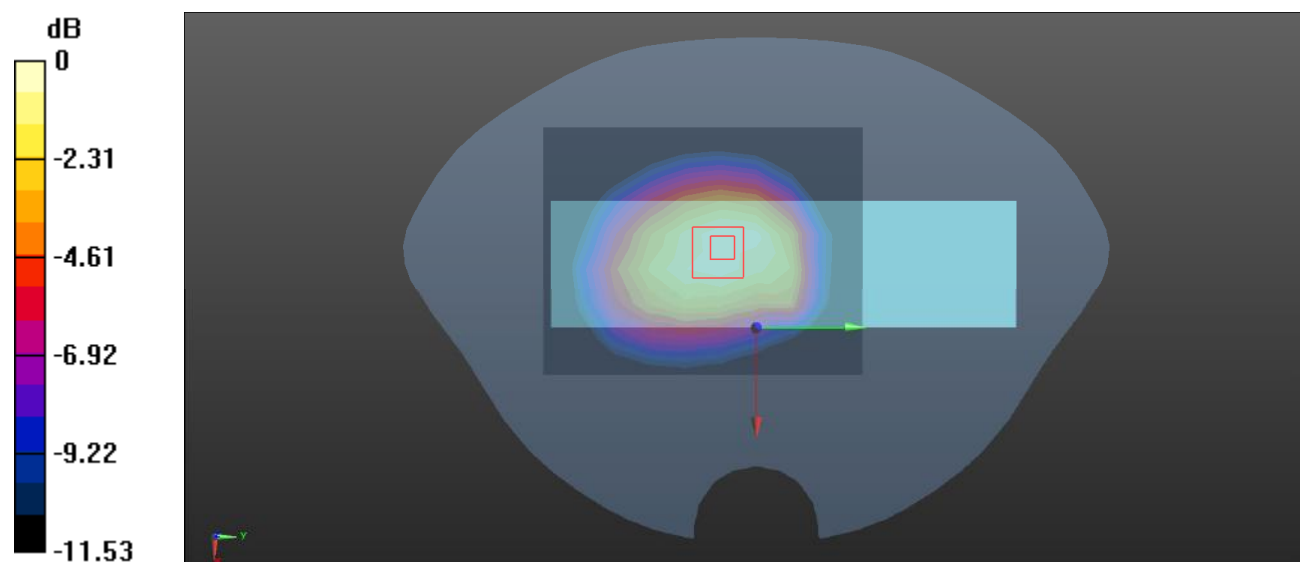

0 dB = 1.17 W/kg = 0.68 dBW/kg

**Test Plot: 11#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.353 \text{ S/m}$ ;  $\epsilon_r = 40.343$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/GSM 1900 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.444 W/kg


**Head Left Cheek/GSM 1900 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.610 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.706 W/kg

**SAR(1 g) = 0.449 W/kg; SAR(10 g) = 0.258 W/kg**

Maximum value of SAR (measured) = 0.485 W/kg

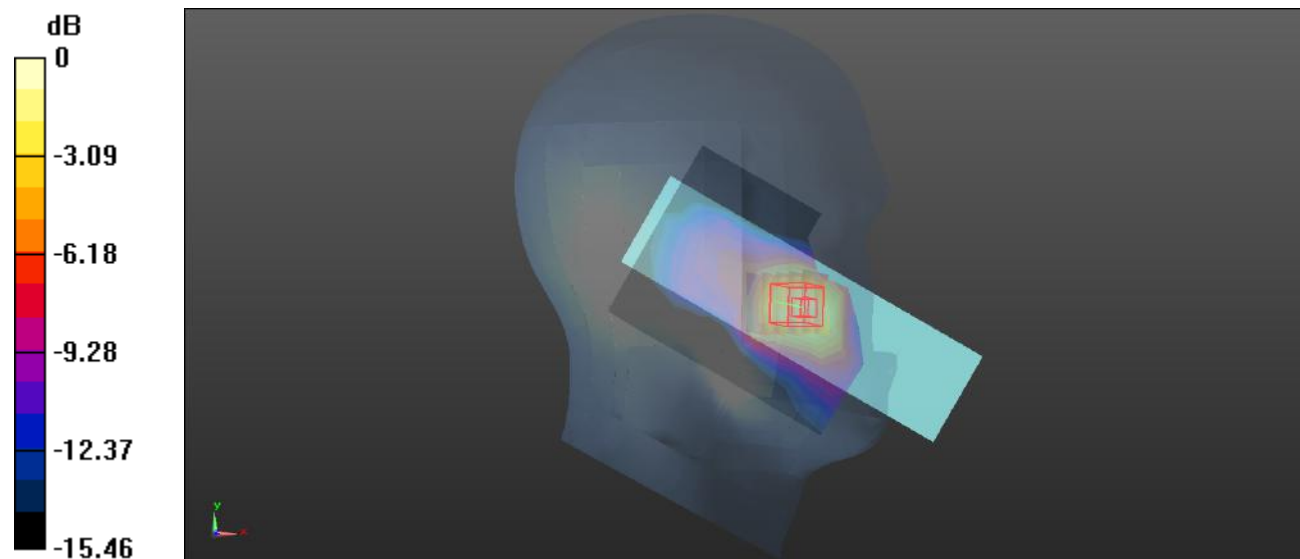

0 dB = 0.485 W/kg = -3.14 dBW/kg

**Test Plot: 12#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/GSM 1900 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.109 W/kg


**Head Left Tilt/GSM 1900 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.342 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.157 W/kg

**SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.069 W/kg**

Maximum value of SAR (measured) = 0.113 W/kg

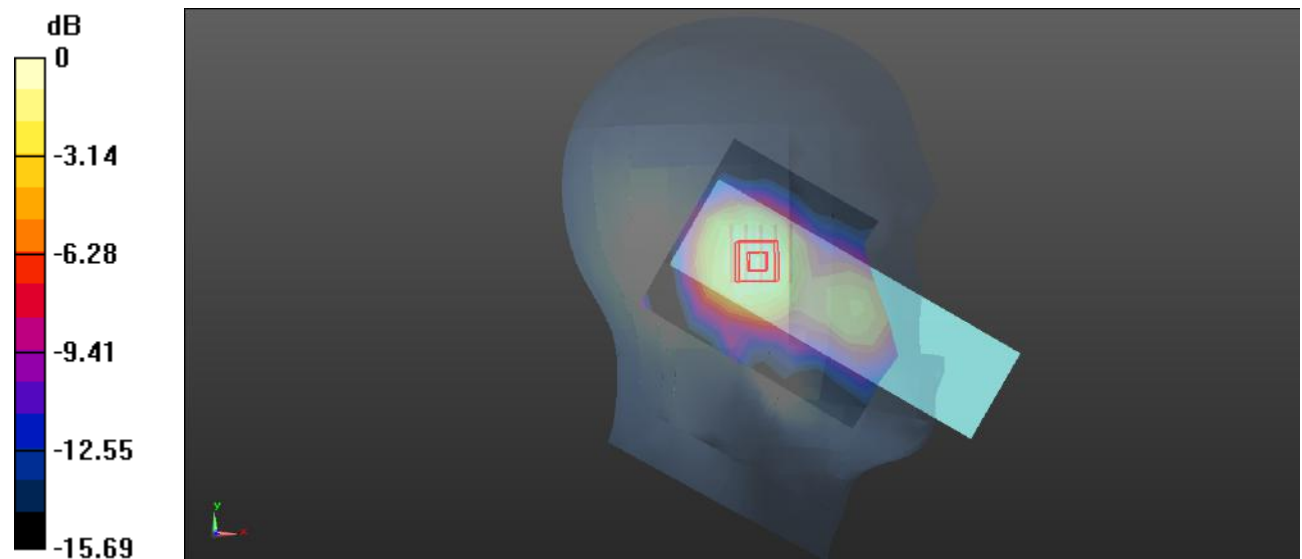

0 dB = 0.113 W/kg = -9.47 dBW/kg

**Test Plot: 13#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/GSM 1900 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.514 W/kg


**Head Right Cheek/GSM 1900 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.240 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.812 W/kg

**SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.292 W/kg**

Maximum value of SAR (measured) = 0.561 W/kg

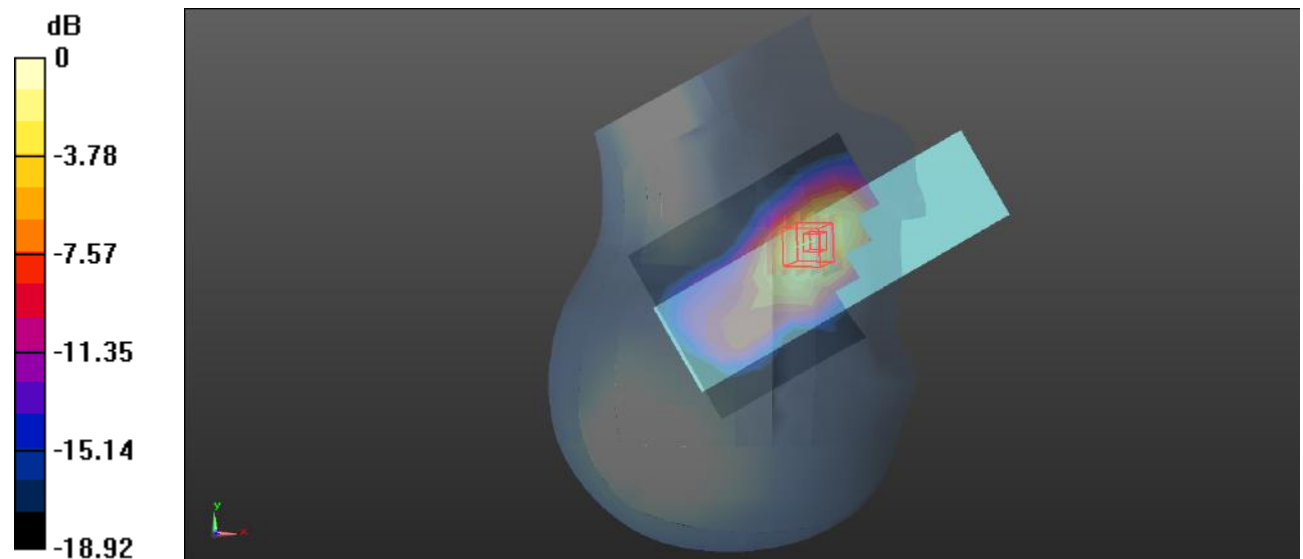

**Test Plot: 14#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/GSM 1900 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.131 W/kg


**Head Right Tilt/GSM 1900 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.950 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.185 W/kg

**SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.079 W/kg**

Maximum value of SAR (measured) = 0.130 W/kg

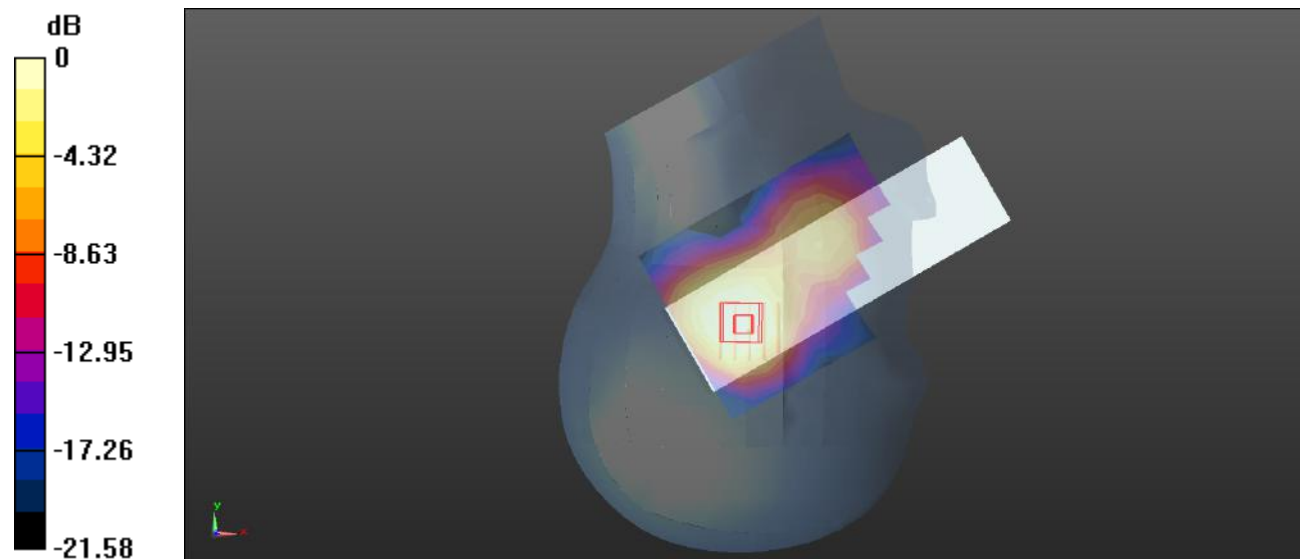

0 dB = 0.130 W/kg = -8.86 dBW/kg

**Test Plot: 15#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Worn Back/GSM 1900 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.776 W/kg


**Body Worn Back/GSM 1900 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.44 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.32 W/kg

**SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.390 W/kg**

Maximum value of SAR (measured) = 0.819 W/kg

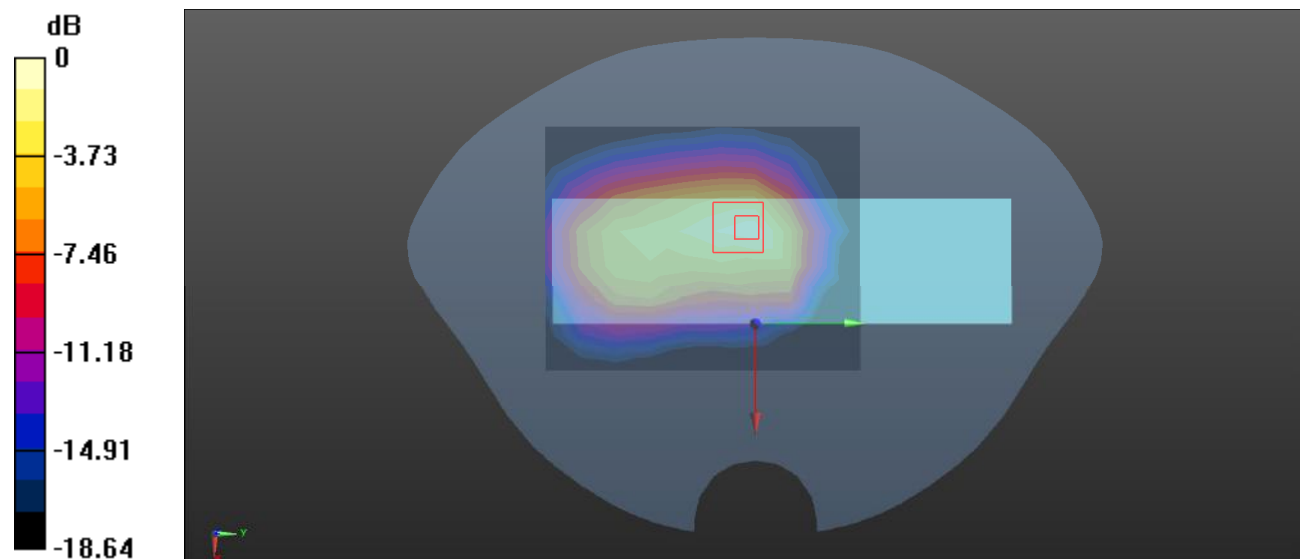

0 dB = 0.819 W/kg = -0.87 dBW/kg

**Test Plot: 16#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2.66

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/GSM 1900 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.737 W/kg


**Body Back/GSM 1900 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.99 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.655 W/kg; SAR(10 g) = 0.353 W/kg**

Maximum value of SAR (measured) = 0.728 W/kg

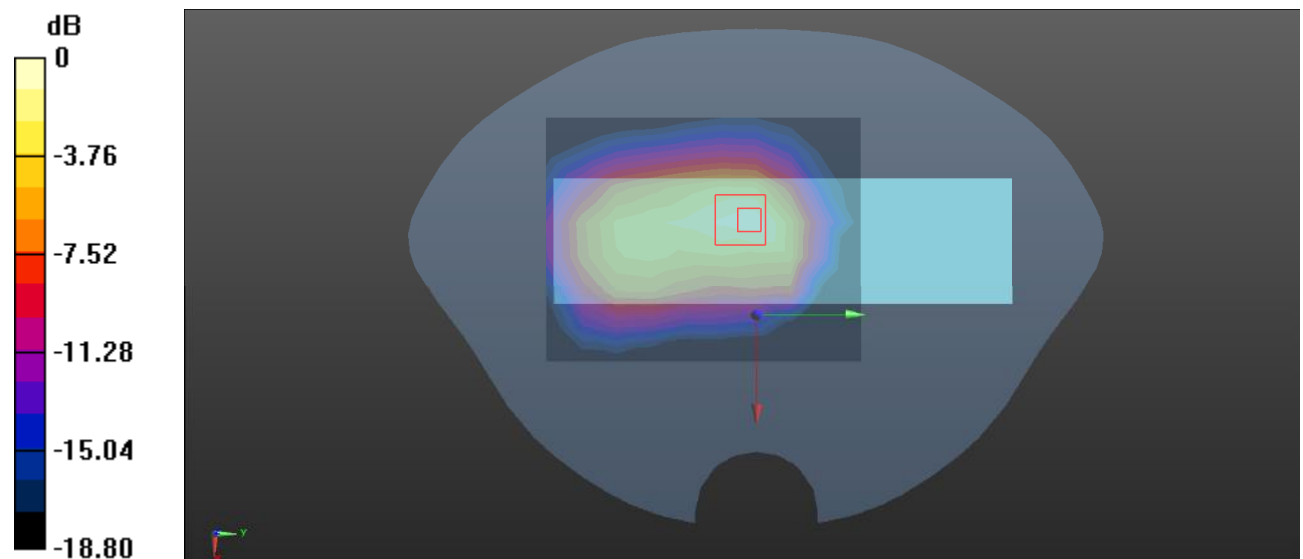

0 dB = 0.728 W/kg = -1.38 dBW/kg



**Test Plot: 17#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/WCDMA Band 2 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.289 W/kg


**Head Left Cheek/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.584 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.490 W/kg

**SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.166 W/kg**

Maximum value of SAR (measured) = 0.311 W/kg

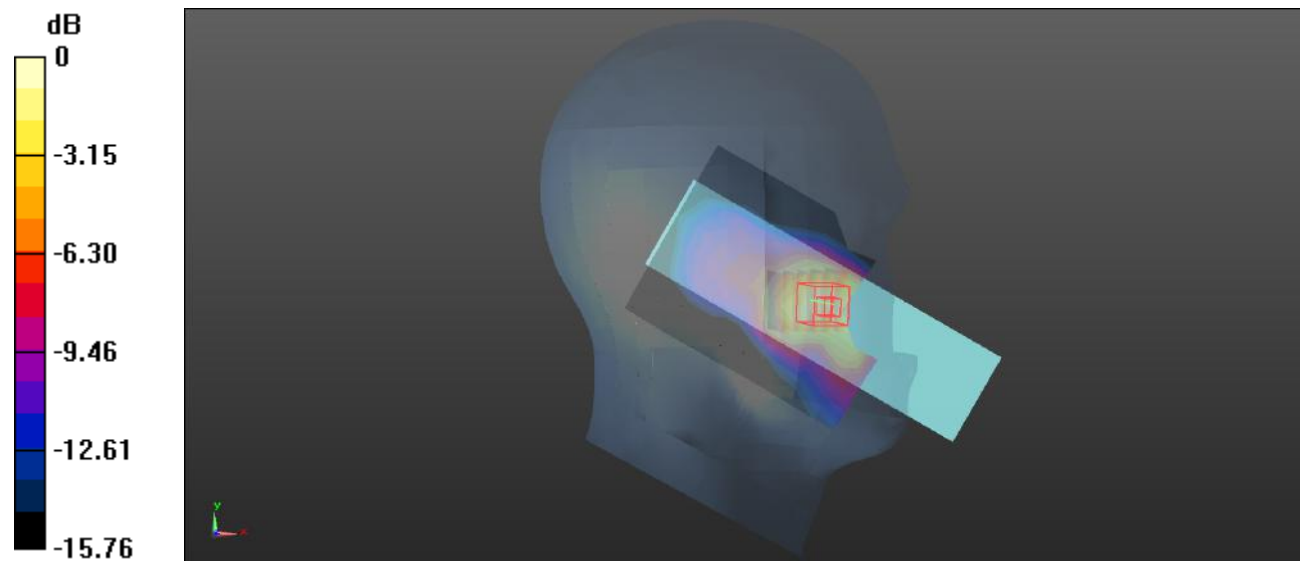

0 dB = 0.311 W/kg = -5.07 dBW/kg

**Test Plot: 18#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.353 \text{ S/m}$ ;  $\epsilon_r = 40.343$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/WCDMA Band 2 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0628 W/kg


**Head Left Tilt/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.104 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0950 W/kg

**SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.0660 W/kg

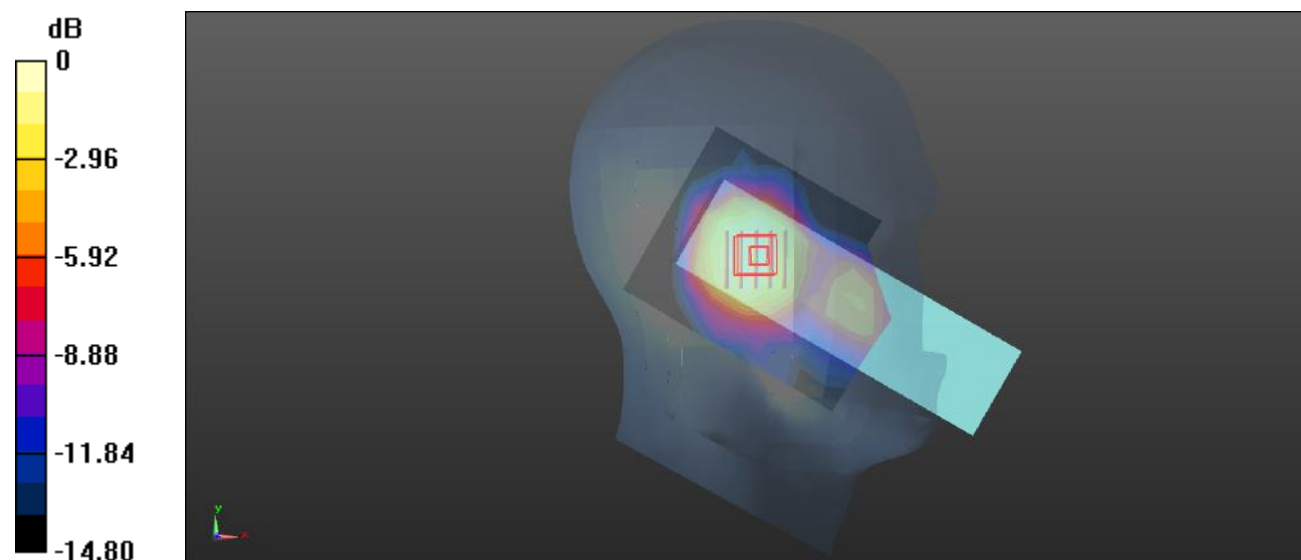

0 dB = 0.0660 W/kg = -11.80 dBW/kg

**Test Plot: 19#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/WCDMA Band 2 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.298 W/kg


**Head Right Cheek/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.071 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.480 W/kg

**SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.163 W/kg**

Maximum value of SAR (measured) = 0.318 W/kg

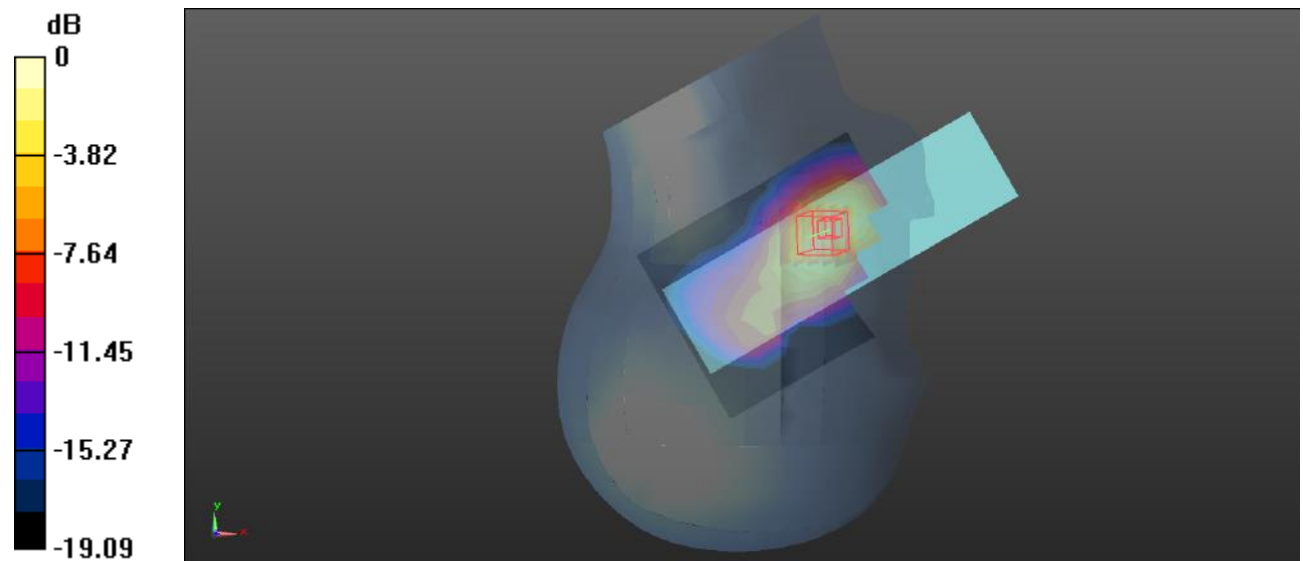

0 dB = 0.318 W/kg = -4.98 dBW/kg

**Test Plot: 20#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/WCDMA Band 2 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0756 W/kg


**Head Right Tilt/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.649 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.121 W/kg

**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.0812 W/kg

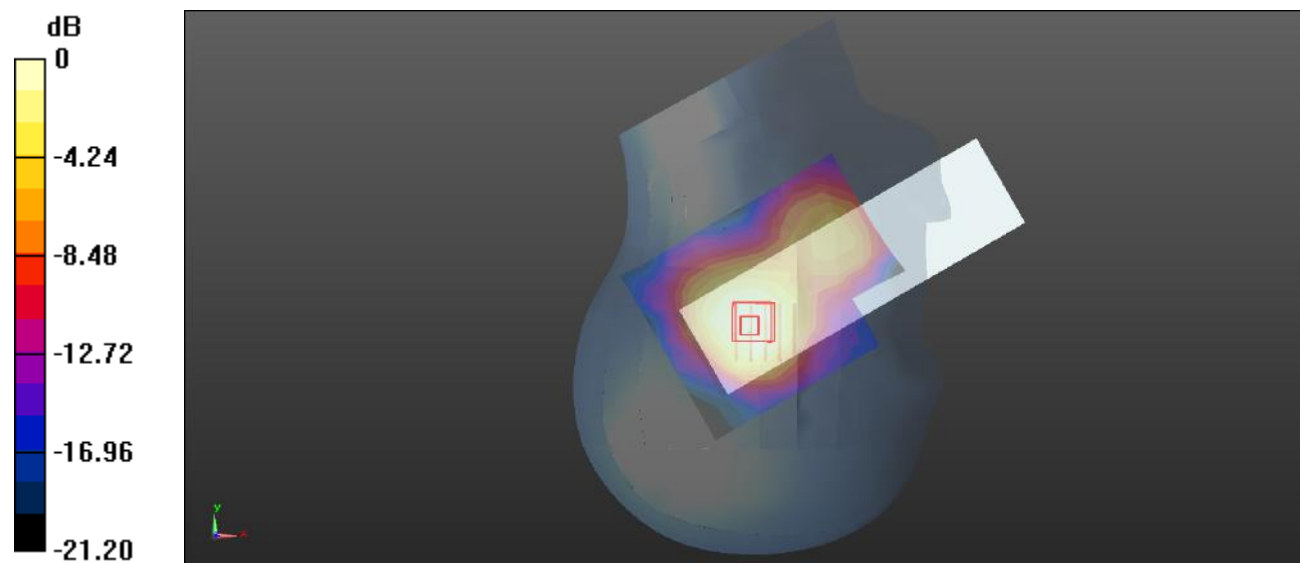

0 dB = 0.0812 W/kg = -10.90 dBW/kg

**Test Plot: 21#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.353 \text{ S/m}$ ;  $\epsilon_r = 40.343$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/WCDMA Band 2 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.450 W/kg


**Body Back/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.22 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.791 W/kg

**SAR(1 g) = 0.414 W/kg; SAR(10 g) = 0.213 W/kg**

Maximum value of SAR (measured) = 0.441 W/kg

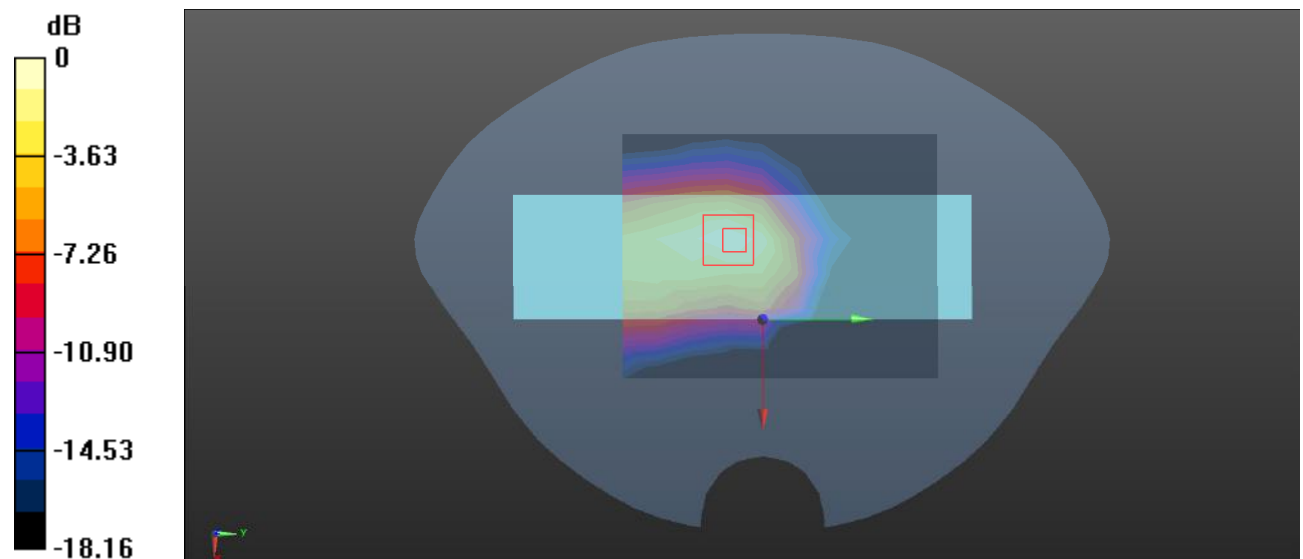

0 dB = 0.441 W/kg = -3.56 dBW/kg

**Test Plot: 22#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.348$  S/m;  $\epsilon_r = 40.42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/WCDMA Band 4 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.773 W/kg


**Head Left Cheek/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.430 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.397 W/kg**

Maximum value of SAR (measured) = 0.745 W/kg

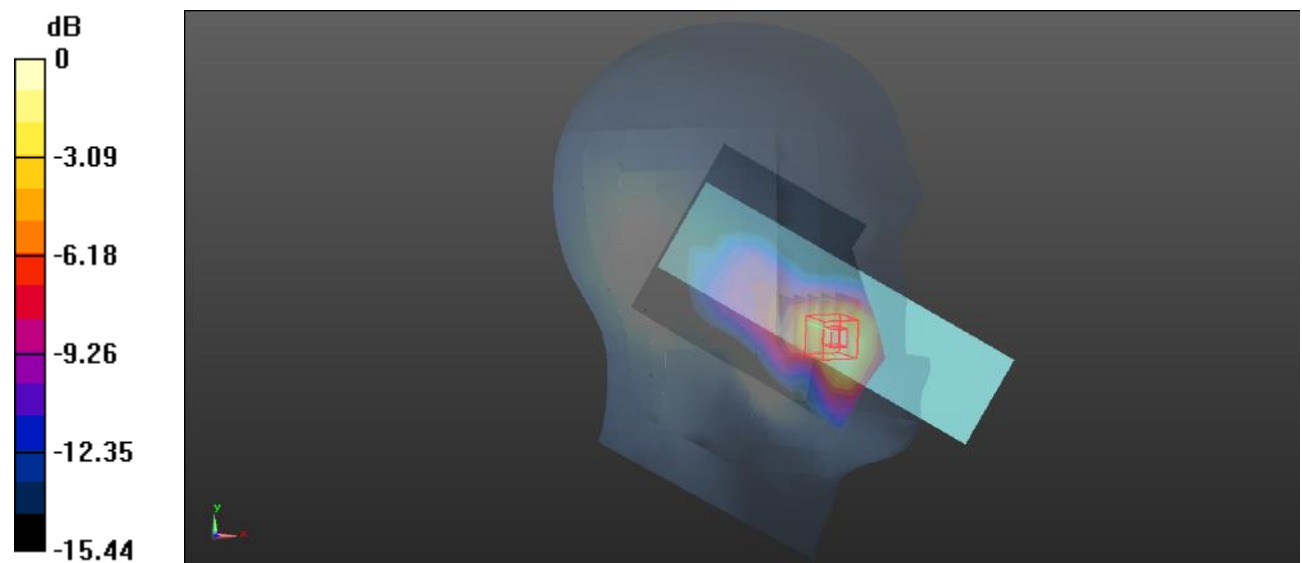

0 dB = 0.745 W/kg = -1.28 dBW/kg

**Test Plot: 23#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.348$  S/m;  $\epsilon_r = 40.42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/WCDMA Band 4 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.136 W/kg


**Head Left Tilt/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.714 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.193 W/kg

**SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.090 W/kg**

Maximum value of SAR (measured) = 0.148 W/kg

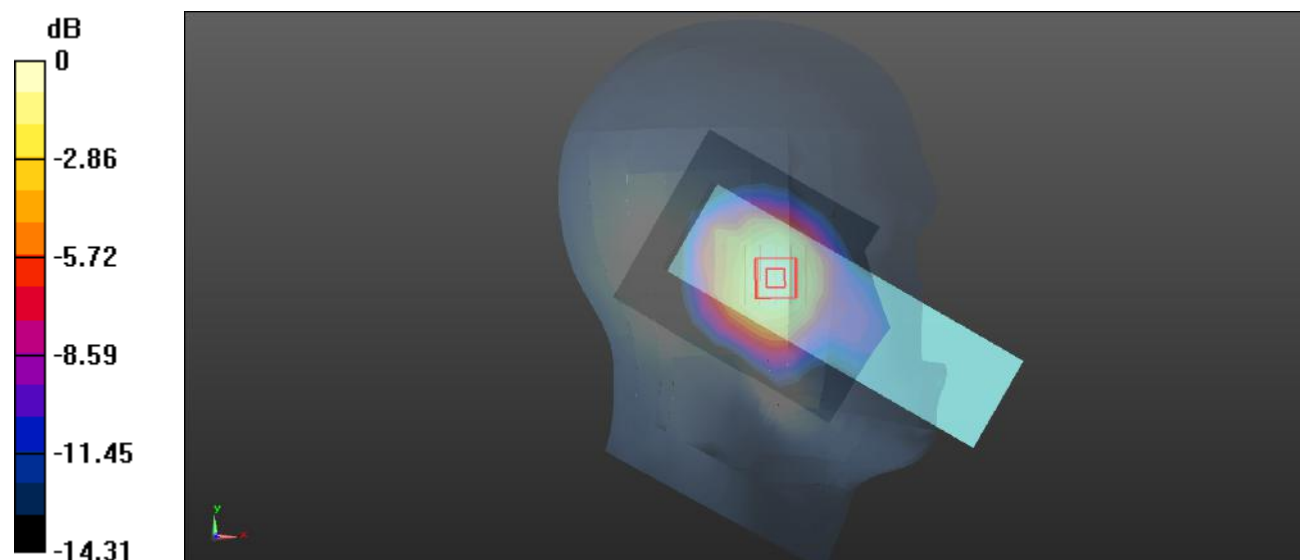

0 dB = 0.148 W/kg = -8.30 dBW/kg

**Test Plot: 24#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.348$  S/m;  $\epsilon_r = 40.42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/WCDMA Band 4 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.606 W/kg


**Head Right Cheek/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.782 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.348 W/kg**

Maximum value of SAR (measured) = 0.686 W/kg

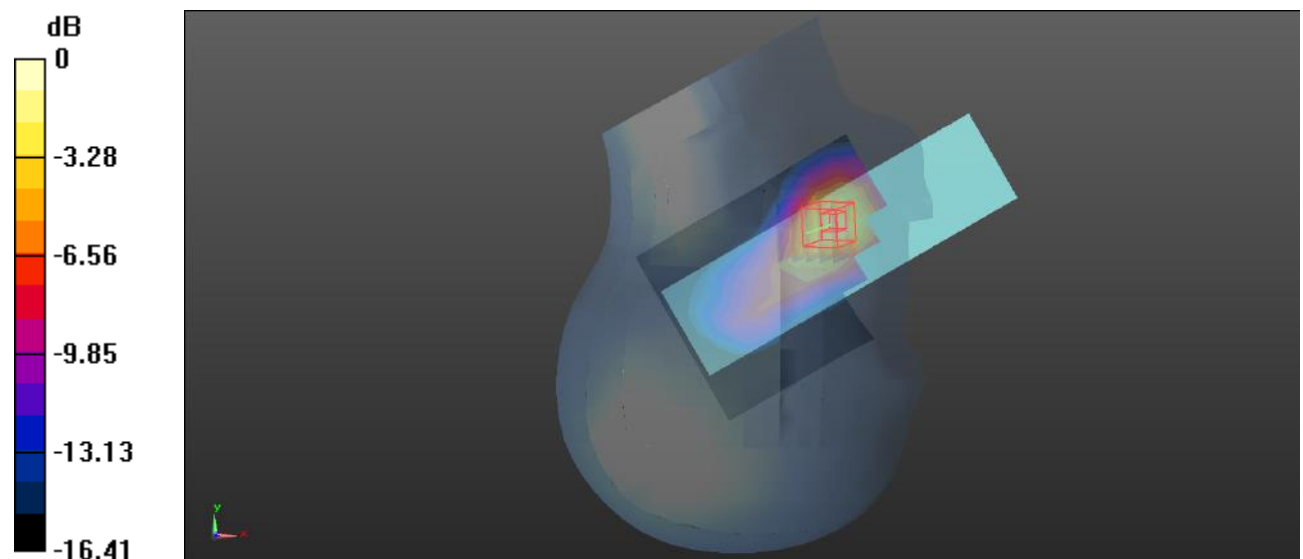

0 dB = 0.686 W/kg = -1.64 dBW/kg



**Test Plot: 25#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.348$  S/m;  $\epsilon_r = 40.42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/WCDMA Band 4 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.134 W/kg


**Head Right Tilt/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.876 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.189 W/kg

**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.082 W/kg**

Maximum value of SAR (measured) = 0.135 W/kg

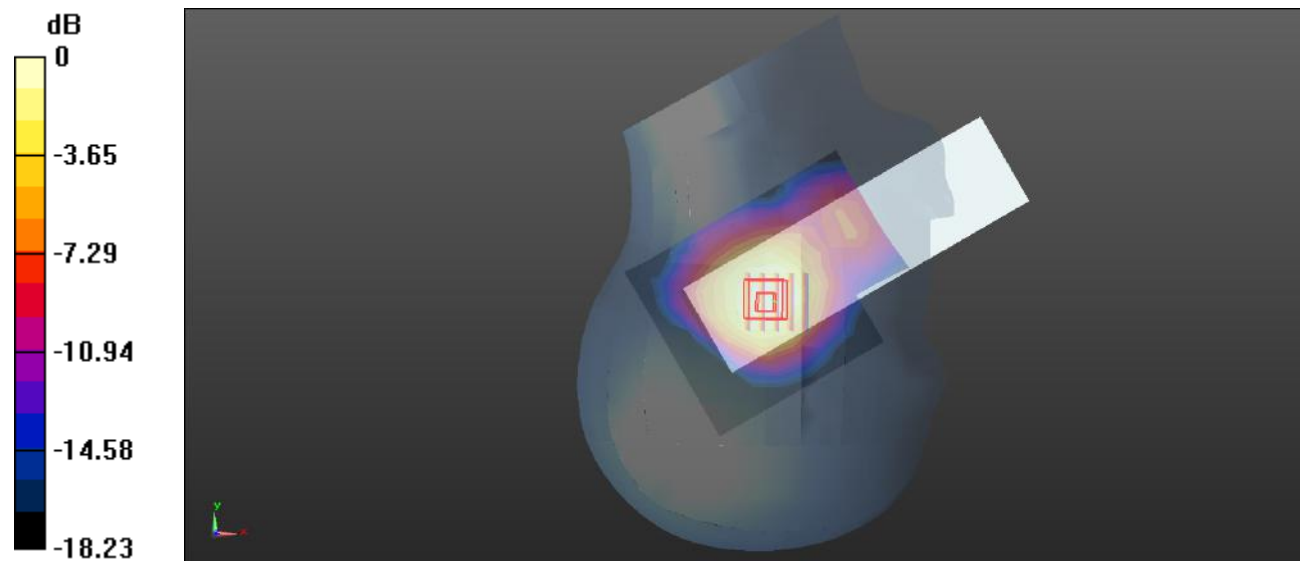

0 dB = 0.135 W/kg = -8.70 dBW/kg

**Test Plot: 26#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1712.4$  MHz;  $\sigma = 1.349$  S/m;  $\epsilon_r = 40.765$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1712.4 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/WCDMA Band 4 Low/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.06 W/kg


**Body Back/WCDMA Band 4 Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.55 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.73 W/kg

**SAR(1 g) = 1 W/kg; SAR(10 g) = 0.545 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

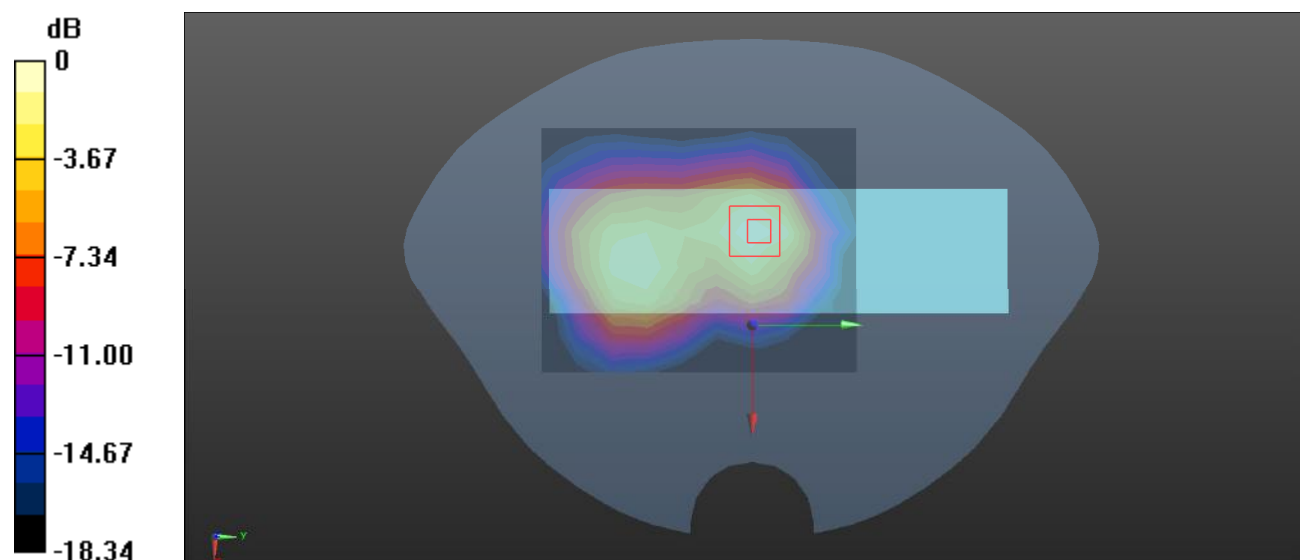

0 dB = 1.06 W/kg = 0.25 dBW/kg

**Test Plot: 27#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.348$  S/m;  $\epsilon_r = 40.42$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1732.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/WCDMA Band 4 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.36 W/kg


**Body Back/WCDMA Band 4 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.16 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.10 W/kg

**SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.676 W/kg**

Maximum value of SAR (measured) = 1.36 W/kg

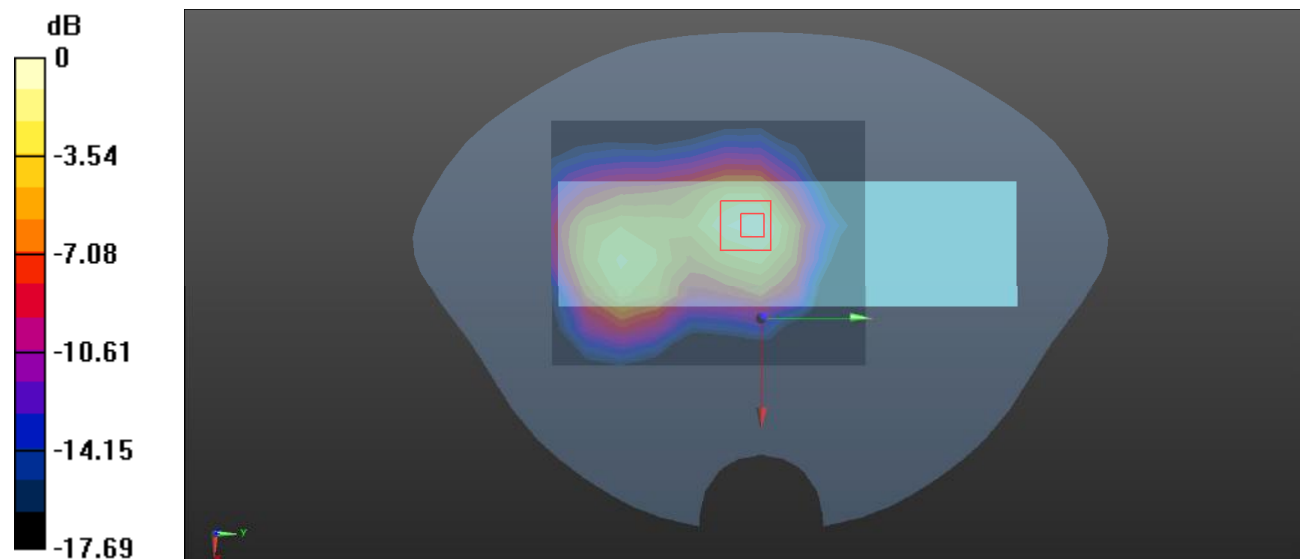

0 dB = 1.36 W/kg = 1.34 dBW/kg

**Test Plot: 28#****DUT: 4G Flip Phone; Type: V202T; Serial: 28O1-1;**

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1752.6$  MHz;  $\sigma = 1.351$  S/m;  $\epsilon_r = 40.131$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1752.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/WCDMA Band 4 High/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.04 W/kg


**Body Back/WCDMA Band 4 High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.56 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.00 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.585 W/kg**

Maximum value of SAR (measured) = 1.17 W/kg

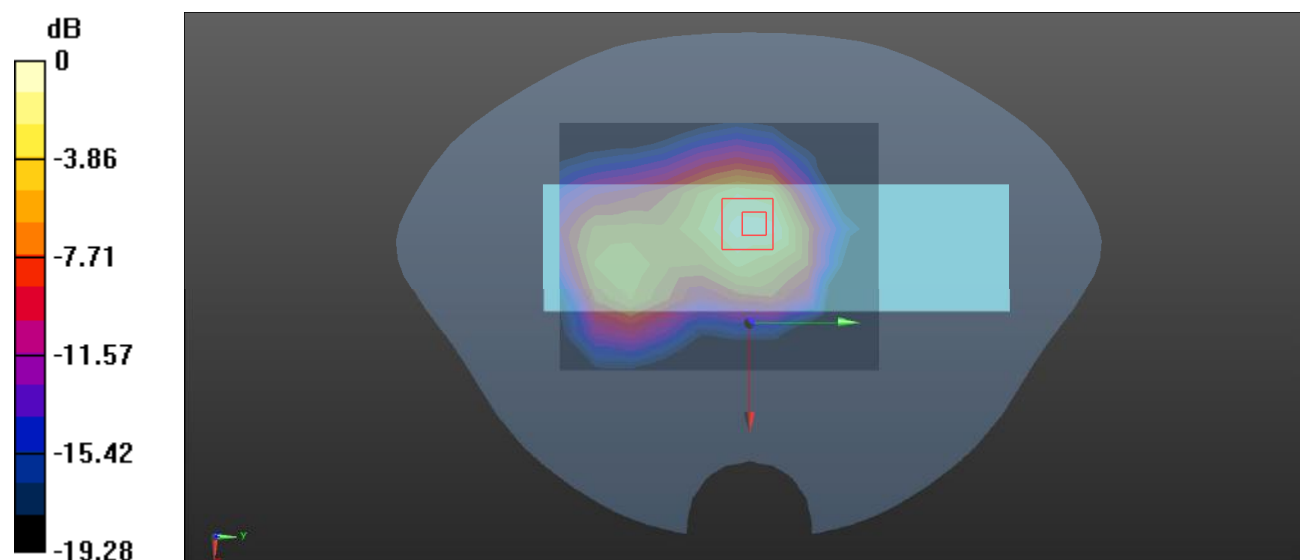

0 dB = 1.17 W/kg = 0.68 dBW/kg

**Test Plot: 29#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/WCDMA Band 5 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.390 W/kg


**Head Left Cheek/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.020 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.536 W/kg

**SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.239 W/kg**

Maximum value of SAR (measured) = 0.391 W/kg

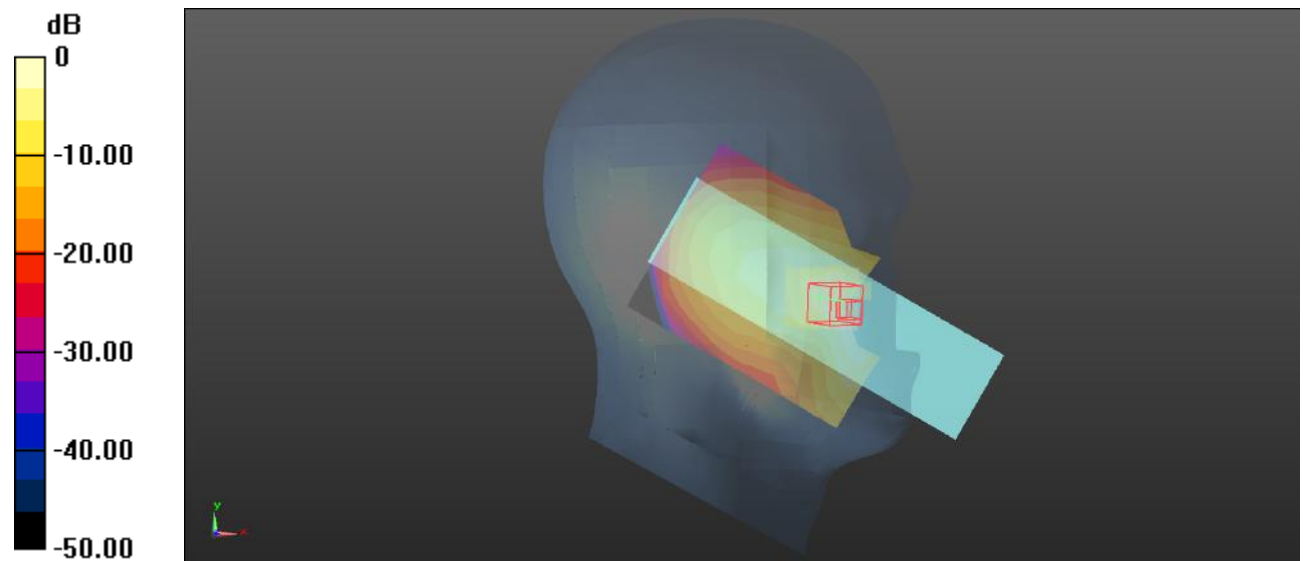

0 dB = 0.391 W/kg = -4.08 dBW/kg

**Test Plot: 30#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/WCDMA Band 5 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0557 W/kg


**Head Left Tilt/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.299 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0680 W/kg

**SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.0554 W/kg

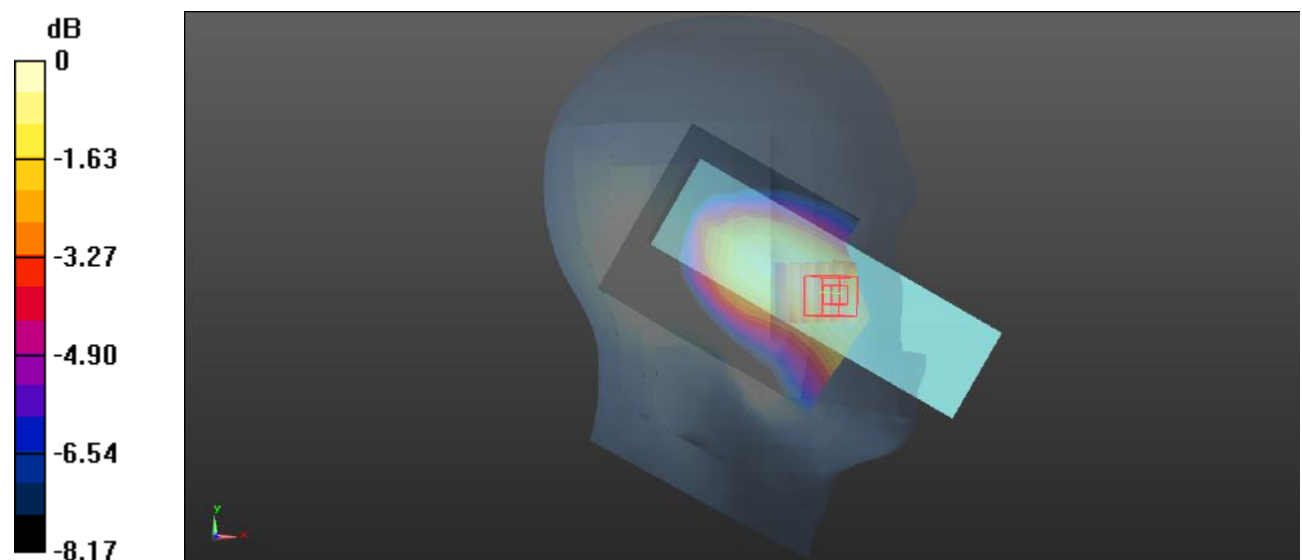

0 dB = 0.0554 W/kg = -12.56 dBW/kg

**Test Plot: 31#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/WCDMA Band 5 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.422 W/kg


**Head Right Cheek/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.305 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.697 W/kg

**SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.259 W/kg**

Maximum value of SAR (measured) = 0.442 W/kg

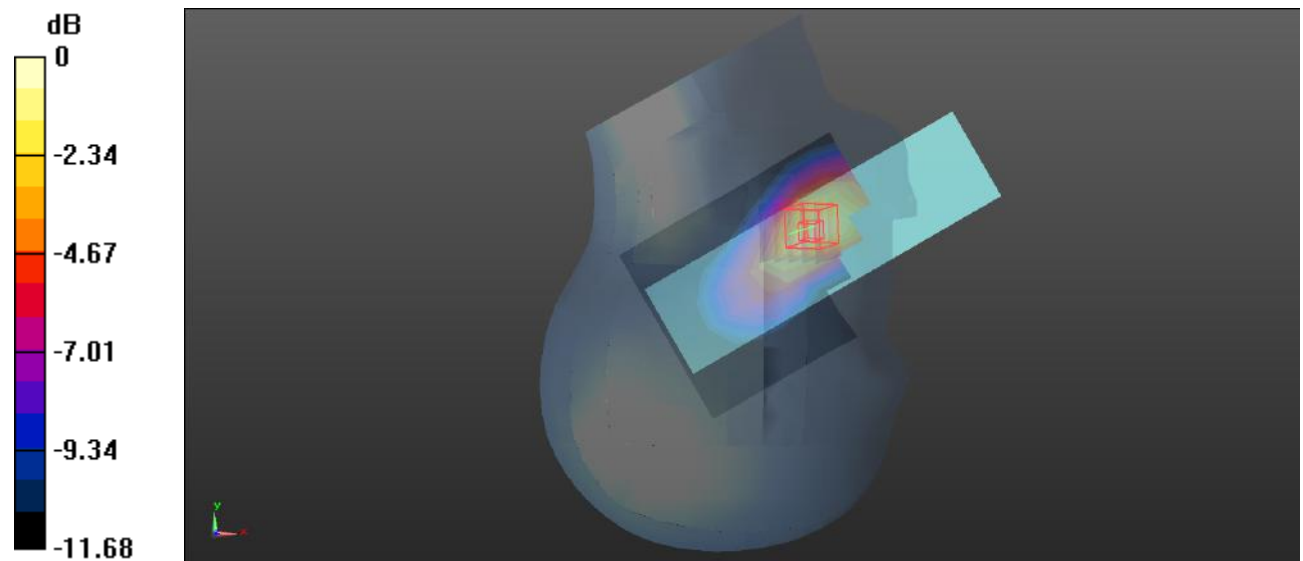

0 dB = 0.442 W/kg = -3.55 dBW/kg

**Test Plot: 32#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/WCDMA Band 5 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0668 W/kg


**Head Right Tilt/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.488 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0770 W/kg

**SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.0660 W/kg

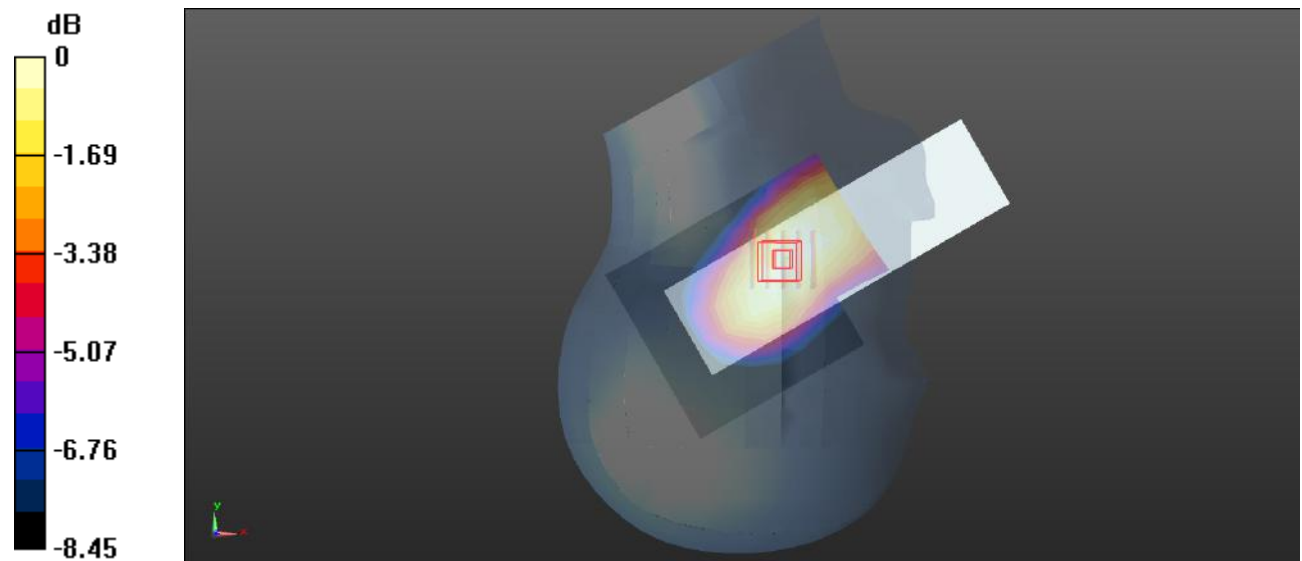

0 dB = 0.0660 W/kg = -11.80 dBW/kg



**Test Plot: 33#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.626$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.6 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/WCDMA Band 5 Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.644 W/kg


**Body Back/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.81 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.814 W/kg

**SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.404 W/kg**

Maximum value of SAR (measured) = 0.623 W/kg

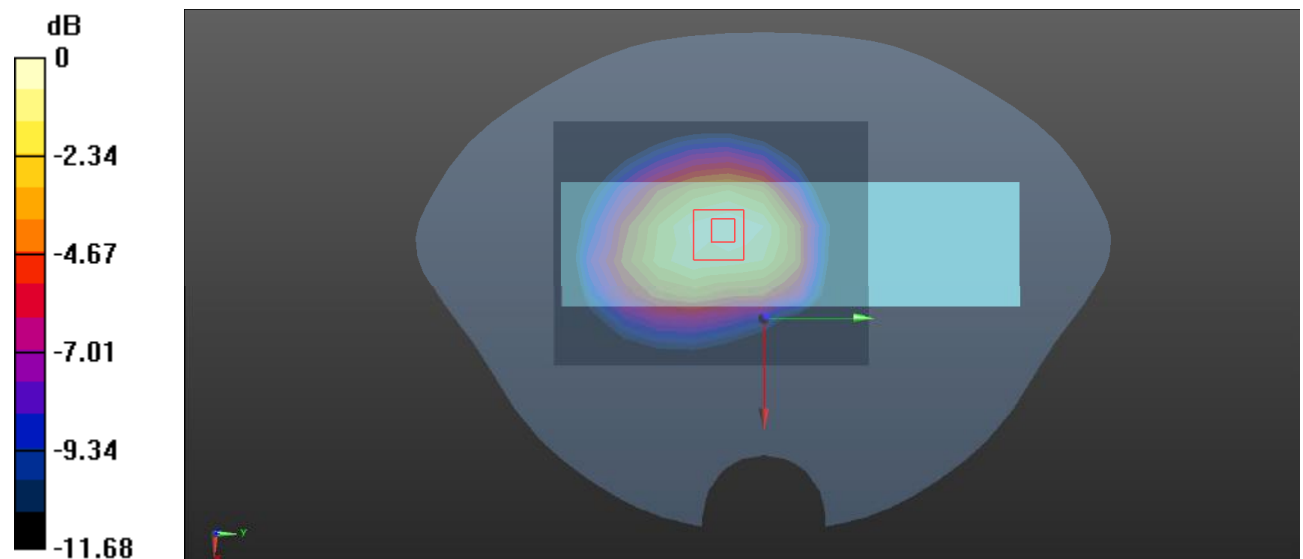

0 dB = 0.623 W/kg = -2.06 dBW/kg

**Test Plot: 34#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 2 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.649 W/kg


**Head Left Cheek/LTE Band 2 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.262 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.341 W/kg**

Maximum value of SAR (measured) = 0.674 W/kg

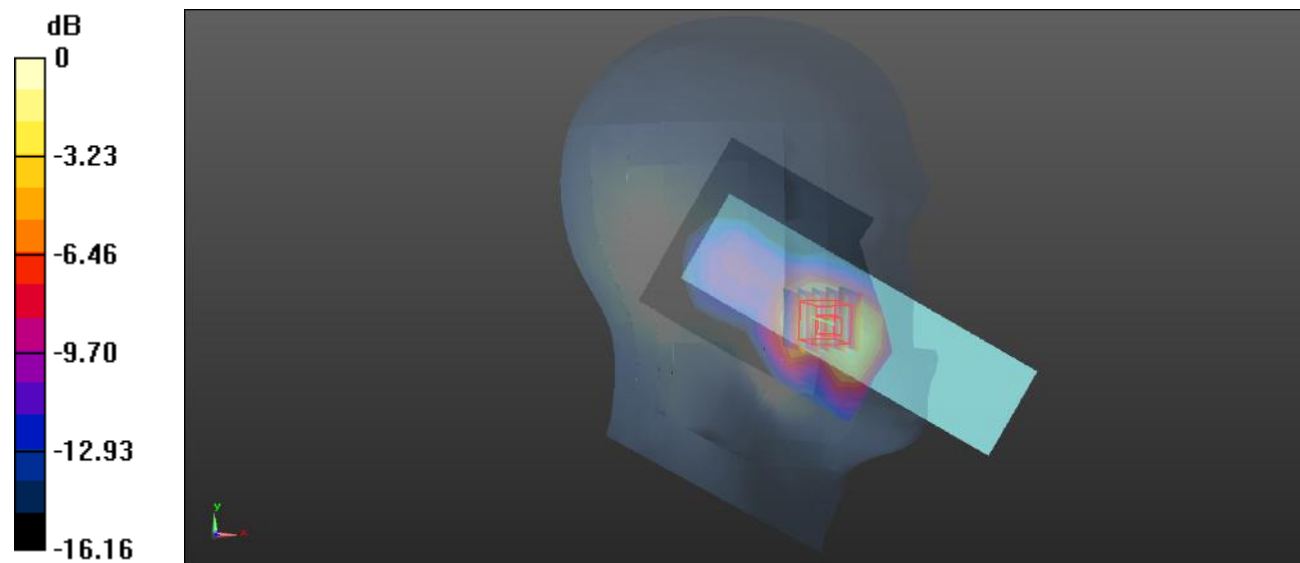

0 dB = 0.674 W/kg = -1.71 dBW/kg

**Test Plot: 35#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.353 \text{ S/m}$ ;  $\epsilon_r = 40.343$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 2 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.398 W/kg


**Head Left Cheek/LTE Band 2 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.084 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.658 W/kg

**SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.211 W/kg**

Maximum value of SAR (measured) = 0.418 W/kg

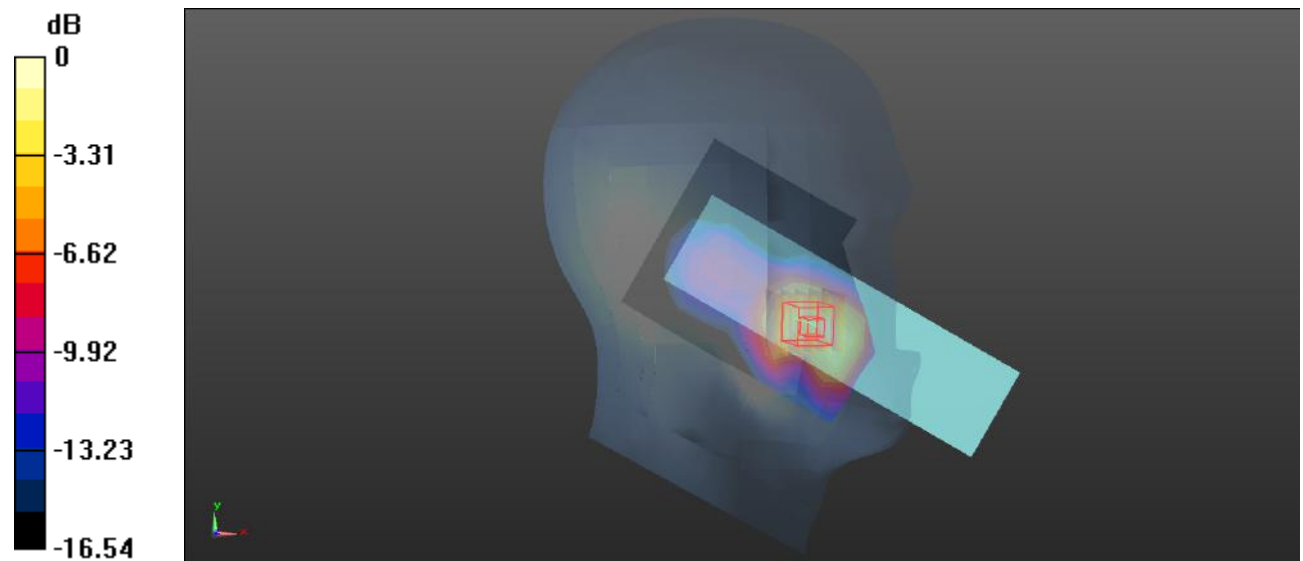

0 dB = 0.418 W/kg = -3.79 dBW/kg

**Test Plot: 36#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 2 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.106 W/kg


**Head Left Tilt/LTE Band 2 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.347 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.149 W/kg

**SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.103 W/kg

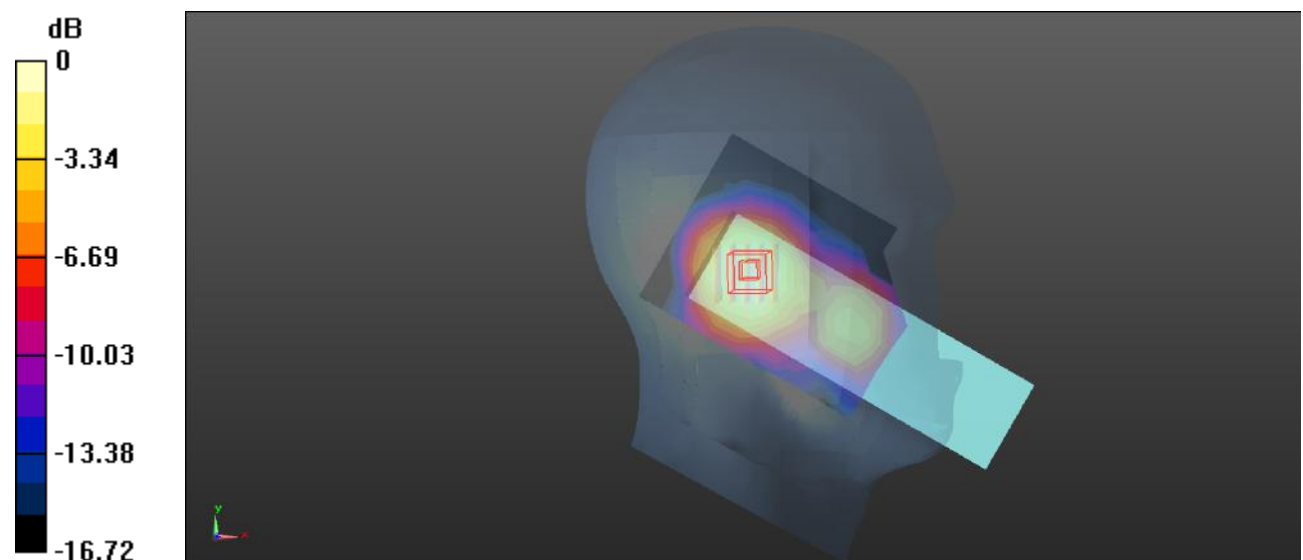

0 dB = 0.103 W/kg = -9.87 dBW/kg

**Test Plot: 37#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.353 \text{ S/m}$ ;  $\epsilon_r = 40.343$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 2 50%RB Mid/Area Scan (8x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 0.0666 W/kg


**Head Left Tilt/LTE Band 2 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 5.921 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0960 W/kg

**SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.0642 W/kg

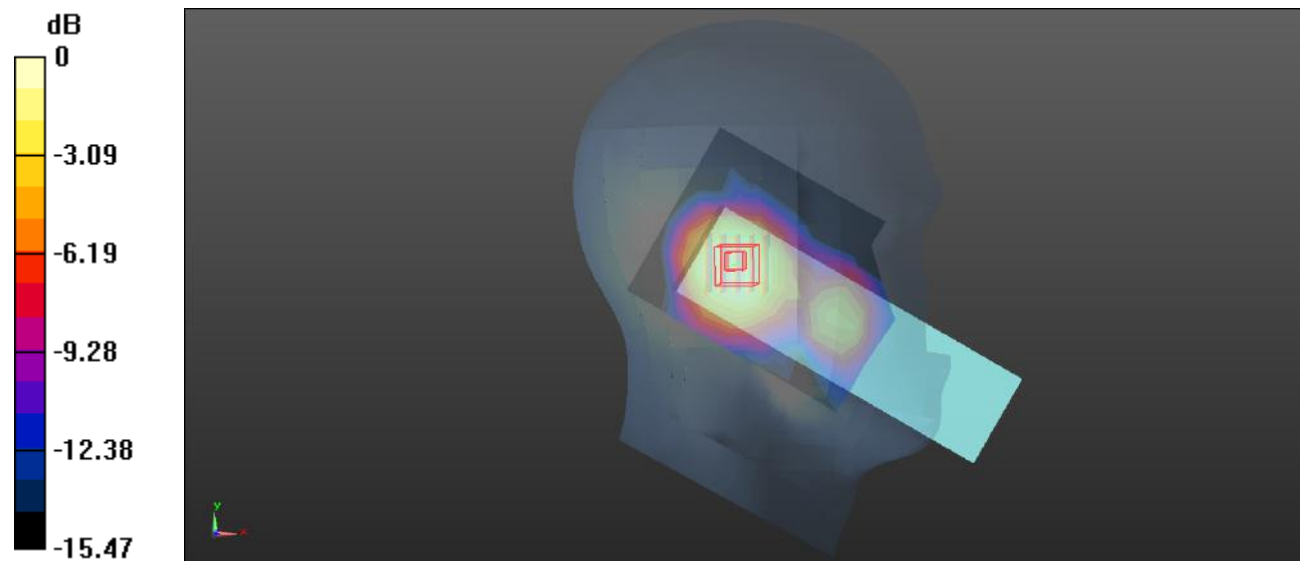

0 dB = 0.0642 W/kg = -11.92 dBW/kg

**Test Plot: 38#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 2 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.647 W/kg


**Head Right Cheek/LTE Band 2 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.045 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 1.17 W/kg

**SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.376 W/kg**

Maximum value of SAR (measured) = 0.776 W/kg

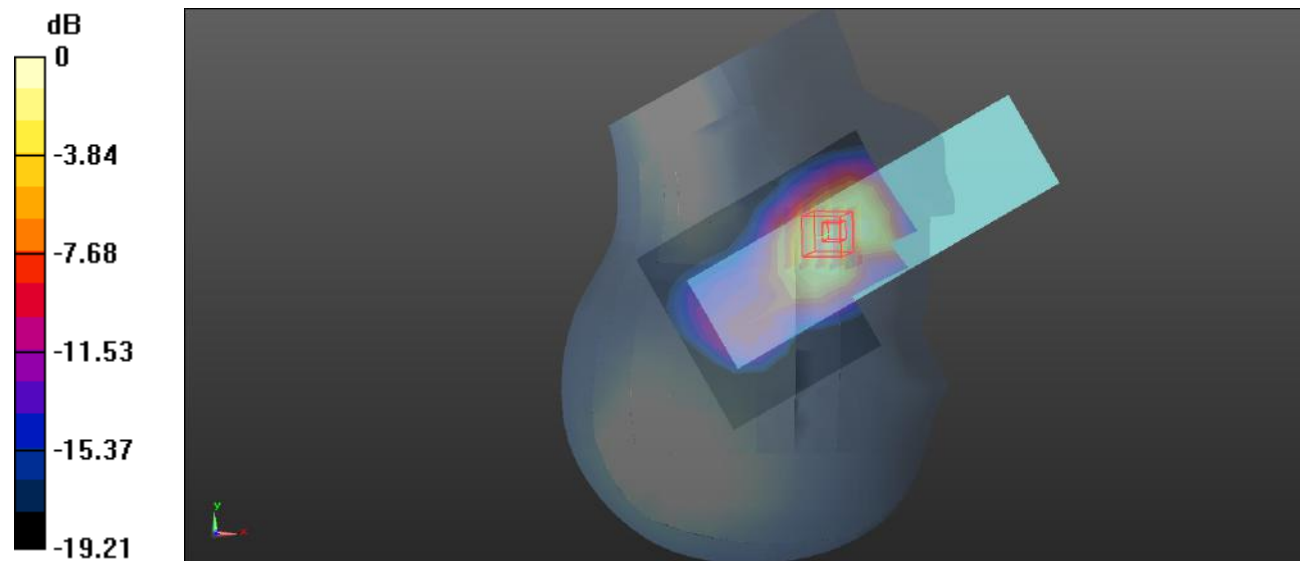

0 dB = 0.776 W/kg = -1.10 dBW/kg

**Test Plot: 39#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 2 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.208 W/kg


**Head Right Cheek/LTE Band 2 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.156 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.303 W/kg

**SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.199 W/kg

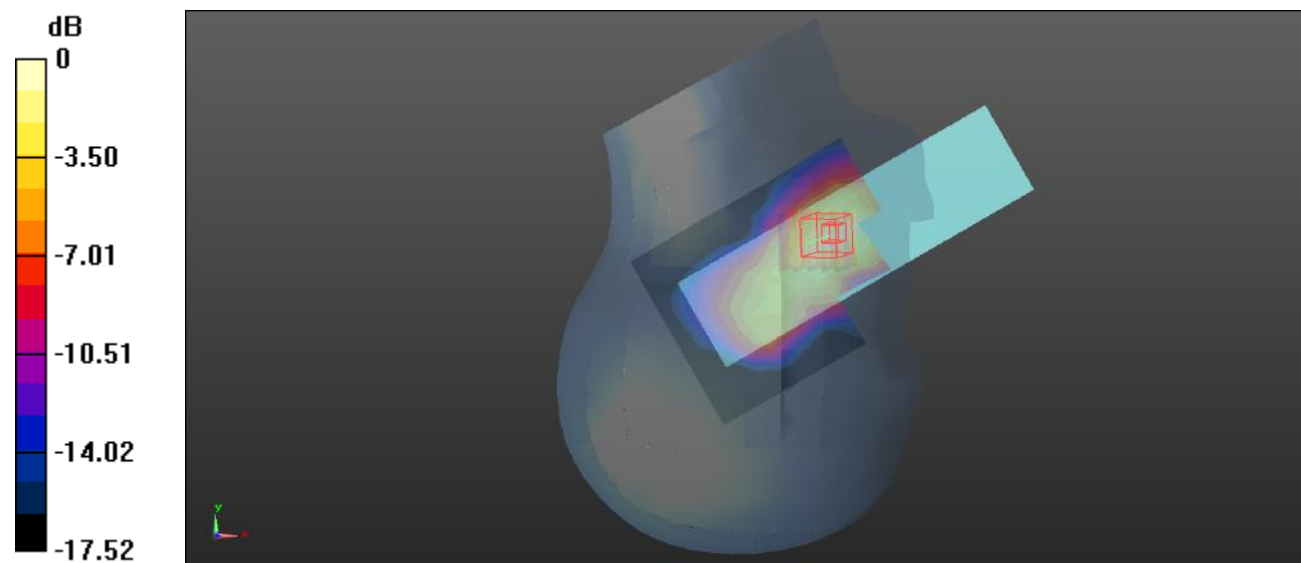

0 dB = 0.199 W/kg = -7.01 dBW/kg

**Test Plot: 40#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 2 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0984 W/kg


**Head Right Tilt/LTE Band 2 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.555 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.146 W/kg

**SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.060 W/kg**

Maximum value of SAR (measured) = 0.102 W/kg

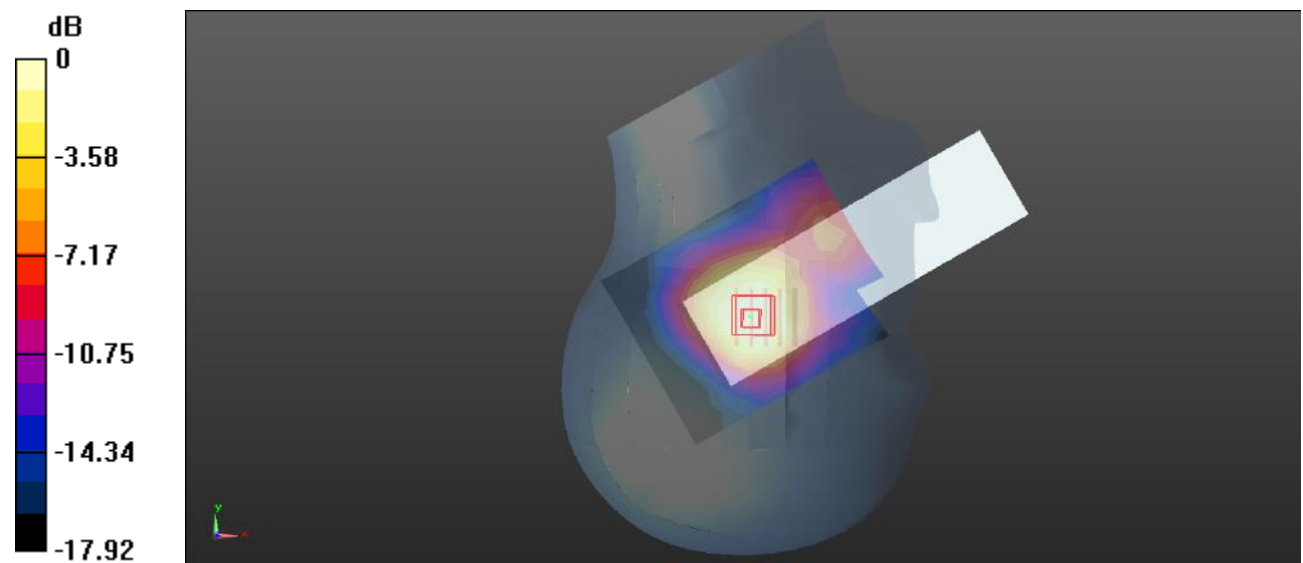

0 dB = 0.102 W/kg = -9.91 dBW/kg



**Test Plot: 41#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 2 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0643 W/kg


**Head Right Tilt/LTE Band 2 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.299 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.144 W/kg

**SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.040 W/kg**

Maximum value of SAR (measured) = 0.0674 W/kg

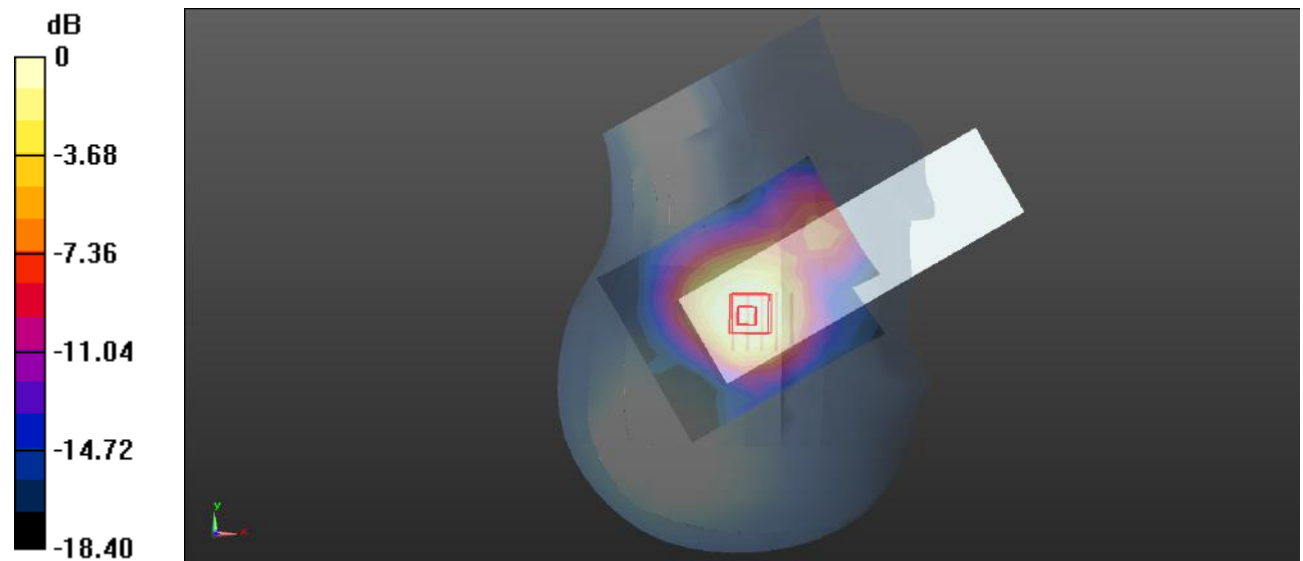

0 dB = 0.0674 W/kg = -11.71 dBW/kg

**Test Plot: 42#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 2 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.676 W/kg


**Body Back/LTE Band 2 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.58 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.327 W/kg**

Maximum value of SAR (measured) = 0.685 W/kg

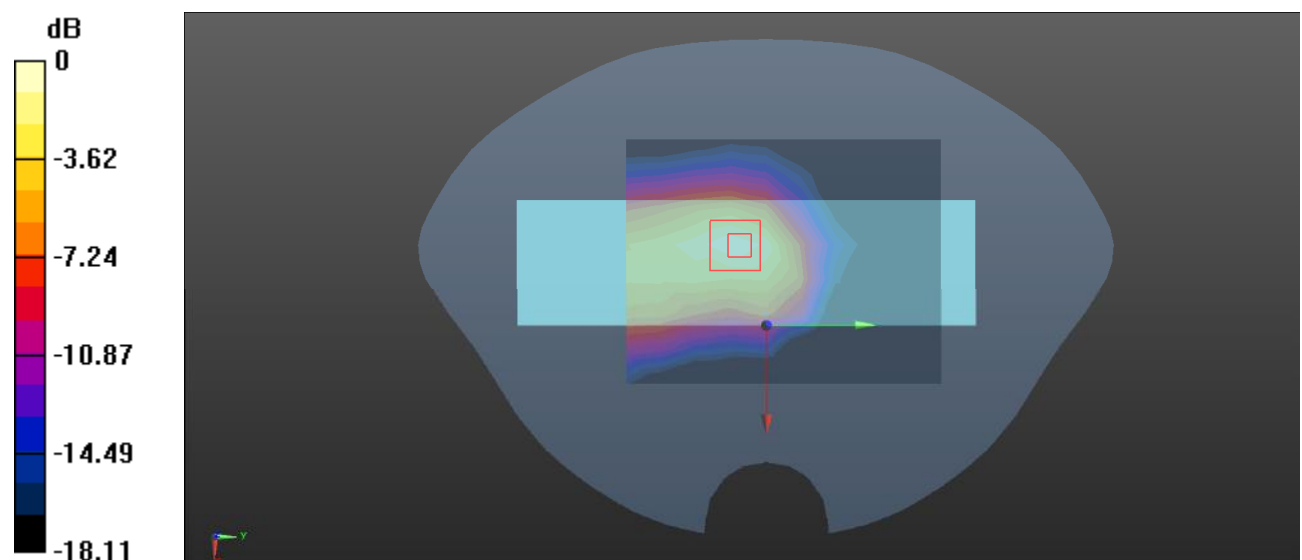

0 dB = 0.685 W/kg = -1.64 dBW/kg

**Test Plot: 43#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.353$  S/m;  $\epsilon_r = 40.343$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.18, 5.18, 5.18) @ 1880 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 2 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.405 W/kg


**Body Back/LTE Band 2 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.89 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.872 W/kg

**SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.239 W/kg**

Maximum value of SAR (measured) = 0.492 W/kg

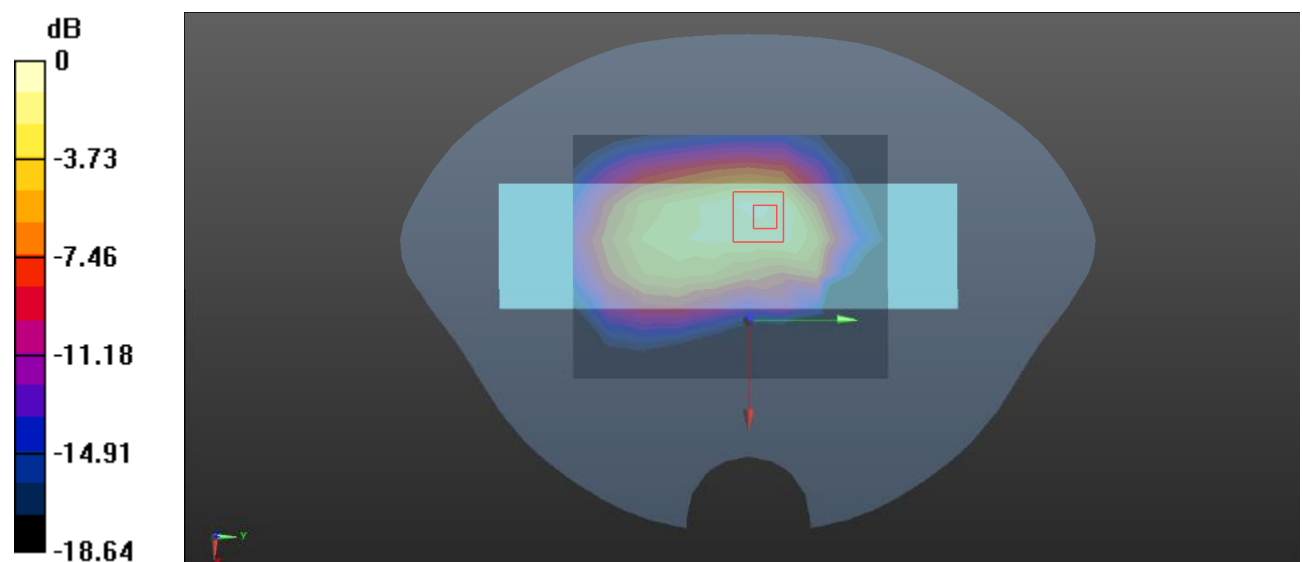

0 dB = 0.492 W/kg = -3.08 dBW/kg

**Test Plot: 44#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.627$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 5 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.260 W/kg


**Head Left Cheek/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.016 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.376 W/kg

**SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.163 W/kg**

Maximum value of SAR (measured) = 0.291 W/kg

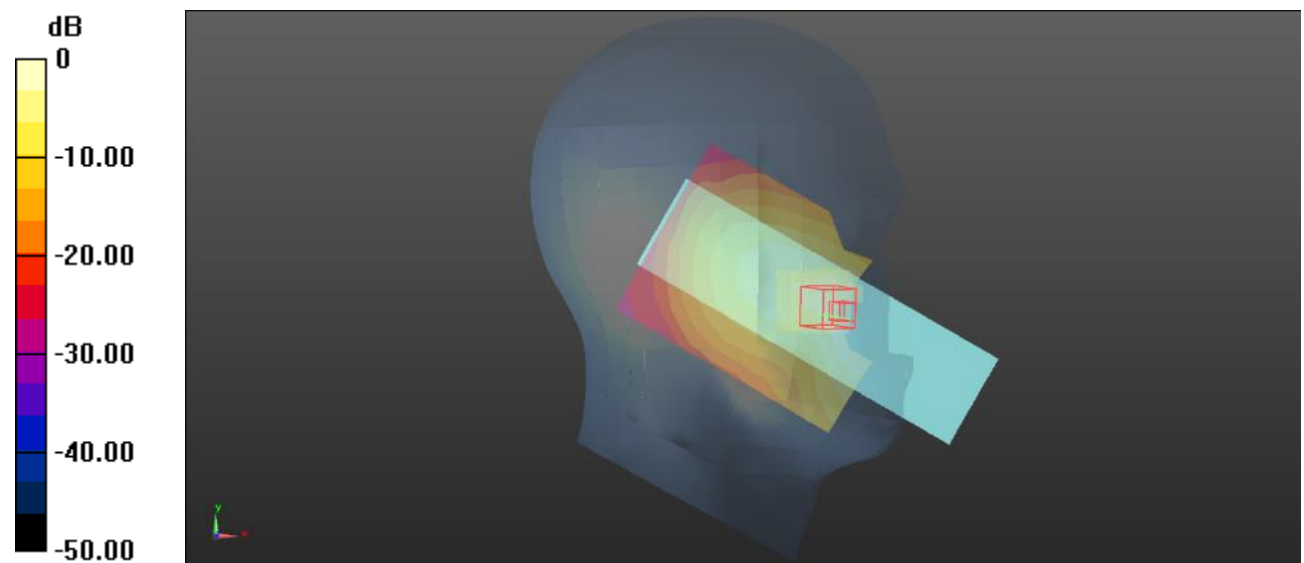

0 dB = 0.291 W/kg = -5.36 dBW/kg

**Test Plot: 45#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.627$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 5 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.251 W/kg


**Head Left Cheek/LTE Band 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.911 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.351 W/kg

**SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.153 W/kg**

Maximum value of SAR (measured) = 0.272 W/kg

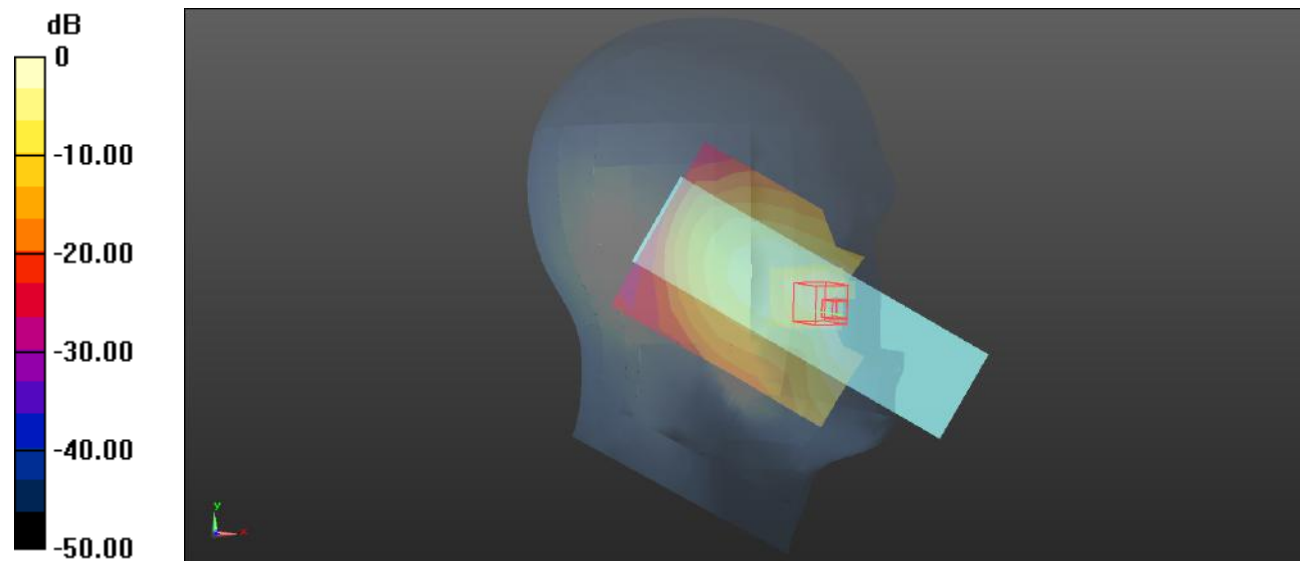

0 dB = 0.272 W/kg = -5.65 dBW/kg

**Test Plot: 46#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.627$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 5 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0461 W/kg


**Head Left Tilt/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.151 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0560 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0456 W/kg

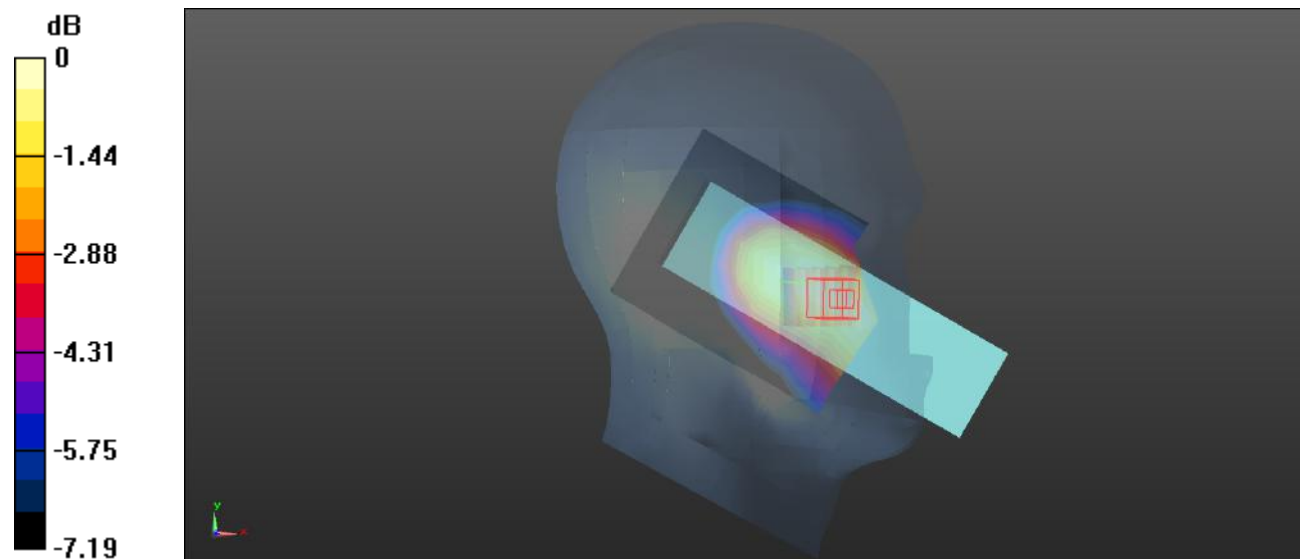

0 dB = 0.0456 W/kg = -13.41 dBW/kg

**Test Plot: 47#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.627$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 5 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0455 W/kg


**Head Left Tilt/LTE Band 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.088 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0520 W/kg

**SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.033 W/kg**

Maximum value of SAR (measured) = 0.0437 W/kg

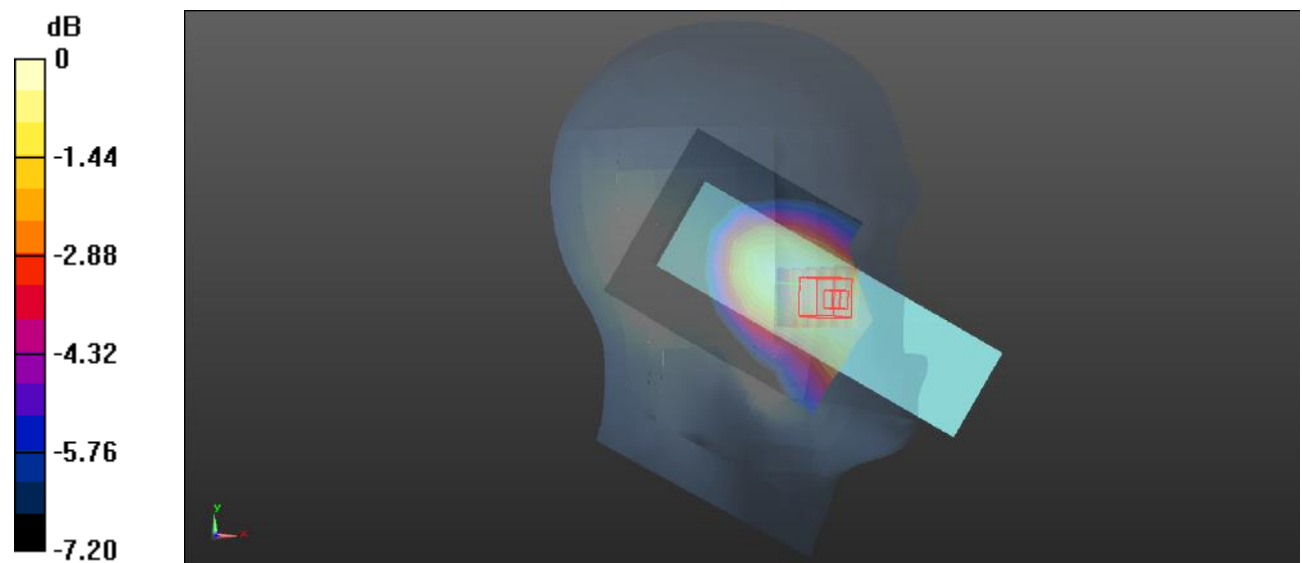

0 dB = 0.0437 W/kg = -13.60 dBW/kg

**Test Plot: 48#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.627$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 5 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.354 W/kg


**Head Right Cheek/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.668 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.481 W/kg

**SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.216 W/kg**

Maximum value of SAR (measured) = 0.350 W/kg

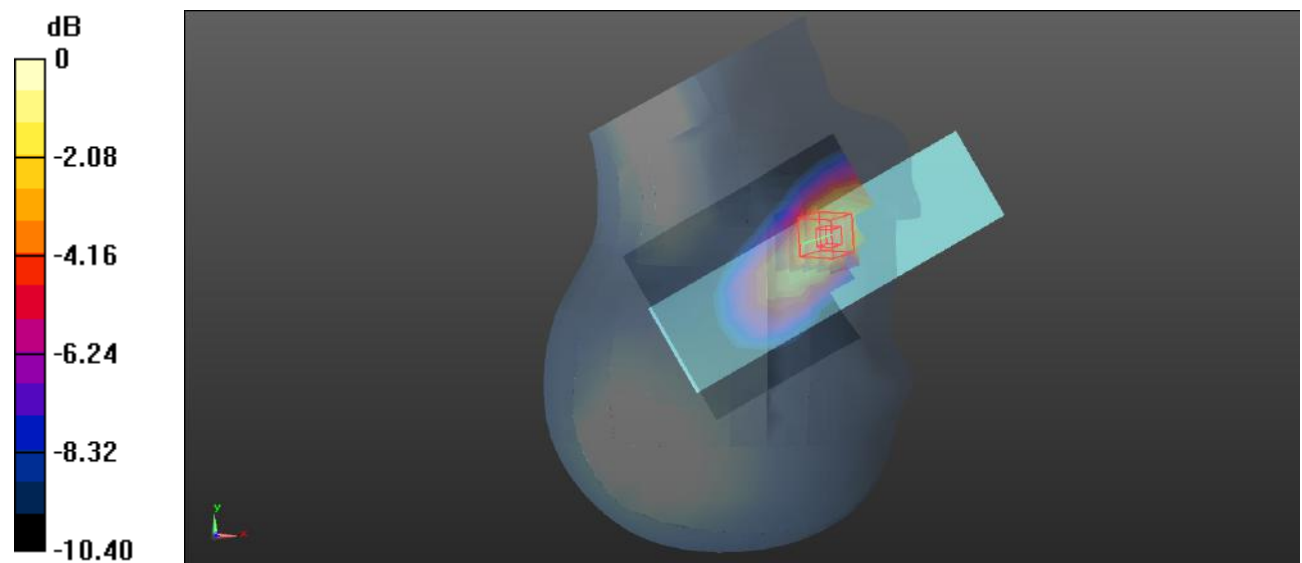

0 dB = 0.350 W/kg = -4.56 dBW/kg



**Test Plot: 49#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.627$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 5 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.264 W/kg


**Head Right Cheek/LTE Band 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.754 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.374 W/kg

**SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.167 W/kg**

Maximum value of SAR (measured) = 0.270 W/kg

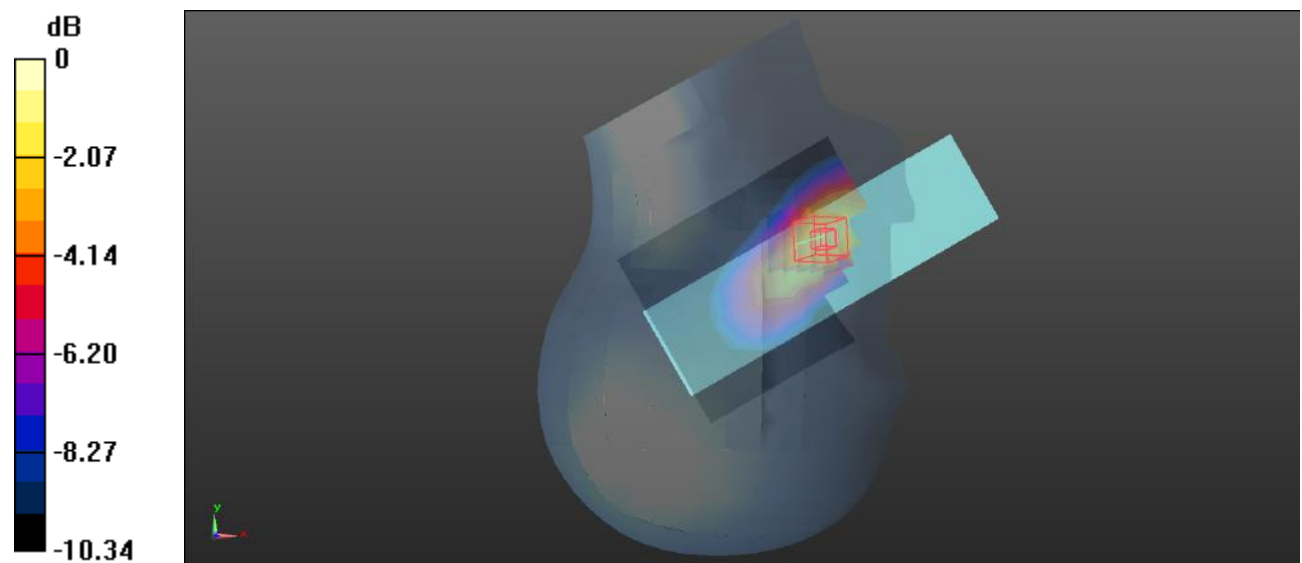

0 dB = 0.270 W/kg = -5.69 dBW/kg

**Test Plot: 50#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.627$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 5 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0712 W/kg


**Head Right Tilt/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.041 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0850 W/kg

**SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.054 W/kg**

Maximum value of SAR (measured) = 0.0721 W/kg

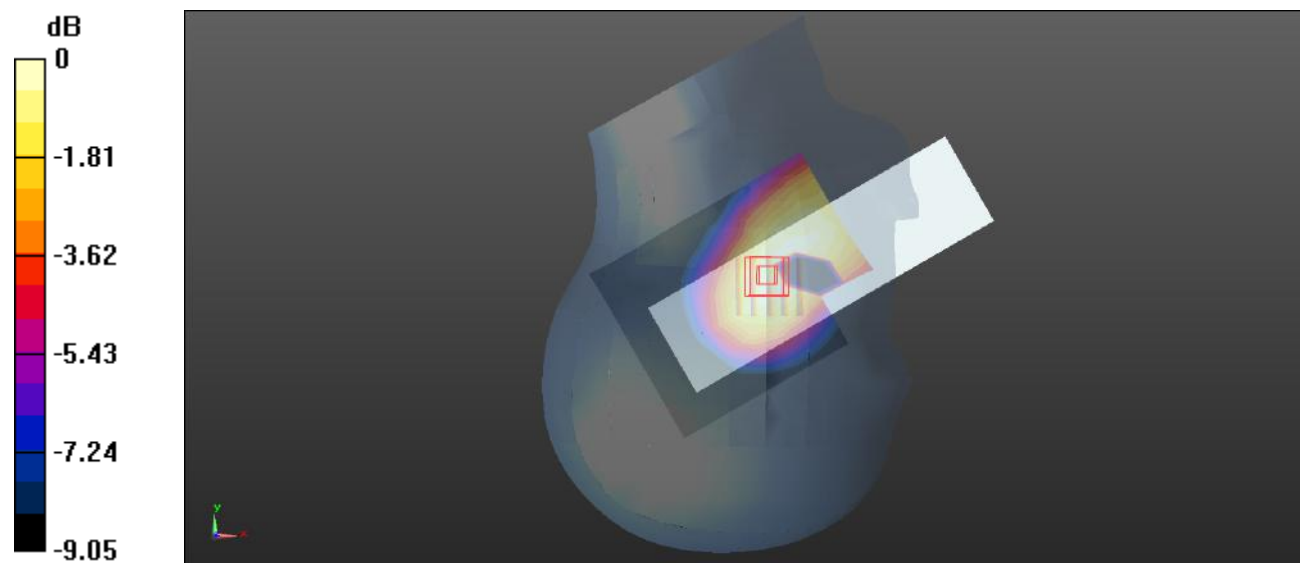

0 dB = 0.0721 W/kg = -11.42 dBW/kg

**Test Plot: 51#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.627$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 5 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0519 W/kg


**Head Right Tilt/LTE Band 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.076 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0620 W/kg

**SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.0524 W/kg

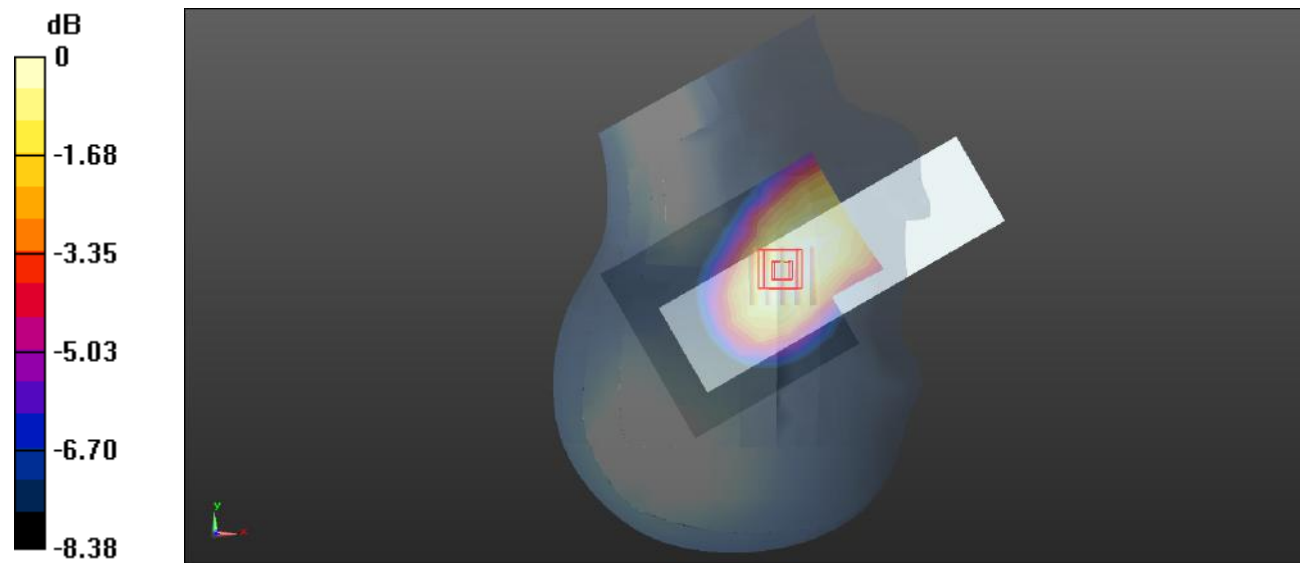

0 dB = 0.0524 W/kg = -12.81 dBW/kg

**Test Plot: 52#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.627$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 5 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.776 W/kg


**Body Back/LTE Band 5 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.54 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.747 W/kg; SAR(10 g) = 0.520 W/kg**

Maximum value of SAR (measured) = 0.789 W/kg

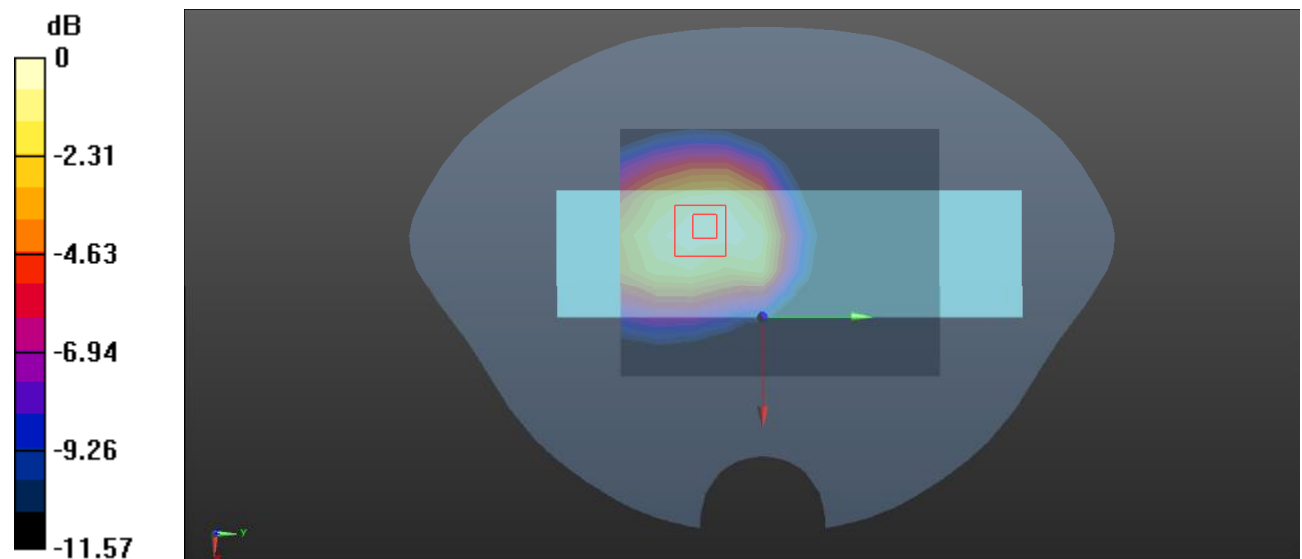

0 dB = 0.789 W/kg = -1.03 dBW/kg

**Test Plot: 53#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 41.627$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 836.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 5 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.610 W/kg


**Body Back/LTE Band 5 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.00 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.784 W/kg

**SAR(1 g) = 0.565 W/kg; SAR(10 g) = 0.391 W/kg**

Maximum value of SAR (measured) = 0.603 W/kg

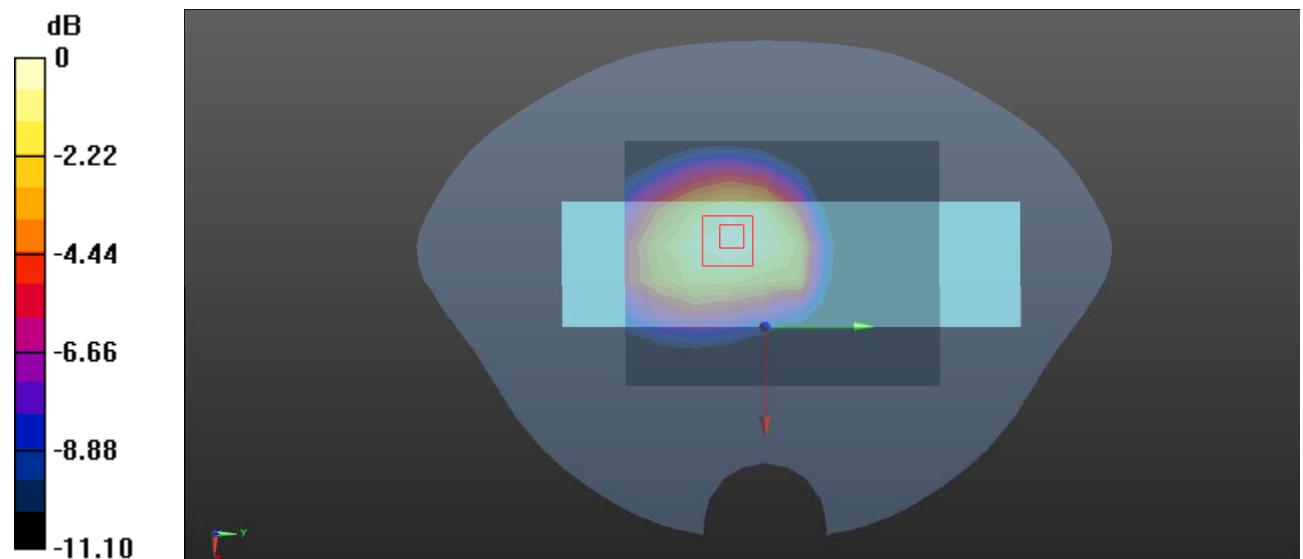

0 dB = 0.603 W/kg = -2.20 dBW/kg

**Test Plot: 54#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.912$  S/m;  $\epsilon_r = 39.509$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2535 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 7 1RB Mid/Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.466 W/kg


**Head Left Cheek/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.338 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.756 W/kg

**SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.224 W/kg**

Maximum value of SAR (measured) = 0.471 W/kg

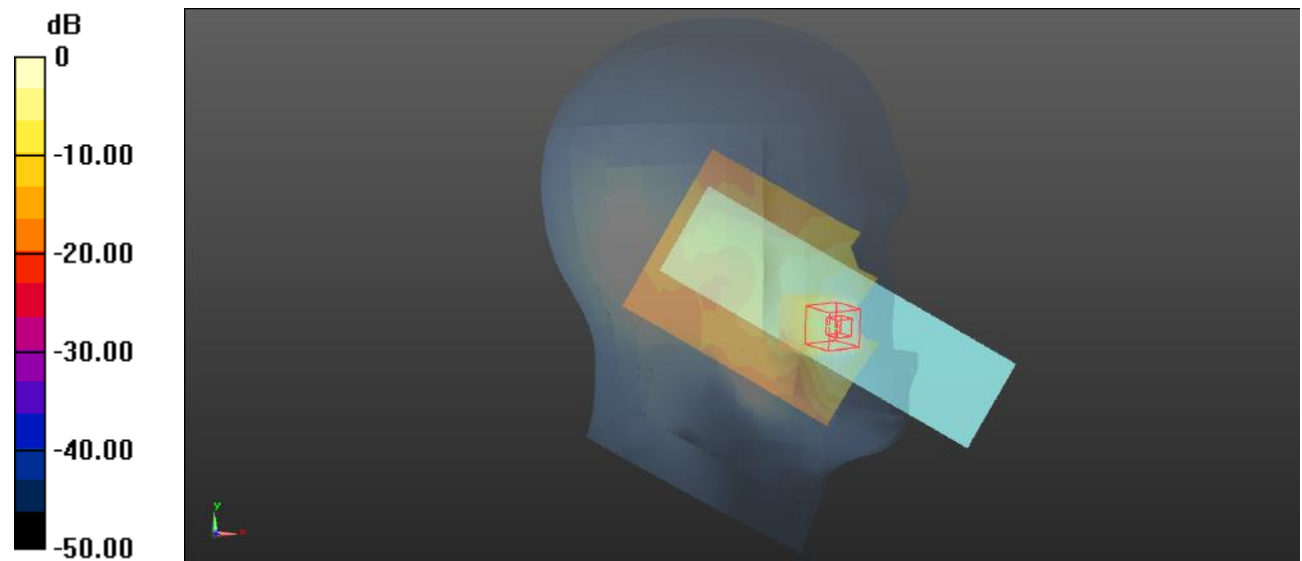

0 dB = 0.471 W/kg = -3.27 dBW/kg

**Test Plot: 55#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.912$  S/m;  $\epsilon_r = 39.509$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2535 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 7 50%RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.312 W/kg


**Head Left Cheek/LTE Band 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.710 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.517 W/kg

**SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.147 W/kg**

Maximum value of SAR (measured) = 0.312 W/kg

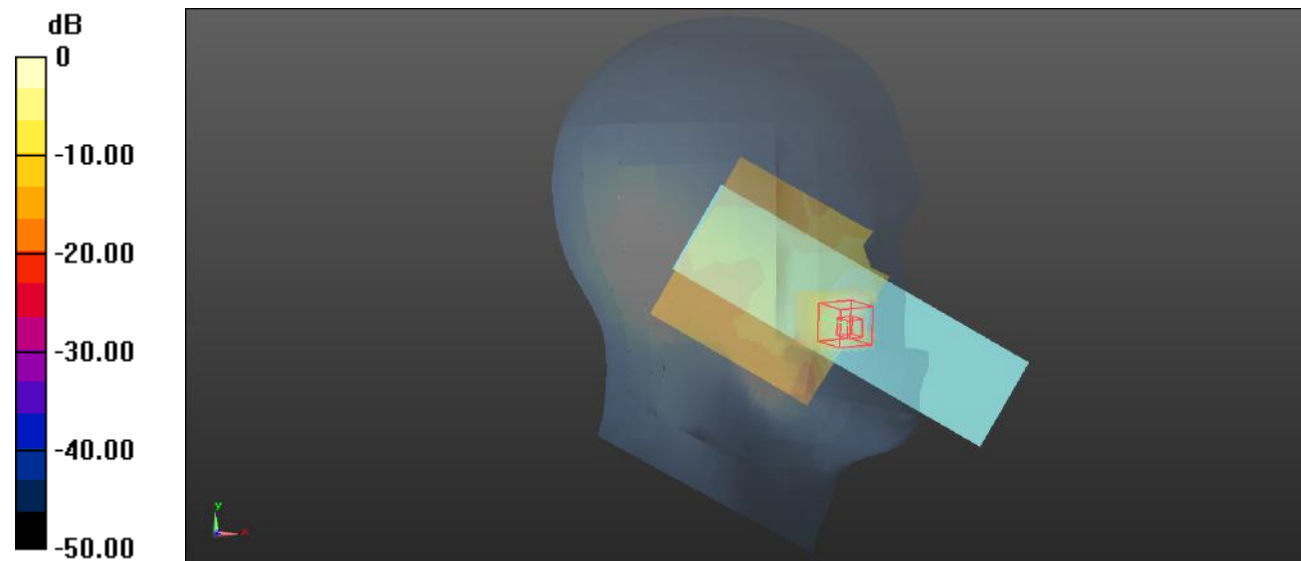

0 dB = 0.312 W/kg = -5.06 dBW/kg

**Test Plot: 56#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.912$  S/m;  $\epsilon_r = 39.509$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2535 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 7 1RB Mid/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0689 W/kg


**Head Left Tilt/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.780 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.117 W/kg

**SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.0715 W/kg

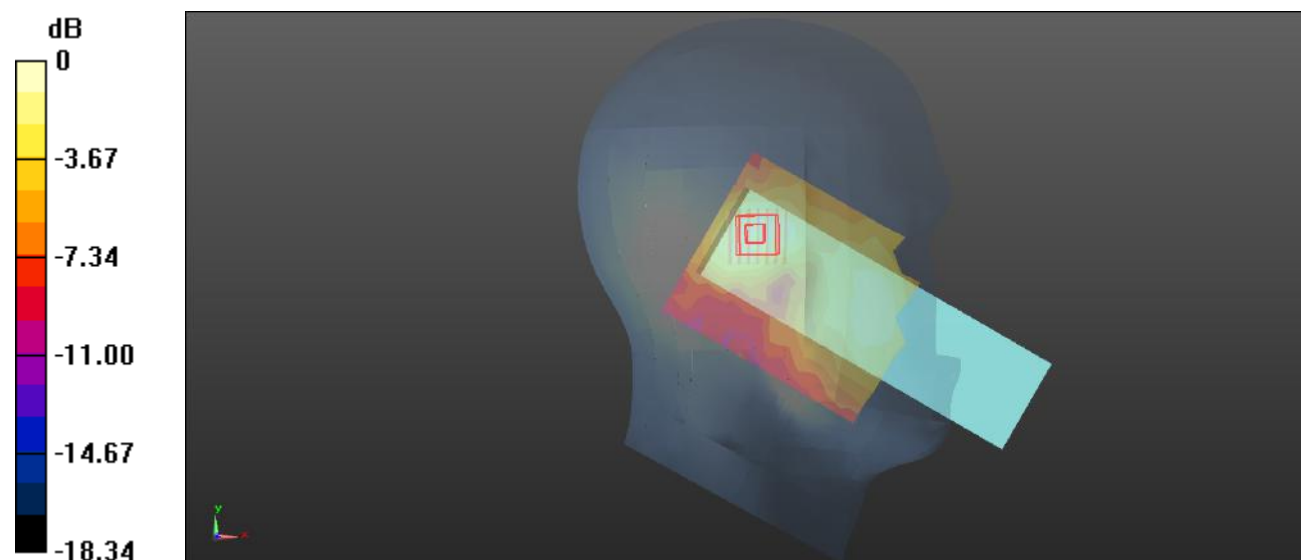

0 dB = 0.0715 W/kg = -11.46 dBW/kg



**Test Plot: 57#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.912$  S/m;  $\epsilon_r = 39.509$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2535 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 7 50%RB Mid/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0493 W/kg


**Head Left Tilt/LTE Band 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.990 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0810 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.025 W/kg**

Maximum value of SAR (measured) = 0.0470 W/kg

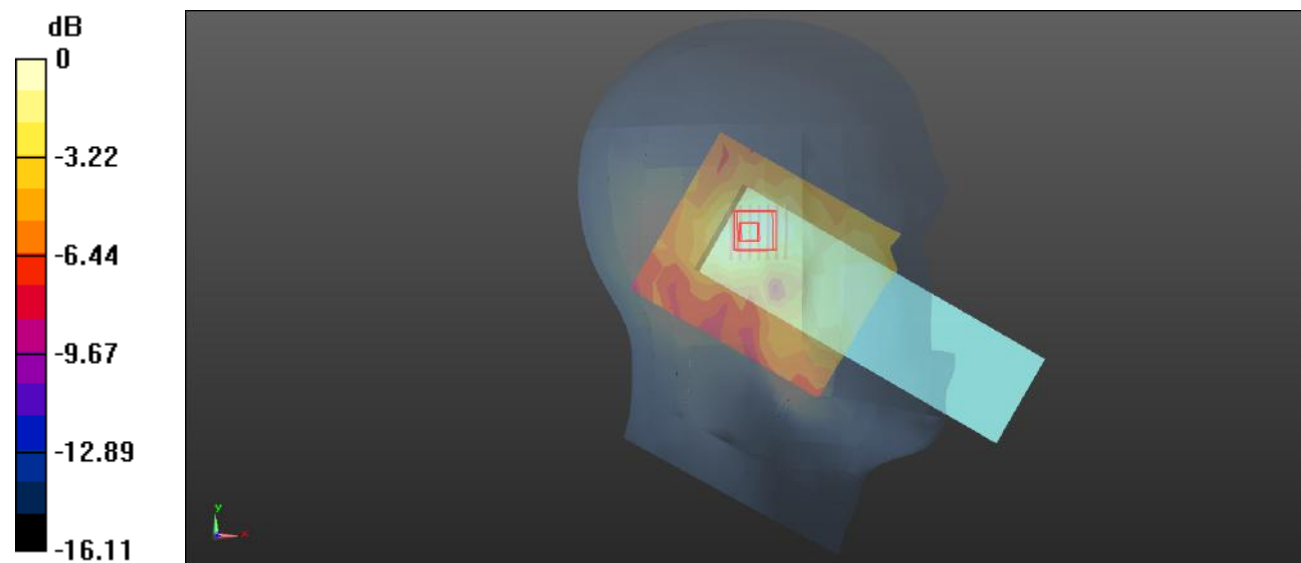

0 dB = 0.0470 W/kg = -13.28 dBW/kg

**Test Plot: 58#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.912$  S/m;  $\epsilon_r = 39.509$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2535 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 7 1RB Mid/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.345 W/kg


**Head Right Cheek/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.410 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.567 W/kg

**SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.172 W/kg**

Maximum value of SAR (measured) = 0.345 W/kg

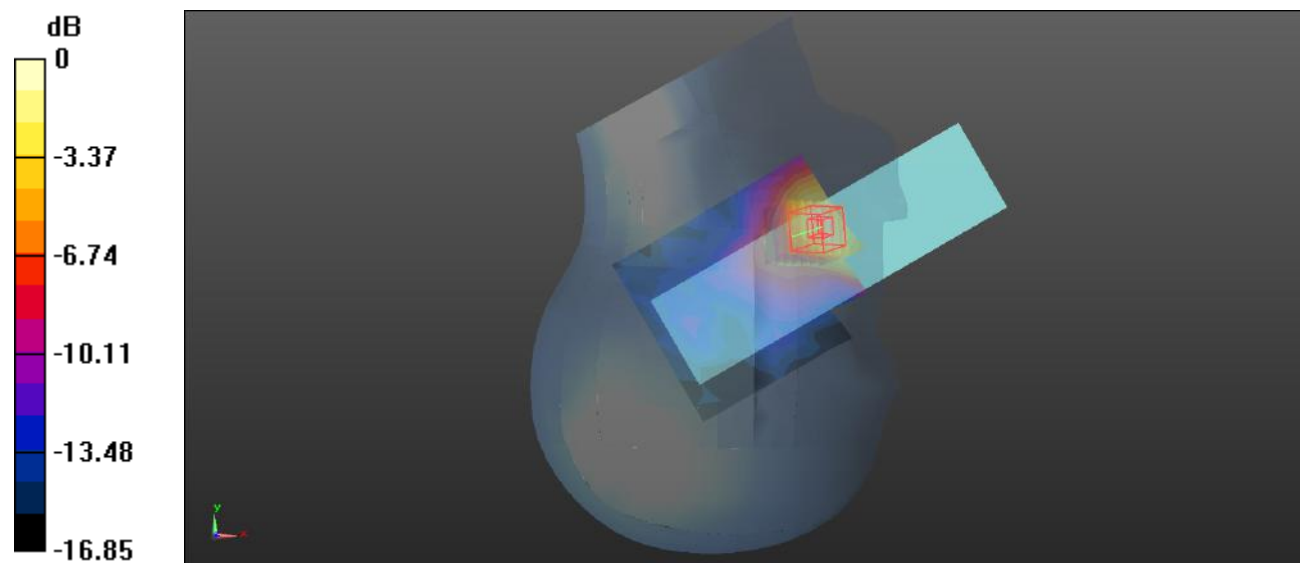

0 dB = 0.345 W/kg = -4.62 dBW/kg

**Test Plot: 59#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.912$  S/m;  $\epsilon_r = 39.509$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2535 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 7 50%RB Mid/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.231 W/kg


**Head Right Cheek/LTE Band 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.731 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.380 W/kg

**SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.115 W/kg**

Maximum value of SAR (measured) = 0.230 W/kg

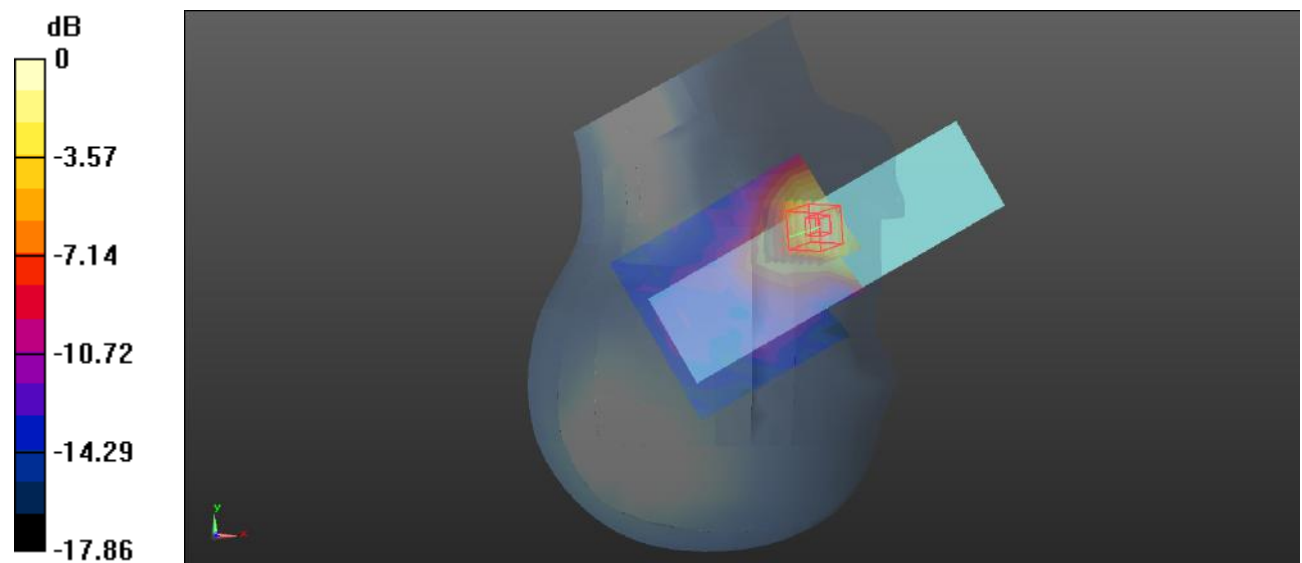

0 dB = 0.230 W/kg = -6.38 dBW/kg

**Test Plot: 60#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.912$  S/m;  $\epsilon_r = 39.509$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2535 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 7 1RB Mid/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0643 W/kg


**Head Right Tilt/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.293 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.103 W/kg

**SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0618 W/kg

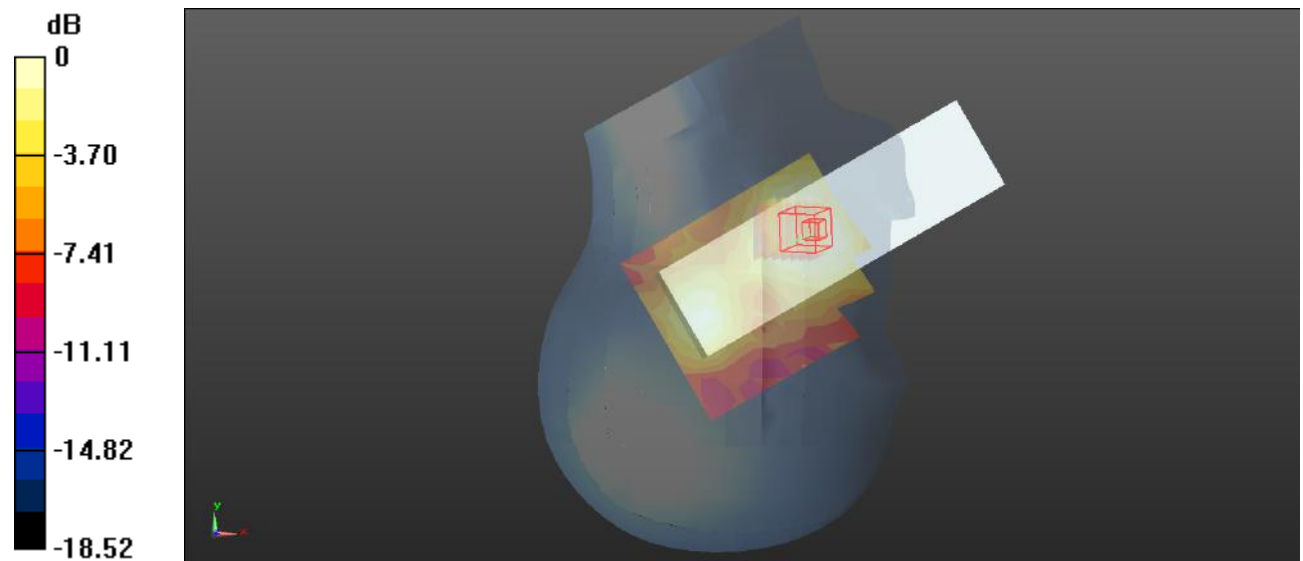

0 dB = 0.0618 W/kg = -12.09 dBW/kg

**Test Plot: 61#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.912$  S/m;  $\epsilon_r = 39.509$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2535 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 7 50%RB Mid/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0434 W/kg

**Head Right Tilt/LTE Band 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm,


dz=5mm

Reference Value = 3.464 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.118 W/kg

**SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0529 W/kg

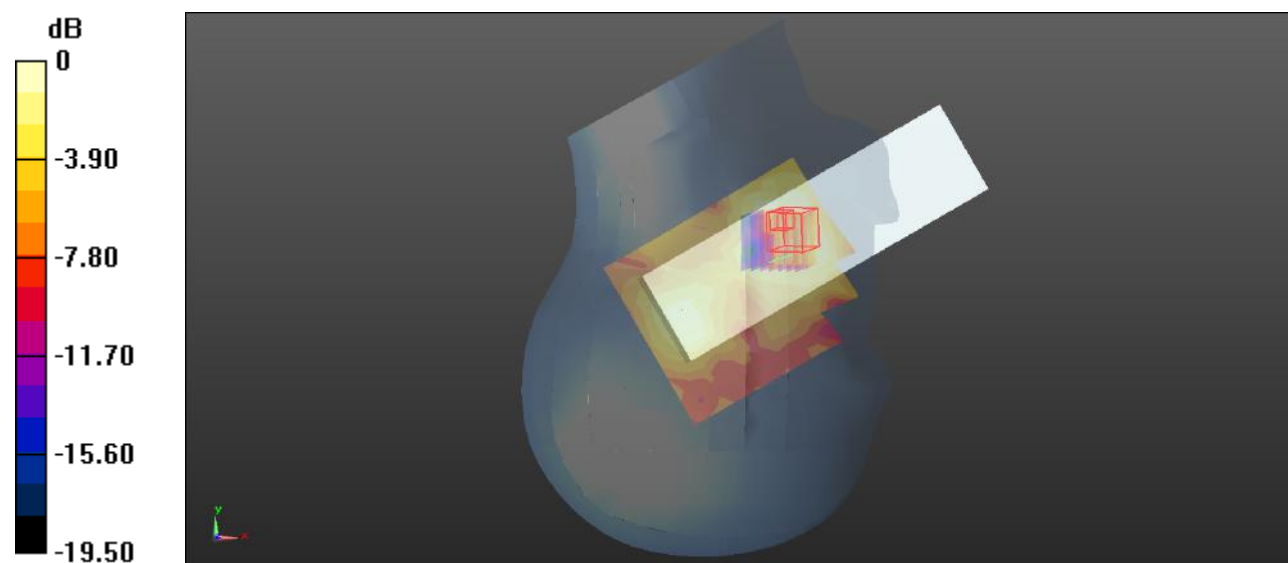

0 dB = 0.0529 W/kg = -12.77 dBW/kg

**Test Plot: 62#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.818$  S/m;  $\epsilon_r = 39.95$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2510 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 7 1RB Low/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.957 W/kg


**Body Back/LTE Band 7 1RB Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.92 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.88 W/kg

**SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.388 W/kg**

Maximum value of SAR (measured) = 0.933 W/kg

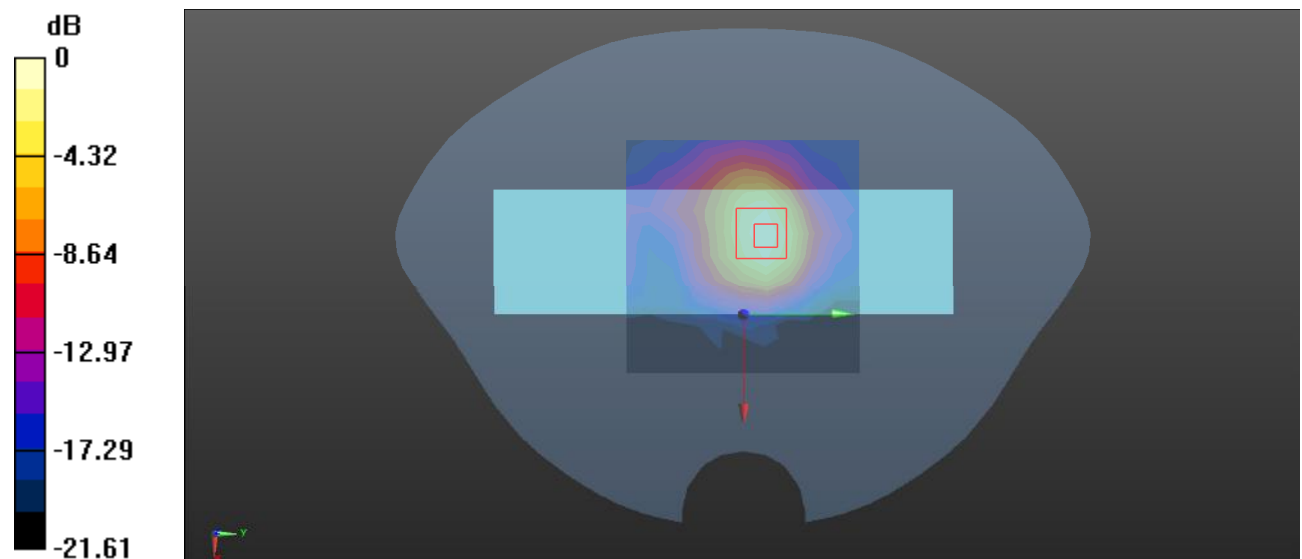

0 dB = 0.933 W/kg = -0.30 dBW/kg

**Test Plot: 63#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.912$  S/m;  $\epsilon_r = 39.509$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2535 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 7 1RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.18 W/kg


**Body Back/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.11 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.32 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.485 W/kg**

Maximum value of SAR (measured) = 1.15 W/kg

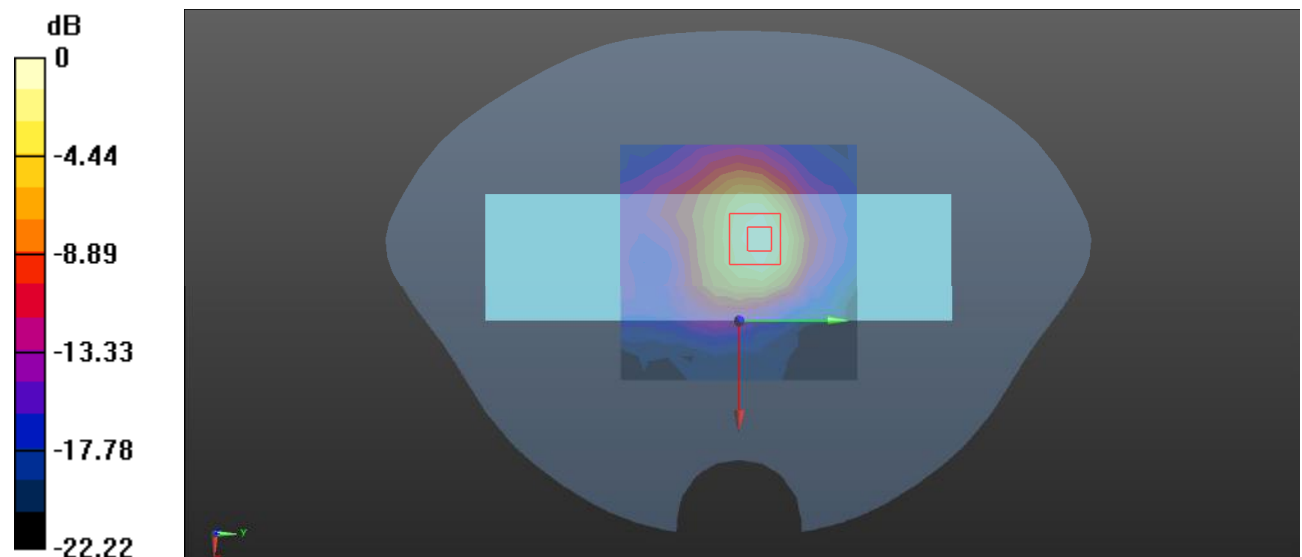

0 dB = 1.15 W/kg = 0.61 dBW/kg

**Test Plot: 64#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.96$  S/m;  $\epsilon_r = 39.226$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2560 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 7 1RB High/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.703 W/kg


**Body Back/LTE Band 7 1RB High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.23 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.40 W/kg

**SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.292 W/kg**

Maximum value of SAR (measured) = 0.688 W/kg

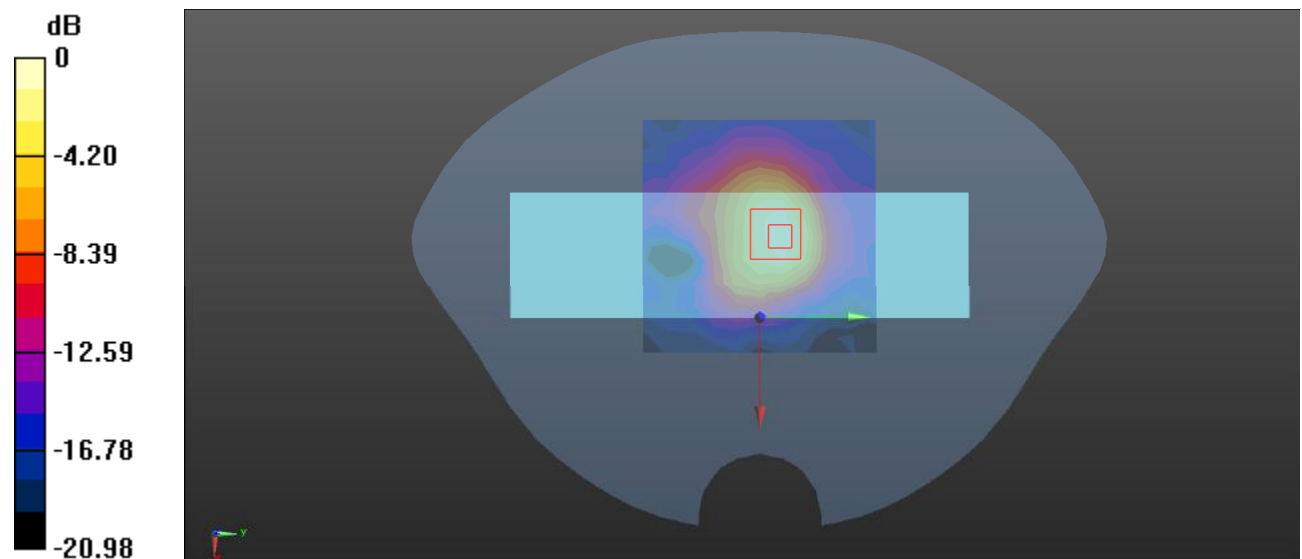

0 dB = 0.688 W/kg = -1.62 dBW/kg



**Test Plot: 65#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.912$  S/m;  $\epsilon_r = 39.509$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2535 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 7 50%RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.779 W/kg


**Body Back/LTE Band 7 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.93 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.319 W/kg**

Maximum value of SAR (measured) = 0.763 W/kg

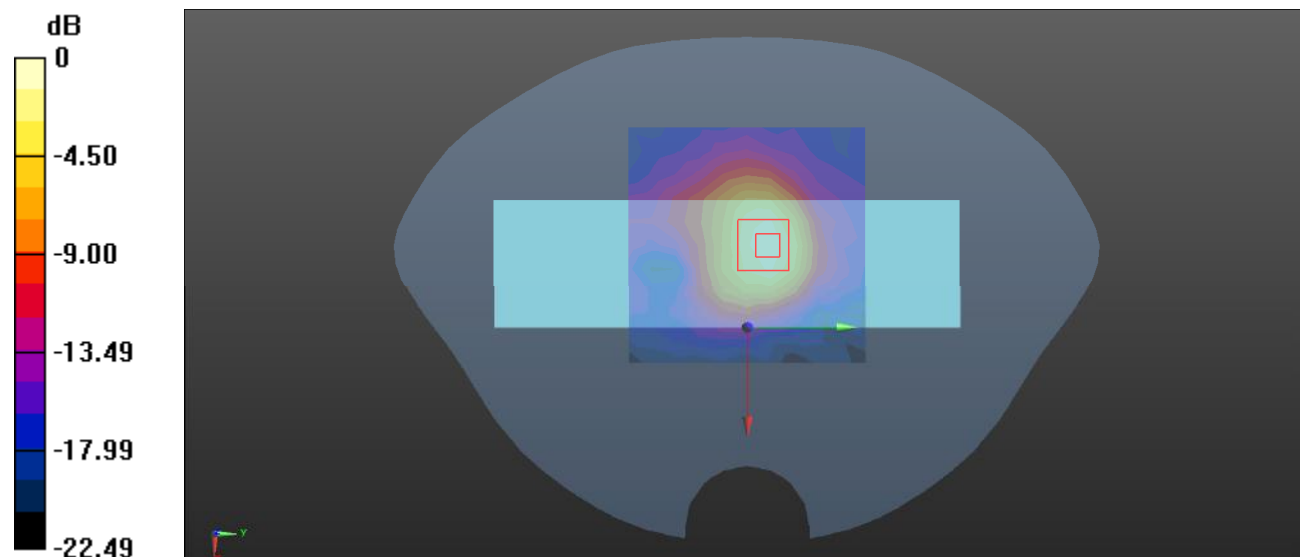

0 dB = 0.763 W/kg = -1.17 dBW/kg

**Test Plot: 66#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.912$  S/m;  $\epsilon_r = 39.509$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.74, 4.74, 4.74) @ 2535 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 7 100%RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.775 W/kg


**Body Back/LTE Band 7 100%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.99 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 0.681 W/kg; SAR(10 g) = 0.317 W/kg**

Maximum value of SAR (measured) = 0.761 W/kg

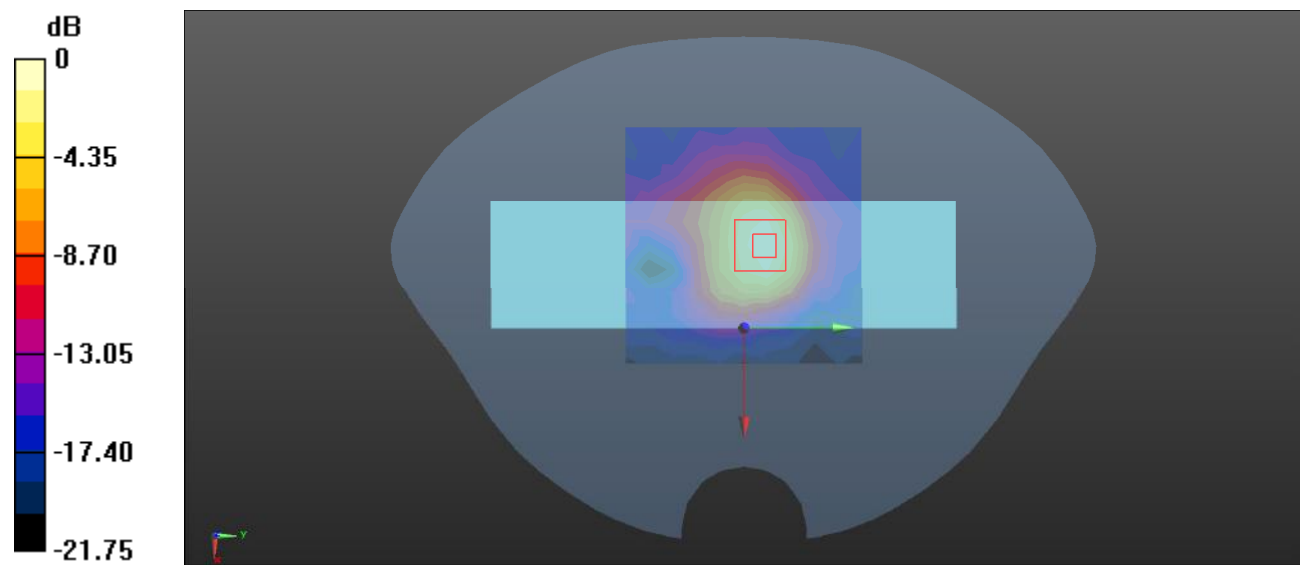

0 dB = 0.761 W/kg = -1.19 dBW/kg

**Test Plot: 67#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 12 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.212 W/kg


**Head Left Cheek/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.296 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.283 W/kg

**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.139 W/kg**

Maximum value of SAR (measured) = 0.220 W/kg

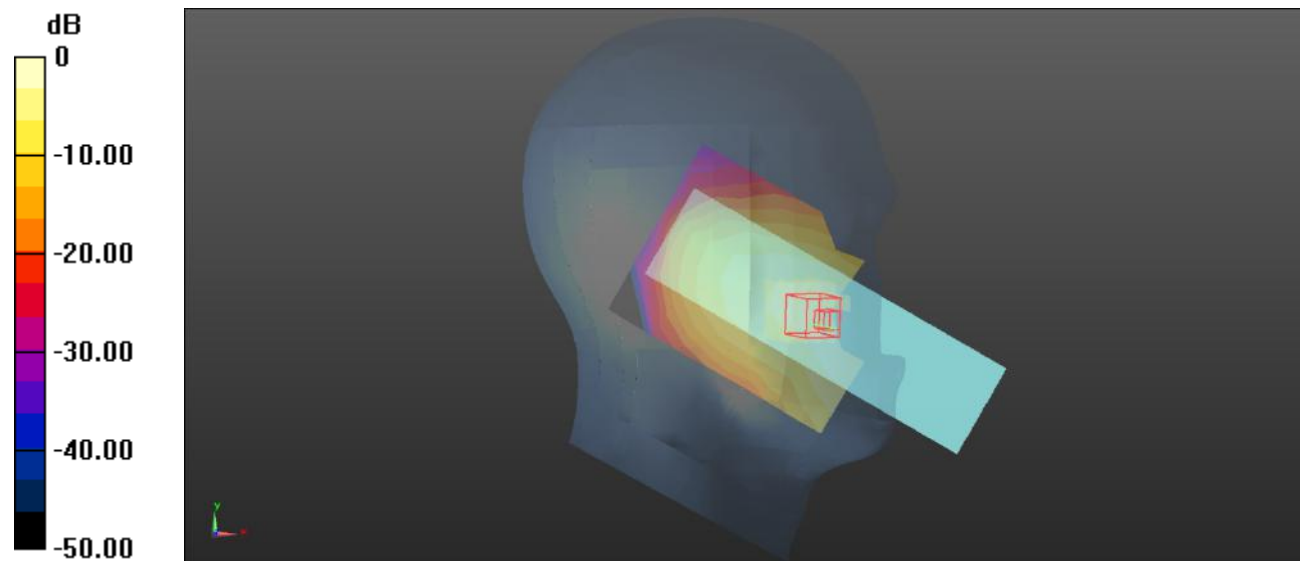

0 dB = 0.220 W/kg = -6.58 dBW/kg

**Test Plot: 68#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 12 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.207 W/kg


**Head Left Cheek/LTE Band 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.228 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.286 W/kg

**SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.134 W/kg**

Maximum value of SAR (measured) = 0.218 W/kg

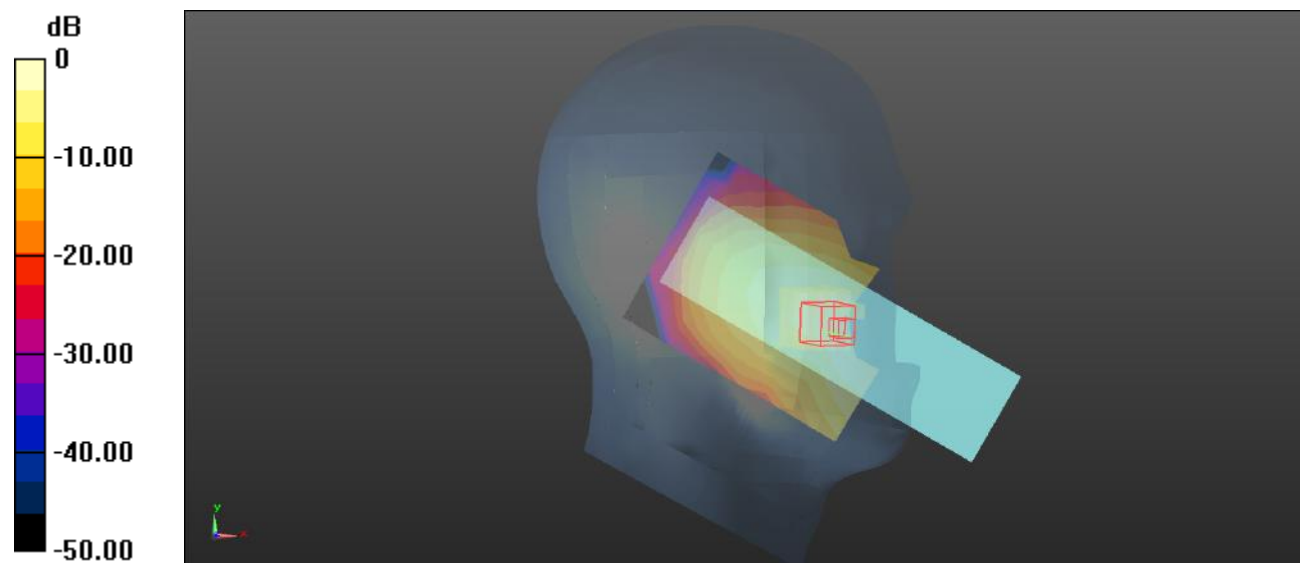

0 dB = 0.218 W/kg = -6.62 dBW/kg

**Test Plot: 69#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 12 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0484 W/kg


**Head Left Tilt/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.271 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0610 W/kg

**SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.038 W/kg**

Maximum value of SAR (measured) = 0.0514 W/kg

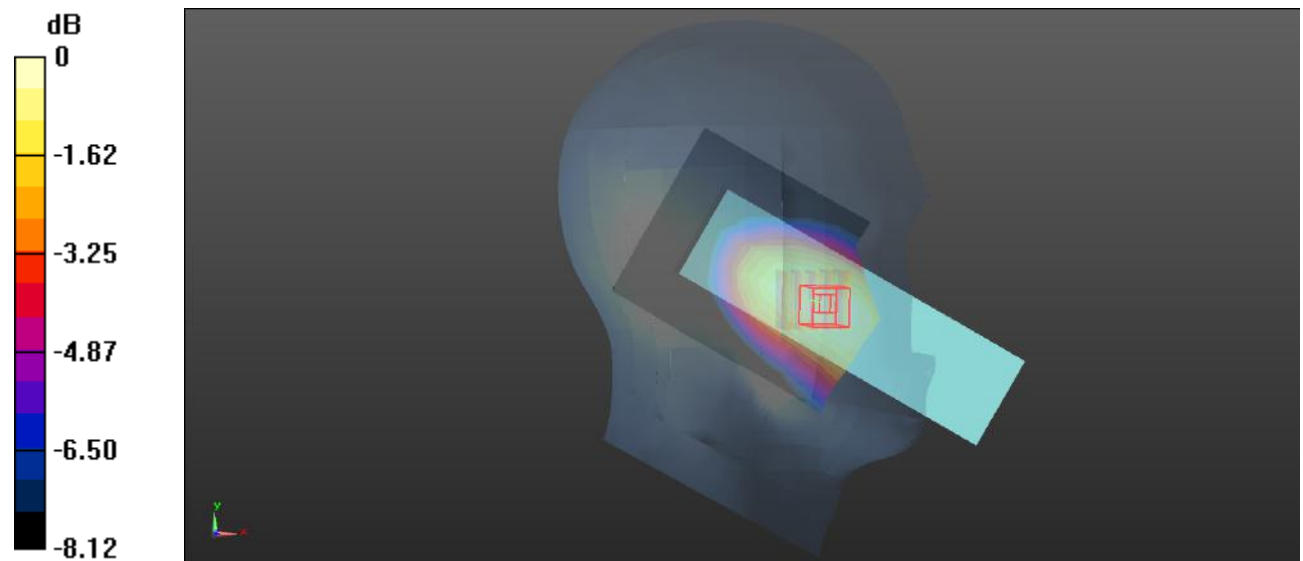

0 dB = 0.0514 W/kg = -12.89 dBW/kg

**Test Plot: 70#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 12 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0394 W/kg


**Head Left Tilt/LTE Band 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.129 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0490 W/kg

**SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0416 W/kg

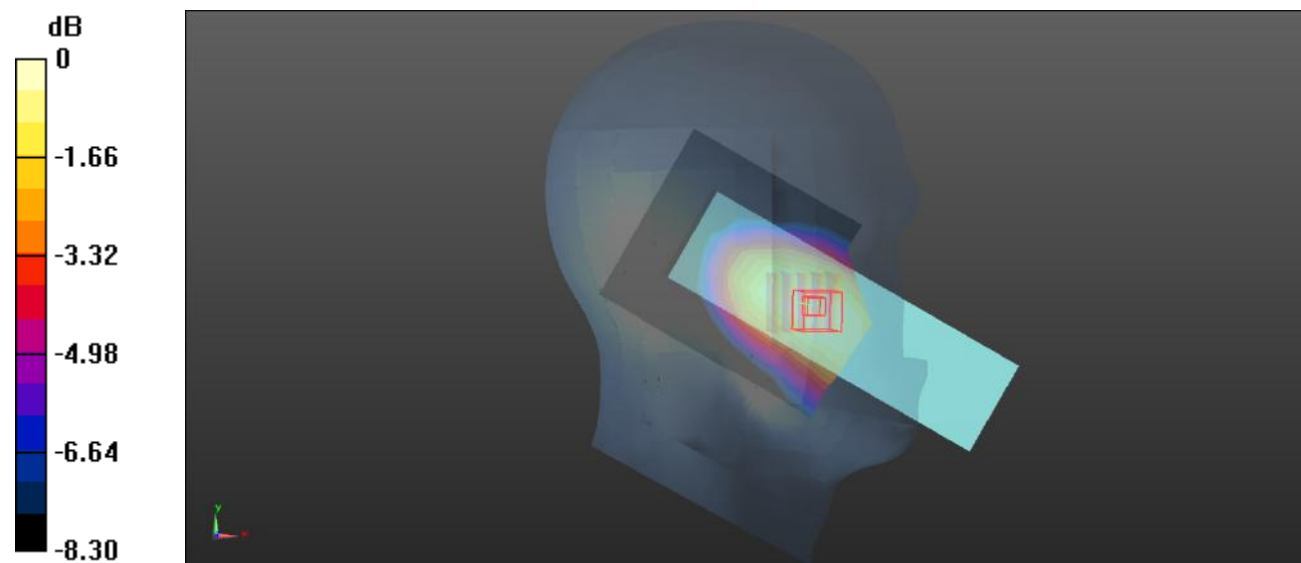

0 dB = 0.0416 W/kg = -13.81 dBW/kg

**Test Plot: 71#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 12 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.247 W/kg


**Head Right Cheek/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.227 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.340 W/kg

**SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.155 W/kg**

Maximum value of SAR (measured) = 0.236 W/kg

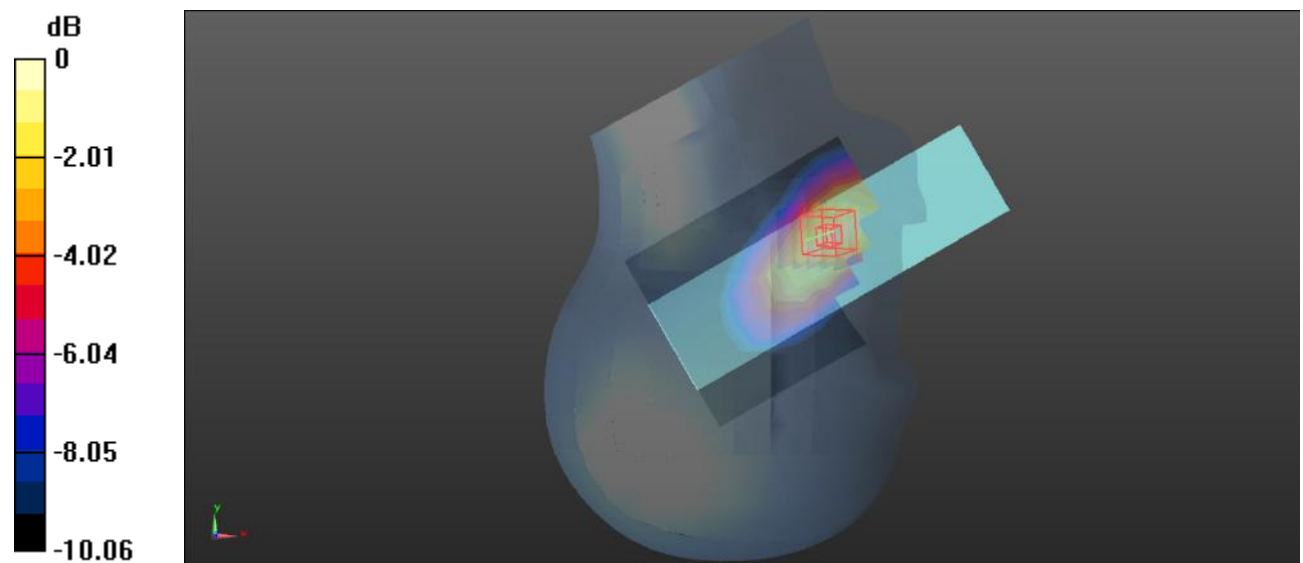

0 dB = 0.236 W/kg = -6.27 dBW/kg

**Test Plot: 72#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 12 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.200 W/kg


**Head Right Cheek/LTE Band 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.670 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.262 W/kg

**SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.125 W/kg**

Maximum value of SAR (measured) = 0.192 W/kg

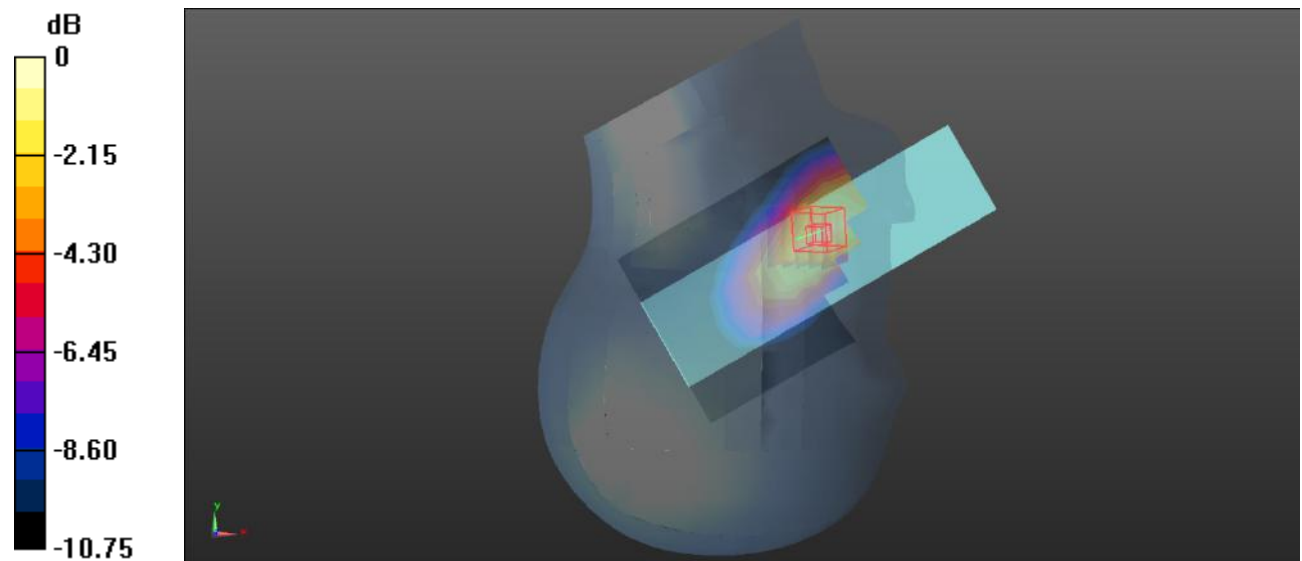

0 dB = 0.192 W/kg = -7.17 dBW/kg



**Test Plot: 73#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 12 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0573 W/kg


**Head Right Tilt/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.012 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0670 W/kg

**SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.042 W/kg**

Maximum value of SAR (measured) = 0.0558 W/kg

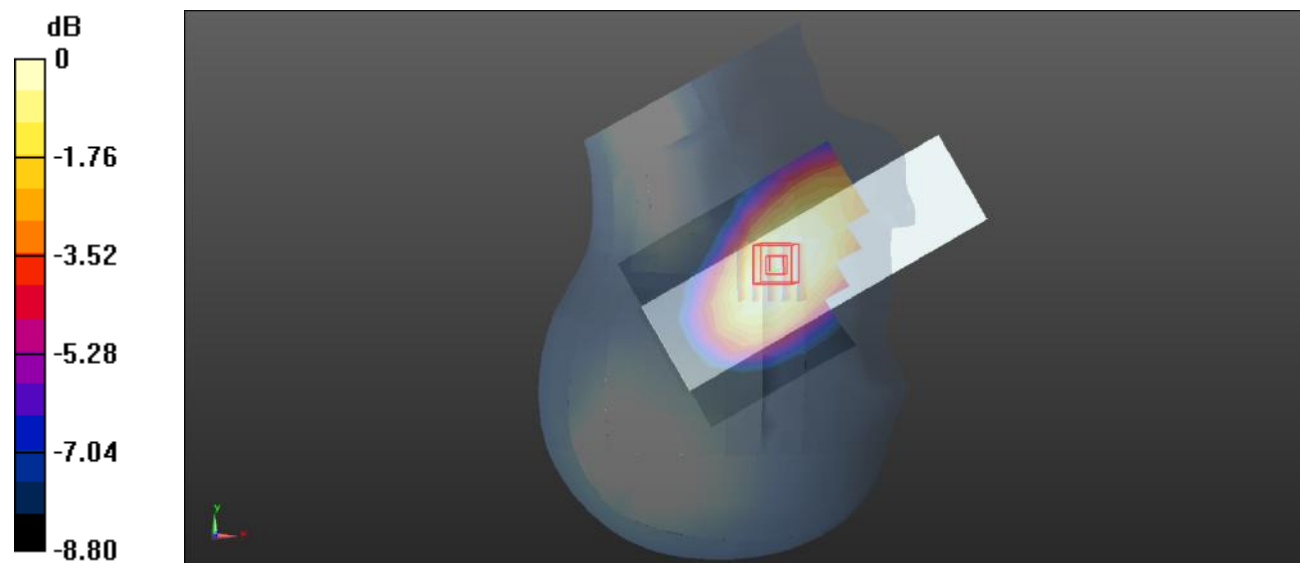

0 dB = 0.0558 W/kg = -12.53 dBW/kg

**Test Plot: 74#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 12 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0457 W/kg


**Head Right Tilt/LTE Band 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.369 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0990 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0490 W/kg

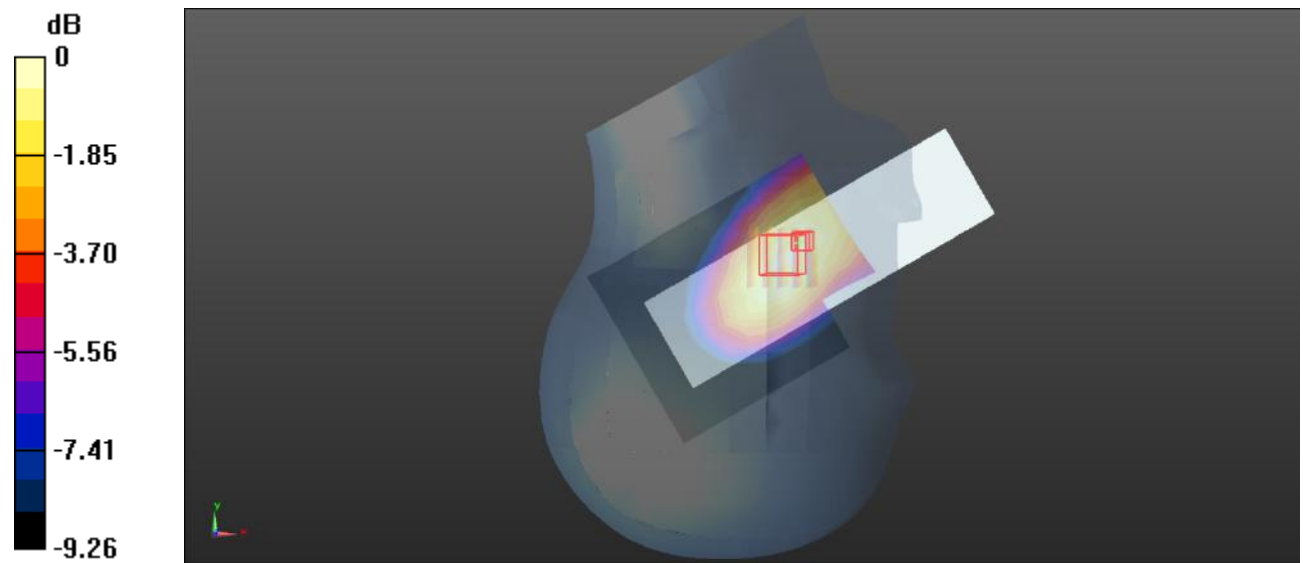

0 dB = 0.0490 W/kg = -13.10 dBW/kg

**Test Plot: 75#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 704$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.637$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 704 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 12 1RB Low/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.848 W/kg


**Body Back/LTE Band 12 1RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.64 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.800 W/kg; SAR(10 g) = 0.556 W/kg**

Maximum value of SAR (measured) = 0.843 W/kg

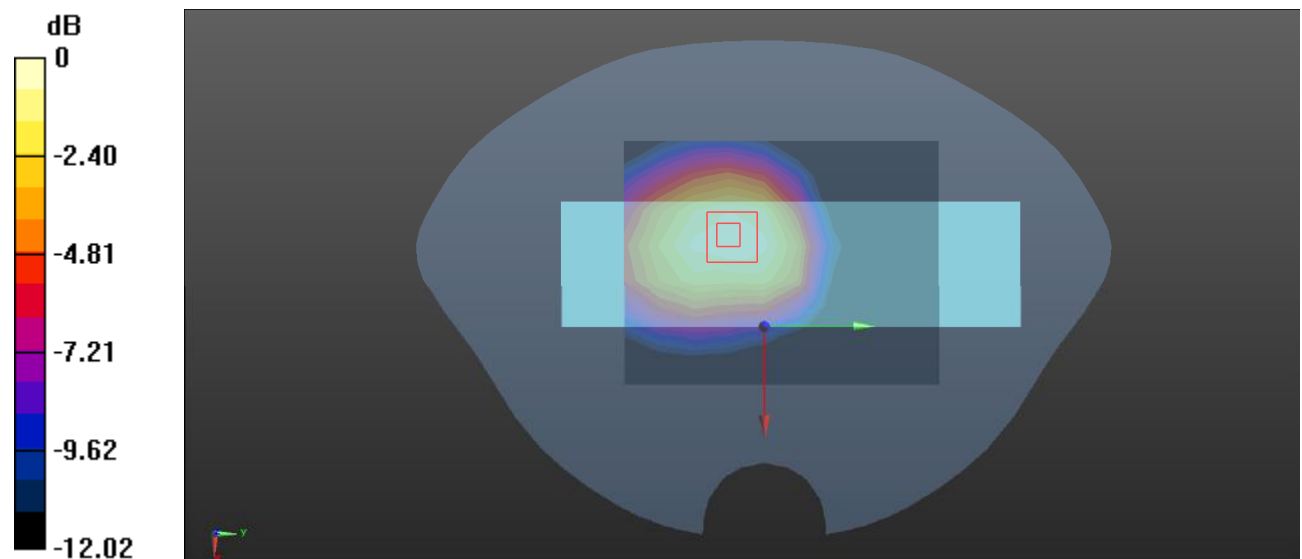

0 dB = 0.843 W/kg = -0.74 dBW/kg

**Test Plot: 76#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 12 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.901 W/kg


**Body Back/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.97 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.585 W/kg**

Maximum value of SAR (measured) = 0.887 W/kg

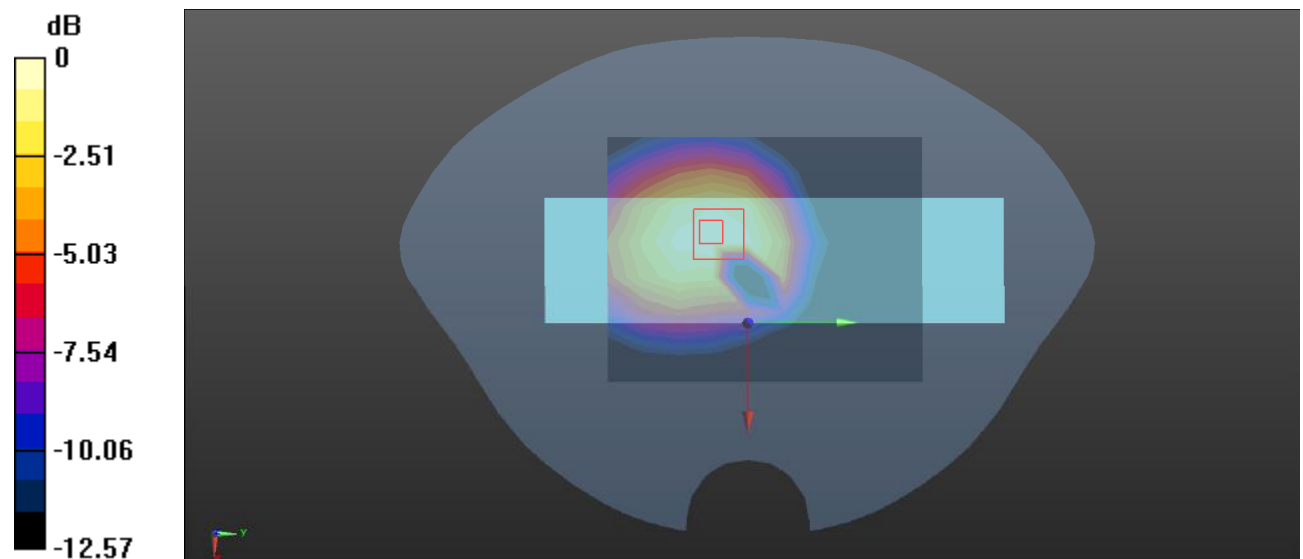

0 dB = 0.887 W/kg = -0.52 dBW/kg

**Test Plot: 77#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 711 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 711 \text{ MHz}$ ;  $\sigma = 0.877 \text{ S/m}$ ;  $\epsilon_r = 42.716$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 711 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 12 1RB High/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.861 W/kg


**Body Back/LTE Band 12 1RB High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.73 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.818 W/kg; SAR(10 g) = 0.566 W/kg**

Maximum value of SAR (measured) = 0.864 W/kg

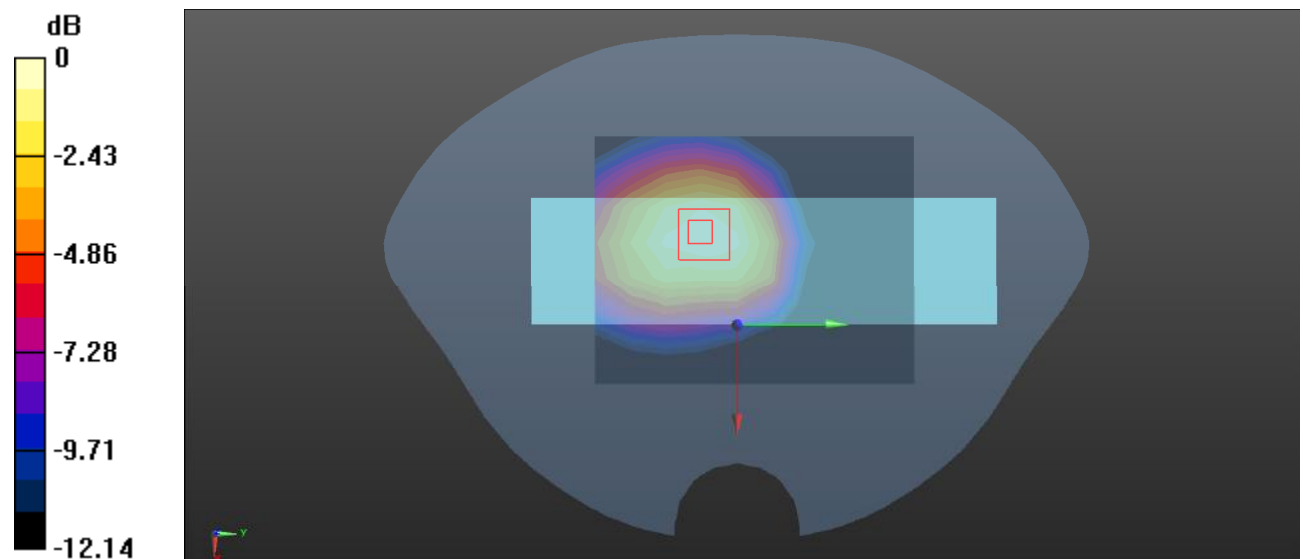

0 dB = 0.864 W/kg = -0.63 dBW/kg

**Test Plot: 78#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 12 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.684 W/kg


**Body Back/LTE Band 12 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.85 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.887 W/kg

**SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.449 W/kg**

Maximum value of SAR (measured) = 0.686 W/kg

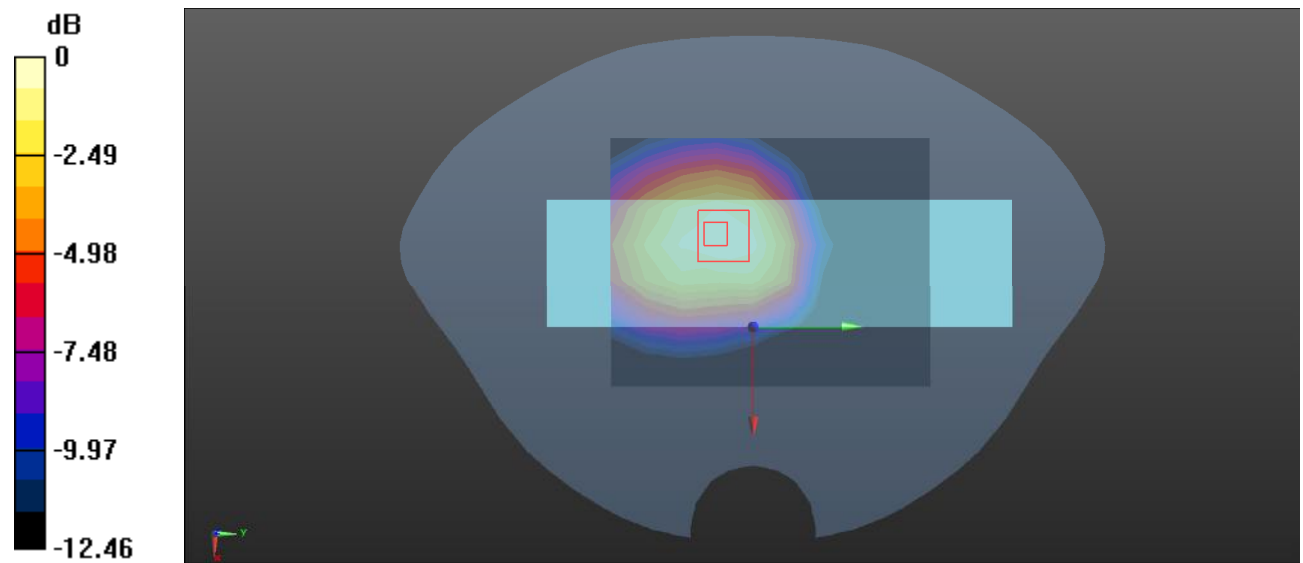

0 dB = 0.686 W/kg = -1.64 dBW/kg

**Test Plot: 79#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.676$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 12 100%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.640 W/kg


**Body Back/LTE Band 12 100%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.59 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.868 W/kg

**SAR(1 g) = 0.607 W/kg; SAR(10 g) = 0.409 W/kg**

Maximum value of SAR (measured) = 0.640 W/kg

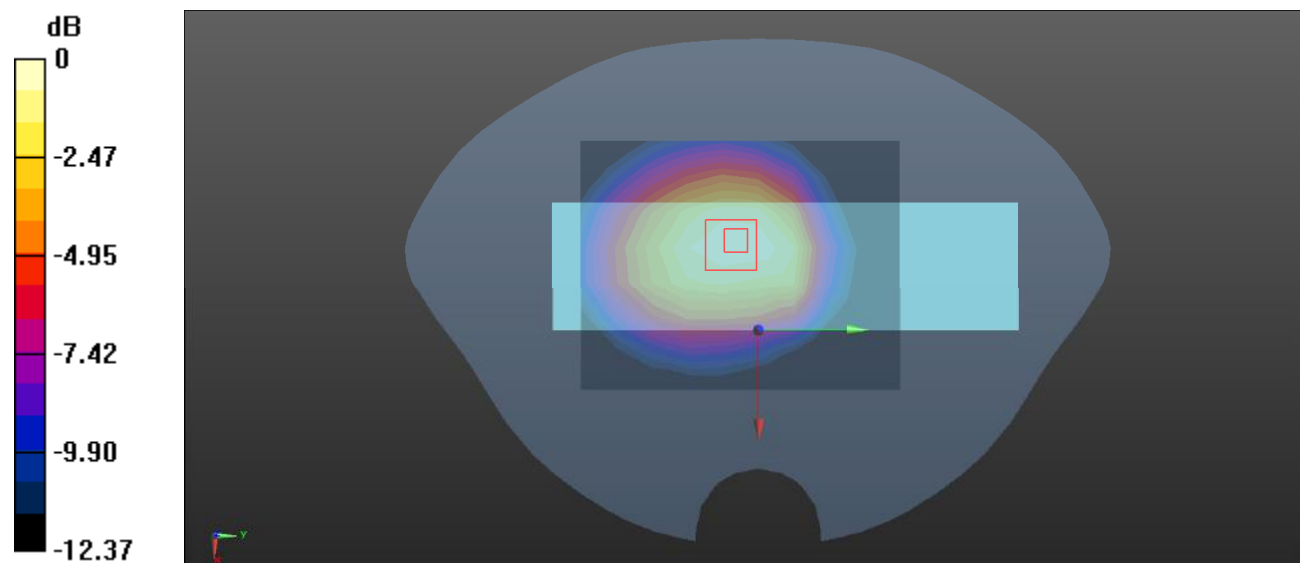

0 dB = 0.640 W/kg = -1.94 dBW/kg

**Test Plot: 80#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.624$  S/m;  $\epsilon_r = 39.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 40 Lower 1RB Mid/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.119 W/kg

**Head Left Cheek/LTE Band 40 Lower 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 3.505 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.241 W/kg

**SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.119 W/kg

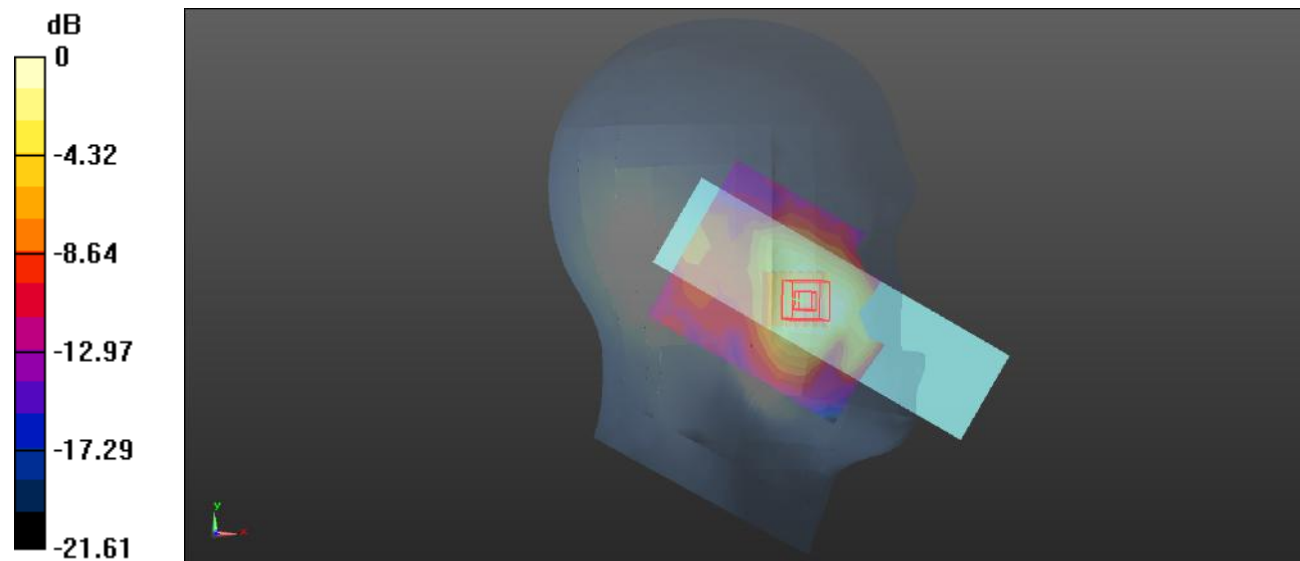



**Test Plot: 81#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.624$  S/m;  $\epsilon_r = 39.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Check/LTE Band 40 Lower 50%RB Mid/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0850 W/kg


**Head Left Check/LTE Band 40 Lower 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.265 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.175 W/kg

**SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.0859 W/kg

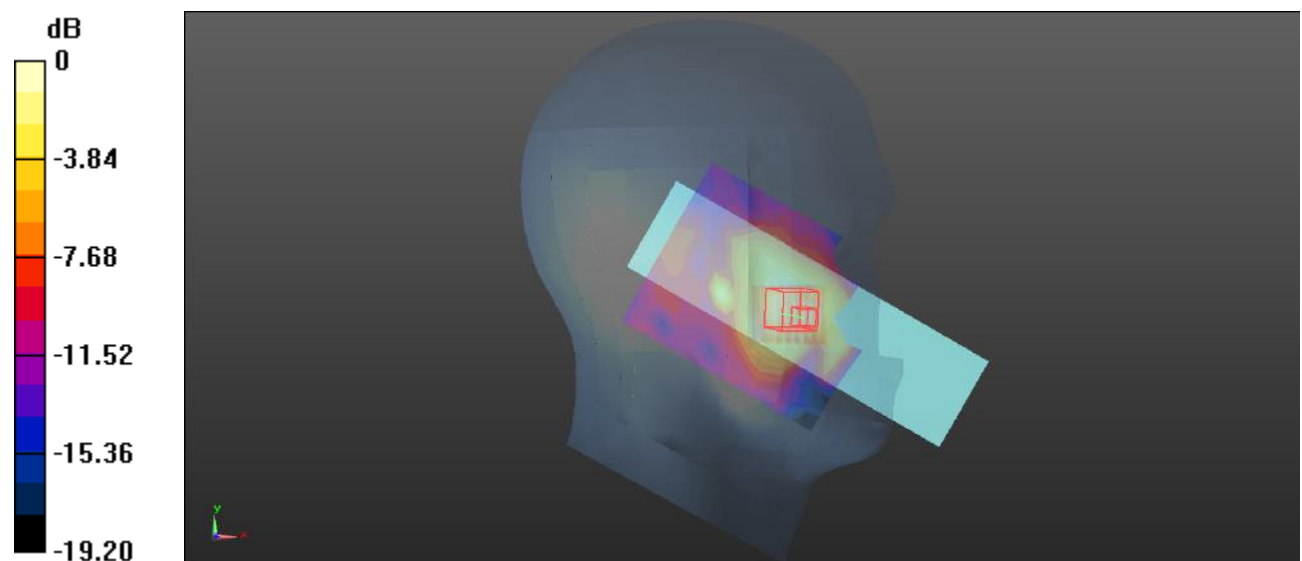

0 dB = 0.0859 W/kg = -10.66 dBW/kg

**Test Plot: 82#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.624$  S/m;  $\epsilon_r = 39.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 40 Lower 1RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0510 W/kg


**Head Left Tilt/LTE Band 40 Lower 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.484 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0840 W/kg

**SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0478 W/kg

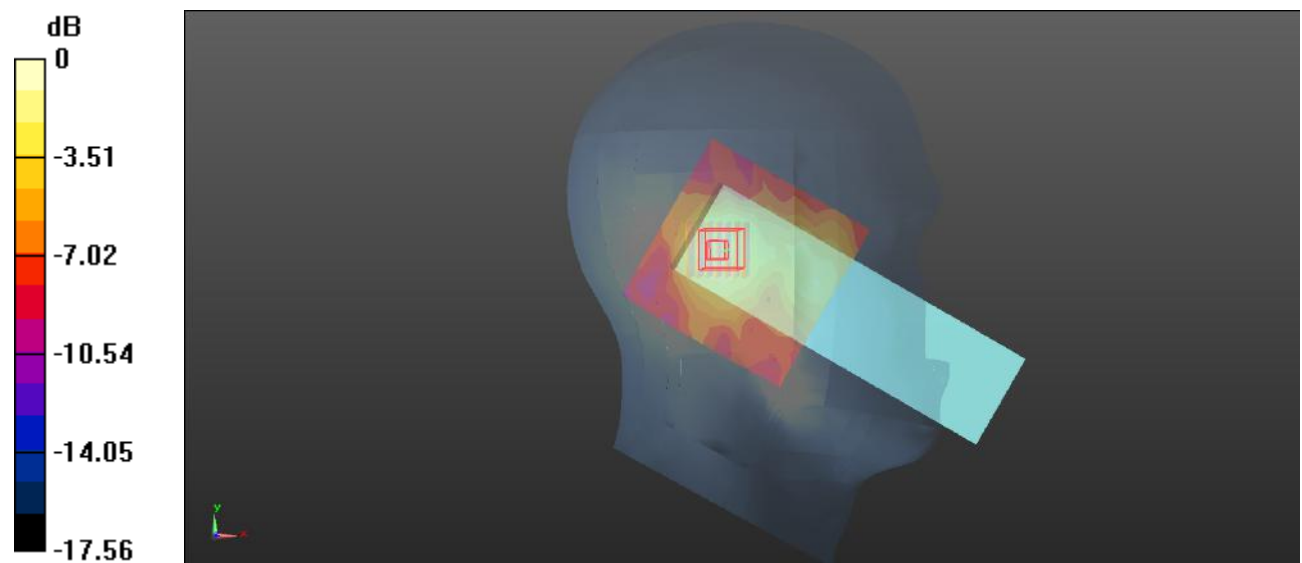

0 dB = 0.0478 W/kg = -13.21 dBW/kg

**Test Plot: 83#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.624$  S/m;  $\epsilon_r = 39.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 40 Lower 50%RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0386 W/kg


**Head Left Tilt/LTE Band 40 Lower 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.513 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0590 W/kg

**SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.018 W/kg**

Maximum value of SAR (measured) = 0.0361 W/kg

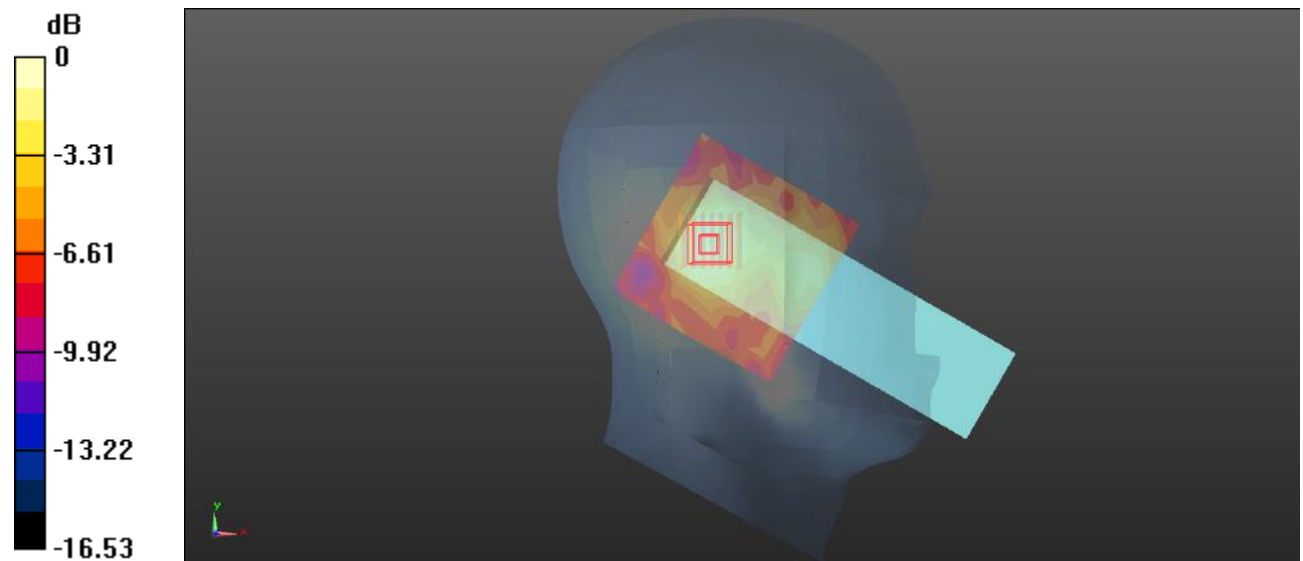

0 dB = 0.0361 W/kg = -14.42 dBW/kg

**Test Plot: 84#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.624$  S/m;  $\epsilon_r = 39.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 40 Lower 1RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.123 W/kg

**Head Right Cheek/LTE Band 40 Lower 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 2.573 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.190 W/kg

**SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.064 W/kg**

Maximum value of SAR (measured) = 0.124 W/kg

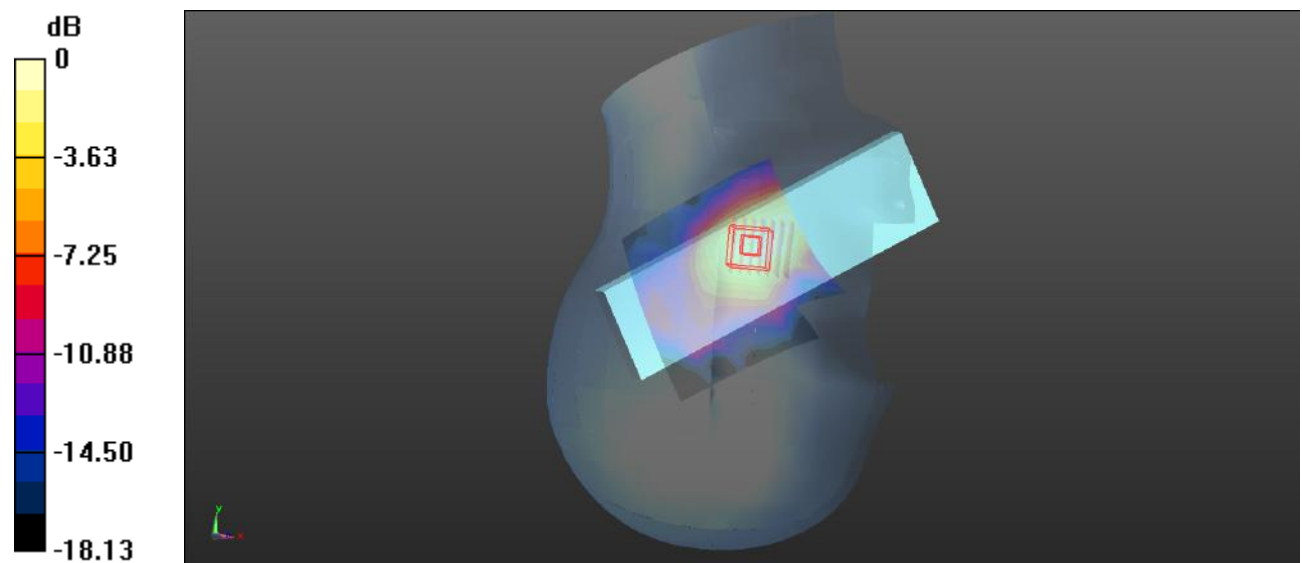

0 dB = 0.124 W/kg = -9.07 dBW/kg

**Test Plot: 85#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.624$  S/m;  $\epsilon_r = 39.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Check/LTE Band 40 Lower 50%RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0794 W/kg


**Head Right Check/LTE Band 40 Lower 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.492 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.138 W/kg

**SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.0812 W/kg

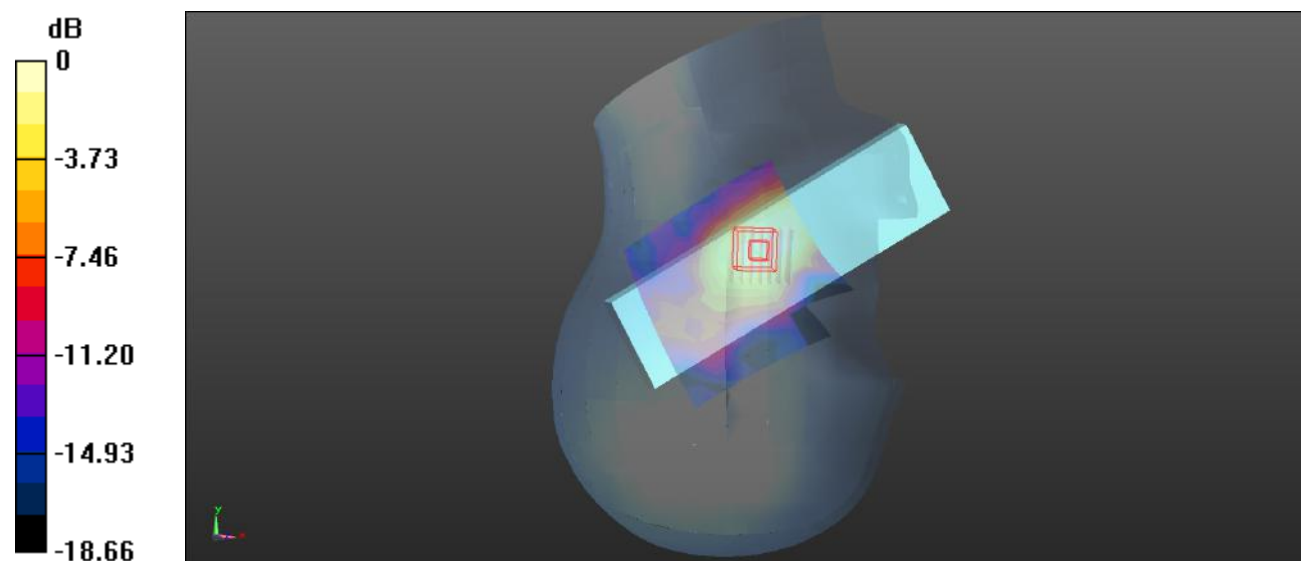

0 dB = 0.0812 W/kg = -10.90 dBW/kg

**Test Plot: 86#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.624$  S/m;  $\epsilon_r = 39.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 40 Lower 1RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0457 W/kg


**Head Right Tilt/LTE Band 40 Lower 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.314 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0800 W/kg

**SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0460 W/kg

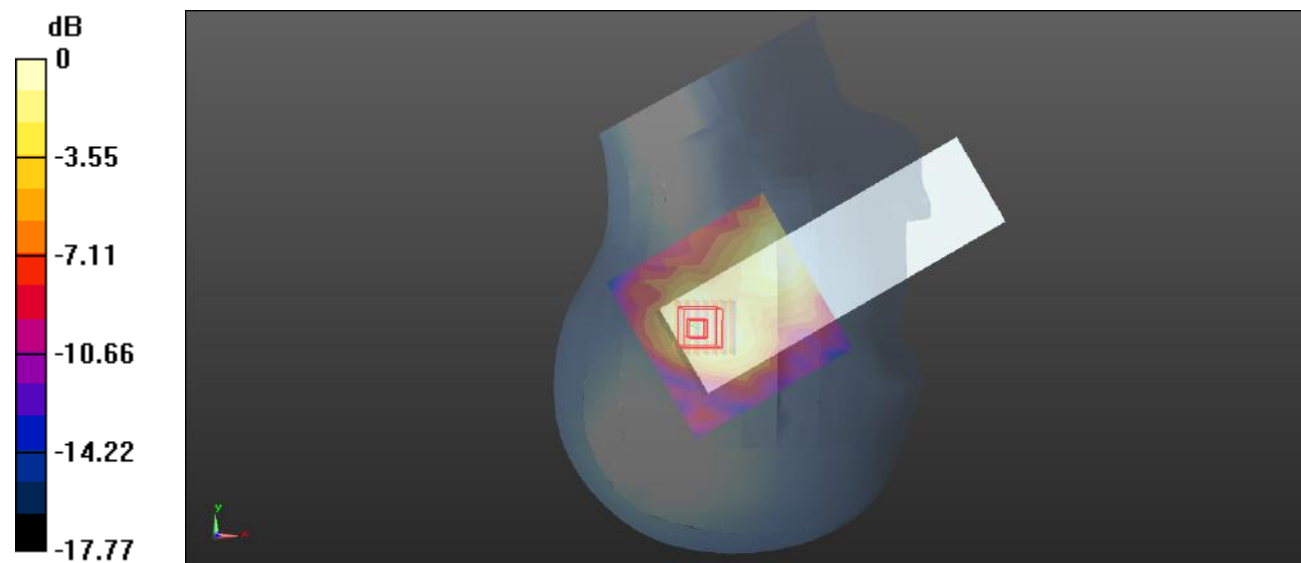

**Test Plot: 87#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.624$  S/m;  $\epsilon_r = 39.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 40 Lower 50%RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0345 W/kg

**Head Right Tilt/LTE Band 40 Lower 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 4.490 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0530 W/kg

**SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0320 W/kg

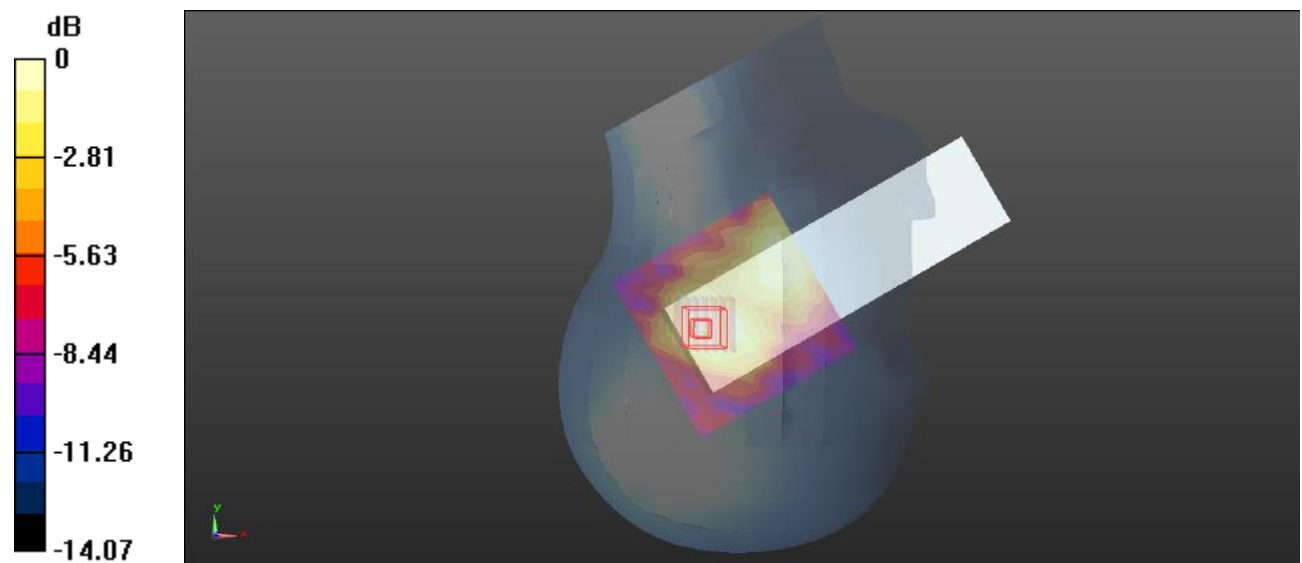

**Test Plot: 88#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.624$  S/m;  $\epsilon_r = 39.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 40 Lower 1RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.459 W/kg


**Body Back/LTE Band 40 Lower 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.31 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.948 W/kg

**SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.181 W/kg**

Maximum value of SAR (measured) = 0.470 W/kg

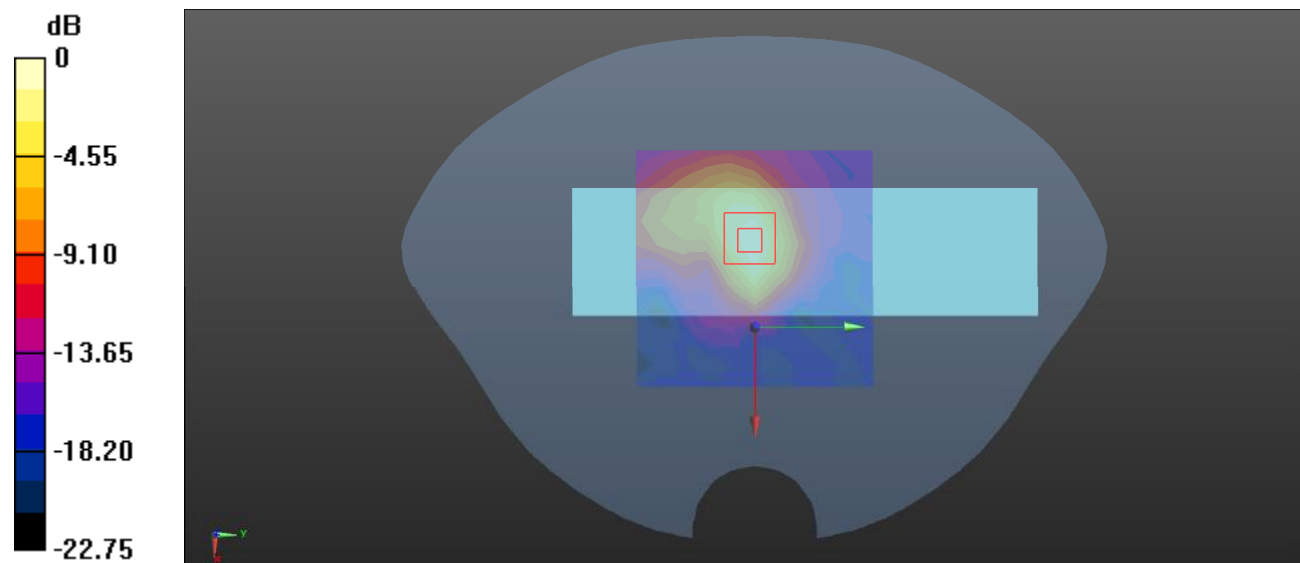

0 dB = 0.470 W/kg = -3.28 dBW/kg



**Test Plot: 89#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.624$  S/m;  $\epsilon_r = 39.638$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 40 Lower 50%RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.292 W/kg


**Body Back/LTE Band 40 Lower 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.04 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.669 W/kg

**SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.127 W/kg**

Maximum value of SAR (measured) = 0.319 W/kg

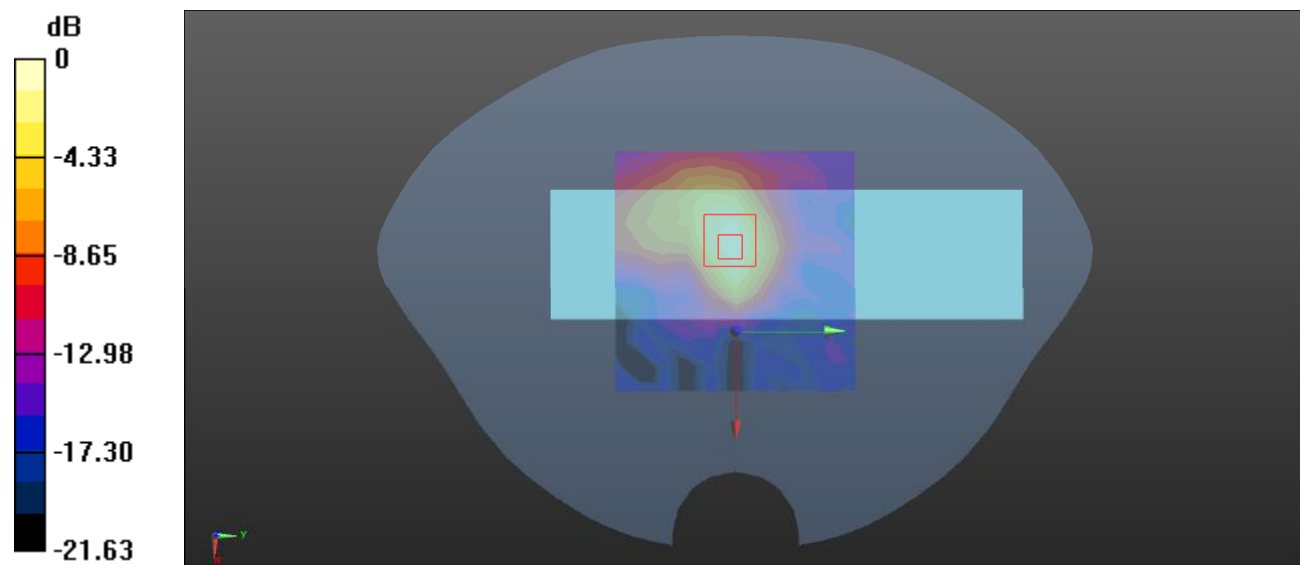

0 dB = 0.319 W/kg = -4.96 dBW/kg

**Test Plot: 90#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2355$  MHz;  $\sigma = 1.714$  S/m;  $\epsilon_r = 39.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 40 Upper 1RB Mid/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.137 W/kg

**Head Left Cheek/LTE Band 40 Upper 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 4.045 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.271 W/kg

**SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.062 W/kg**

Maximum value of SAR (measured) = 0.136 W/kg

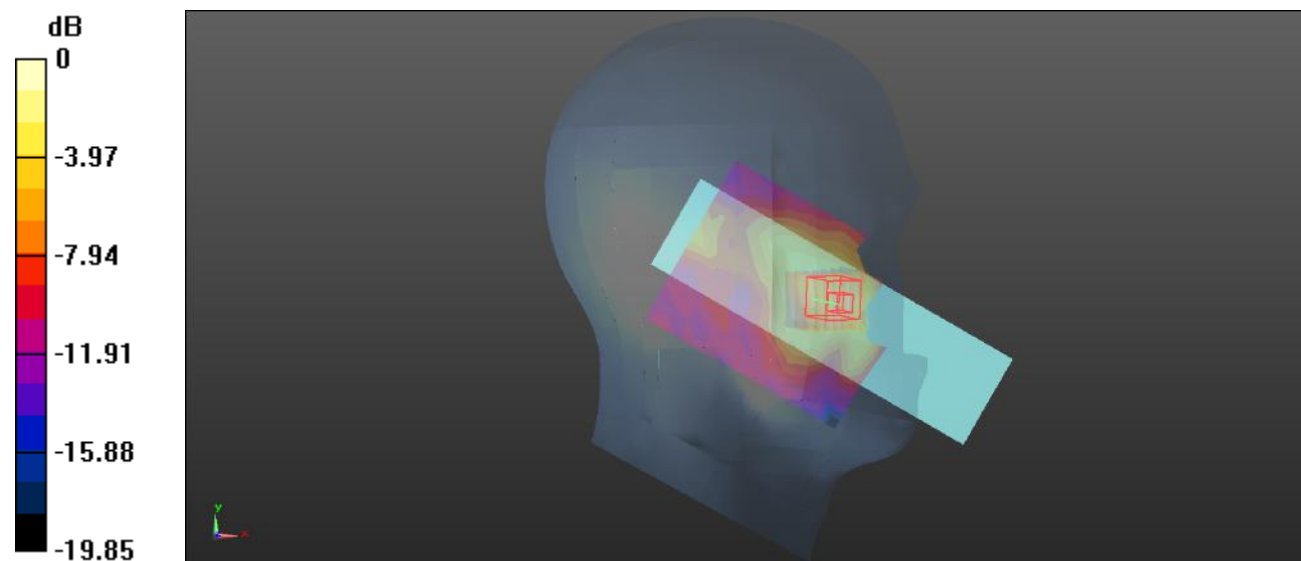

0 dB = 0.136 W/kg = -8.66 dBW/kg

**Test Plot: 91#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2355$  MHz;  $\sigma = 1.714$  S/m;  $\epsilon_r = 39.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Check/LTE Band 40 Upper 50%RB Mid/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0937 W/kg


**Head Left Check/LTE Band 40 Upper 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.452 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.183 W/kg

**SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.0892 W/kg

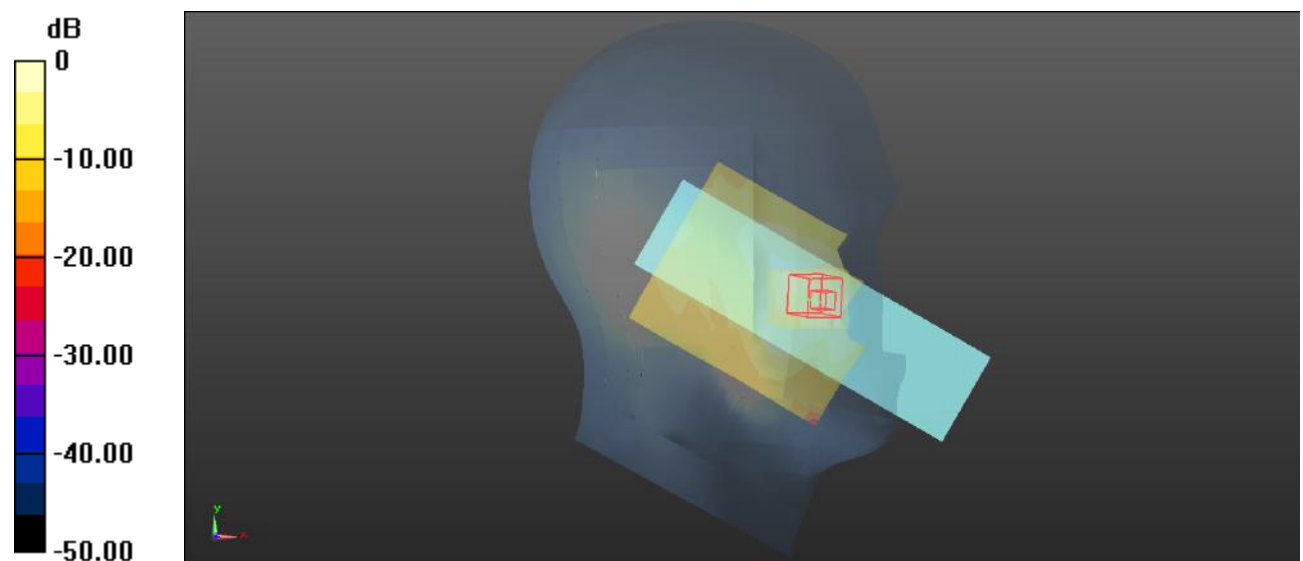

0 dB = 0.0892 W/kg = -10.50 dBW/kg

**Test Plot: 92#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2355$  MHz;  $\sigma = 1.714$  S/m;  $\epsilon_r = 39.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 40 Upper 1RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0744 W/kg


**Head Left Tilt/LTE Band 40 Upper 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.776 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.123 W/kg

**SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.0660 W/kg

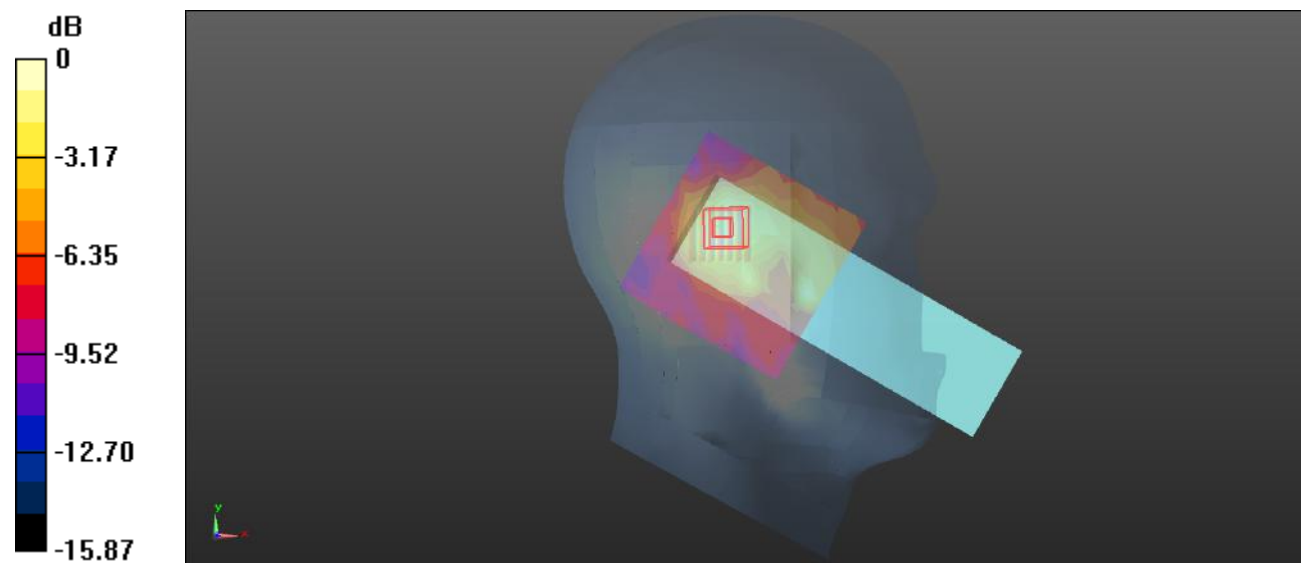

0 dB = 0.0660 W/kg = -11.80 dBW/kg

**Test Plot: 93#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2355$  MHz;  $\sigma = 1.714$  S/m;  $\epsilon_r = 39.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 40 Upper 50%RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0481 W/kg

**Head Left Tilt/LTE Band 40 Upper 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 5.308 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0810 W/kg

**SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.022 W/kg**

Maximum value of SAR (measured) = 0.0523 W/kg

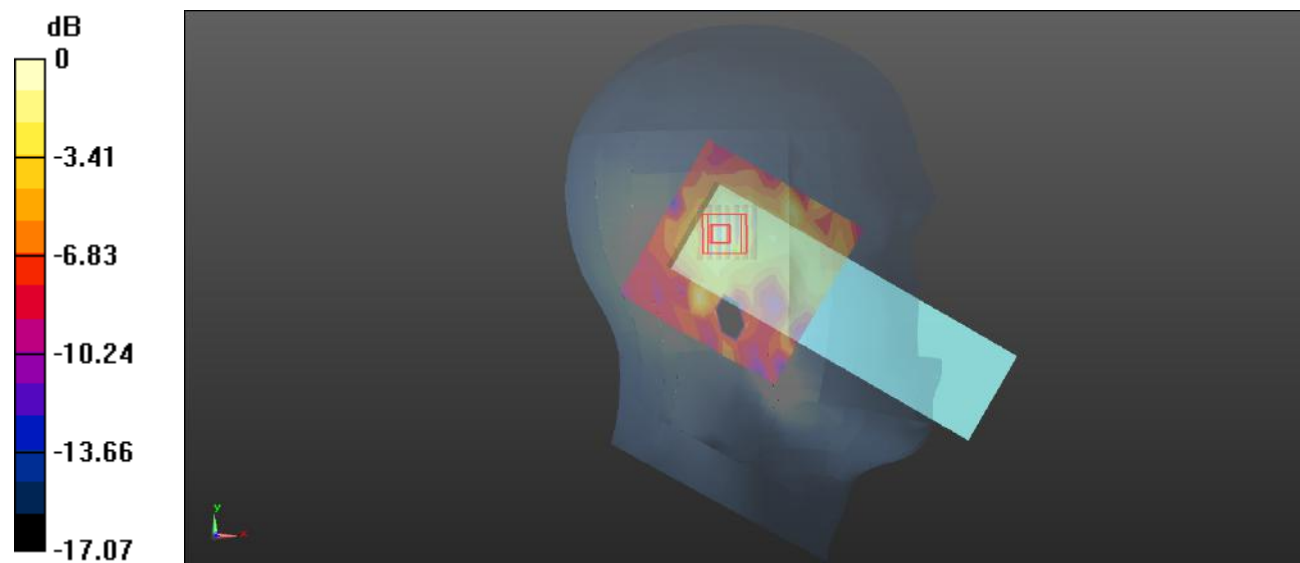

0 dB = 0.0523 W/kg = -12.81 dBW/kg

**Test Plot: 94#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2355$  MHz;  $\sigma = 1.714$  S/m;  $\epsilon_r = 39.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 40 Upper 1RB Mid/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.127 W/kg

**Head Right Cheek/LTE Band 40 Upper 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 2.598 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.215 W/kg

**SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.142 W/kg

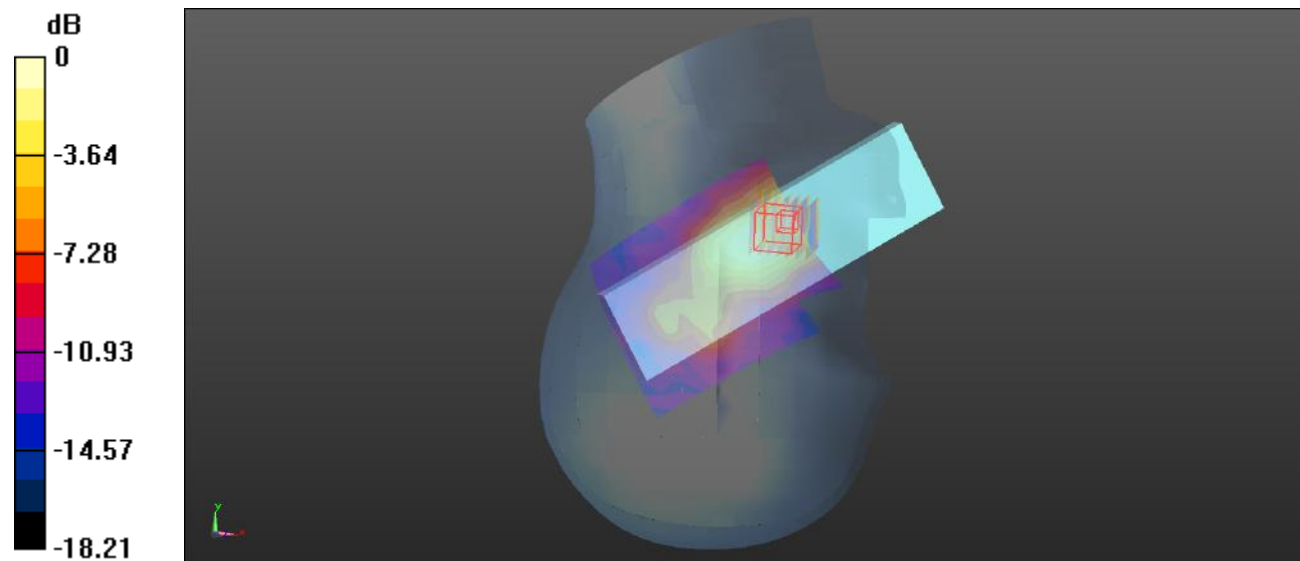

0 dB = 0.142 W/kg = -8.48 dBW/kg

**Test Plot: 95#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2355$  MHz;  $\sigma = 1.714$  S/m;  $\epsilon_r = 39.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Check/LTE Band 40 Upper 50%RB Mid/Area Scan (11x13x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0938 W/kg


**Head Right Check/LTE Band 40 Upper 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.713 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.160 W/kg

**SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.0881 W/kg

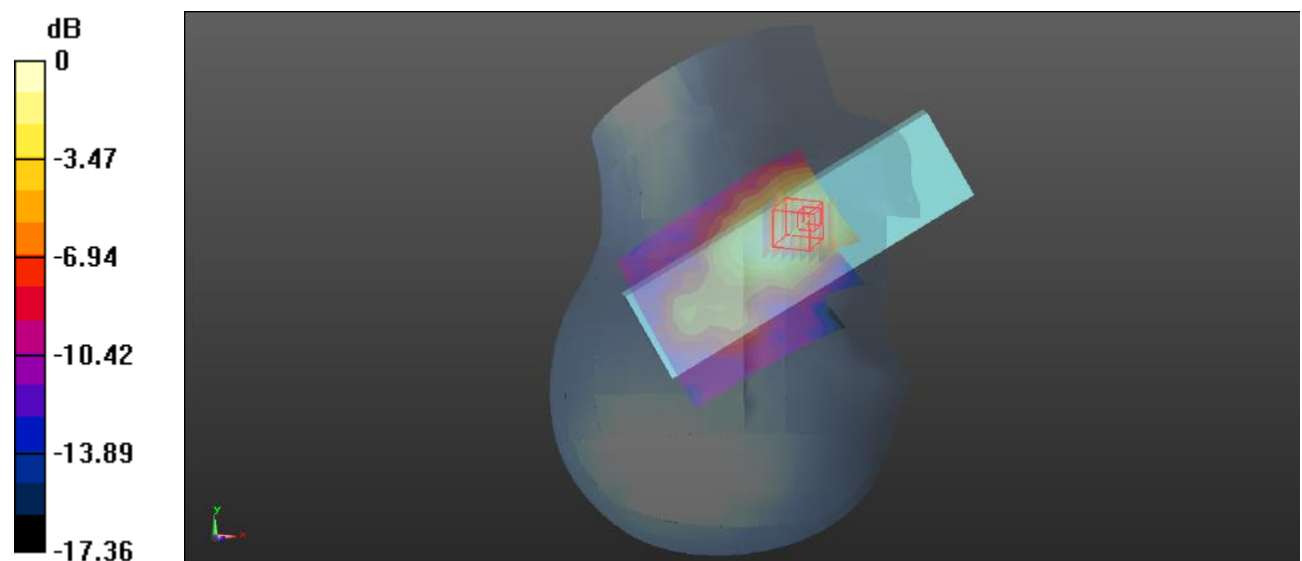

0 dB = 0.0881 W/kg = -10.55 dBW/kg

**Test Plot: 96#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2355$  MHz;  $\sigma = 1.714$  S/m;  $\epsilon_r = 39.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 40 Upper 1RB Mid/Area Scan (11x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0609 W/kg


**Head Right Tilt/LTE Band 40 Upper 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.866 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0920 W/kg

**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.029 W/kg**

Maximum value of SAR (measured) = 0.0574 W/kg

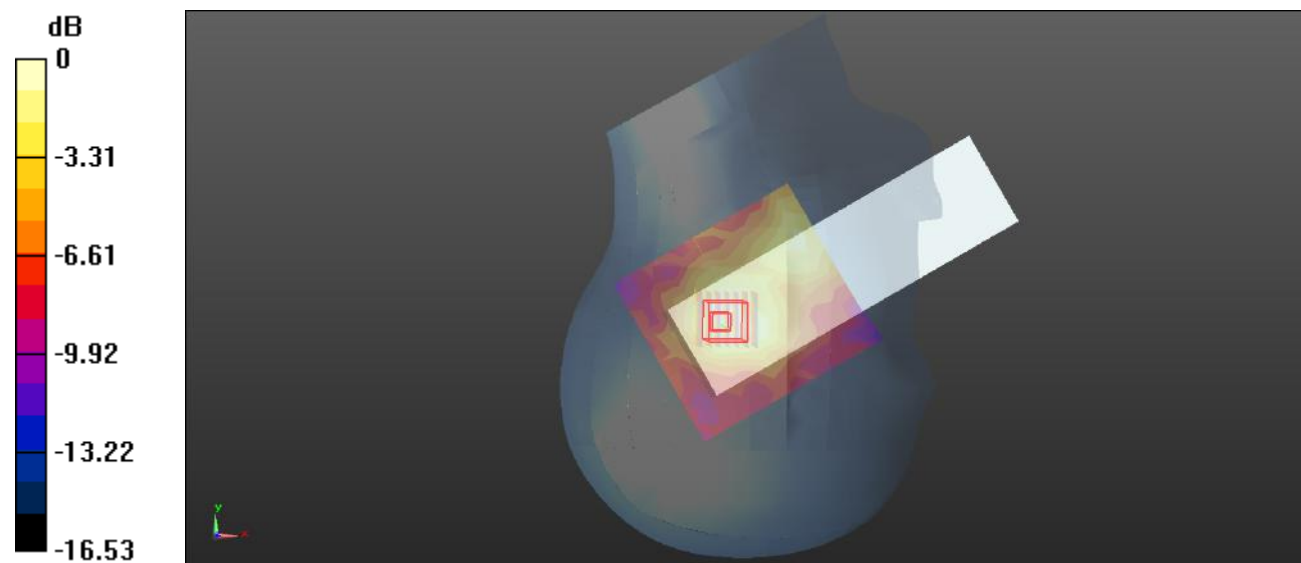

0 dB = 0.0574 W/kg = -12.41 dBW/kg



**Test Plot: 97#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2355$  MHz;  $\sigma = 1.714$  S/m;  $\epsilon_r = 39.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 40 Upper 50%RB Mid/Area Scan (11x12x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0463 W/kg

**Head Right Tilt/LTE Band 40 Upper 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 3.741 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0820 W/kg

**SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.020 W/kg**

Maximum value of SAR (measured) = 0.0437 W/kg

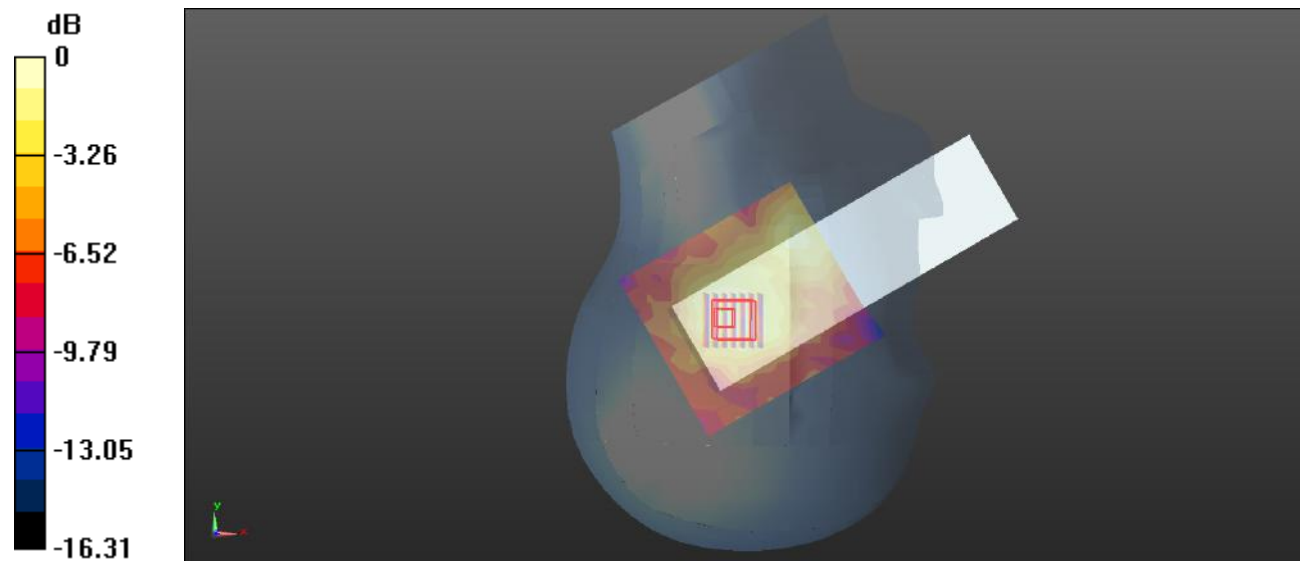

0 dB = 0.0437 W/kg = -13.60 dBW/kg

**Test Plot: 98#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2355$  MHz;  $\sigma = 1.714$  S/m;  $\epsilon_r = 39.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 40 Upper 1RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.740 W/kg


**Body Back/LTE Band 40 Upper 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.11 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 0.669 W/kg; SAR(10 g) = 0.300 W/kg**

Maximum value of SAR (measured) = 0.762 W/kg

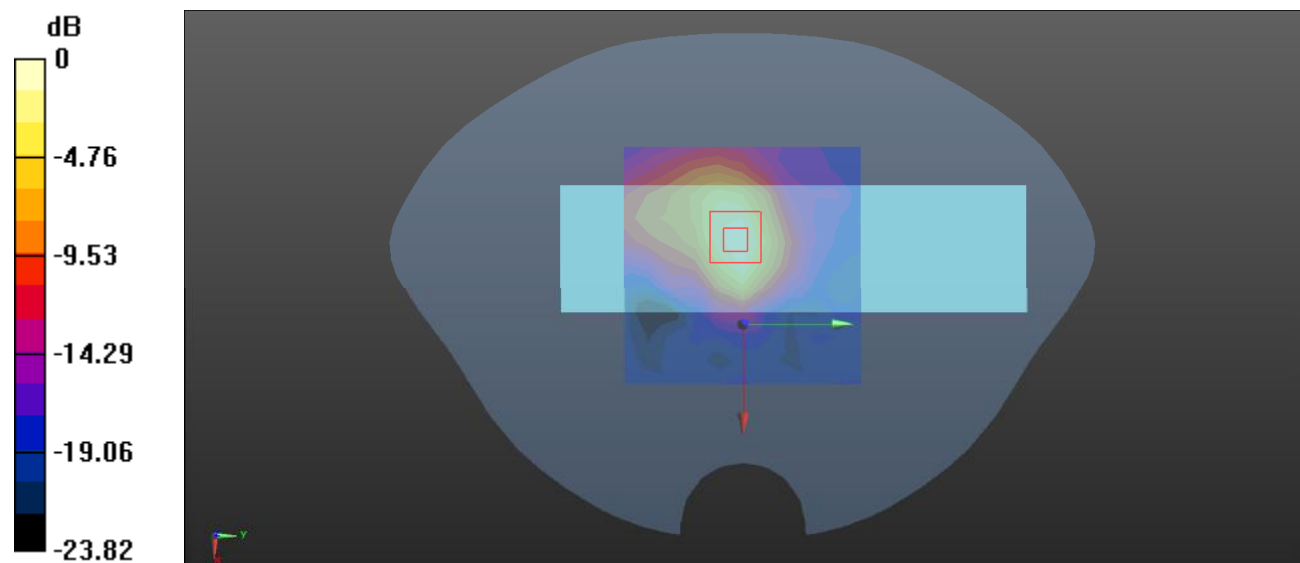

0 dB = 0.762 W/kg = -1.18 dBW/kg

**Test Plot: 99#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2355 MHz; Duty Cycle: 1:3.33

Medium parameters used:  $f = 2355$  MHz;  $\sigma = 1.714$  S/m;  $\epsilon_r = 39.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 40 Upper 50%RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.507 W/kg


**Body Back/LTE Band 40 Upper 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.96 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.204 W/kg**

Maximum value of SAR (measured) = 0.502 W/kg

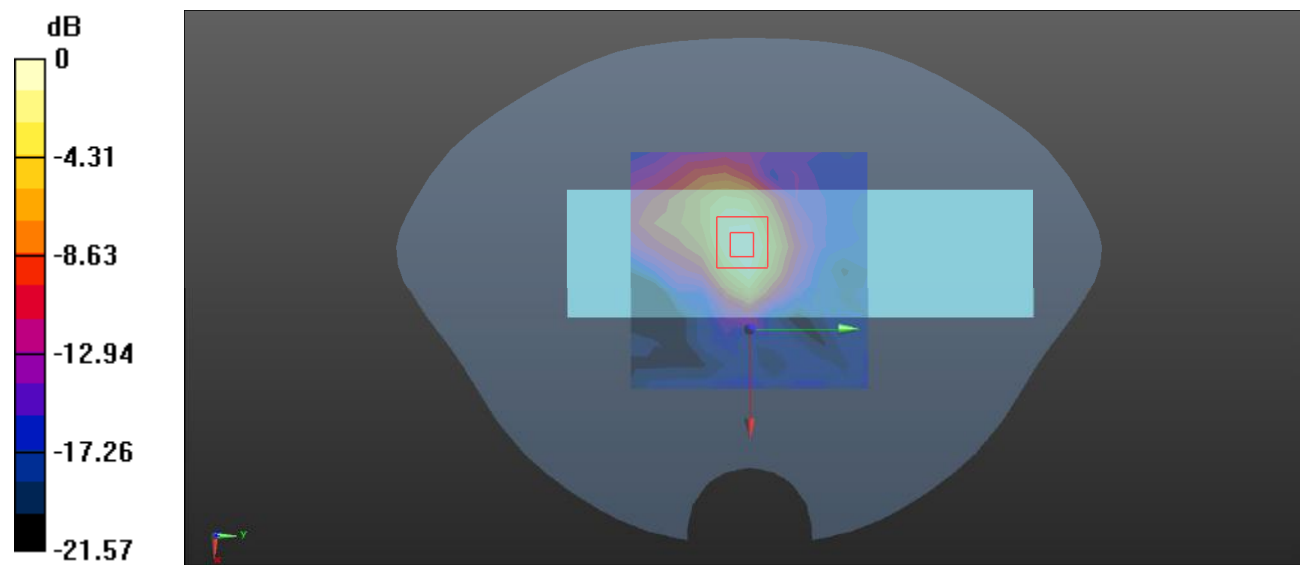

0 dB = 0.502 W/kg = -2.99 dBW/kg

**Test Plot: 100#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.927$  S/m;  $\epsilon_r = 39.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2605 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 41 1RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.247 W/kg


**Head Left Cheek/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.267 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.403 W/kg

**SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.105 W/kg**

Maximum value of SAR (measured) = 0.249 W/kg

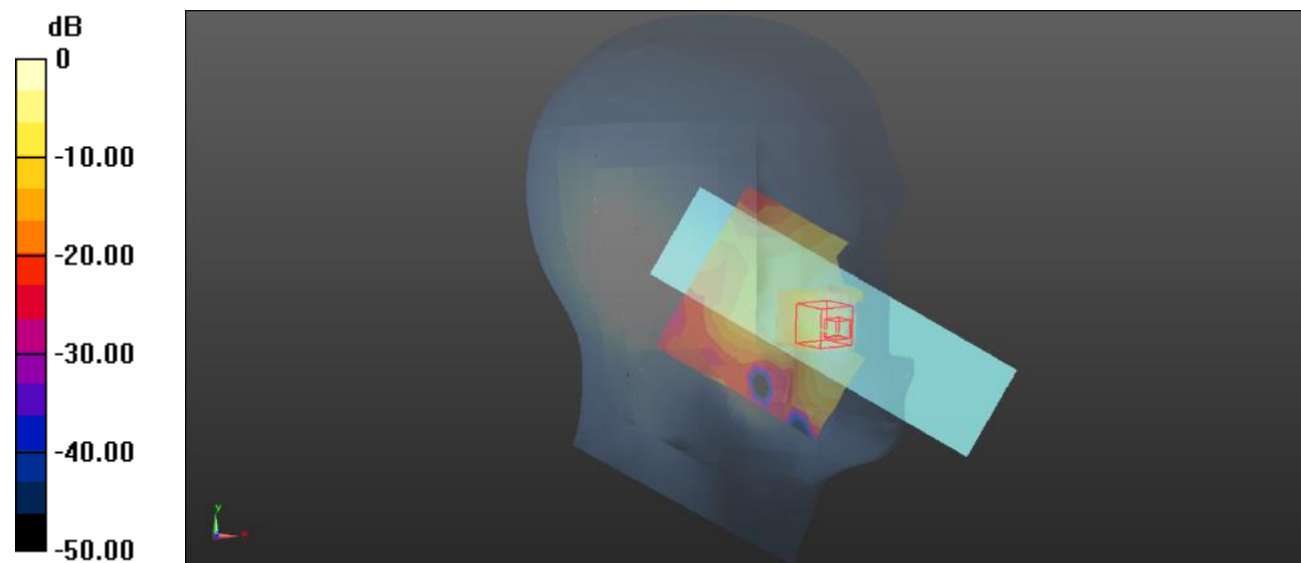

0 dB = 0.249 W/kg = -6.04 dBW/kg

**Test Plot: 101#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.927$  S/m;  $\epsilon_r = 39.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2605 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 41 50%RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.169 W/kg


**Head Left Cheek/LTE Band 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.339 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.277 W/kg

**SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.070 W/kg**

Maximum value of SAR (measured) = 0.170 W/kg

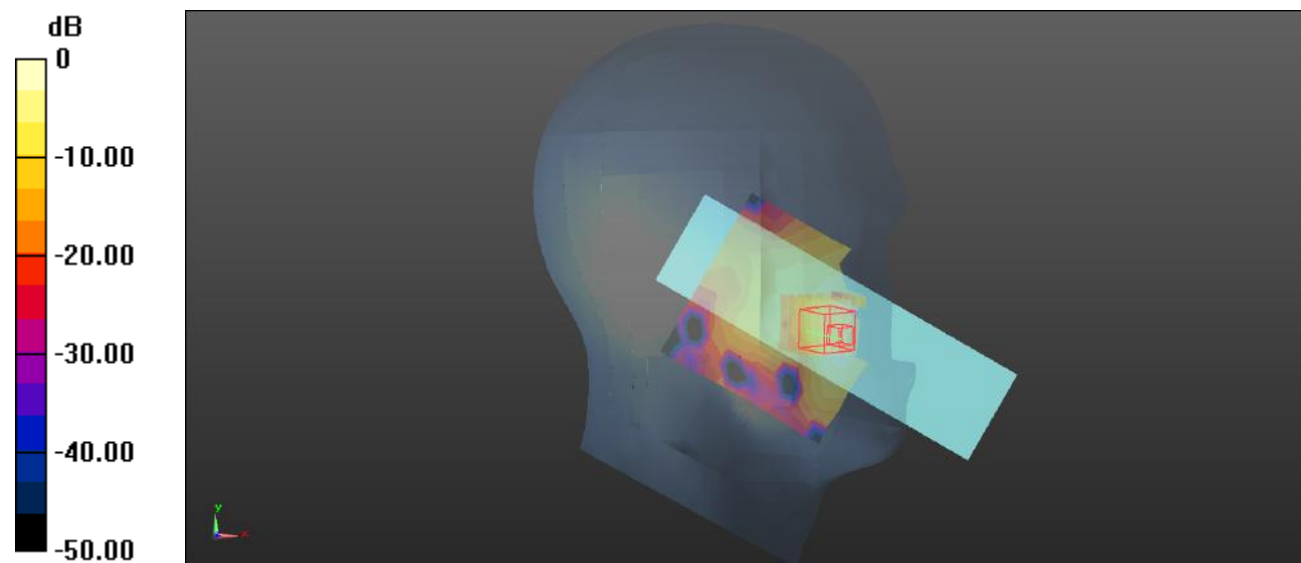

0 dB = 0.170 W/kg = -7.70 dBW/kg

**Test Plot: 102#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.927$  S/m;  $\epsilon_r = 39.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2605 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 41 1RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0278 W/kg


**Head Left Tilt/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.451 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0440 W/kg

**SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.011 W/kg**

Maximum value of SAR (measured) = 0.0277 W/kg

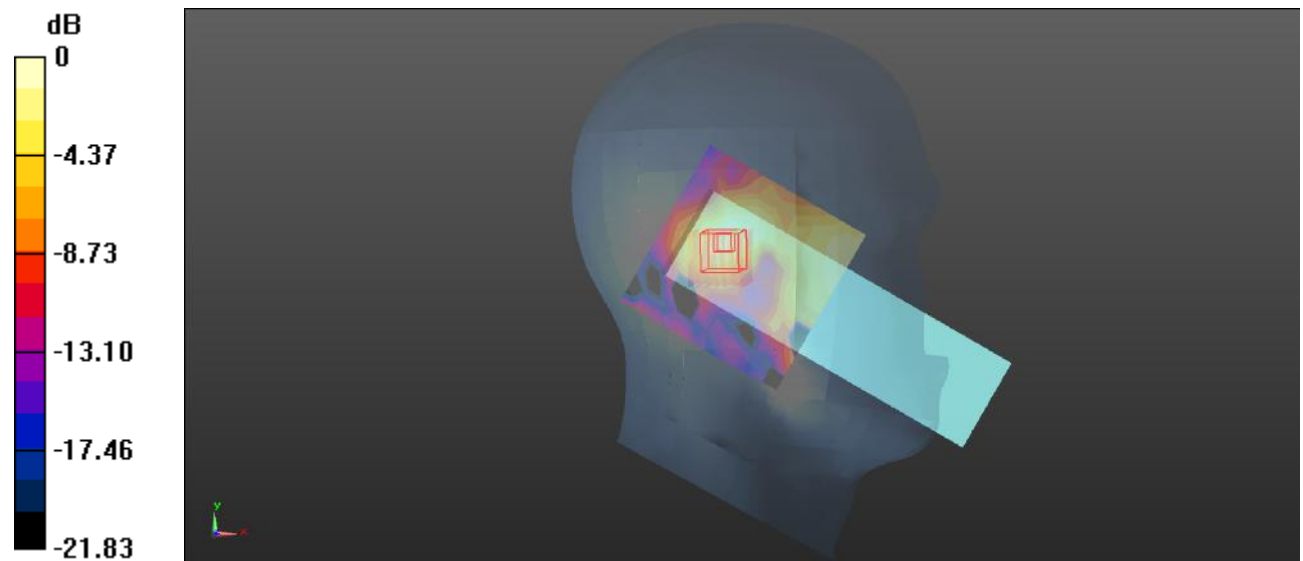

0 dB = 0.0277 W/kg = -15.58 dBW/kg

**Test Plot: 103#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.927$  S/m;  $\epsilon_r = 39.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2605 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 41 50%RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0226 W/kg


**Head Left Tilt/LTE Band 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.478 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0420 W/kg

**SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.011 W/kg**

Maximum value of SAR (measured) = 0.0251 W/kg

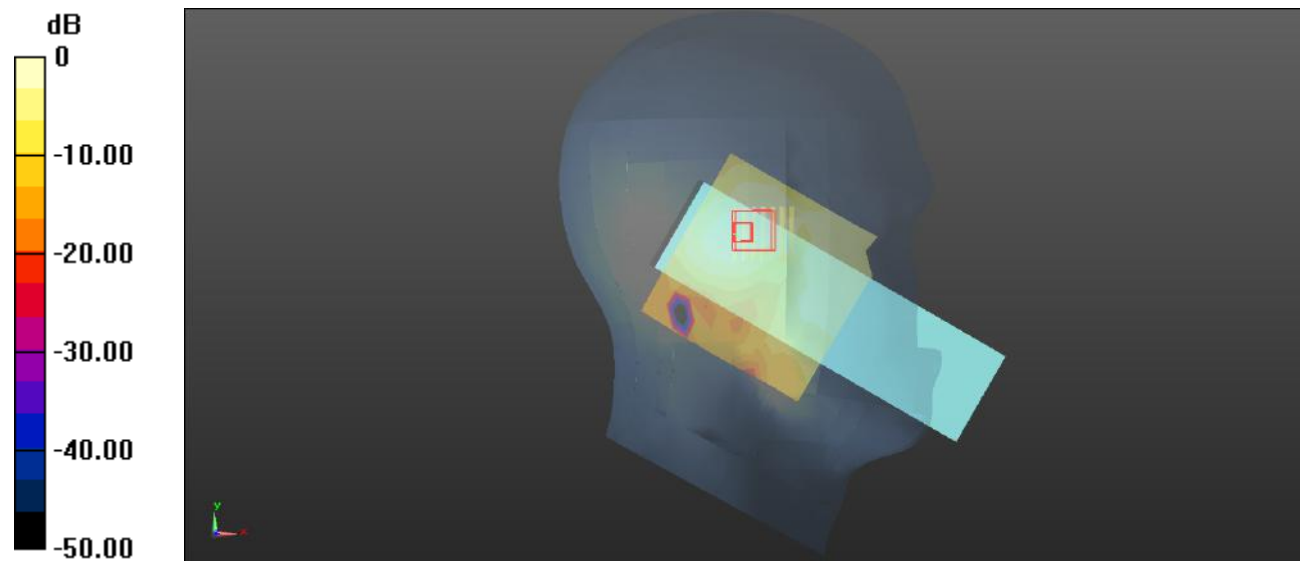

0 dB = 0.0251 W/kg = -16.00 dBW/kg

**Test Plot: 104#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.927$  S/m;  $\epsilon_r = 39.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2605 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 41 1RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.258 W/kg


**Head Right Cheek/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.835 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.463 W/kg

**SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.121 W/kg**

Maximum value of SAR (measured) = 0.261 W/kg

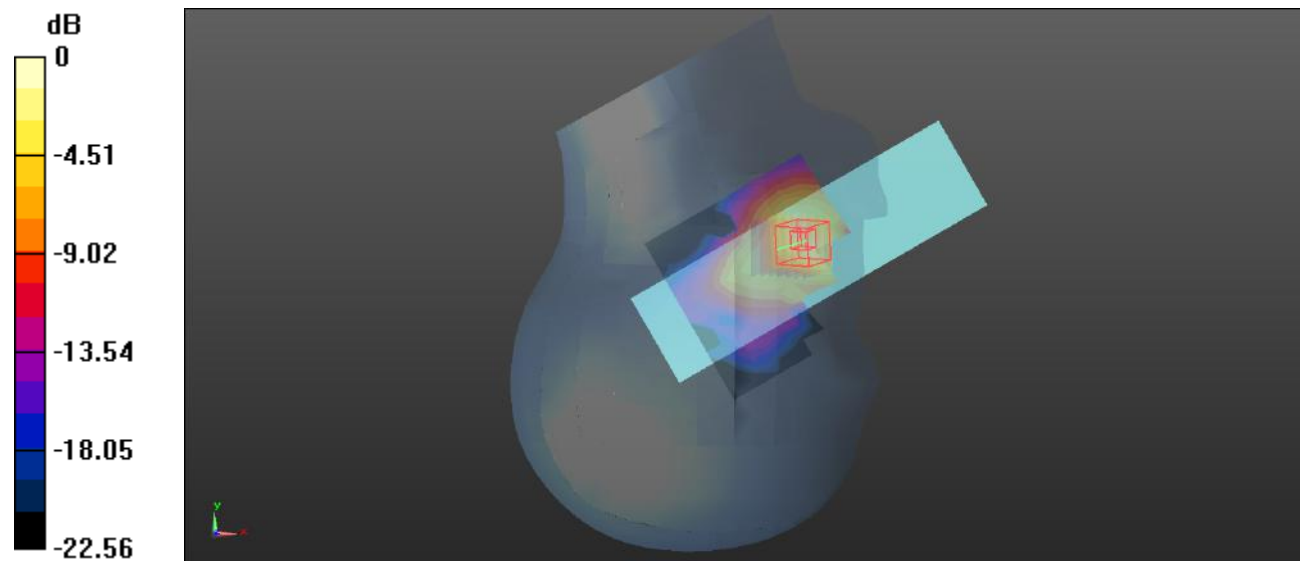

0 dB = 0.261 W/kg = -5.83 dBW/kg



**Test Plot: 105#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.927$  S/m;  $\epsilon_r = 39.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2605 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 41 50%RB Mid/Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.107 W/kg


**Head Right Cheek/LTE Band 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.012 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.185 W/kg

**SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.052 W/kg**

Maximum value of SAR (measured) = 0.122 W/kg

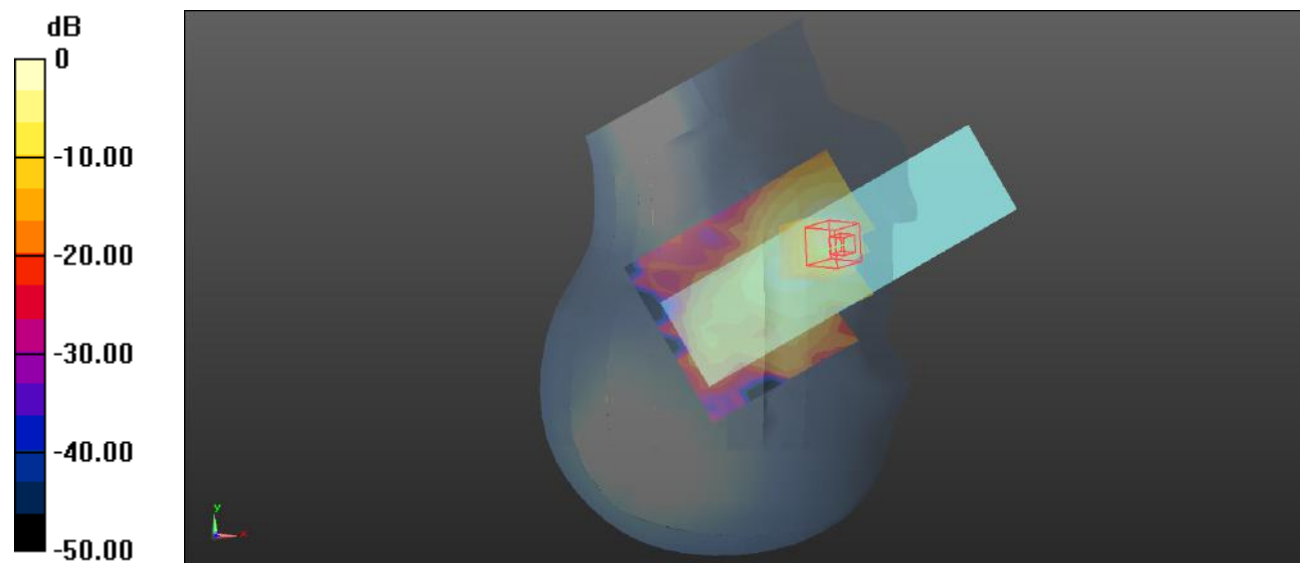

0 dB = 0.122 W/kg = -9.14 dBW/kg

**Test Plot: 106#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.927$  S/m;  $\epsilon_r = 39.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2605 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 41 1RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0331 W/kg


**Head Right Tilt/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.677 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.181 W/kg

**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0331 W/kg

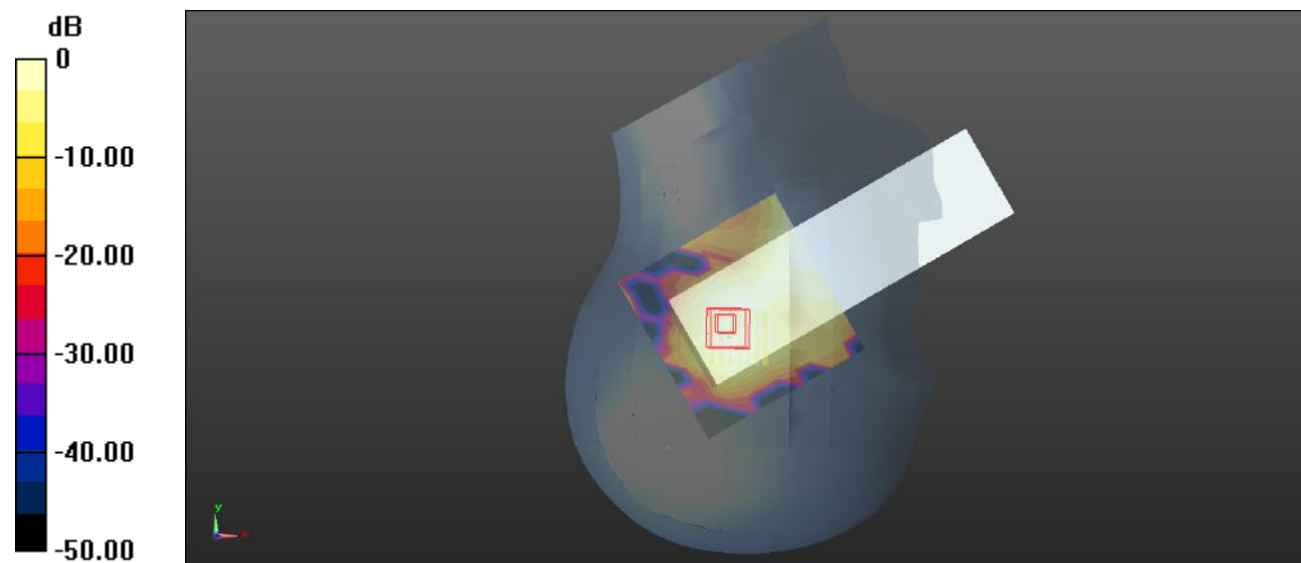

0 dB = 0.0331 W/kg = -14.80 dBW/kg

**Test Plot: 107#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.927$  S/m;  $\epsilon_r = 39.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2605 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 41 50%RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0189 W/kg


**Head Right Tilt/LTE Band 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.576 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0440 W/kg

**SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.00832 W/kg**

Maximum value of SAR (measured) = 0.0197 W/kg

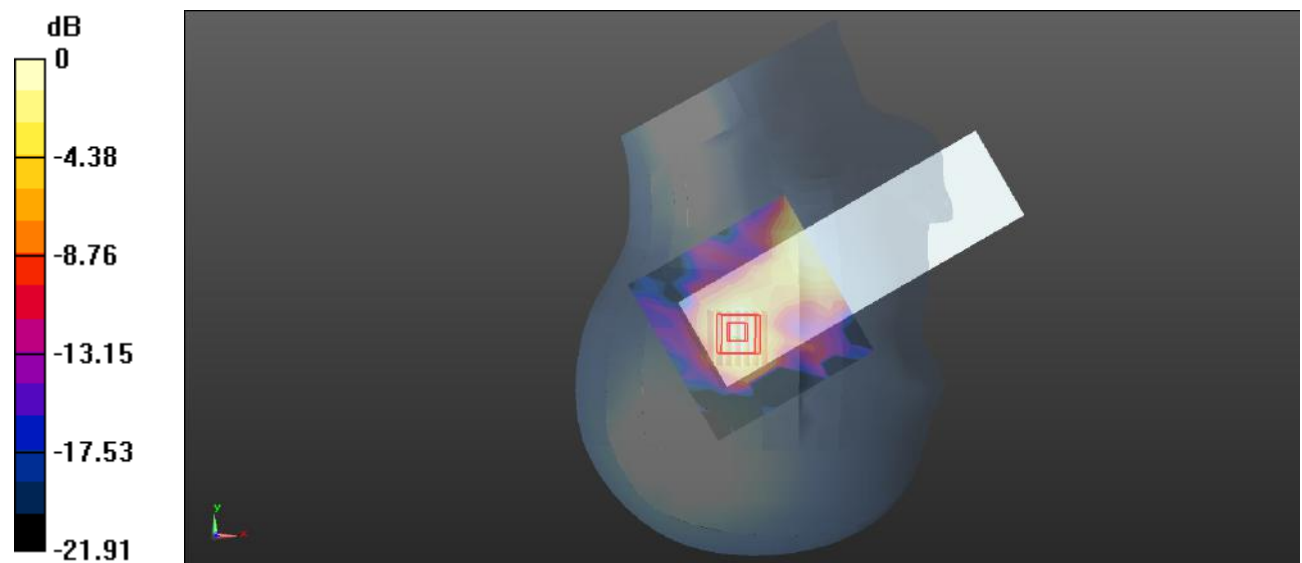

0 dB = 0.0197 W/kg = -17.06 dBW/kg

**Test Plot: 108#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.927$  S/m;  $\epsilon_r = 39.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2605 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 41 1RB Mid/Area Scan (11x11x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.593 W/kg


**Body Back/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.67 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.543 W/kg; SAR(10 g) = 0.244 W/kg**

Maximum value of SAR (measured) = 0.614 W/kg

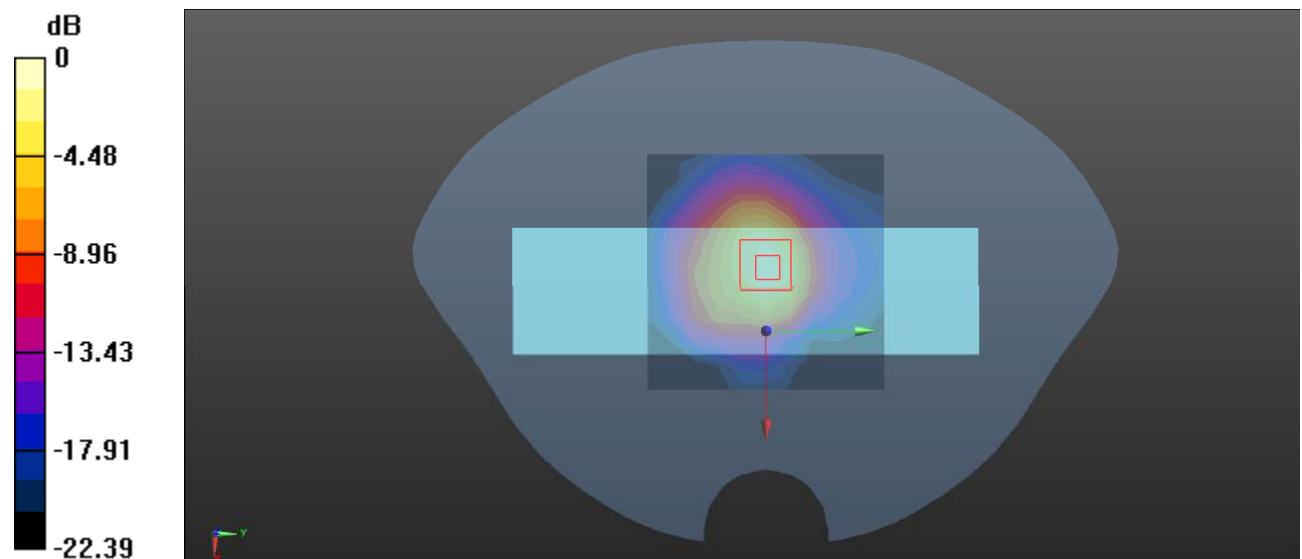

0 dB = 0.614 W/kg = -2.12 dBW/kg

**Test Plot: 109#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2605 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f = 2605$  MHz;  $\sigma = 1.927$  S/m;  $\epsilon_r = 39.16$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2605 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 41 50%RB Mid/Area Scan (11x14x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.384 W/kg


**Body Back/LTE Band 41 50%RB Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.415 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.796 W/kg

**SAR(1 g) = 0.344 W/kg; SAR(10 g) = 0.154 W/kg**

Maximum value of SAR (measured) = 0.379 W/kg

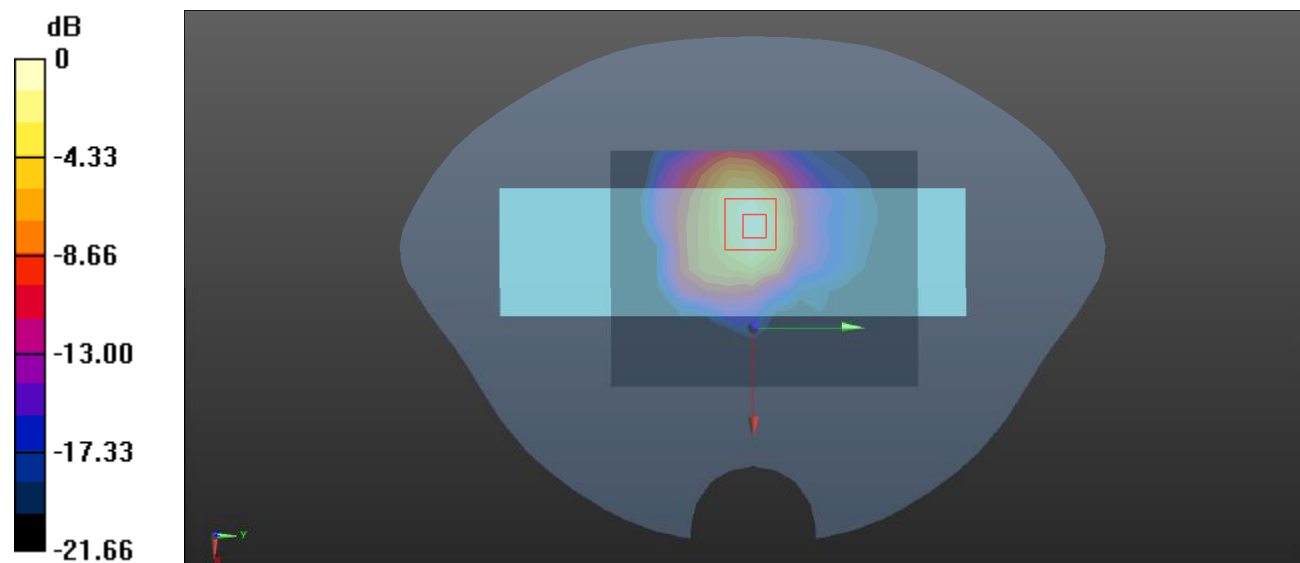

0 dB = 0.379 W/kg = -4.21 dBW/kg

**Test Plot: 110#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 40.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 60 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.582 W/kg


**Head Left Cheek/LTE Band 60 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.769 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.921 W/kg

**SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.304 W/kg**

Maximum value of SAR (measured) = 0.604 W/kg

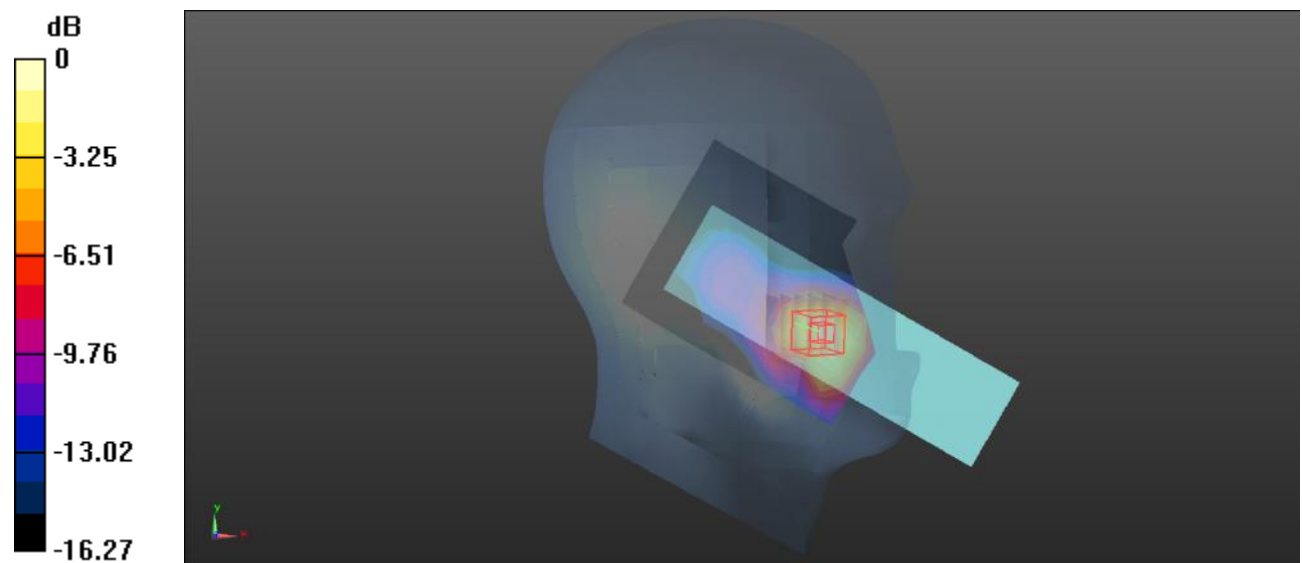

0 dB = 0.604 W/kg = -2.19 dBW/kg

**Test Plot: 111#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 40.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Cheek/LTE Band 66 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.382 W/kg


**Head Left Cheek/LTE Band 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.540 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.595 W/kg

**SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.194 W/kg**

Maximum value of SAR (measured) = 0.383 W/kg

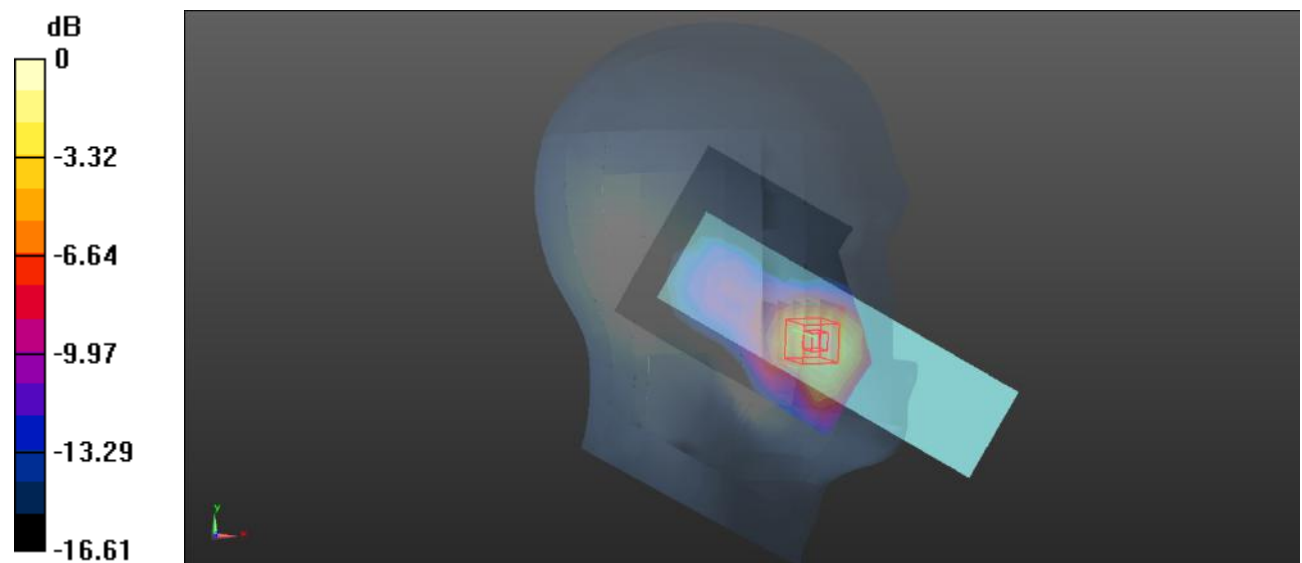

0 dB = 0.383 W/kg = -4.17 dBW/kg

**Test Plot: 112#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 40.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 66 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0871 W/kg


**Head Left Tilt/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.491 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.125 W/kg

**SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.054 W/kg**

Maximum value of SAR (measured) = 0.0879 W/kg

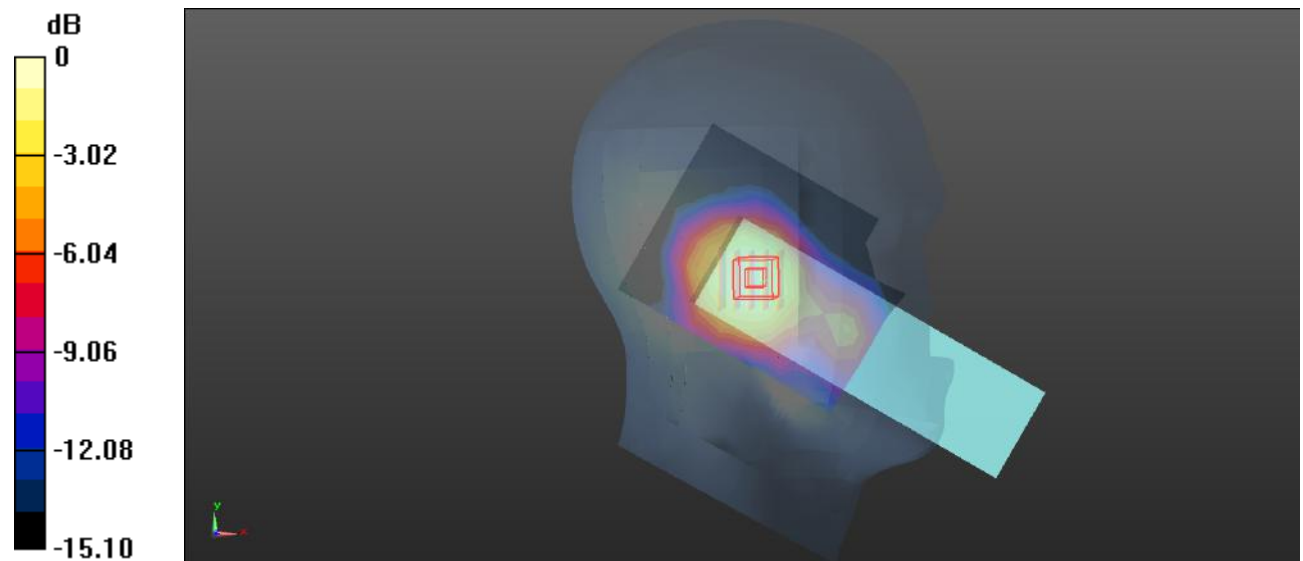

0 dB = 0.0879 W/kg = -10.56 dBW/kg



**Test Plot: 113#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 40.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Left Tilt/LTE Band 66 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0581 W/kg


**Head Left Tilt/LTE Band 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.418 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0840 W/kg

**SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.0573 W/kg

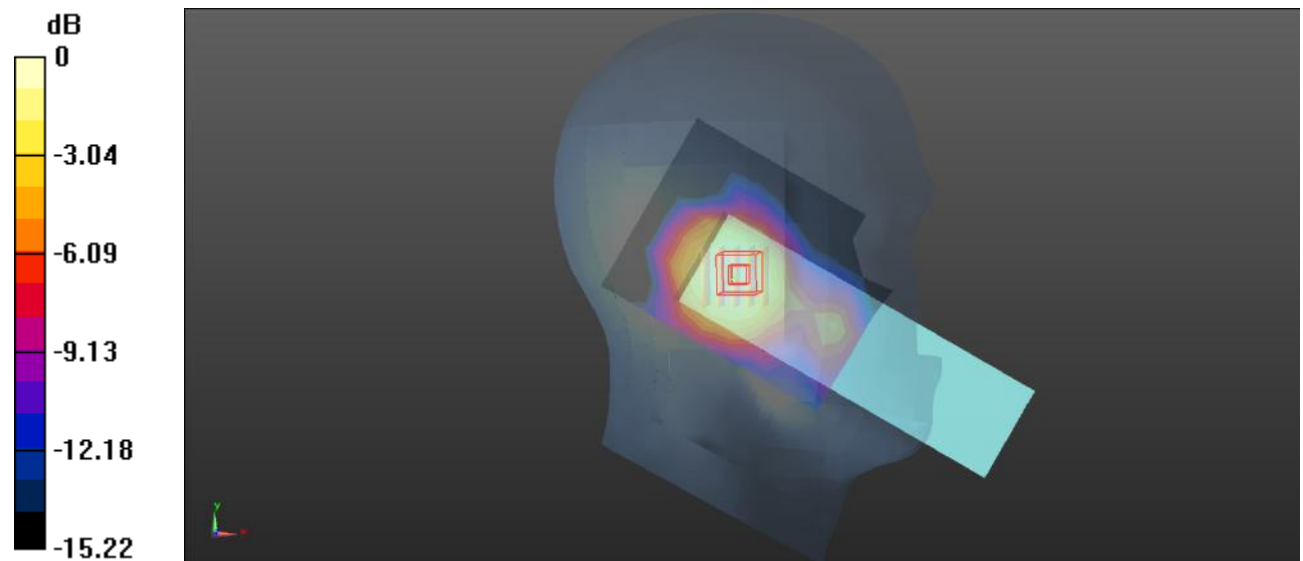

0 dB = 0.0573 W/kg = -12.42 dBW/kg

**Test Plot: 114#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 40.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 66 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.613 W/kg


**Head Right Cheek/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.246 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.589 W/kg; SAR(10 g) = 0.317 W/kg**

Maximum value of SAR (measured) = 0.642 W/kg

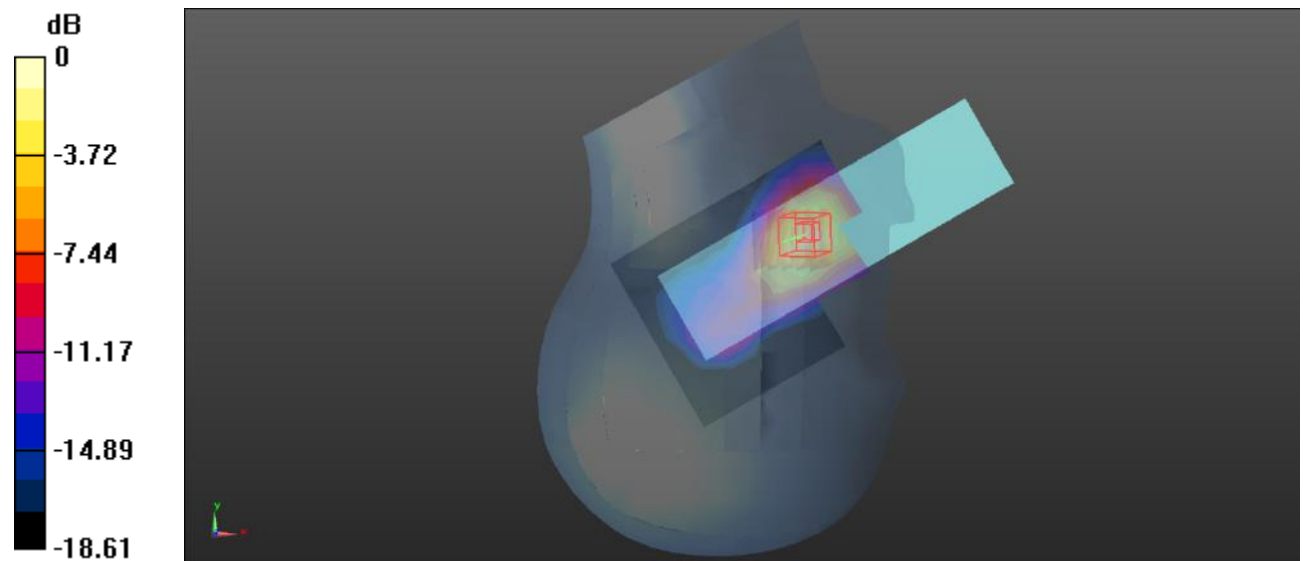

0 dB = 0.642 W/kg = -1.92 dBW/kg

**Test Plot: 115#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 40.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Cheek/LTE Band 66 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.403 W/kg


**Head Right Cheek/LTE Band 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.881 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.669 W/kg

**SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.206 W/kg**

Maximum value of SAR (measured) = 0.423 W/kg

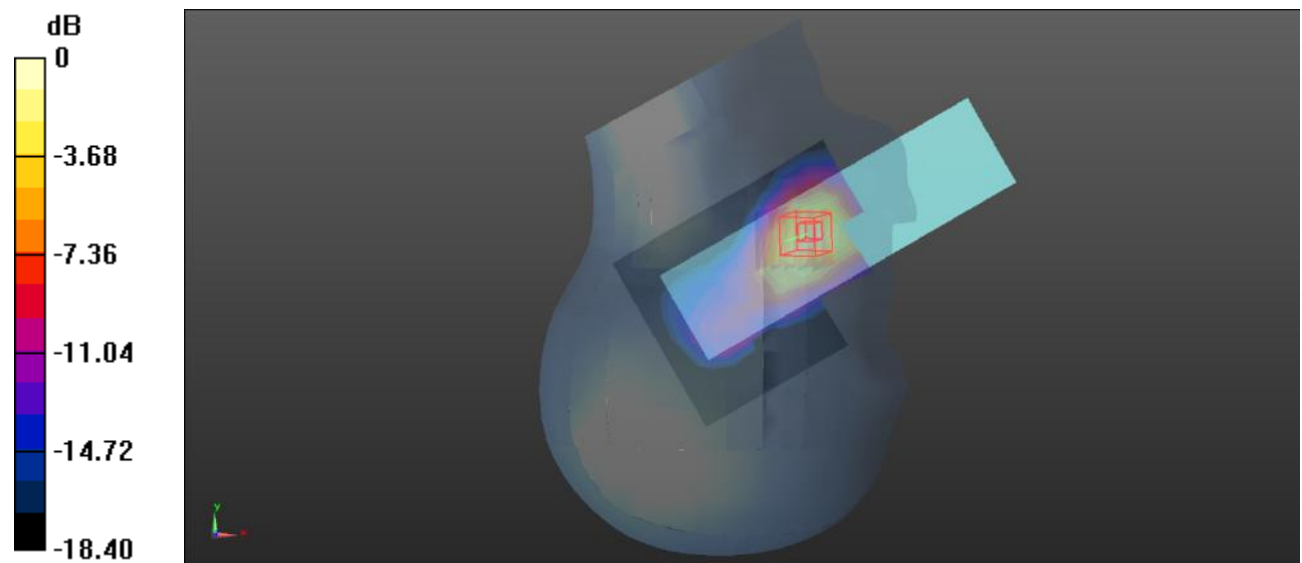

**Test Plot: 116#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 40.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 66 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.101 W/kg


**Head Right Tilt/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.656 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.143 W/kg

**SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.059 W/kg**

Maximum value of SAR (measured) = 0.100 W/kg

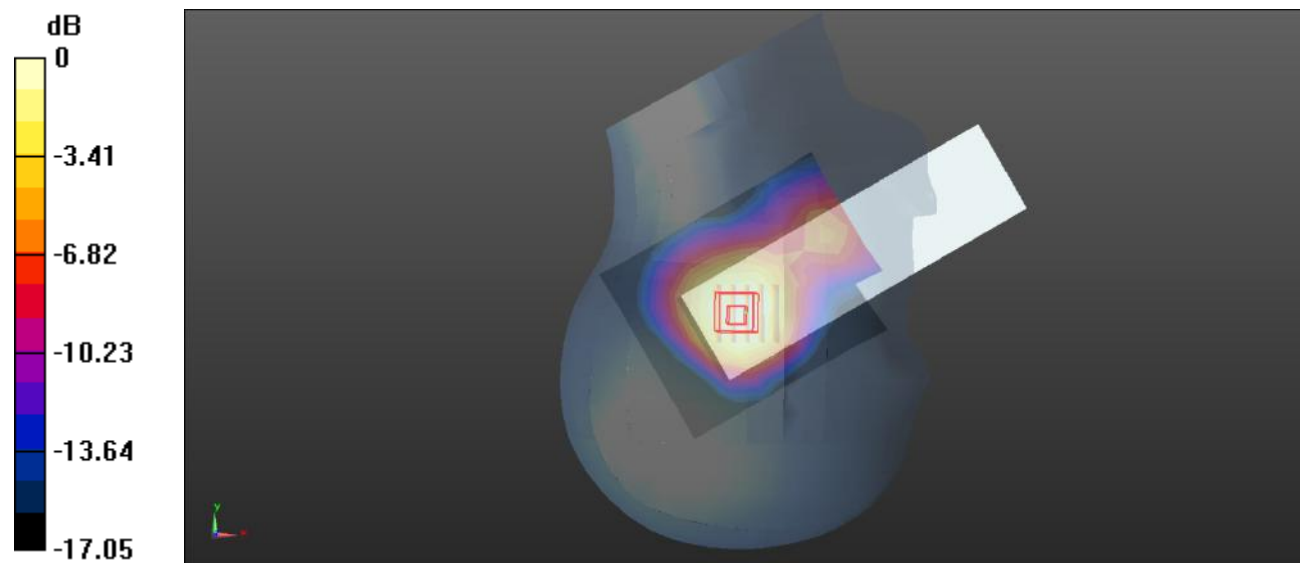

0 dB = 0.100 W/kg = -10.00 dBW/kg

**Test Plot: 117#**

**DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 40.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Head Right Tilt/LTE Band 66 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0678 W/kg


**Head Right Tilt/LTE Band 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.467 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0950 W/kg

**SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.038 W/kg**

Maximum value of SAR (measured) = 0.0651 W/kg

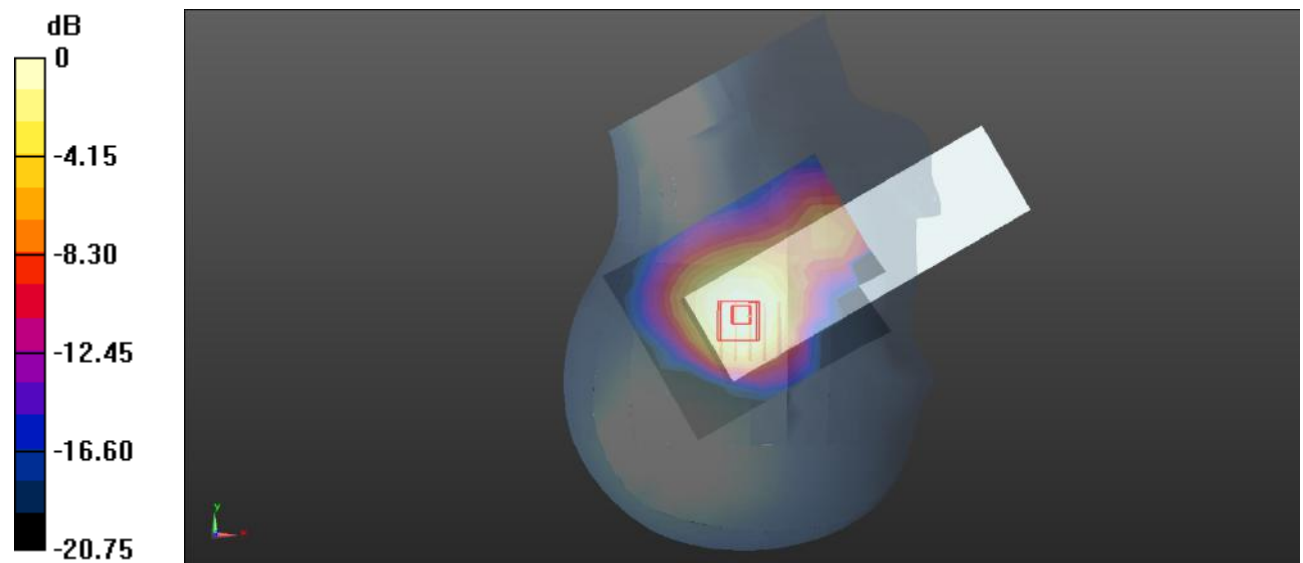

0 dB = 0.0651 W/kg = -11.86 dBW/kg

**Test Plot: 118#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.349$  S/m;  $\epsilon_r = 40.635$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1720 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 66 1RB Low/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.535 W/kg


**Body Back/LTE Band 66 1RB Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.91 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.936 W/kg

**SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.268 W/kg**

Maximum value of SAR (measured) = 0.556 W/kg

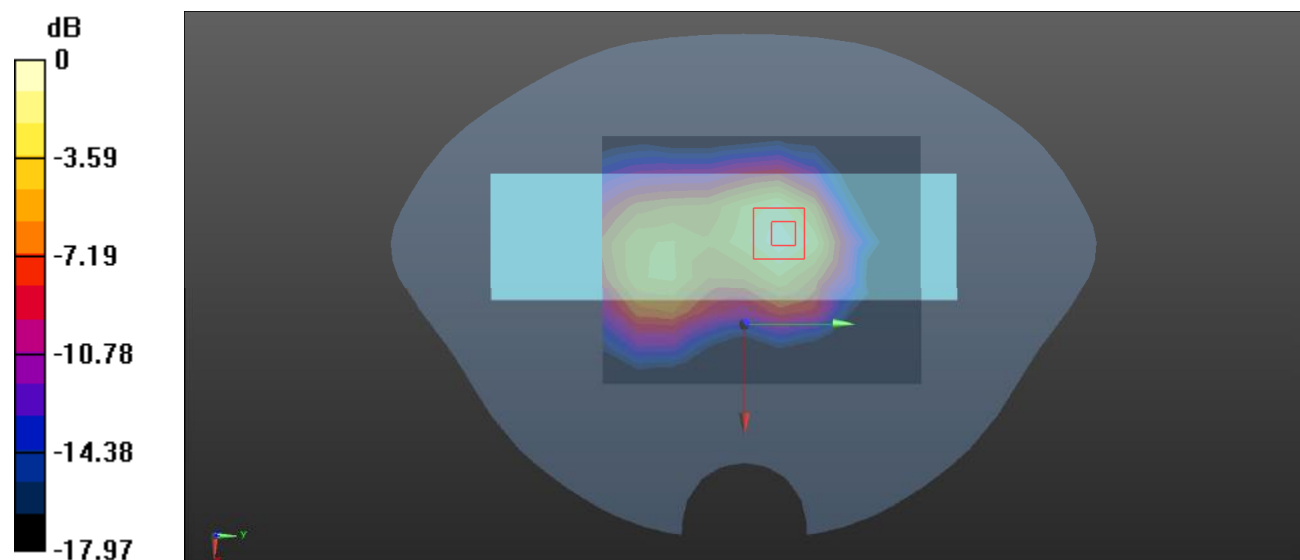

0 dB = 0.556 W/kg = -2.55 dBW/kg

**Test Plot: 119#**

**DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 40.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 66 1RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.925 W/kg


**Body Back/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.02 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.875 W/kg; SAR(10 g) = 0.464 W/kg**

Maximum value of SAR (measured) = 0.963 W/kg

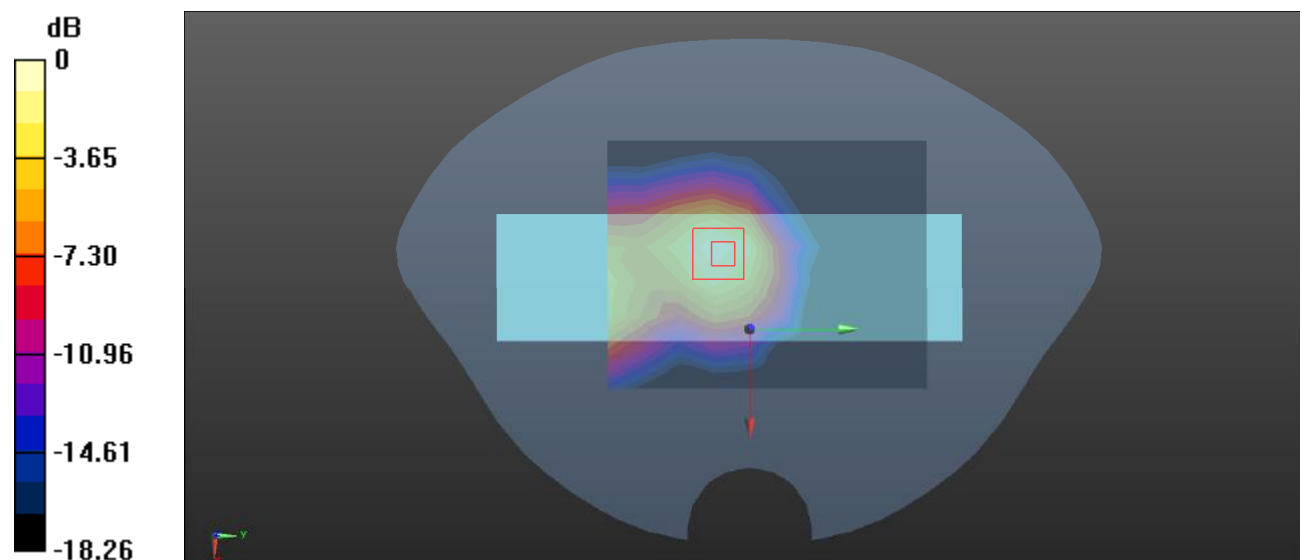

0 dB = 0.963 W/kg = -0.16 dBW/kg

**Test Plot: 120#****DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.381$  S/m;  $\epsilon_r = 40.187$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

**DASY5 Configuration:**

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1770 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 66 1RB High/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.12 W/kg


**Body Back/LTE Band 66 1RB High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.66 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.91 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.567 W/kg**

Maximum value of SAR (measured) = 1.13 W/kg

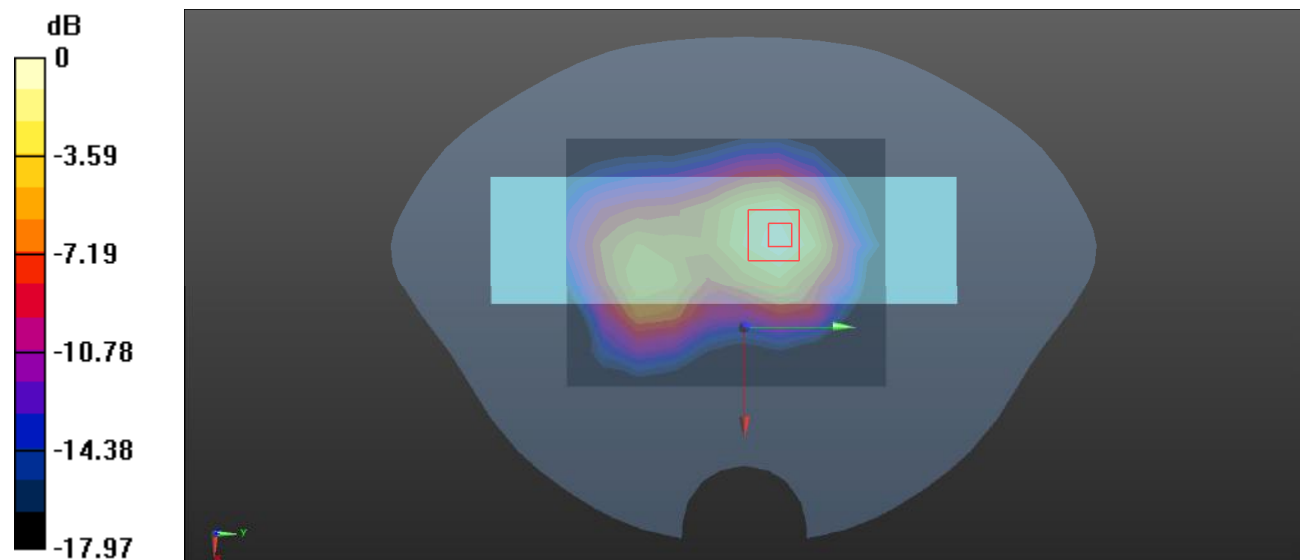

0 dB = 1.13 W/kg = 0.53 dBW/kg



**Test Plot: 121#**

**DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 40.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 66 50%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.567 W/kg


**Body Back/LTE Band 66 50%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.13 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.324 W/kg**

Maximum value of SAR (measured) = 0.661 W/kg

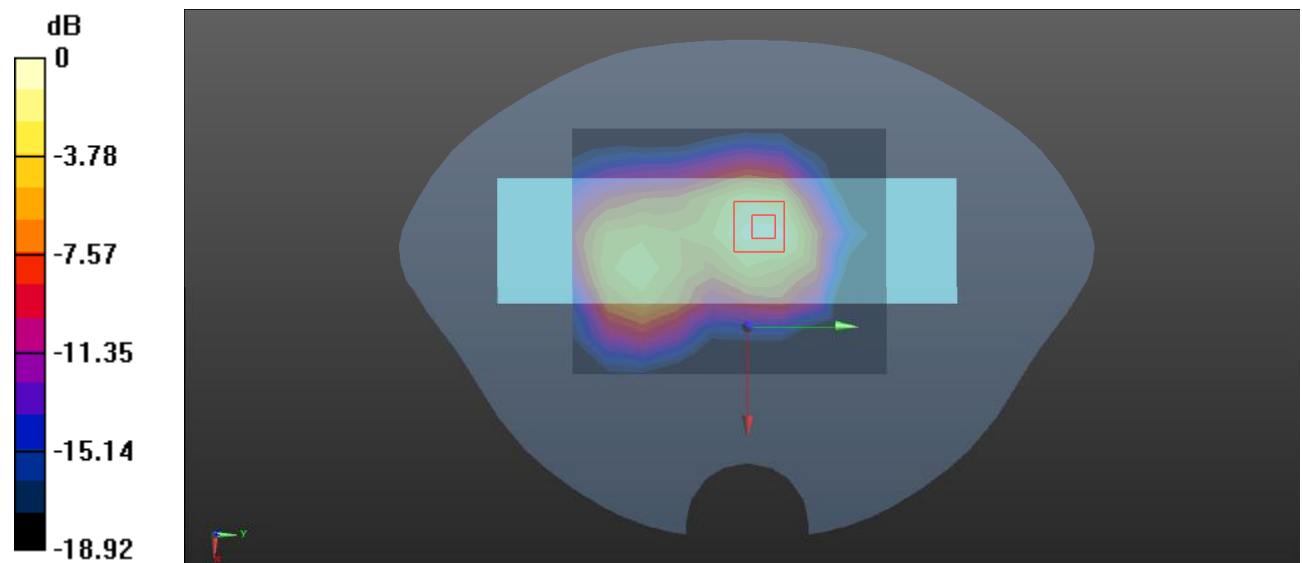

**Test Plot: 122#**

**DUT: 4G Flip Phone; Type: V202T; Serial: 2801-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.347$  S/m;  $\epsilon_r = 40.208$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Body Back/LTE Band 66 100%RB Mid/Area Scan (8x10x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.787 W/kg


**Body Back/LTE Band 66 100%RB Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.10 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.54 W/kg

**SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.374 W/kg**

Maximum value of SAR (measured) = 0.765 W/kg

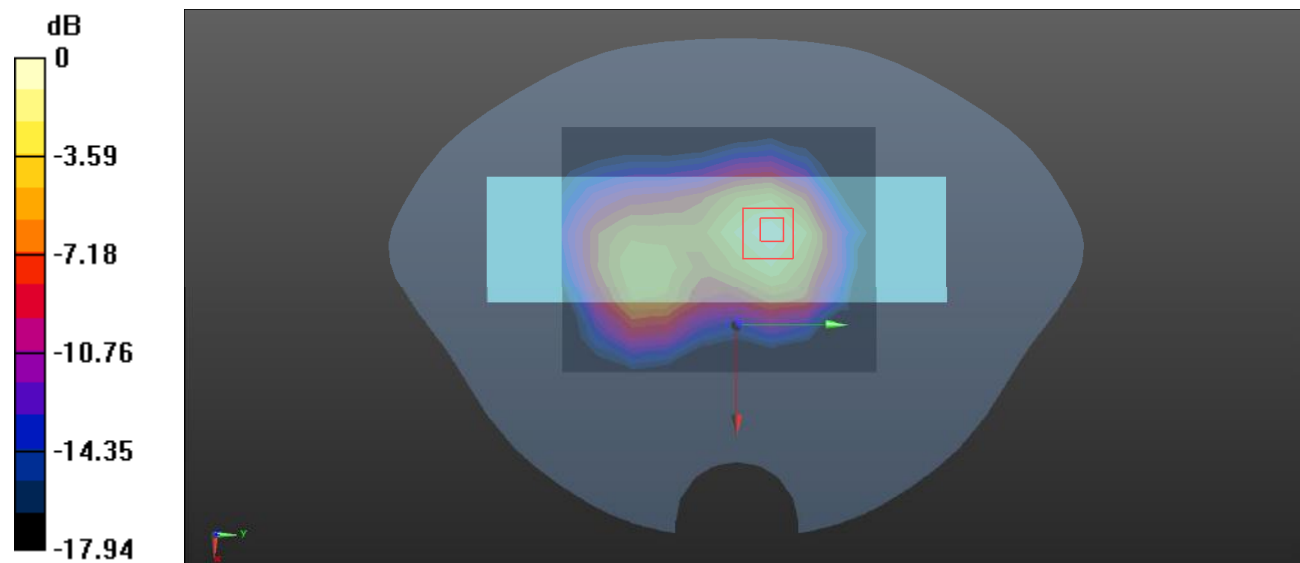

0 dB = 0.765 W/kg = -1.16 dBW/kg