


GPS L1/L2 Re-Radiator

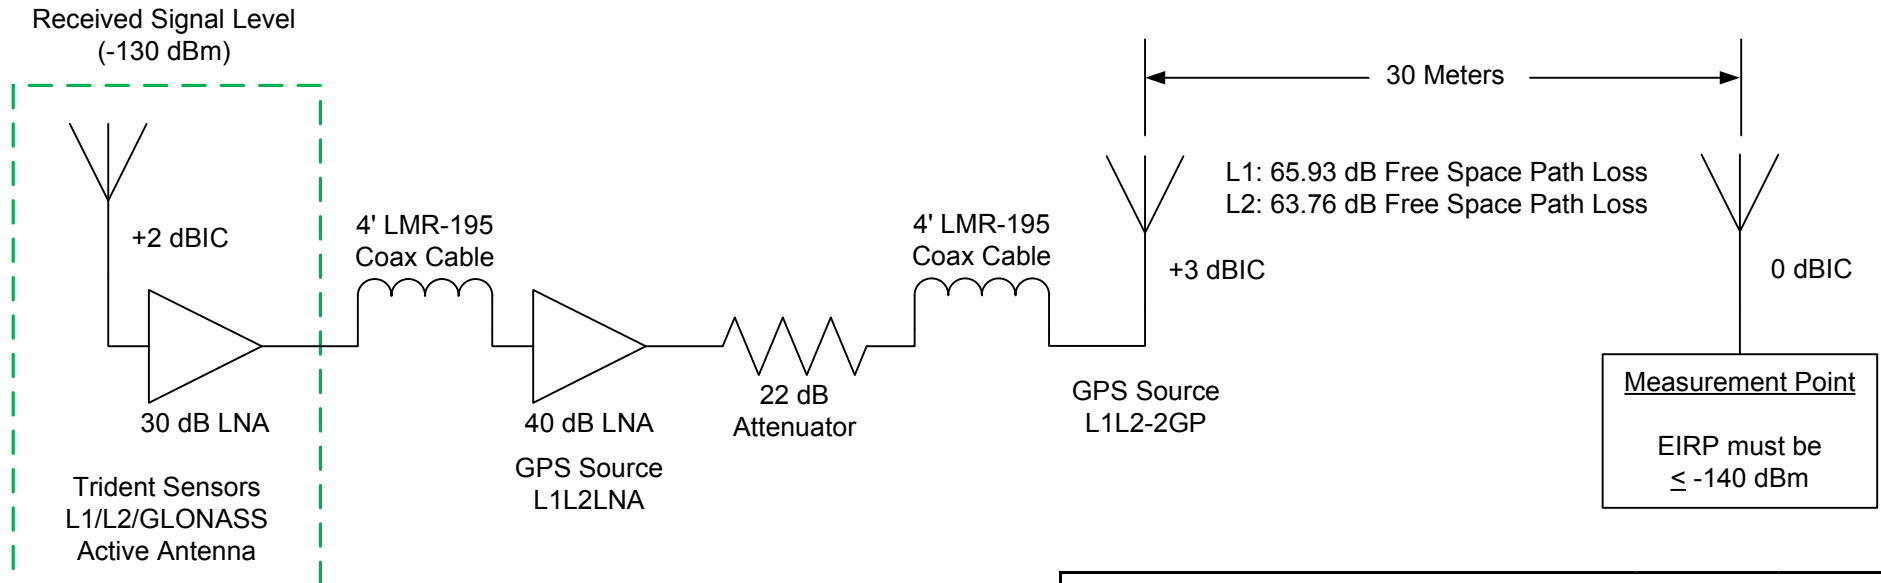

GPS L1/L2 Link Budgets		
Parameters	Frequencies	
	L1 1575.42 MHz	L2 1227.6 MHz
Receive Signal Level (dBm)	-130	-130
Antenna (dBIC)	2	2
LNA (dB)	30	30
4" LMR-195 Coax Cable (dB)	-0.7	-0.6
LNA (dB)	40	40
Fixed Attenuator (dB)	-22	-22
4" LMR-195 Coax Cable (dB)	-0.7	-0.6
Antenna (dBIC)	3	3
Re-Radiated Power (dBm)	-78.4	-78.2
30 Meter Free Space Path Loss (dB)	-65.93	-63.76
EIRP at Measurement Point (dBm)	-144.33	-141.96

LMR-195 Coax Cable Loss

File Edit View History Bookmarks Tools Help

Welcome to Times Microwave ... x +

www.timesmicrowave.com/calculator/? Google

Latest Headlines S&FP Clearance and Vi... AIS Backplane

COAXIAL CABLE - ATTENUATION & POWER HANDLING CALCULATOR

Coaxial Cable Data

Product: LMR-195

Frequency (MHz): 1575.42

Run Length (Feet): 4

« Reset Calculate »

PRODUCT PERFORMANCE PARAMETERS

Attenuation:	14.9 db/100ft	48.9 db/100mtr
Average Power:	0.11 KW	
Cable Vg:	76 %	
Nominal Td:	1.34 nSec/ft	4.39 nSec/mtr
Capacitance:	26.7 pF/ft	87.7 pF/mtr
Typical Connector Loss:	0.08 dB/pair	

CABLE ASSEMBLY PERFORMANCE

Cable Run Attenuation:	0.6 dB
Total Cable Assembly Loss:	0.7 dB
Cable Run Efficiency:	87.2 %
Cable Run Time Delay:	5.35 nSec

[Click here for more information on this product](#)

Values are nominal 25°C performance calculations. Actual measured values may vary from the calculated values based on manufacturing tolerances, cable assembly length, connector performance, actual operating frequency, and measurement accuracy.

File Edit View History Bookmarks Tools Help

Welcome to Times Microwave ... x +

www.timesmicrowave.com/calculator/? Google

Latest Headlines S&FP Clearance and Vi... AIS Backplane

COAXIAL CABLE - ATTENUATION & POWER HANDLING CALCULATOR

Coaxial Cable Data

Product: LMR-195

Frequency (MHz): 1227.6

Run Length (Feet): 4

« Reset Calculate »

PRODUCT PERFORMANCE PARAMETERS

Attenuation:	13.1 db/100ft	42.9 db/100mtr
Average Power:	0.12 KW	
Cable Vg:	76 %	
Nominal Td:	1.34 nSec/ft	4.39 nSec/mtr
Capacitance:	26.7 pF/ft	87.7 pF/mtr
Typical Connector Loss:	0.07 dB/pair	

CABLE ASSEMBLY PERFORMANCE

Cable Run Attenuation:	0.5 dB
Total Cable Assembly Loss:	0.6 dB
Cable Run Efficiency:	88.6 %
Cable Run Time Delay:	5.35 nSec

[Click here for more information on this product](#)

Values are nominal 25°C performance calculations. Actual measured values may vary from the calculated values based on manufacturing tolerances, cable assembly length, connector performance, actual operating frequency, and measurement accuracy.