

TEST REPORT

Product Name: Neck-Style Gaming Wireless Earphone
FCC ID: 2A2CJ-TEB-1
Trademark: TNTOR
Model Number: TEB-1
Prepared For: shen zhen shi lei du ke ji you xian gong si
Address: Shen zhen shi luo hu qu gui yuan jie dao jie fang lu 4068 hao ming shi ge A1306
Manufacturer: SHENZHEN WETON TECHNOLOGY CO., LTD
Address: No.19 Zone C, Fenghuang Industrial Park, Xinnan Community, Pinghu Street, Longgang District, Shenzhen 518111, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China
Sample Received Date: Jun. 4, 2021
Sample tested Date: Jun. 4, 2021 to Jun. 7, 2021
Issue Date: Jun. 7, 2021
Report No.: CTB210607049RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Arron Liu

Reviewed by:

Bin Mei

Approved by:

Rita Xiao / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	26
8.1 Block Diagram Of Test Setup	26
8.2 Limit	26
8.3 Test procedure	26
8.4 Test Result	27
9. CONDUCTED PEAK OUTPUT POWER	34
9.1 Block Diagram Of Test Setup	34
9.2 Limit	34
9.3 Test procedure	34
9.4 Test Result	35
10. 20DB OCCUPIED BANDWIDTH	39
10.1 Block Diagram Of Test Setup	39
10.2 Limit	39
10.3 Test procedure	39
10.4 Test Result	39
11. CARRIER FREQUENCIES SEPARATION	43
11.1 Block Diagram Of Test Setup	43
11.2 Limit	43

- 11.3 Test procedure 43
- 11.4 Test Result 43
- 12. HOPPING CHANNEL NUMBER 47**
- 12.1 Block Diagram Of Test Setup 47
- 12.2 Limit 47
- 12.3 Test procedure 47
- 12.4 Test Result 47
- 13. DWELL TIME 49**
- 13.1 Block Diagram Of Test Setup 49
- 13.2 Limit 49
- 13.3 Test procedure 49
- 13.4 Test Result 50
- 14. PSEUDORANDOM FREQUENCY 54**
- 14.1 Limit 54
- 14.2 Test procedure 54
- 14.3 Test Result 55
- 15. ANTENNA REQUIREMENT 56**
- 16. EUT PHOTOGRAPHS 57**
- 17. EUT TEST SETUP PHOTOGRAPHS 58**

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB210607049RFX	Jun. 7, 2021	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10^{-7}
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	TEB-1
Model Description:	N/A
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 1.299dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: Internal Antenna
Antenna Gain:	Bluetooth: 1dBi
Ratings:	DC 5V charging from adapter

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	3.7V
Normal Temperature($^{\circ}$ C)	25
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	Sep. 28, 2020	Sep. 28, 2021
2	Power Sensor	Agilent	U2021XA	MY56120032	Sep. 28, 2020	Sep. 28, 2021
3	Power Sensor	Agilent	U2021XA	MY56120034	Sep. 28, 2020	Sep. 28, 2021
4	Communication test set	R&S	CMW500	108058	Sep. 28, 2020	Sep. 28, 2021
5	Spectrum Analyzer	R&S	FSP40	100550	Sep. 28, 2020	Sep. 28, 2021
6	Signal Generator	Agilent	N5181A	MY49060920	Sep. 28, 2020	Sep. 28, 2021
7	Signal Generator	Agilent	N5182A	MY47420195	Sep. 28, 2020	Sep. 28, 2021
8	Communication test set	Agilent	E5515C	MY50102567	Oct. 10, 2020	Oct. 10, 2021
9	band rejection filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	Sep. 28, 2020	Sep. 28, 2021
10	band rejection filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	Sep. 28, 2020	Sep. 28, 2021
11	band rejection filter	Xingbo	XBLBQ-DZA 120	190821-1-1	Sep. 28, 2020	Sep. 28, 2021
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	\	\
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	Sep. 28, 2020	Sep. 28, 2021
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	Sep. 28, 2020	Sep. 28, 2021
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	\	\
16	966 chamber	C.R.T.	966 Room	966	Nov. 9, 2019	Nov. 08, 2022
17	Receiver	R&S	ESPI	100362	Sep. 28, 2020	Sep. 28, 2021

18	Amplifier	HP	8447E	2945A02747	Sep. 28, 2020	Sep. 28, 2021
19	Amplifier	Agilent	8449B	3008A01838	Sep. 28, 2020	Sep. 28, 2021
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	Nov. 02, 2020	Nov. 01, 2021
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	Nov. 02, 2020	Nov. 01, 2021
22	Software	Fala	EZ-EMC	FA-03A2 RE	\	\
23	3-Loop Antenna	Daze	ZN30401	17014	Sep. 28, 2020	Sep. 28, 2021
24	loop antenna	ZHINAN	ZN30900A	/	Sep. 28, 2020	Sep. 28, 2021
25	Horn antenna	A/H/System	SAS-574	588	Sep. 28, 2020	Sep. 28, 2021
26	Amplifier	AEROFLEX	/	S/N/ 097	Sep. 28, 2020	Sep. 28, 2021

Conducted emissions Test						
27	Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
28	AMN	ROHDE&SC HWARZ	ESH3-Z5	100318	Sep. 28, 2020	Sep. 28, 2021
29	Pulse limiter	ROHDE&SC HWARZ	ESH3Z2	357881052	Sep. 28, 2020	Sep. 28, 2021
30	EMI TEST RECEIVER	ROHDE&SC HWARZ	ESCS30	834115/006	Sep. 28, 2020	Sep. 28, 2021
31	Coaxial cable	ZDECL	Z302S	18091804	Sep. 28, 2020	Sep. 28, 2021
32	ISN	TESEQ	NTFM8158	183	Sep. 28, 2020	Sep. 28, 2021
33	EMI TEST RECEIVER	ROHDE&SC HWARZ	ESCI	100428/003	Sep. 28, 2020	Sep. 28, 2021
34	Software	Fala	EZ-EMC	EMC-CON 3A1.1	\	\

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

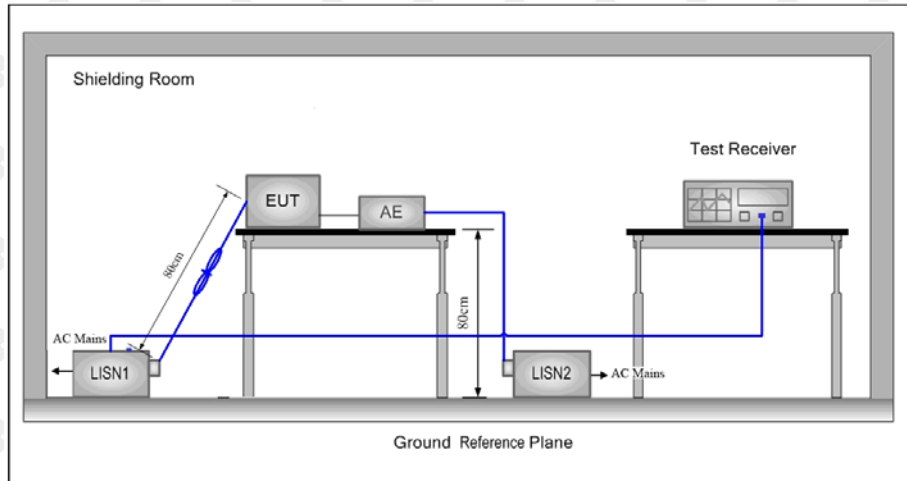

6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was

between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result


L:

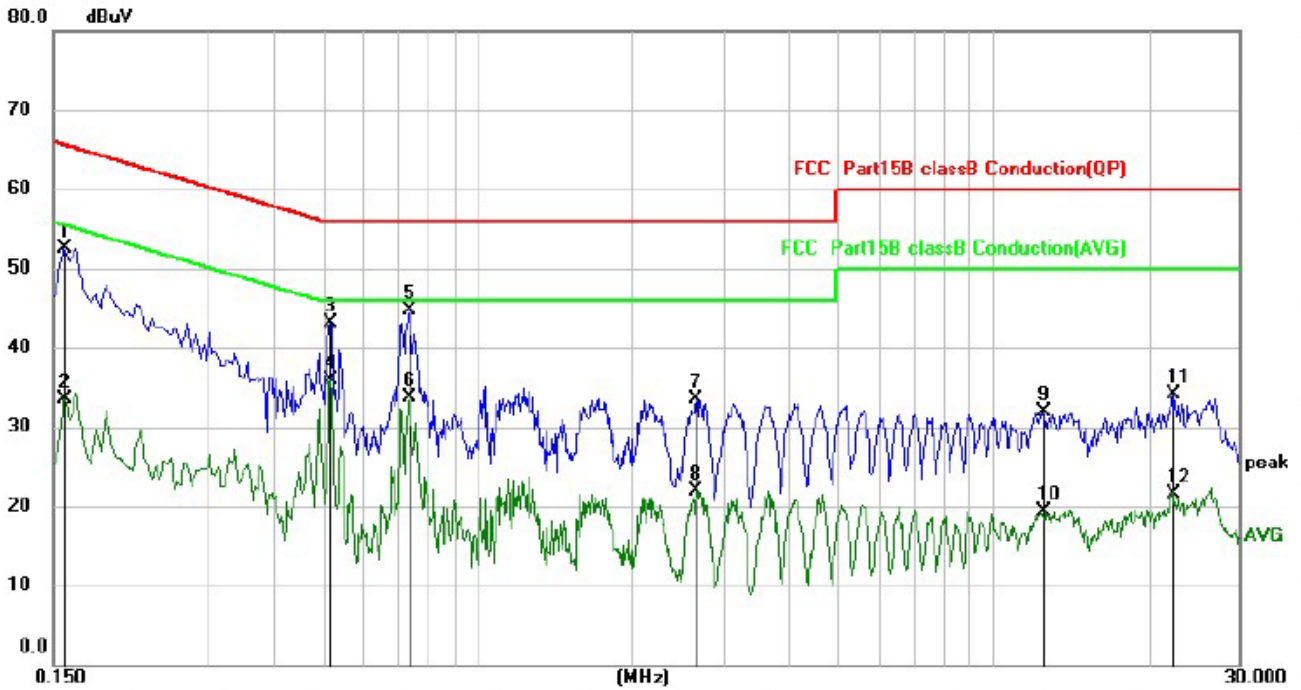

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1580	42.61	9.96	52.57	65.57	-13.00	QP
2		0.1580	23.58	9.96	33.54	55.57	-22.03	AVG
3		0.5181	33.13	9.96	43.09	56.00	-12.91	QP
4	*	0.5181	25.94	9.96	35.90	46.00	-10.10	AVG
5		0.7378	34.65	9.96	44.61	56.00	-11.39	QP
6		0.7378	23.80	9.96	33.76	46.00	-12.24	AVG
7		2.6500	23.41	10.05	33.46	56.00	-22.54	QP
8		2.6500	11.92	10.05	21.97	46.00	-24.03	AVG
9		12.4900	21.10	10.88	31.98	60.00	-28.02	QP
10		12.4900	8.49	10.88	19.37	50.00	-30.63	AVG
11		22.3537	22.91	11.18	34.09	60.00	-25.91	QP
12		22.3537	10.23	11.18	21.41	50.00	-28.59	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

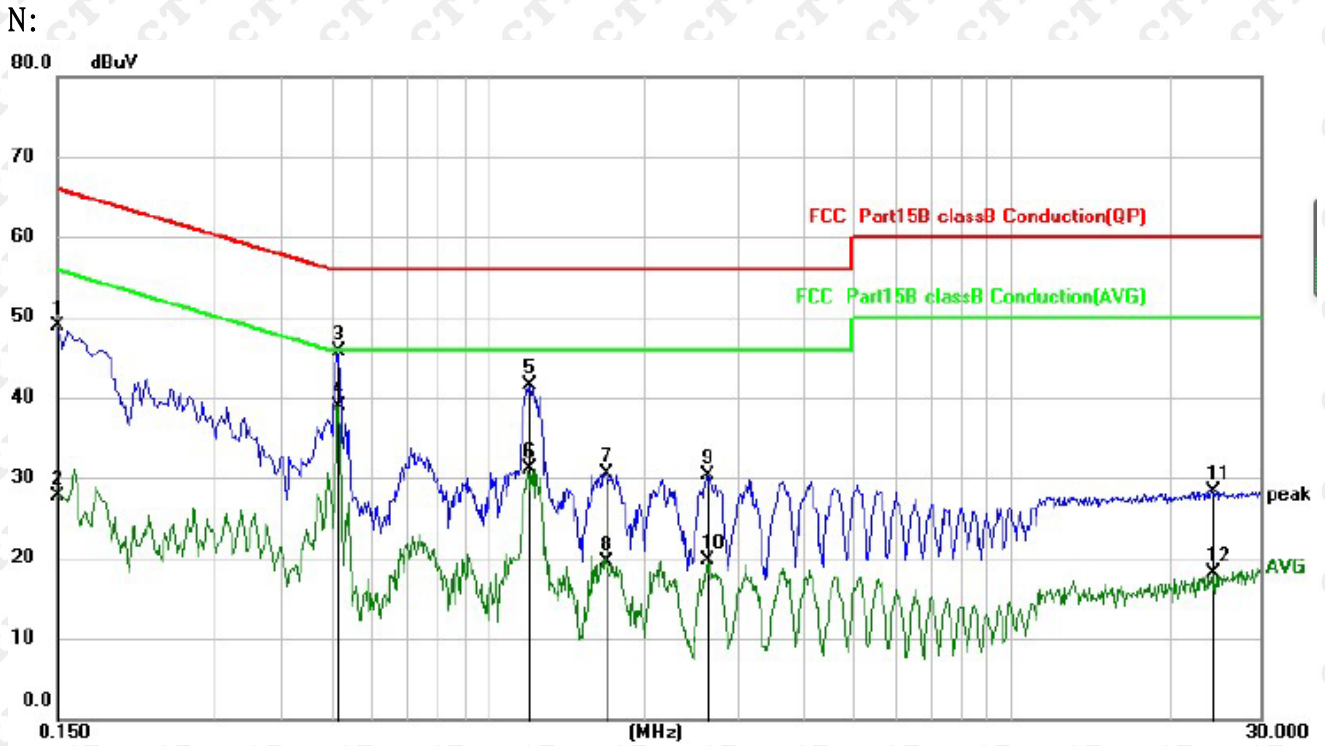

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1500	38.97	9.96	48.93	66.00	-17.07	QP
2		0.1500	17.81	9.96	27.77	56.00	-28.23	AVG
3		0.5180	35.67	9.96	45.63	56.00	-10.37	QP
4	*	0.5180	28.85	9.96	38.81	46.00	-7.19	AVG
5		1.1977	31.49	9.97	41.46	56.00	-14.54	QP
6		1.1977	21.15	9.97	31.12	46.00	-14.88	AVG
7		1.6737	20.56	10.00	30.56	56.00	-25.44	QP
8		1.6737	9.45	10.00	19.45	46.00	-26.55	AVG
9		2.6179	20.27	10.04	30.31	56.00	-25.69	QP
10		2.6179	9.60	10.04	19.64	46.00	-26.36	AVG
11		24.2377	17.03	11.21	28.24	60.00	-31.76	QP
12		24.2377	6.87	11.21	18.08	50.00	-31.92	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

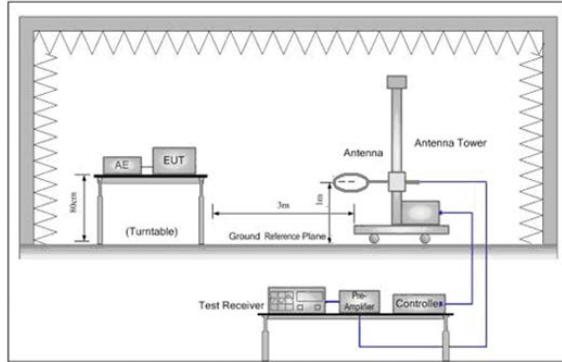


Figure 1. Below 30MHz

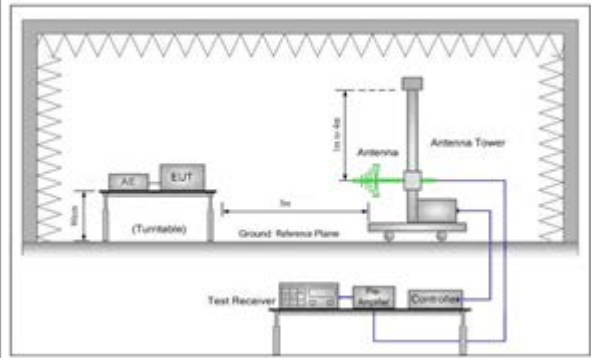


Figure 2. 30MHz to 1GHz

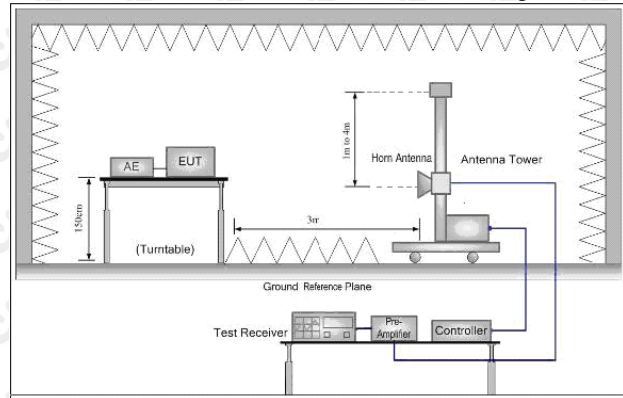


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

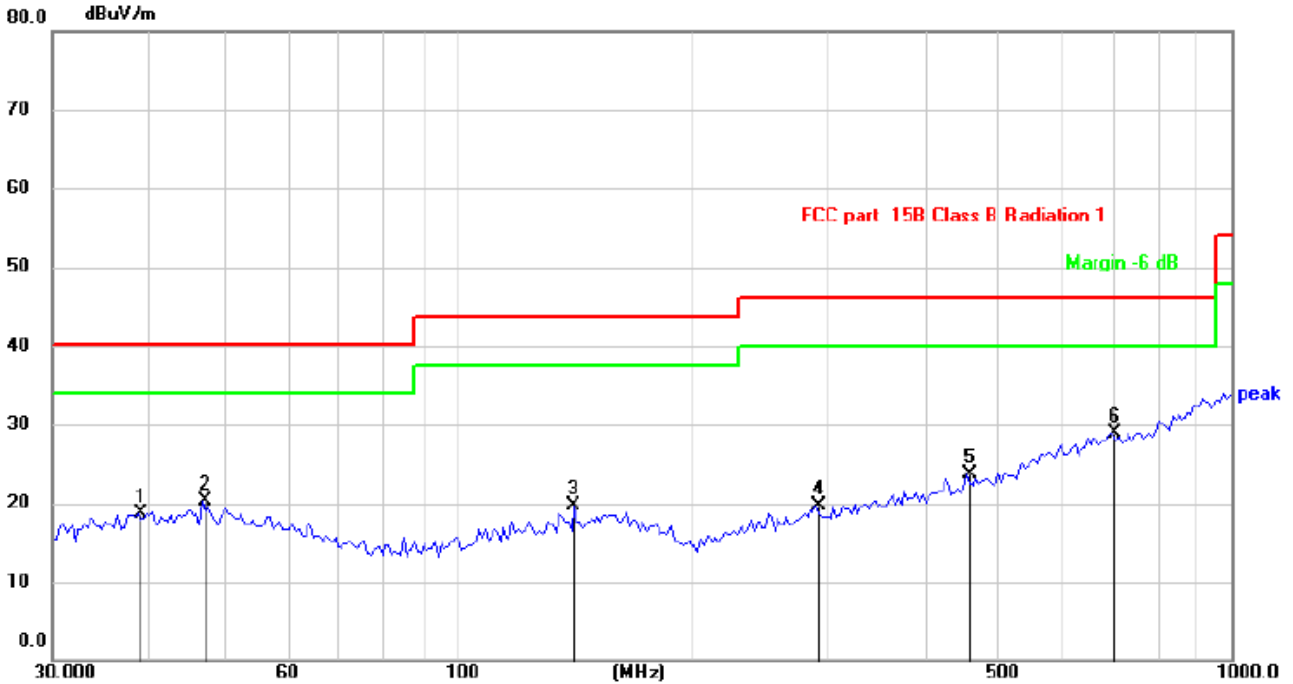

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		38.6839	25.69	-6.91	18.78	40.00	-21.22	QP
2		46.9125	27.22	-6.98	20.24	40.00	-19.76	QP
3		141.5777	27.06	-7.28	19.78	43.50	-23.72	QP
4		290.5262	26.75	-7.01	19.74	46.00	-26.26	QP
5		454.3100	26.99	-3.38	23.61	46.00	-22.39	QP
6	*	698.0796	26.23	2.76	28.99	46.00	-17.01	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V

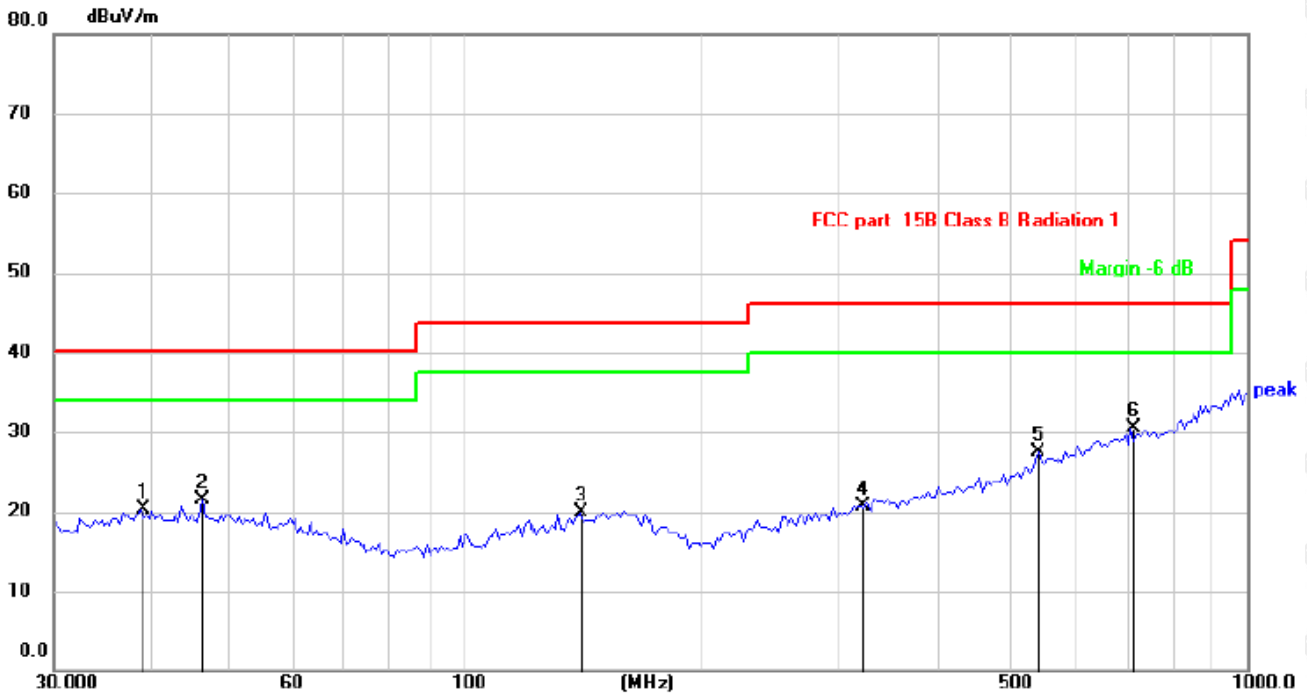

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		38.6839	27.17	-6.91	20.26	40.00	-19.74	QP
2		46.5030	28.45	-6.97	21.48	40.00	-18.52	QP
3		140.3421	27.22	-7.33	19.89	43.50	-23.61	QP
4		319.9370	27.09	-6.34	20.75	46.00	-25.25	QP
5		541.3725	28.61	-1.03	27.58	46.00	-18.42	QP
6	*	710.4268	27.57	2.93	30.50	46.00	-15.50	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Above 1 GHz Test Results:

CH Low (2402MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
4804	57.58	-3.65	53.93	74.00	-20.07	peak
4804	50.10	-3.65	46.45	54.00	-7.55	AVG
7206	59.05	-0.95	58.10	74.00	-15.90	peak
7206	40.73	-0.95	39.78	54.00	-14.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dBµV)	Factor (dB)	Emission Level (dBµV/m)	Limits (dBµV/m)	Margin (dB)	Detector Type
4804	58.35	-3.65	54.70	74.00	-19.30	peak
4804	50.99	-3.65	47.34	54.00	-6.66	AVG
7206	60.53	-0.95	59.58	74.00	-14.42	peak
7206	42.00	-0.95	41.05	54.00	-12.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	59.56	-3.54	56.02	74.00	-17.98	peak
4882.00	48.12	-3.54	44.58	54.00	-9.42	AVG
7323.00	56.50	-0.81	55.69	74.00	-18.31	peak
7323.00	42.53	-0.81	41.72	54.00	-12.28	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	57.76	-3.54	54.22	74.00	-19.78	peak
4882.00	48.81	-3.54	45.27	54.00	-8.73	AVG
7323.00	58.60	-0.81	57.79	74.00	-16.21	peak
7323.00	41.46	-0.81	40.65	54.00	-13.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)
Horizontal:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960	59.26	-3.43	55.83	74.00	-18.17	peak
4960	47.67	-3.44	44.23	54.00	-9.77	AVG
7440	60.46	-0.77	59.69	74.00	-14.31	peak
7440	42.09	-0.77	41.32	54.00	-12.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4960	58.23	-3.43	54.80	74.00	-19.20	peak
4960	47.83	-3.44	44.39	54.00	-9.61	AVG
7440	61.48	-0.77	60.71	74.00	-13.29	peak
7440	41.47	-0.77	40.70	54.00	-13.30	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) All modulations were test at Low, Middle, and High channel, only the worst result of GFSK DH5 Low Channel was reported for below 1GHz test.
- (3) For BT above 1GHz test all modulations were test at Low, Middle, and High channel, only the worst result GFSK DH5 was reported.
- (4) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5) Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	57.46	-5.81	51.65	74.00	-22.35	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.66	-5.84	48.82	74.00	-25.18	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.18	-5.81	50.37	74.00	-23.63	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.68	-5.84	50.84	74.00	-23.16	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.38	-5.81	49.57	74.00	-24.43	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.13	-6.06	48.07	74.00	-25.93	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.65	-5.81	51.84	74.00	-22.16	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.16	-6.06	48.10	74.00	-25.90	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.50	-5.81	49.69	74.00	-24.31	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.12	-5.84	49.28	74.00	-24.72	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	54.14	-5.81	48.33	74.00	-25.67	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	52.87	-5.84	47.03	74.00	-26.97	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.71	-5.81	49.90	74.00	-24.10	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.11	-6.06	50.05	74.00	-23.95	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:


Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.44	-5.81	49.63	74.00	-24.37	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.33	-6.06	48.27	74.00	-25.73	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

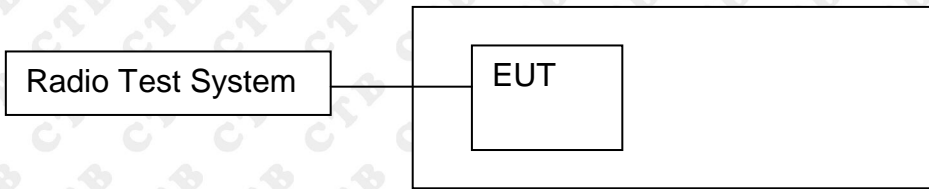

8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


8.3 Test procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold

Note: Test from 30MHz to 25GHz, only worse case 30MHz to 12.75GHz is reported, no emission found above 12.75GHz.

8.4 Test Result

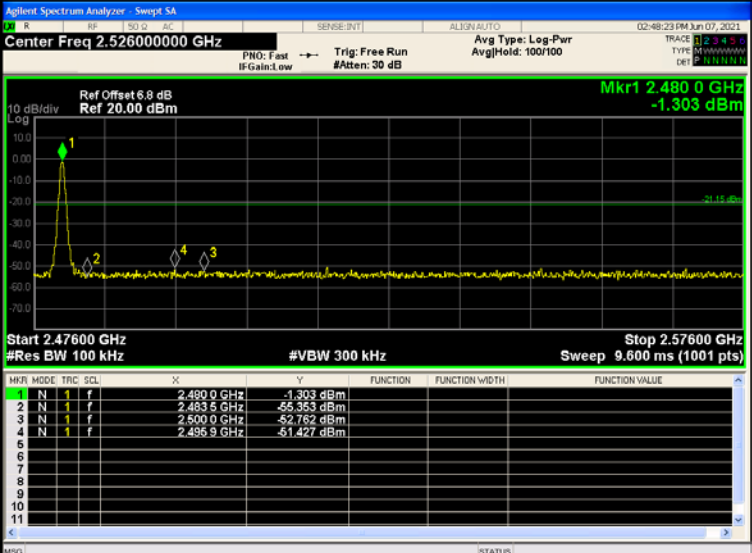BAND EDGE Graphs																																														
<p>GFSK/LCH/ No Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4020 GHz</td> <td>0.901 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4000 GHz</td> <td>-53.031 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.3900 GHz</td> <td>-55.102 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td>N</td> <td>1</td> <td>f</td> <td>2.3838 GHz</td> <td>-49.405 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	2	N	1	f	2.4020 GHz	0.901 dBm				3	N	1	f	2.4000 GHz	-53.031 dBm				4	N	1	f	2.3900 GHz	-55.102 dBm				6	N	1	f	2.3838 GHz	-49.405 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
2	N	1	f	2.4020 GHz	0.901 dBm																																									
3	N	1	f	2.4000 GHz	-53.031 dBm																																									
4	N	1	f	2.3900 GHz	-55.102 dBm																																									
6	N	1	f	2.3838 GHz	-49.405 dBm																																									
<p>GFSK/LCH/ Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4029 GHz</td> <td>-0.749 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4000 GHz</td> <td>-52.582 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.3900 GHz</td> <td>-52.761 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.3444 GHz</td> <td>-49.601 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4029 GHz	-0.749 dBm				2	N	1	f	2.4000 GHz	-52.582 dBm				3	N	1	f	2.3900 GHz	-52.761 dBm				4	N	1	f	2.3444 GHz	-49.601 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4029 GHz	-0.749 dBm																																									
2	N	1	f	2.4000 GHz	-52.582 dBm																																									
3	N	1	f	2.3900 GHz	-52.761 dBm																																									
4	N	1	f	2.3444 GHz	-49.601 dBm																																									
<p>GFSK/HCH/ No Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4800 GHz</td> <td>-1.303 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4835 GHz</td> <td>-55.353 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.5000 GHz</td> <td>-52.762 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4969 GHz</td> <td>-51.427 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4800 GHz	-1.303 dBm				2	N	1	f	2.4835 GHz	-55.353 dBm				3	N	1	f	2.5000 GHz	-52.762 dBm				4	N	1	f	2.4969 GHz	-51.427 dBm			
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4800 GHz	-1.303 dBm																																									
2	N	1	f	2.4835 GHz	-55.353 dBm																																									
3	N	1	f	2.5000 GHz	-52.762 dBm																																									
4	N	1	f	2.4969 GHz	-51.427 dBm																																									

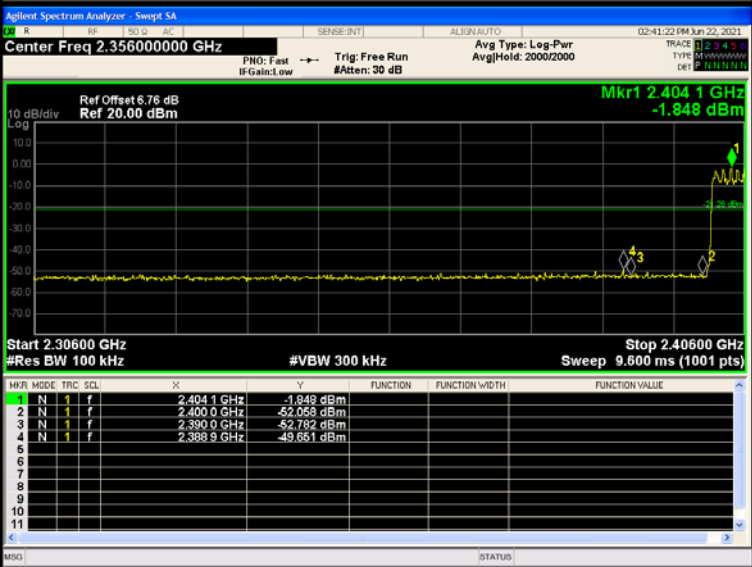
<p>GFSK/HCH/ Hop</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.52600000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.476 0 GHz -1.861 dBm Start 2.47600 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.600 ms (1001 pts) Stop 2.57600 GHz</p> <table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.476 0 GHz</td><td>-1.861 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 5 GHz</td><td>-53.492 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 0 GHz</td><td>-52.483 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.496 0 GHz</td><td>-50.643 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.476 0 GHz	-1.861 dBm				2	N	1	f	2.483 5 GHz	-53.492 dBm				3	N	1	f	2.500 0 GHz	-52.483 dBm				4	N	1	f	2.496 0 GHz	-50.643 dBm				
MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.476 0 GHz	-1.861 dBm																																										
2	N	1	f	2.483 5 GHz	-53.492 dBm																																										
3	N	1	f	2.500 0 GHz	-52.483 dBm																																										
4	N	1	f	2.496 0 GHz	-50.643 dBm																																										
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.35600000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.402 1 GHz -2.841 dBm Start 2.30600 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.600 ms (1001 pts) Stop 2.40600 GHz</p> <table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.402 1 GHz</td><td>-2.841 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 0 GHz</td><td>-53.214 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 0 GHz</td><td>-54.361 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.388 6 GHz</td><td>-50.856 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 1 GHz	-2.841 dBm				2	N	1	f	2.400 0 GHz	-53.214 dBm				3	N	1	f	2.390 0 GHz	-54.361 dBm				4	N	1	f	2.388 6 GHz	-50.856 dBm				
MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.402 1 GHz	-2.841 dBm																																										
2	N	1	f	2.400 0 GHz	-53.214 dBm																																										
3	N	1	f	2.390 0 GHz	-54.361 dBm																																										
4	N	1	f	2.388 6 GHz	-50.856 dBm																																										
<p>$\pi/4$DQPSK/LCH/ Hop</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.35600000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.404 1 GHz -1.848 dBm Start 2.30600 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 9.600 ms (1001 pts) Stop 2.40600 GHz</p> <table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.404 1 GHz</td><td>-1.848 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 0 GHz</td><td>-52.088 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 0 GHz</td><td>-52.782 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.388 9 GHz</td><td>-49.661 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.404 1 GHz	-1.848 dBm				2	N	1	f	2.400 0 GHz	-52.088 dBm				3	N	1	f	2.390 0 GHz	-52.782 dBm				4	N	1	f	2.388 9 GHz	-49.661 dBm				
MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.404 1 GHz	-1.848 dBm																																										
2	N	1	f	2.400 0 GHz	-52.088 dBm																																										
3	N	1	f	2.390 0 GHz	-52.782 dBm																																										
4	N	1	f	2.388 9 GHz	-49.661 dBm																																										

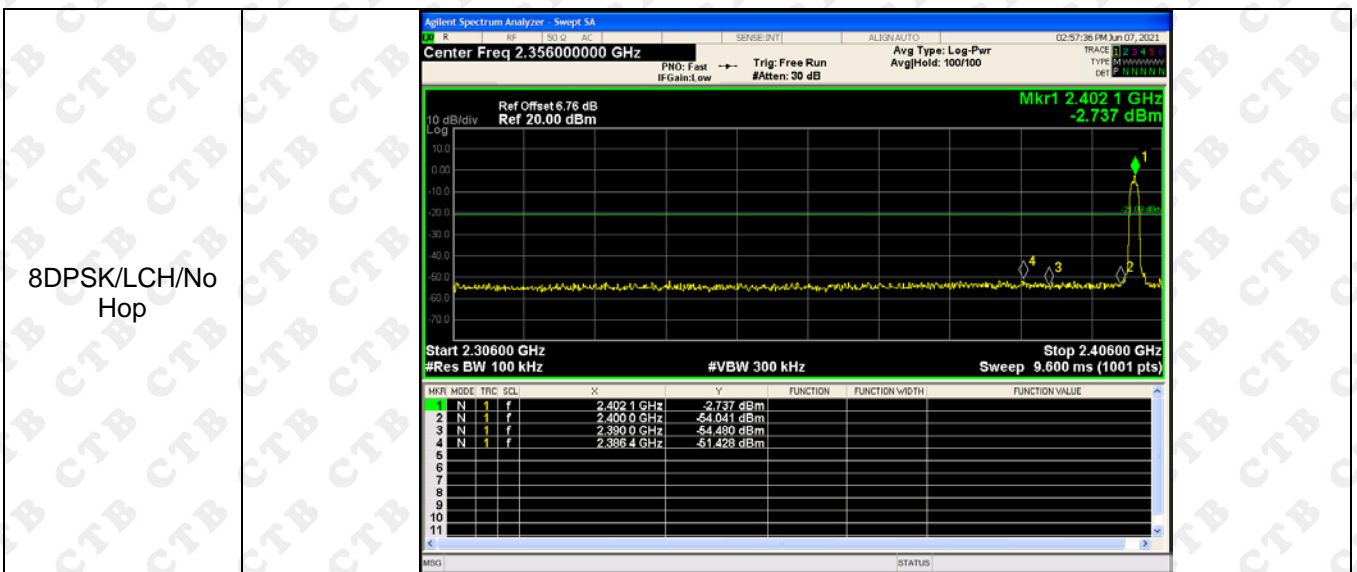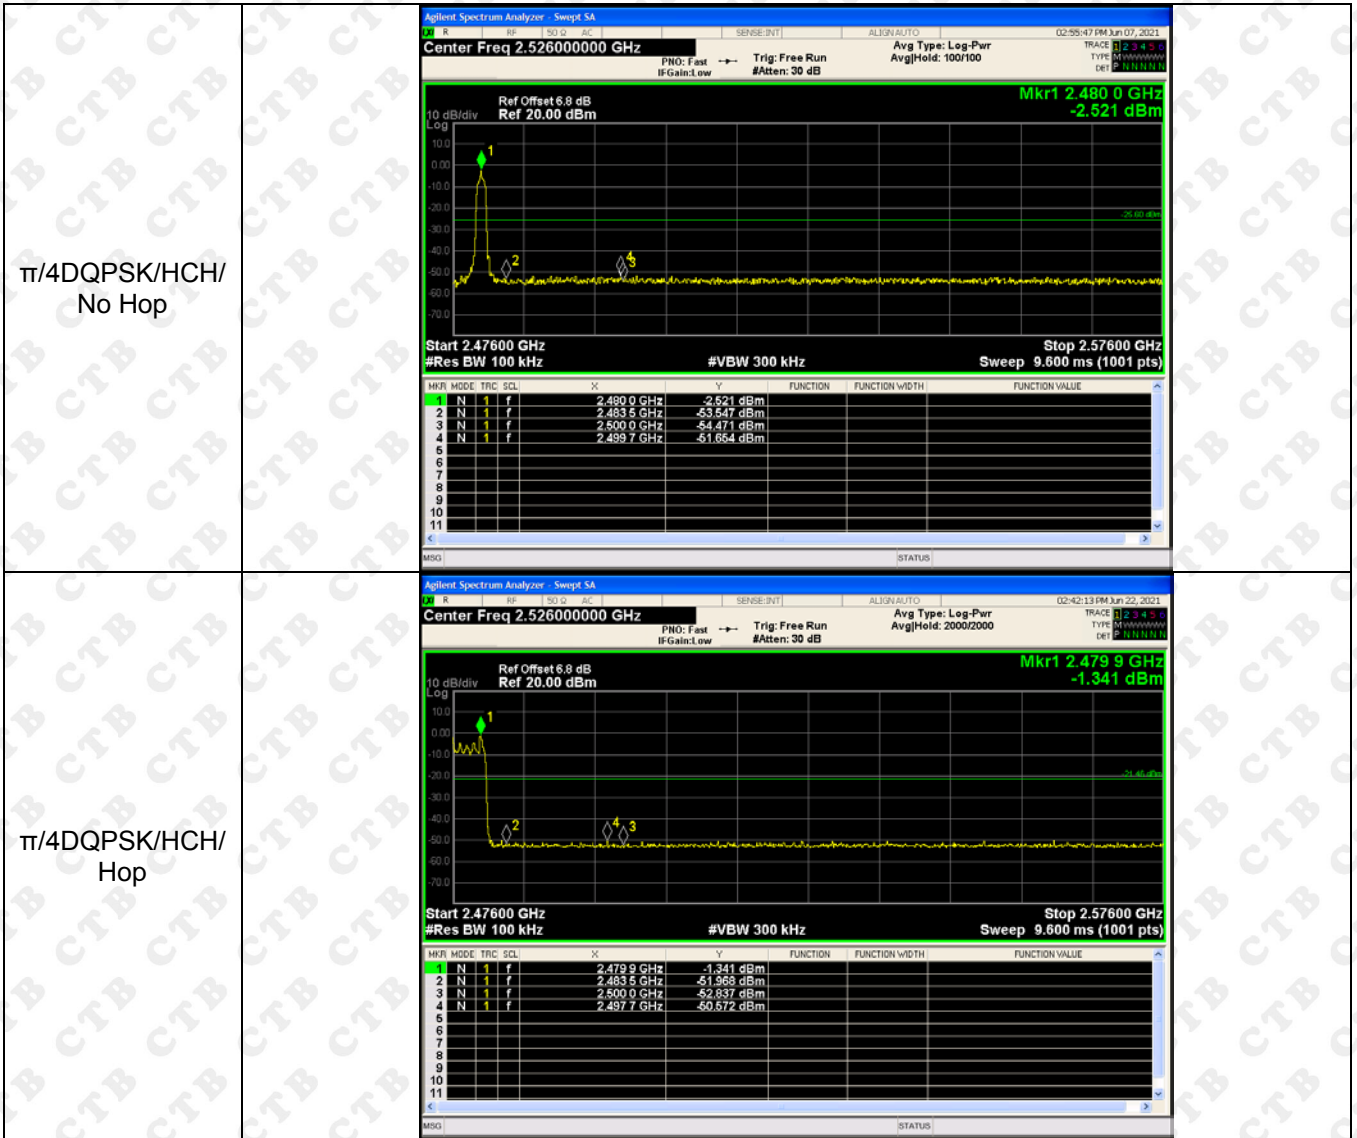


<p>8DPSK /LCH/Hop</p>		<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4029 GHz</td> <td>-0.983 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4000 GHz</td> <td>-51.406 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.3900 GHz</td> <td>-52.387 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.3819 GHz</td> <td>-50.432 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4029 GHz	-0.983 dBm				2	N	1	f	2.4000 GHz	-51.406 dBm				3	N	1	f	2.3900 GHz	-52.387 dBm				4	N	1	f	2.3819 GHz	-50.432 dBm				
MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.4029 GHz	-0.983 dBm																																											
2	N	1	f	2.4000 GHz	-51.406 dBm																																											
3	N	1	f	2.3900 GHz	-52.387 dBm																																											
4	N	1	f	2.3819 GHz	-50.432 dBm																																											
<p>8DPSK /HCH/No Hop</p>		<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4799 GHz</td> <td>-1.237 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4835 GHz</td> <td>-54.637 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.5000 GHz</td> <td>-53.895 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4921 GHz</td> <td>-50.104 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4799 GHz	-1.237 dBm				2	N	1	f	2.4835 GHz	-54.637 dBm				3	N	1	f	2.5000 GHz	-53.895 dBm				4	N	1	f	2.4921 GHz	-50.104 dBm				
MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.4799 GHz	-1.237 dBm																																											
2	N	1	f	2.4835 GHz	-54.637 dBm																																											
3	N	1	f	2.5000 GHz	-53.895 dBm																																											
4	N	1	f	2.4921 GHz	-50.104 dBm																																											
<p>8DPSK /HCH/Hop</p>		<table border="1"> <thead> <tr> <th>MFR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4799 GHz</td> <td>-1.265 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4835 GHz</td> <td>-52.148 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.5000 GHz</td> <td>-52.562 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4972 GHz</td> <td>-51.005 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4799 GHz	-1.265 dBm				2	N	1	f	2.4835 GHz	-52.148 dBm				3	N	1	f	2.5000 GHz	-52.562 dBm				4	N	1	f	2.4972 GHz	-51.005 dBm				
MFR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																								
1	N	1	f	2.4799 GHz	-1.265 dBm																																											
2	N	1	f	2.4835 GHz	-52.148 dBm																																											
3	N	1	f	2.5000 GHz	-52.562 dBm																																											
4	N	1	f	2.4972 GHz	-51.005 dBm																																											

RF Conducted Spurious Emissions Graphs


GFSK/LCH

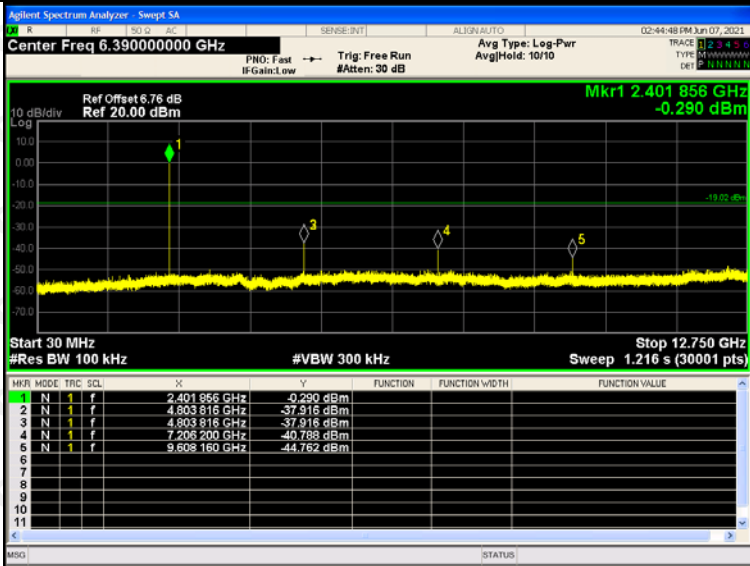




GFSK/MCH

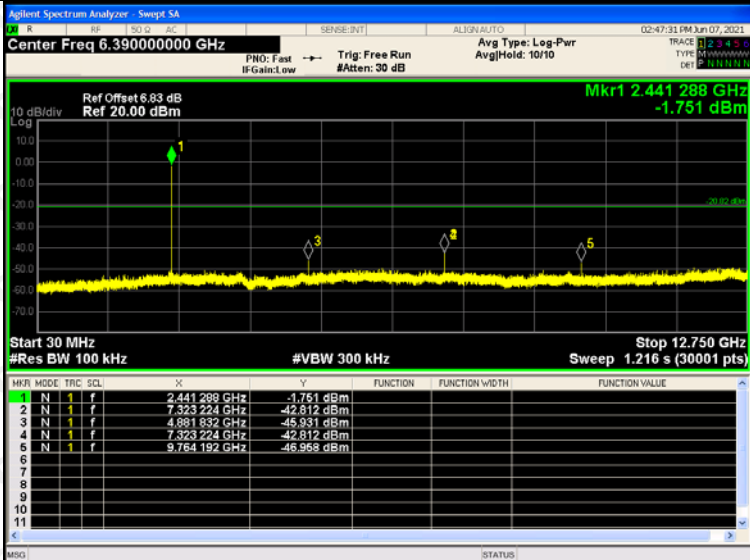

GFSK/HCH

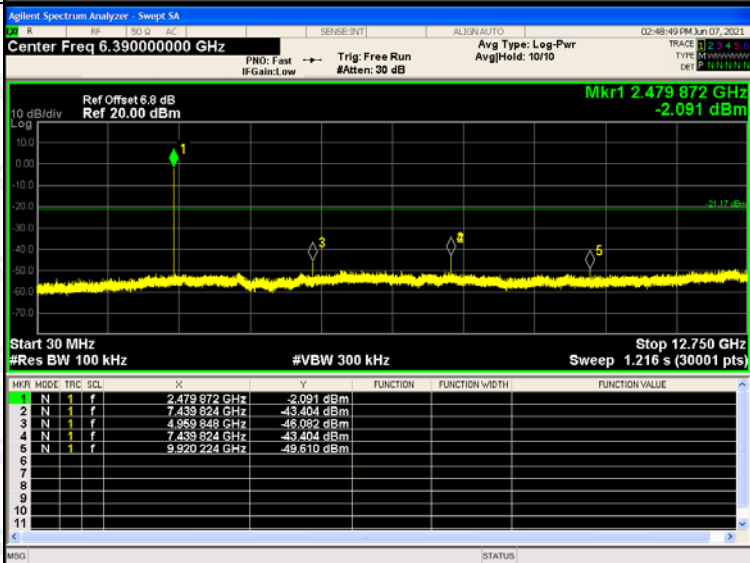


<p>$\pi/4$DQPSK /LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 6.390000000 GHz Ref Offset 6.76 dB Ref 20.00 dBm Mkr1 2.402 280 GHz -6.527 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 280 GHz</td> <td></td> <td></td> <td>-6.527 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>3.603 160 GHz</td> <td></td> <td></td> <td>-45.063 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.803 392 GHz</td> <td></td> <td></td> <td>-46.136 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.205 776 GHz</td> <td></td> <td></td> <td>-45.652 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.608 160 GHz</td> <td></td> <td></td> <td>-45.063 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 280 GHz			-6.527 dBm	2	N	1	f	3.603 160 GHz			-45.063 dBm	3	N	1	f	4.803 392 GHz			-46.136 dBm	4	N	1	f	7.205 776 GHz			-45.652 dBm	5	N	1	f	9.608 160 GHz			-45.063 dBm	
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f	2.402 280 GHz			-6.527 dBm																																											
2	N	1	f	3.603 160 GHz			-45.063 dBm																																											
3	N	1	f	4.803 392 GHz			-46.136 dBm																																											
4	N	1	f	7.205 776 GHz			-45.652 dBm																																											
5	N	1	f	9.608 160 GHz			-45.063 dBm																																											
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 6.390000000 GHz Ref Offset 6.83 dB Ref 20.00 dBm Mkr1 2.440 964 GHz -5.472 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 964 GHz</td> <td></td> <td></td> <td>-5.472 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>7.322 800 GHz</td> <td></td> <td></td> <td>-44.771 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.852 256 GHz</td> <td></td> <td></td> <td>-46.015 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.392 800 GHz</td> <td></td> <td></td> <td>-44.771 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.784 192 GHz</td> <td></td> <td></td> <td>-46.095 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 964 GHz			-5.472 dBm	2	N	1	f	7.322 800 GHz			-44.771 dBm	3	N	1	f	4.852 256 GHz			-46.015 dBm	4	N	1	f	7.392 800 GHz			-44.771 dBm	5	N	1	f	9.784 192 GHz			-46.095 dBm	
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f	2.440 964 GHz			-5.472 dBm																																											
2	N	1	f	7.322 800 GHz			-44.771 dBm																																											
3	N	1	f	4.852 256 GHz			-46.015 dBm																																											
4	N	1	f	7.392 800 GHz			-44.771 dBm																																											
5	N	1	f	9.784 192 GHz			-46.095 dBm																																											
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 6.390000000 GHz Ref Offset 6.8 dB Ref 20.00 dBm Mkr1 2.479 872 GHz -5.247 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 12.750 GHz Sweep 1.216 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 872 GHz</td> <td></td> <td></td> <td>-5.247 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>7.439 824 GHz</td> <td></td> <td></td> <td>-44.134 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.959 848 GHz</td> <td></td> <td></td> <td>-44.376 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.439 824 GHz</td> <td></td> <td></td> <td>-44.134 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.919 800 GHz</td> <td></td> <td></td> <td>-47.789 dBm</td> </tr> </tbody> </table>	MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 872 GHz			-5.247 dBm	2	N	1	f	7.439 824 GHz			-44.134 dBm	3	N	1	f	4.959 848 GHz			-44.376 dBm	4	N	1	f	7.439 824 GHz			-44.134 dBm	5	N	1	f	9.919 800 GHz			-47.789 dBm	
MKR MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																											
1	N	1	f	2.479 872 GHz			-5.247 dBm																																											
2	N	1	f	7.439 824 GHz			-44.134 dBm																																											
3	N	1	f	4.959 848 GHz			-44.376 dBm																																											
4	N	1	f	7.439 824 GHz			-44.134 dBm																																											
5	N	1	f	9.919 800 GHz			-47.789 dBm																																											
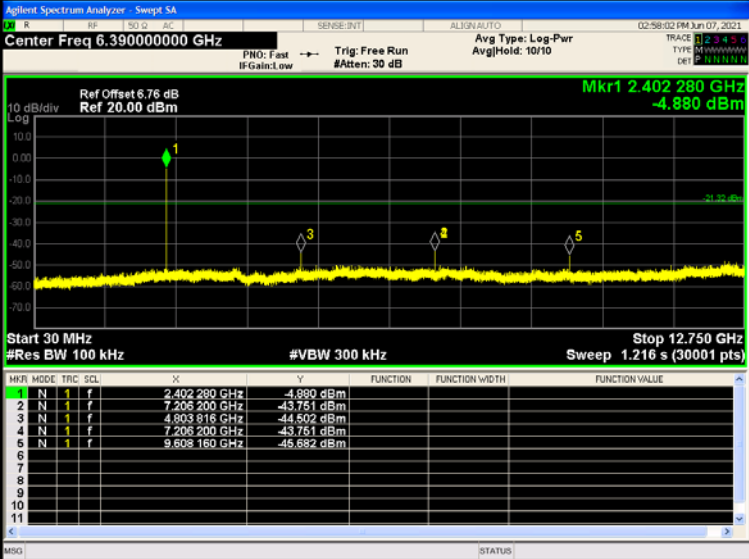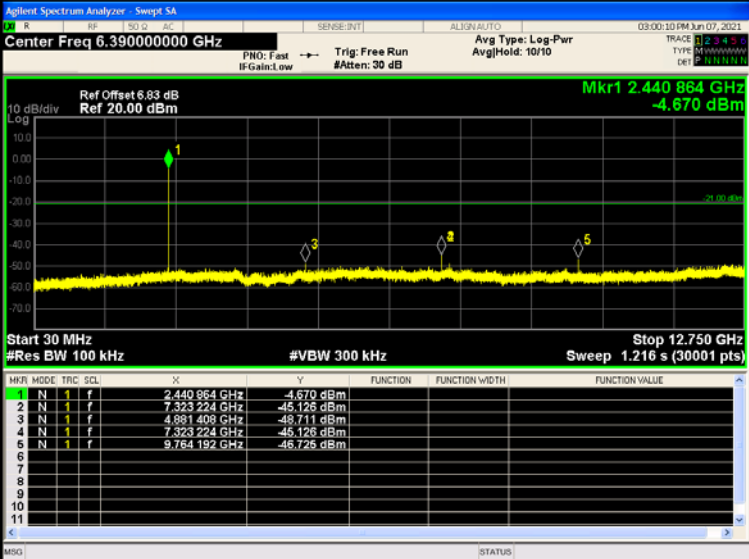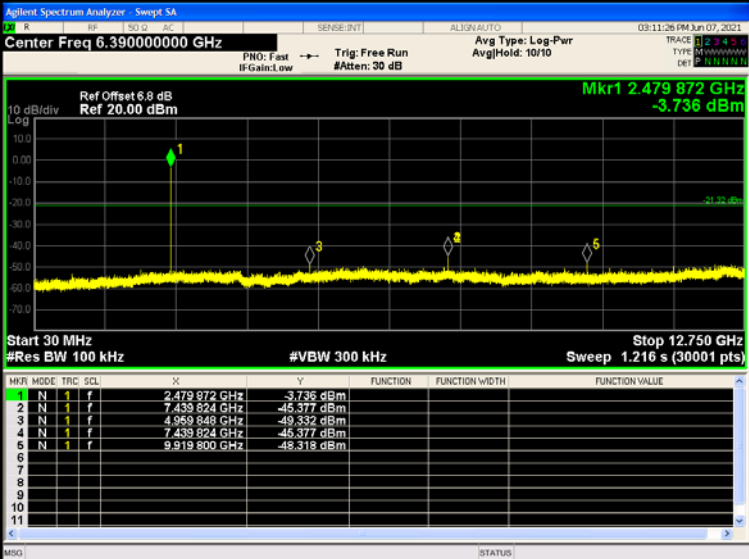
<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 280 GHz</td> <td>-4.880 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>7.208 200 GHz</td> <td>-43.751 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.803 816 GHz</td> <td>-44.502 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.206 200 GHz</td> <td>-43.751 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.608 160 GHz</td> <td>-46.682 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 280 GHz	-4.880 dBm				2	N	1	f	7.208 200 GHz	-43.751 dBm				3	N	1	f	4.803 816 GHz	-44.502 dBm				4	N	1	f	7.206 200 GHz	-43.751 dBm				5	N	1	f	9.608 160 GHz	-46.682 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.402 280 GHz	-4.880 dBm																																																		
2	N	1	f	7.208 200 GHz	-43.751 dBm																																																		
3	N	1	f	4.803 816 GHz	-44.502 dBm																																																		
4	N	1	f	7.206 200 GHz	-43.751 dBm																																																		
5	N	1	f	9.608 160 GHz	-46.682 dBm																																																		
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 864 GHz</td> <td>-4.670 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>7.323 224 GHz</td> <td>-46.126 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.881 408 GHz</td> <td>-48.711 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.393 224 GHz</td> <td>-46.126 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.764 192 GHz</td> <td>-46.726 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 864 GHz	-4.670 dBm				2	N	1	f	7.323 224 GHz	-46.126 dBm				3	N	1	f	4.881 408 GHz	-48.711 dBm				4	N	1	f	7.393 224 GHz	-46.126 dBm				5	N	1	f	9.764 192 GHz	-46.726 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.440 864 GHz	-4.670 dBm																																																		
2	N	1	f	7.323 224 GHz	-46.126 dBm																																																		
3	N	1	f	4.881 408 GHz	-48.711 dBm																																																		
4	N	1	f	7.393 224 GHz	-46.126 dBm																																																		
5	N	1	f	9.764 192 GHz	-46.726 dBm																																																		
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 872 GHz</td> <td>-3.736 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>7.439 824 GHz</td> <td>-46.377 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.959 848 GHz</td> <td>-49.332 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.439 824 GHz</td> <td>-46.377 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.919 800 GHz</td> <td>-48.318 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 872 GHz	-3.736 dBm				2	N	1	f	7.439 824 GHz	-46.377 dBm				3	N	1	f	4.959 848 GHz	-49.332 dBm				4	N	1	f	7.439 824 GHz	-46.377 dBm				5	N	1	f	9.919 800 GHz	-48.318 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.479 872 GHz	-3.736 dBm																																																		
2	N	1	f	7.439 824 GHz	-46.377 dBm																																																		
3	N	1	f	4.959 848 GHz	-49.332 dBm																																																		
4	N	1	f	7.439 824 GHz	-46.377 dBm																																																		
5	N	1	f	9.919 800 GHz	-48.318 dBm																																																		

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

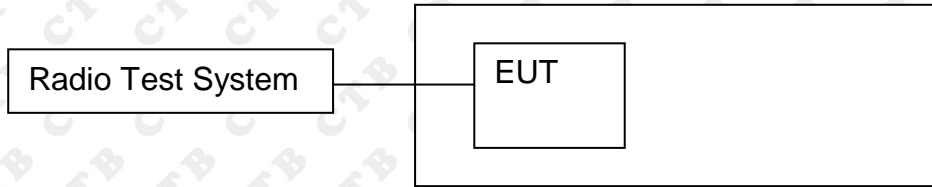

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 8MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
EDR mode (GFSK)	LCH	1.299	PASS
	MCH	-0.578	PASS
	HCH	-0.931	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	-0.638	PASS
	MCH	-0.683	PASS
	HCH	-1.061	PASS
EDR mode (8DPSK)	LCH	-0.27	PASS
	MCH	-0.23	PASS
	HCH	-0.87	PASS

Test Graph:


Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts) Mkr1 2.401939 GHz -1.299 dBm</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts) Mkr1 2.441003 GHz -0.578 dBm</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts) Mkr1 2.480034 GHz -0.931 dBm</p>

<p>$\pi/4$DQPSK/LCH</p>	
<p>$/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

<p>8DPSK/LCH</p>	
<p>8DPSK /MCH</p>	
<p>8DPSK /HCH</p>	

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

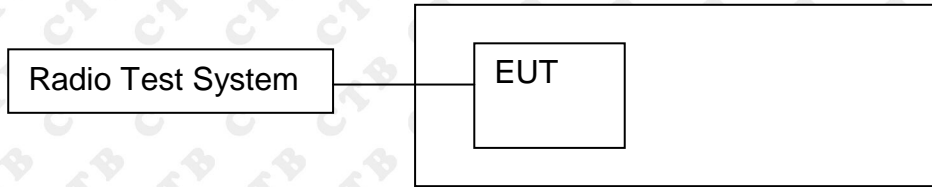

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.866	PASS
	Mid channel	0.873	PASS
	High channel	0.866	PASS
$\pi/4$ DQPSK	Low channel	1.257	PASS
	Mid channel	1.23	PASS
	High channel	1.219	PASS
8DPSK	Low channel	1.309	PASS
	Mid channel	1.232	PASS
	High channel	1.2	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.76 dB Ref 26.76 dBm Mkr3 2.402438 GHz -22.553 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 2.667 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.03 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	7.03 dBm	Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-20.00 dB
Occupied Bandwidth	Total Power	7.03 dBm								
Transmit Freq Error	OBW Power	99.00 %								
x dB Bandwidth	x dB	-20.00 dB								
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.83 dB Ref 26.83 dBm Mkr3 2.441434 GHz -25.283 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 2.667 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.02 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	5.02 dBm	Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-20.00 dB
Occupied Bandwidth	Total Power	5.02 dBm								
Transmit Freq Error	OBW Power	99.00 %								
x dB Bandwidth	x dB	-20.00 dB								
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.8 dB Ref 26.80 dBm Mkr3 2.480439 GHz -25.190 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 2.667 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>4.74 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	4.74 dBm	Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-20.00 dB
Occupied Bandwidth	Total Power	4.74 dBm								
Transmit Freq Error	OBW Power	99.00 %								
x dB Bandwidth	x dB	-20.00 dB								