



Test Data**Maximum Conducted Output Power**



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-3.036	0	-3.036	30	Pass
NVNT	BLE	2442	Ant1	-1.706	0	-1.706	30	Pass
NVNT	BLE	2480	Ant1	-2.629	0	-2.629	30	Pass

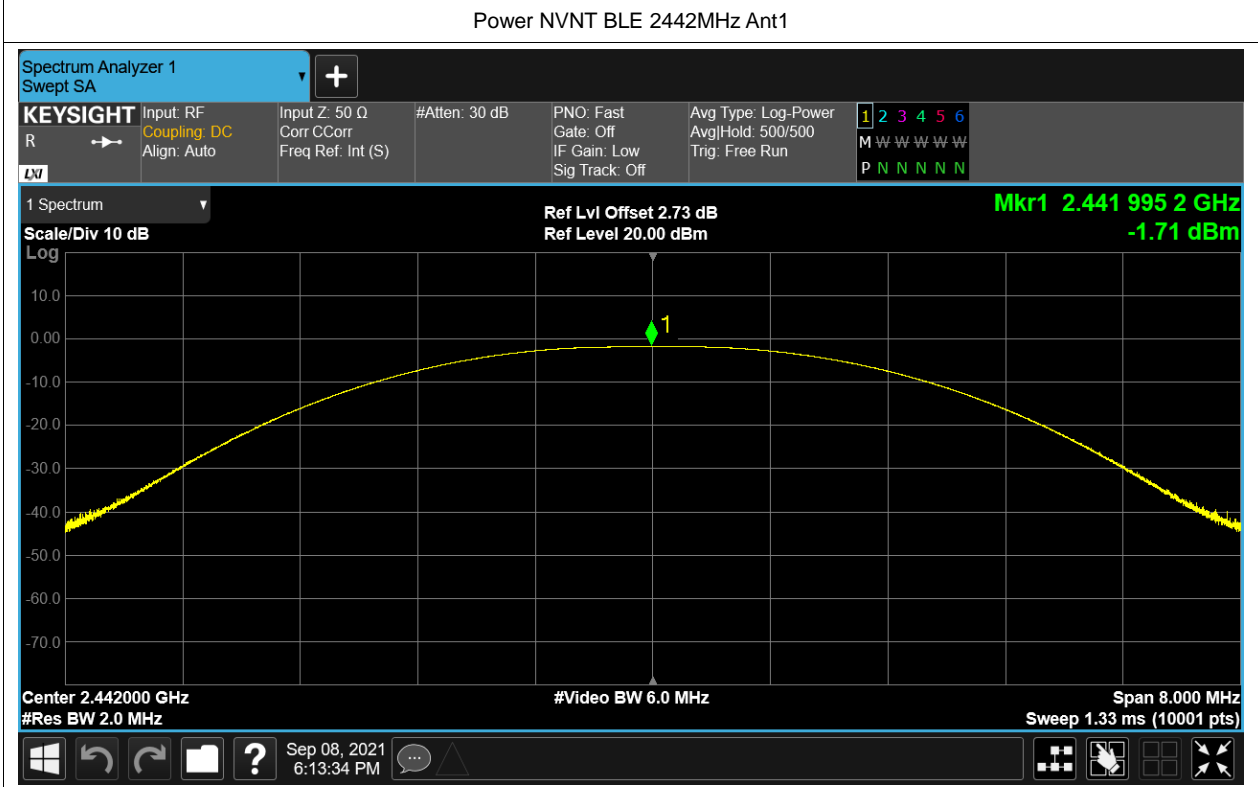


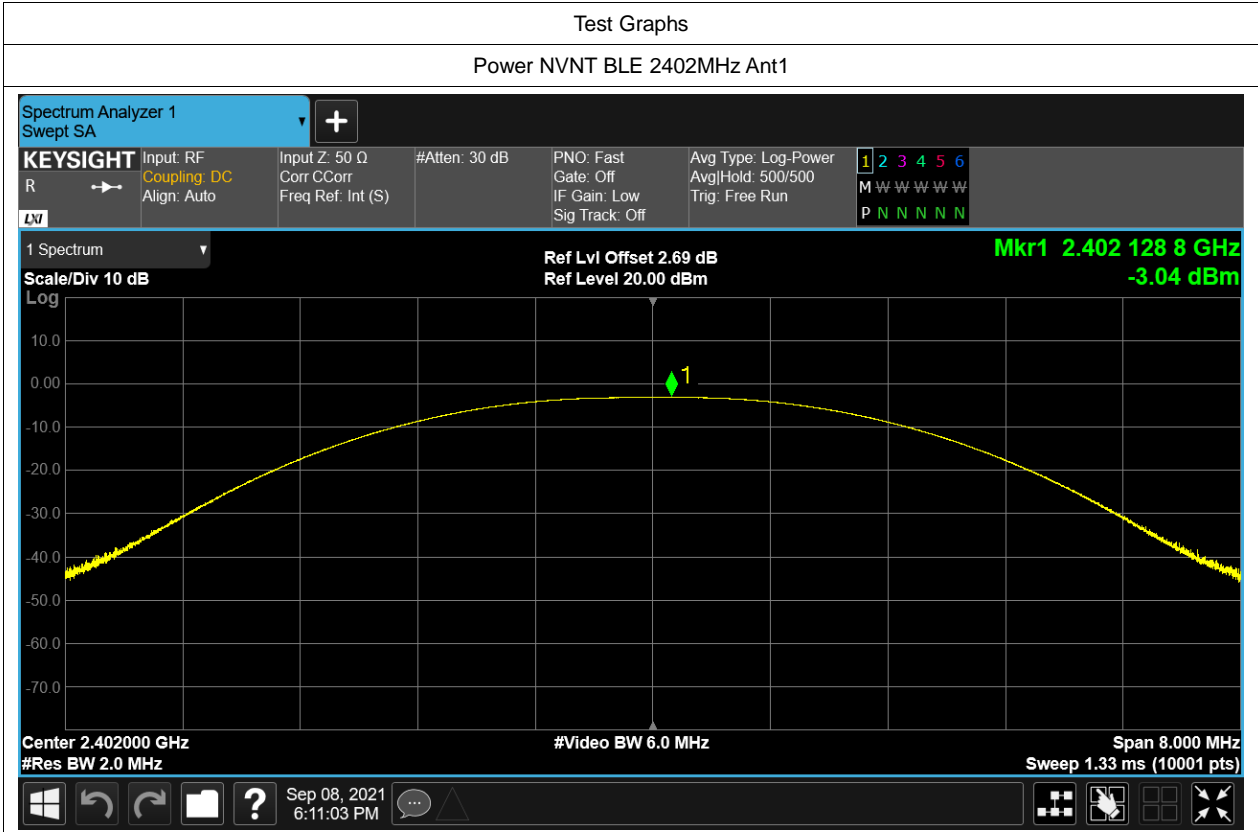

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	0.68	0.5	Pass
NVNT	BLE	2442	Ant1	0.684	0.5	Pass
NVNT	BLE	2480	Ant1	0.684	0.5	Pass

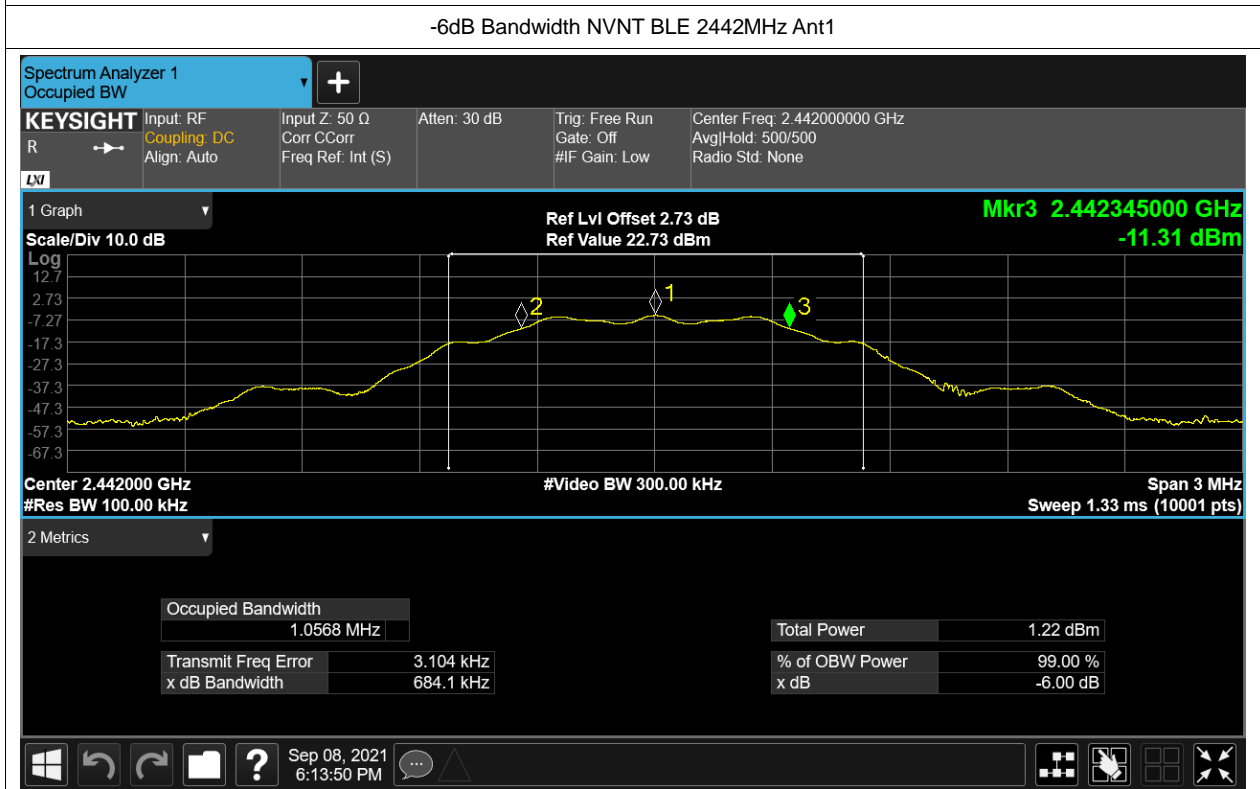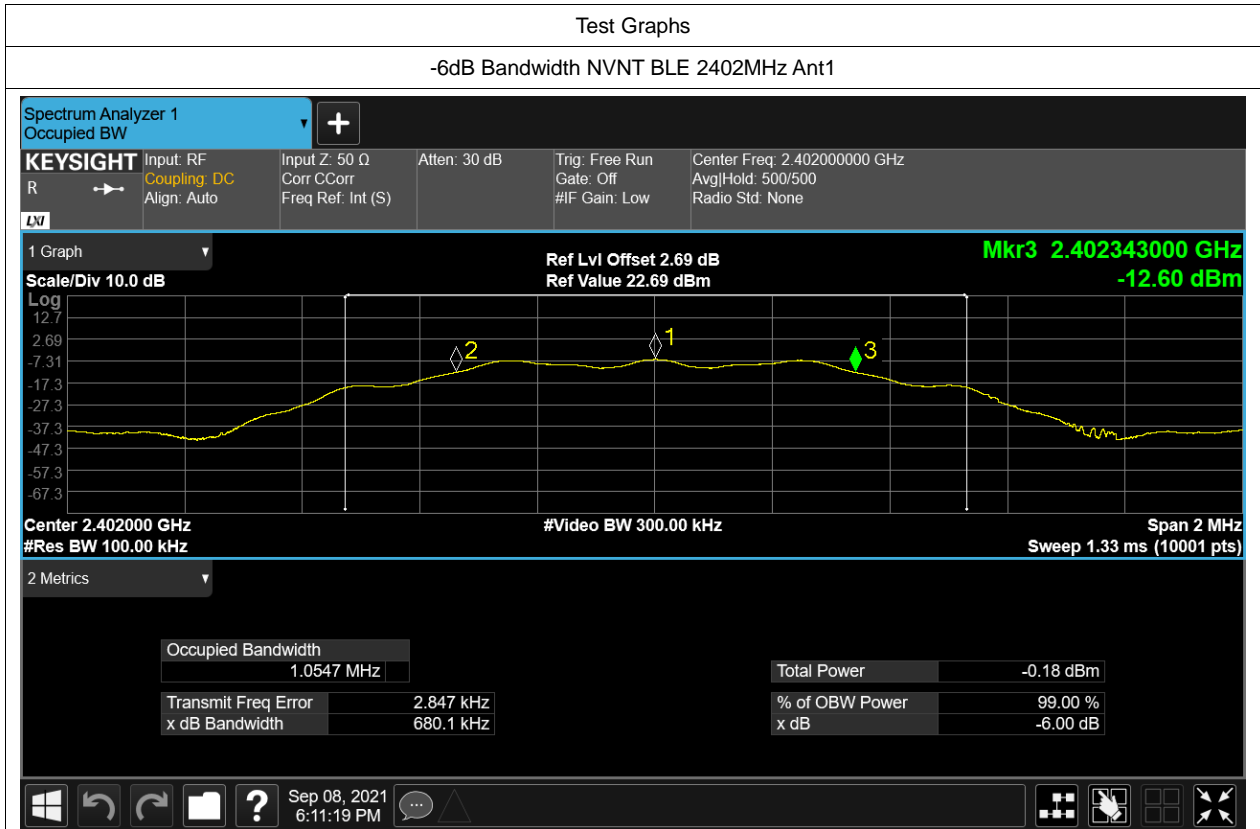


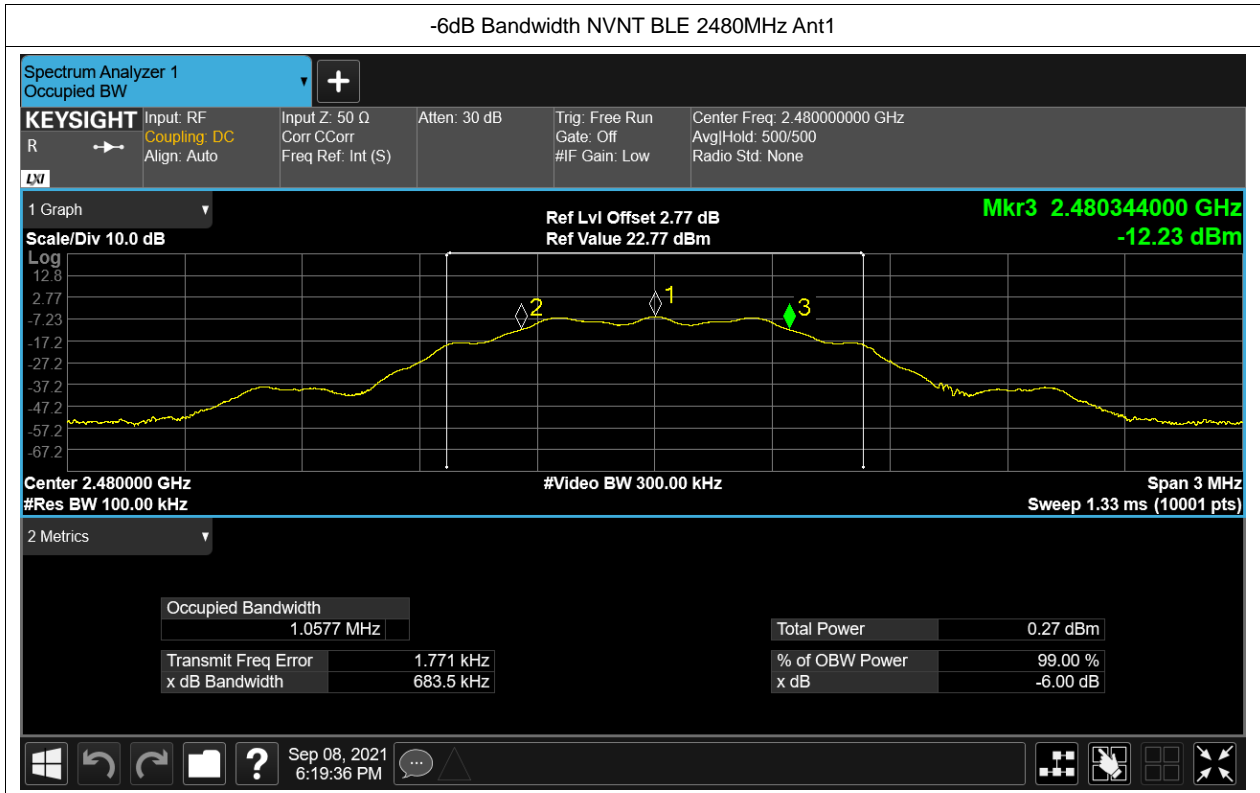

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant1	1.052941981
NVNT	BLE	2442	Ant1	1.051022148
NVNT	BLE	2480	Ant1	1.050440161

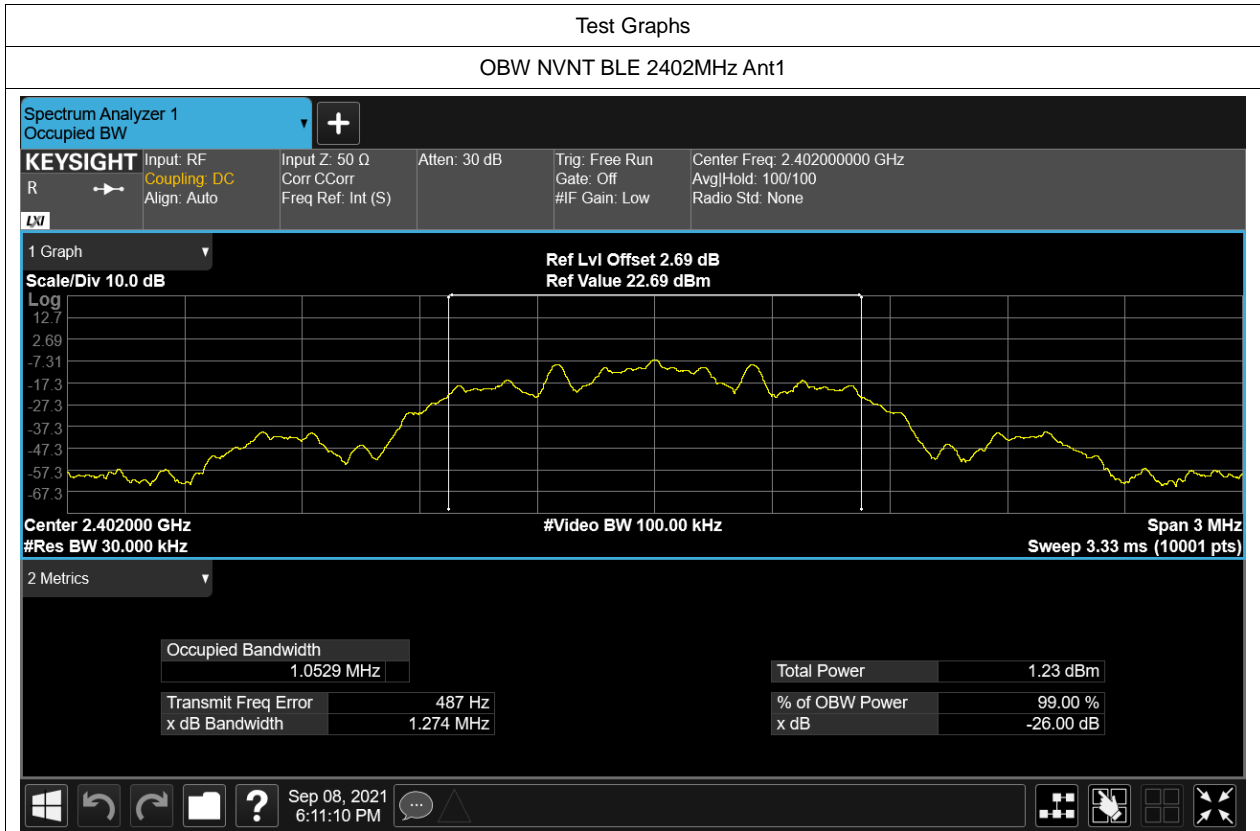

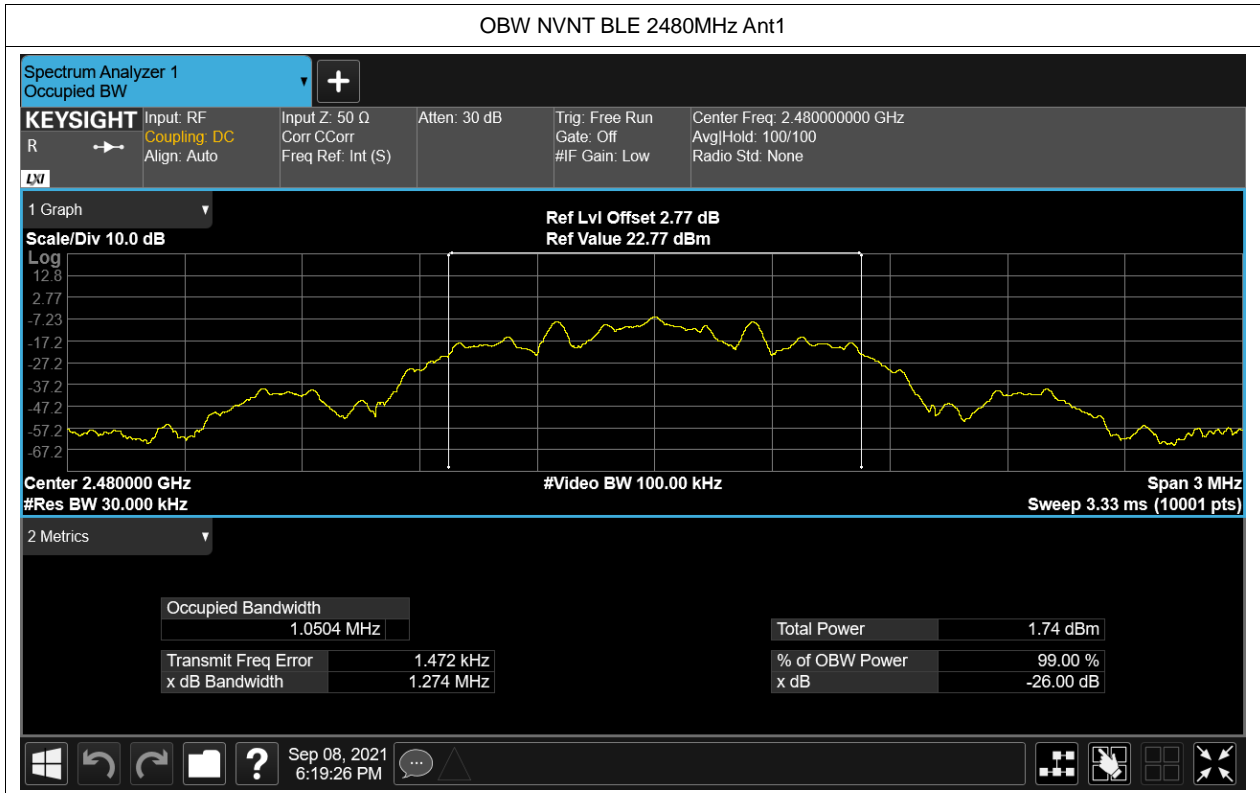


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-9.39	8	Pass
NVNT	BLE	2442	Ant1	-8.035	8	Pass
NVNT	BLE	2480	Ant1	-8.99	8	Pass


Test Graphs

PSD NVNT BLE 2402MHz Ant1

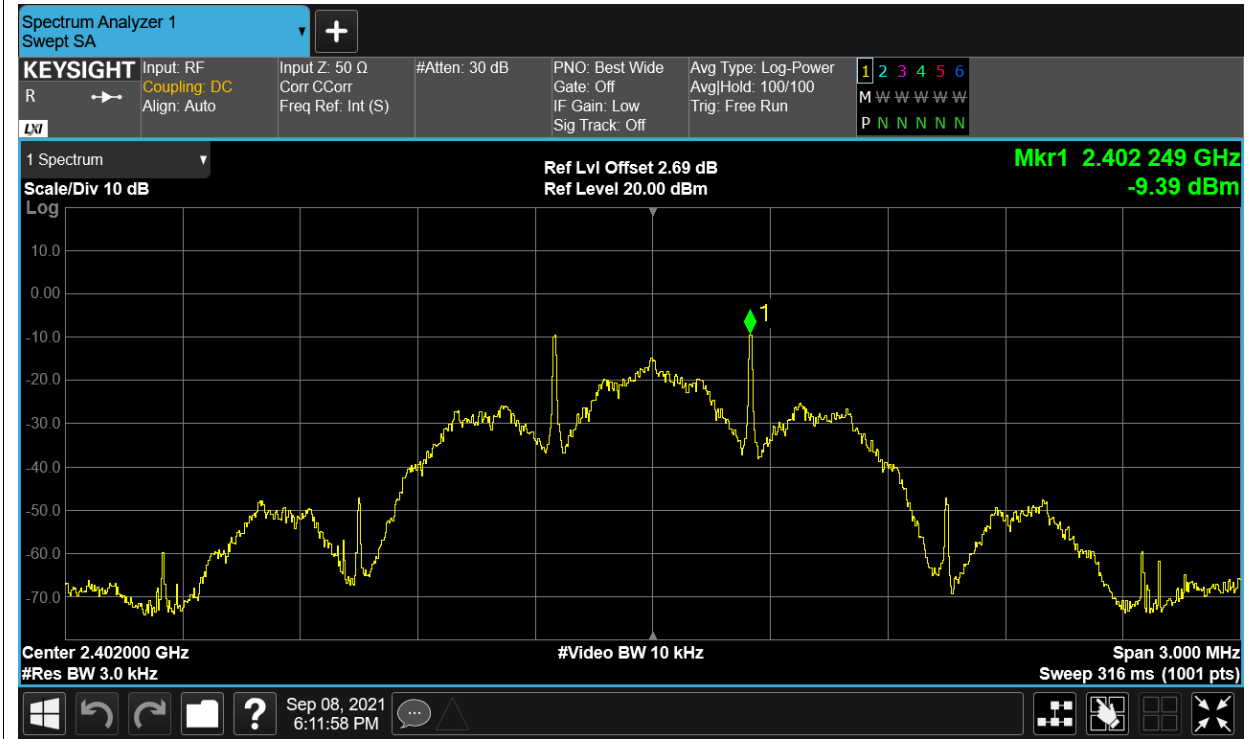



PSD NVNT BLE 2442MHz Ant1


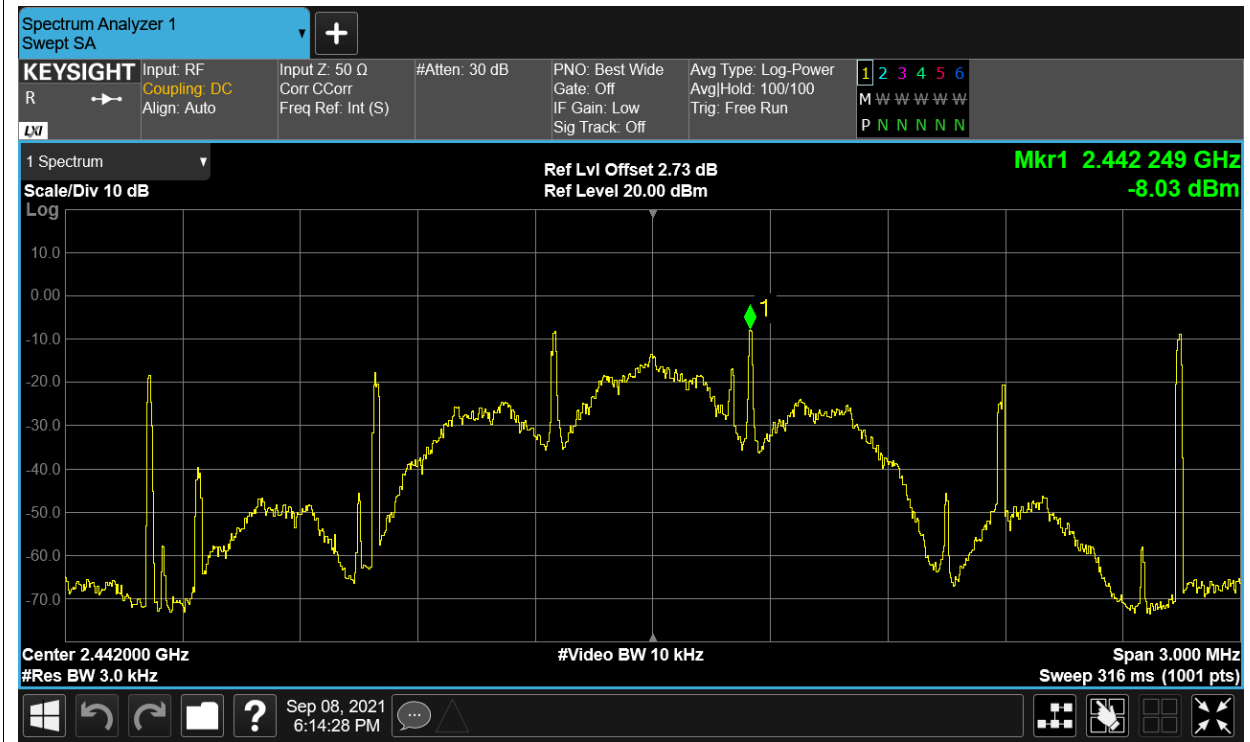


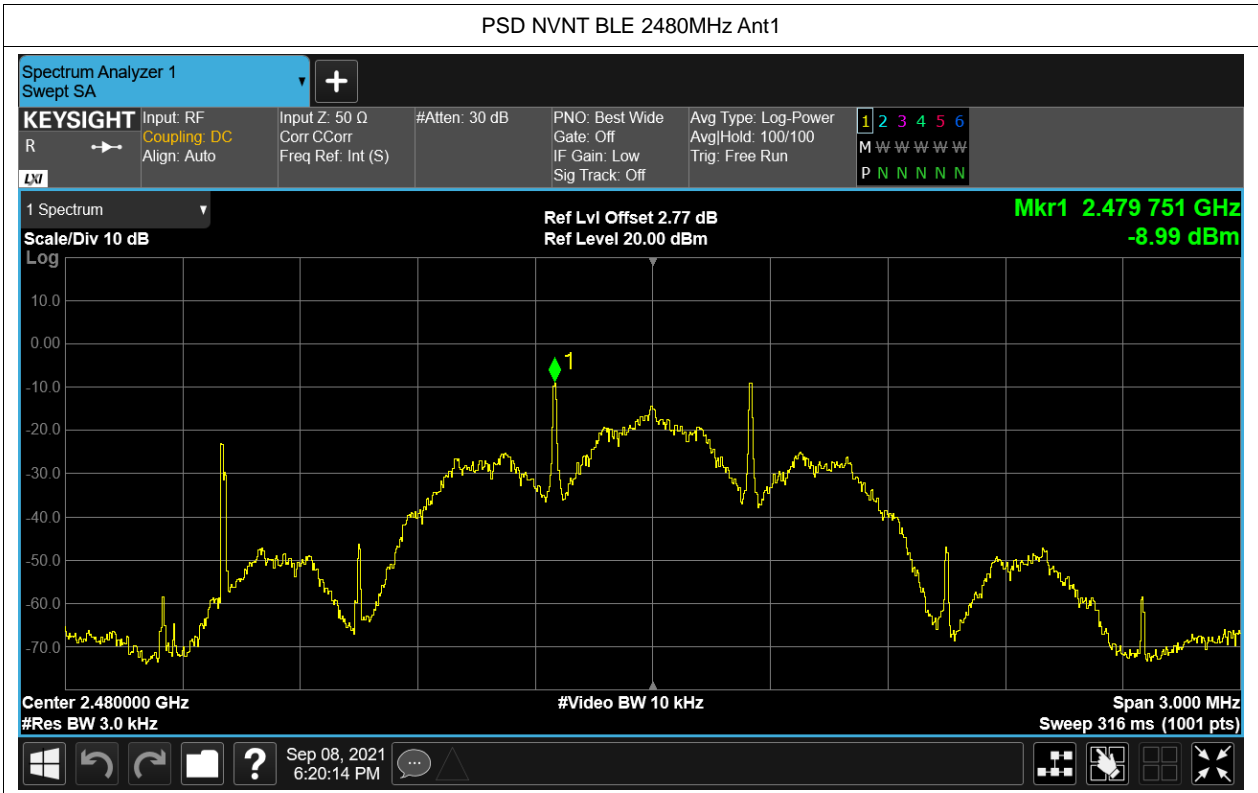

Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-49.23	-20	Pass
NVNT	BLE	2480	Ant1	-49.63	-20	Pass

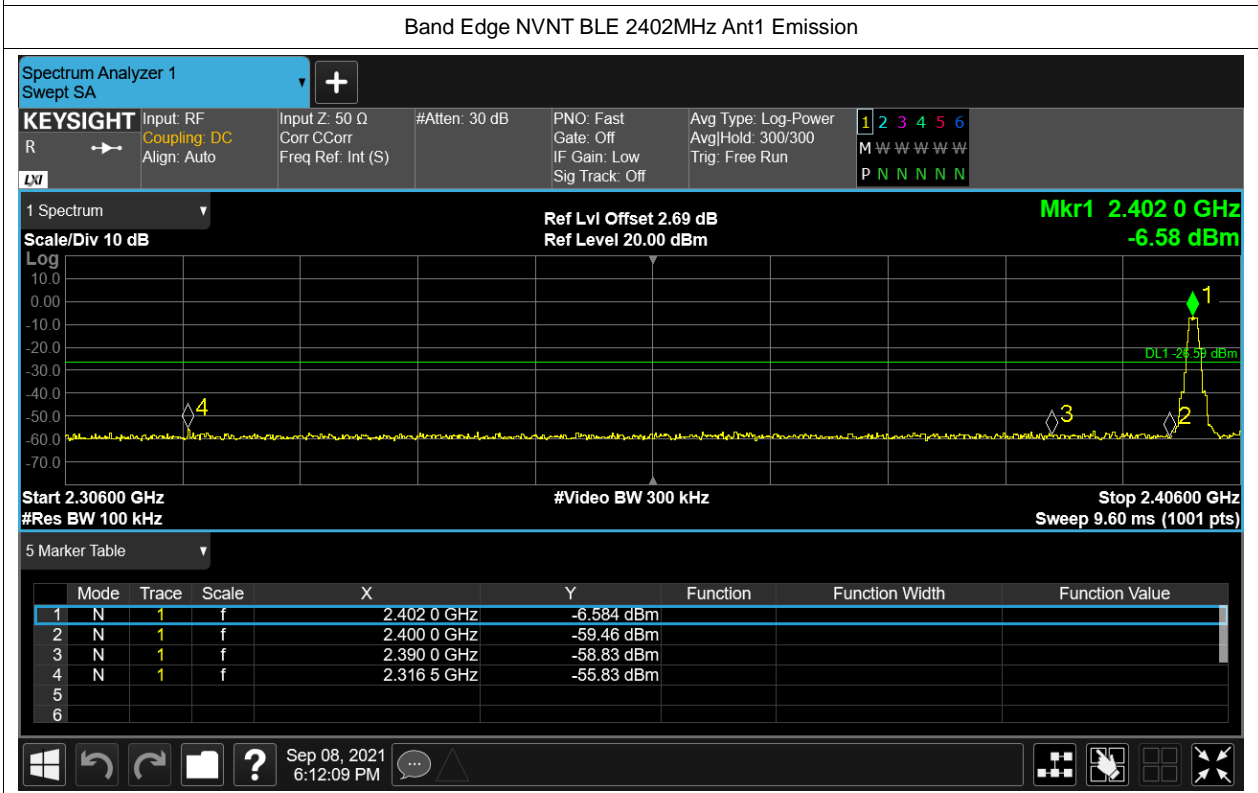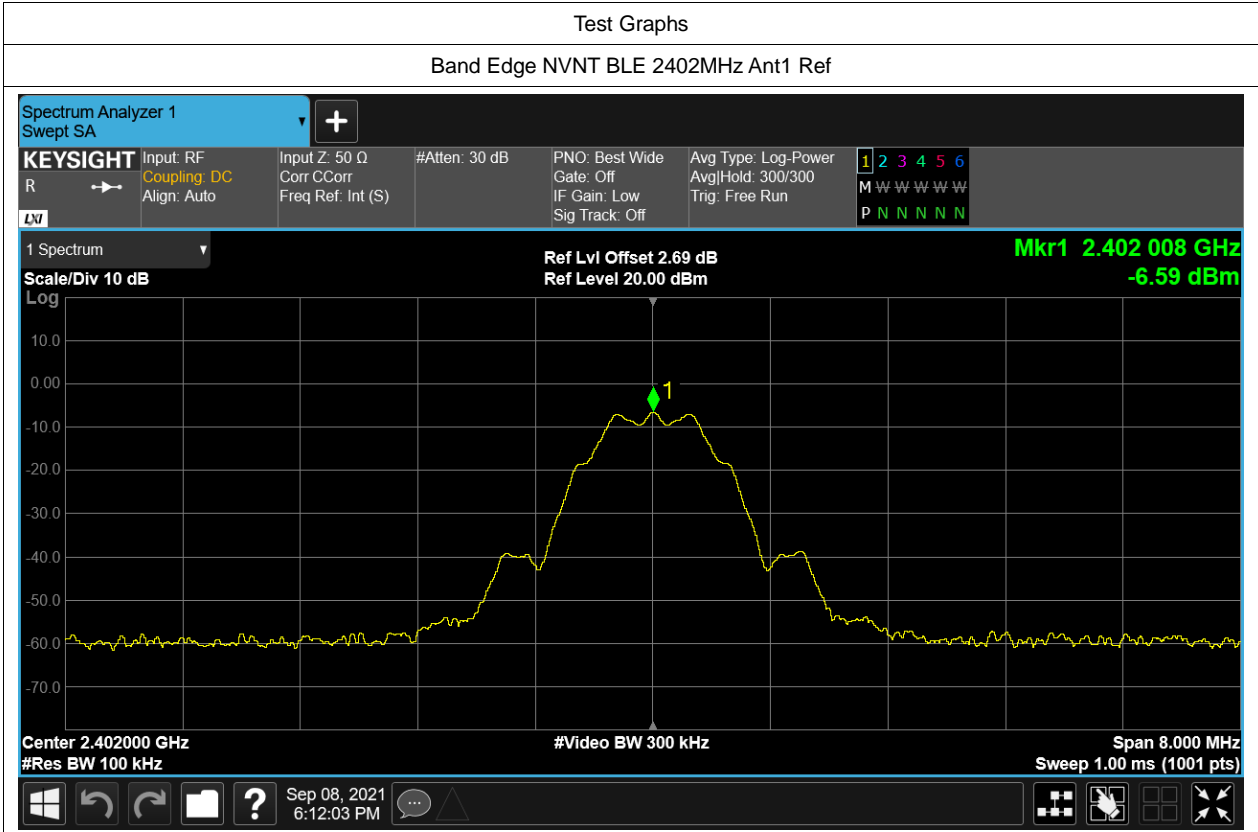

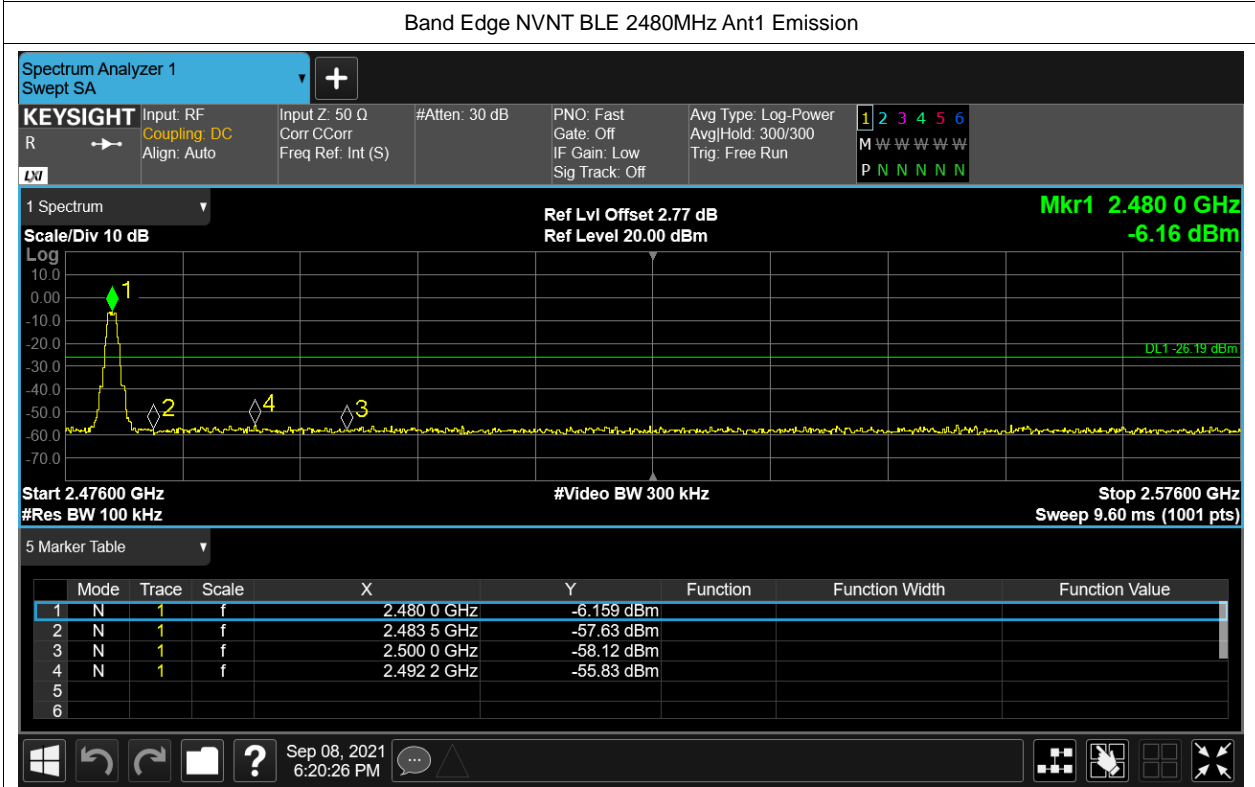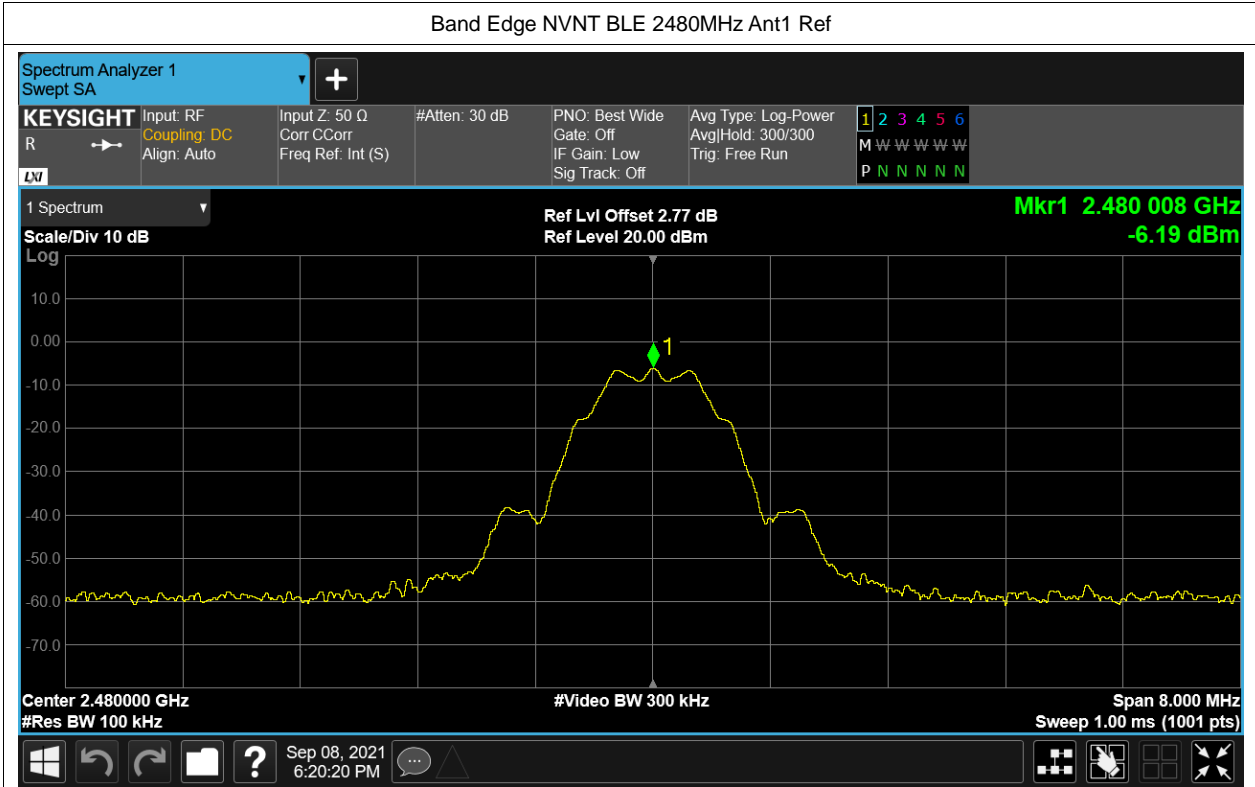

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-42.92	-20	Pass
NVNT	BLE	2442	Ant1	-44.18	-20	Pass
NVNT	BLE	2480	Ant1	-43.83	-20	Pass

