

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

8.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

8.5.4 Test Procedure

■ Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for $f < 1$ GHz(30MHz to 1GHz), 200Hz for $f < 150$ KHz(9KHz to 150KHz), 9KHz for < 30 MHz

(150KHz to 30KHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

■ Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW \geq 3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

■ Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle \geq 98 percent, set VBW \leq RBW/100 (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is $<$ 98 percent, set VBW \geq $1/T$, where T is defined in section II.B.1.a).

Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

■ **Band edge measurements.**

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

8.5.5 Test Results

The voltage AC120V and the modes 802.11a/n/ac has been tested and the worst result recorded as below

- For Undesirable radiated Spurious Emission in U-NII – 1
All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:
- : Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Test mode:		802.11a		Frequency(MHz):		5180	
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)		
5535.05	V	45.84	-49.36	-27	-22.36		
12114.35	V	57.62	-37.58	-27	-10.58		
18000.00	V	62.31	-32.89	-27	-5.89		
5615.62	H	46.63	-48.57	-27	-21.57		
12149.41	H	58.55	-36.65	-27	-9.65		
17948.04	H	43.22	-51.98	-27	-24.98		

Test mode:		802.11a		Frequency(MHz):		5200	
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)		
5631.87	V	46.01	-49.19	-27	-22.19		
11600.35	V	58.38	-36.82	-27	-9.82		
17948.04	V	61.24	-33.96	-27	-6.96		
5631.87	H	46.52	-48.68	-27	-21.68		
12184.58	H	58.38	-36.82	-27	-9.82		
17948.04	H	62.13	-33.07	-27	-6.07		

Test mode:		802.11a		Frequency(MHz):		5240	
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)		
5090.01	V	46.42	-48.78	-27	-21.78		
12255.22	V	58.21	-36.99	-27	-9.99		
18000.00	V	61.28	-33.92	-27	-6.92		
5567.14	H	47.02	-48.18	-27	-21.18		
12184.58	H	57.51	-37.69	-27	-10.69		
18000.00	H	60.88	-34.32	-27	-7.32		

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3)EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters

Frequency: 5180

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5535.05	V	45.84	28.33	74	54	-28.16	-25.67
12114.35	V	57.62	40.24	74	54	-16.38	-13.76
18000.00	V	62.31	44.23	74	54	-11.69	-9.77
5615.62	H	46.63	30.77	74	54	-27.37	-23.23
12149.41	H	58.55	40.24	74	54	-15.45	-13.76
17948.04	H	43.22	61.4	74	54	-30.78	-12.60

Frequency: 5200

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5631.87	V	46.01	28.84	74	54	-27.99	-25.16
11600.35	V	58.38	40.77	74	54	-15.62	-13.23
17948.04	V	61.24	43.29	74	54	-12.76	-10.71
5631.87	H	46.52	28.73	74	54	-27.48	-25.27
12184.58	H	58.38	40.88	74	54	-15.62	-13.12
17948.04	H	62.13	44.55	74	54	-11.87	-9.45

Frequency: 5240

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5090.01	V	46.42	28.16	74	54	-27.58	-25.84
12255.22	V	58.21	40.03	74	54	-15.79	-13.97
18000.00	V	61.28	43.52	74	54	-12.72	-10.48
5567.14	H	47.02	30.73	74	54	-26.98	-23.27
12184.58	H	57.51	40.19	74	54	-16.49	-13.81
18000.00	H	60.88	43.66	74	54	-13.12	-10.34

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

● ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11a Frequency(MHz): 5180

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5147.725	H	61.89	-33.31	-27	Pass
5121.465	V	61.47	-33.73	-27	Pass

Test mode: 802.11a Frequency(MHz): 5240

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5352.299	H	64.36	-30.84	-27	Pass
5353.086	V	62.59	-32.61	-27	Pass

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 (3) Correct Factor= Ant_F + Cab_L - Preamp
 (4) EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters

Test mode: 802.11a Frequency(MHz): 5180

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5147.725	V	61.89	74	44.60	54
5121.465	H	61.47	74	44.80	54

Test mode: 802.11a Frequency(MHz): 5240


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
5352.299	V	64.36	74	47.20	54
5353.086	H	62.59	74	46.50	54

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 (3) Correct Factor= Ant_F + Cab_L - Preamp
 (4)Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

U-NII - 1

Test Model Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)


802.11a 802.11n(HT20) 802.11n(HT40)
 5180 5200 5240 Ant.Pol H

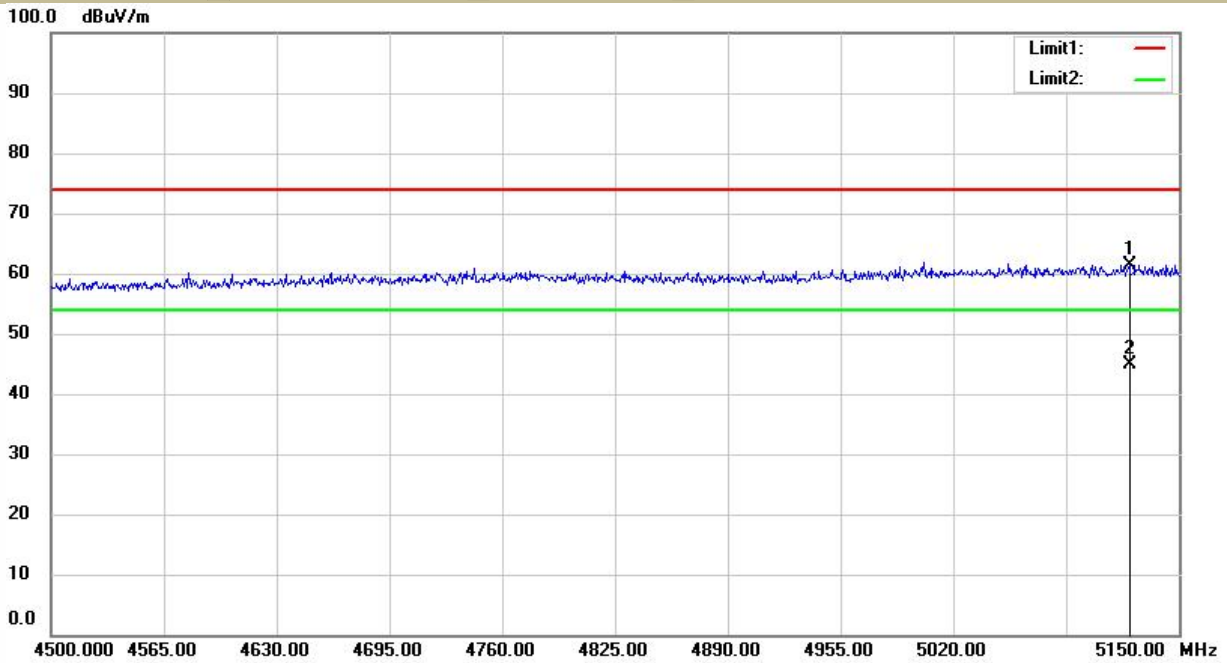

U-NII - 1

Test Model Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)


802.11a 802.11n(HT20) 802.11n(HT40)
 5180 5200 5240 Ant.Pol V

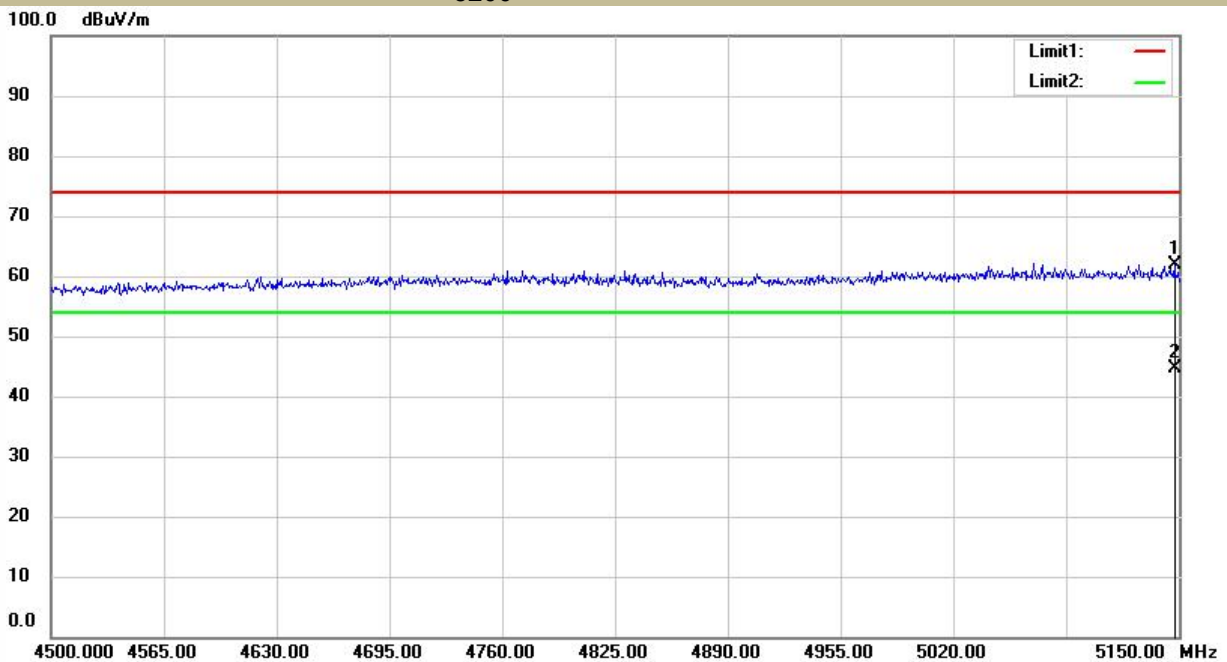

U-NII - 1

Test Model Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)


802.11a 802.11n(HT20) 802.11n(HT40)
 5180 5200 5240 Ant.Pol H

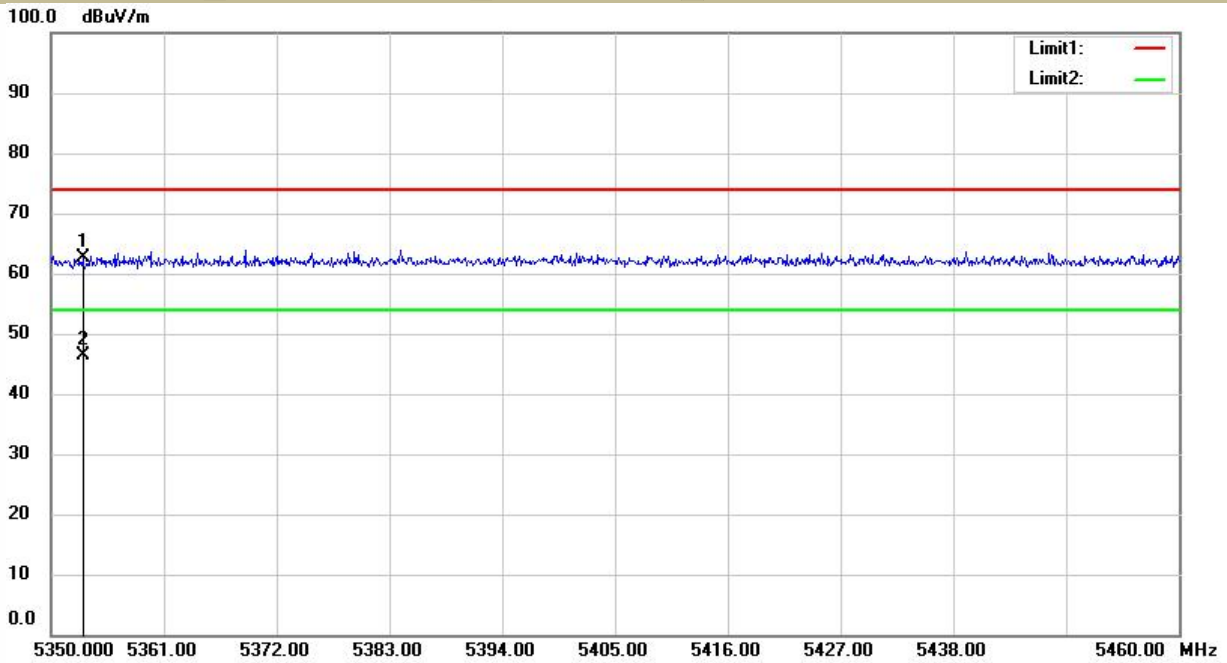

U-NII - 1

Test Model Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz)

802.11a 802.11n(HT20) 802.11n(HT40)
 5180 5200 5240 Ant.Pol V

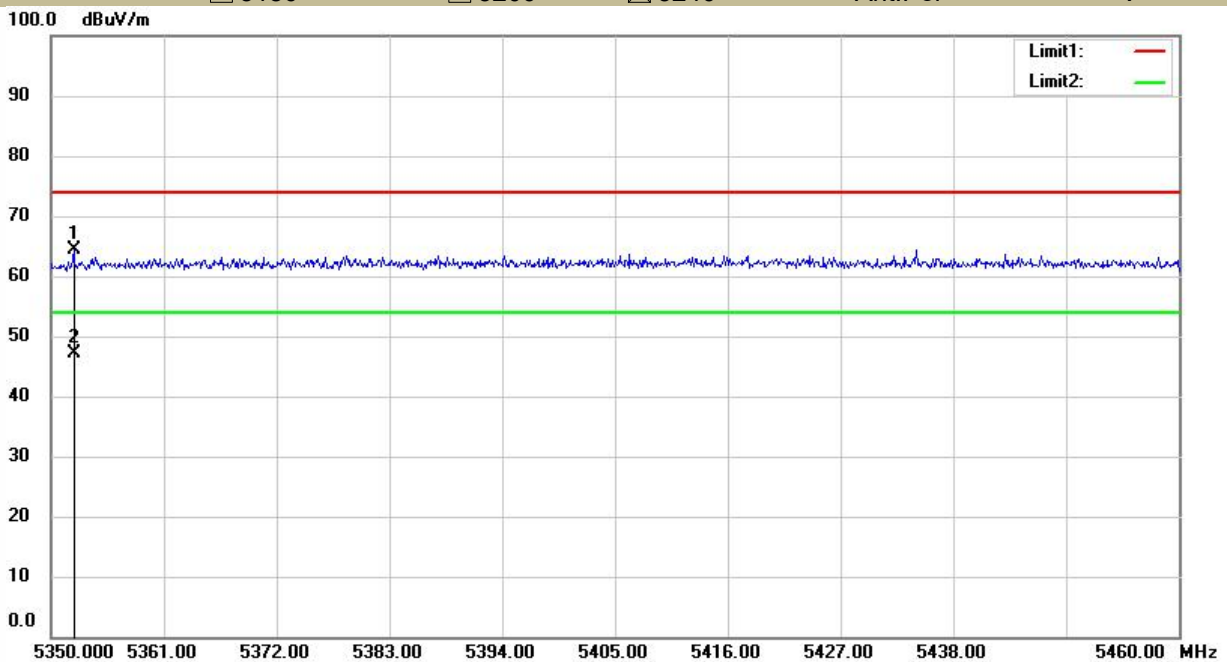

- For Undesirable radiated Spurious Emission in U-NII -3

All the modes 802.11a/n/ac has been tested and the worst result 802.11a recorded as below:

- Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Test mode: 802.11a Frequency(MHz): 5745

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5631.87	V	45.88	-49.32	-27	-22.32
12184.58	V	58.23	-36.97	-27	-9.97
18000.00	V	61.28	-33.92	-27	-6.92
5075.32	H	45.44	-49.76	-27	-22.76
12184.58	H	57.57	-37.63	-27	-10.63
17948.04	H	61.50	-33.7	-27	-6.70

Test mode: 802.11a Frequency(MHz): 5785

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5599.41	V	46.46	-48.74	-27	-21.74
12290.69	V	57.26	-37.94	-27	-10.94
18000.00	V	61.01	-34.19	-27	-7.19
5075.32	H	46.58	-48.62	-27	-21.62
12184.58	H	58.73	-36.47	-27	-9.47
17948.04	H	61.30	-33.9	-27	-6.90

Test mode: 802.11a Frequency(MHz): 5825

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
5615.62	V	46.55	-48.65	-27	-21.65
11533.48	V	58.22	-36.98	-27	-9.98
17844.59	V	61.04	-34.16	-27	-7.16
5615.62	H	45.69	-49.51	-27	-22.51
12184.58	H	58.41	-36.79	-27	-9.79
17948.04	H	60.84	-34.36	-27	-7.36

Note: (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters

Frequency: 802.11a				Frequency(MHz): 5745			
Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5631.87	V	45.88	28.76	74	54	-28.12	-25.24
12184.58	V	58.23	40.53	74	54	-15.77	-13.47
18000.00	V	61.28	43.49	74	54	-12.72	-10.51
5075.32	H	45.44	27.21	74	54	-28.56	-26.79
12184.58	H	57.57	40.16	74	54	-16.43	-13.84
17948.04	H	61.50	43.27	74	54	-12.50	-10.73

Frequency: 802.11a				Frequency(MHz): 5785			
Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5599.41	V	46.46	29.37	74	54	-27.54	-24.63
12290.69	V	57.26	31.15	74	54	-16.74	-22.85
18000.00	V	61.01	43.53	74	54	-12.99	-10.47
5075.32	H	46.58	29.71	74	54	-27.42	-24.29
12184.58	H	58.73	40.22	74	54	-15.27	-13.78
17948.04	H	61.30	43.29	74	54	-12.70	-10.71

Frequency: 802.11a				Frequency(MHz): 5825			
Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin (dB)	
		PK	AV	PK	AV	PK	AV
5615.62	V	46.55	29.85	74	54	-27.45	-24.15
11533.48	V	58.22	41.18	74	54	-15.78	-12.82
17844.59	V	61.04	44.01	74	54	-12.96	-9.99
5615.62	H	45.69	28.51	74	54	-28.31	-25.49
12184.58	H	58.41	40.33	74	54	-15.59	-13.67
17948.04	H	60.84	43.25	74	54	-13.16	-10.75

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

● Undesirable radiated Spurious Emission in band edge

Test mode: 802.11a Frequency: 5745

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5720.113	V	62.42	-32.78	27	PASS
5718.400	H	62.66	-32.54	27	PASS


Test mode: 802.11a Frequency: 5825

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5850.200	V	62.71	-32.49	27	PASS
5850.894	H	62.33	-32.87	27	PASS

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 (3) Correct Factor= Ant_F + Cab_L - Preamp
 (4) EIRP[dBm] = E[dBμV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters


U-NII -3

Test Model	Undesirable radiated <input checked="" type="checkbox"/> 802.11a	Undesirable radiated <input type="checkbox"/> 802.11n(HT20)	Spurious Emission in Band Edge <input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> 5745		Ant.Pol H

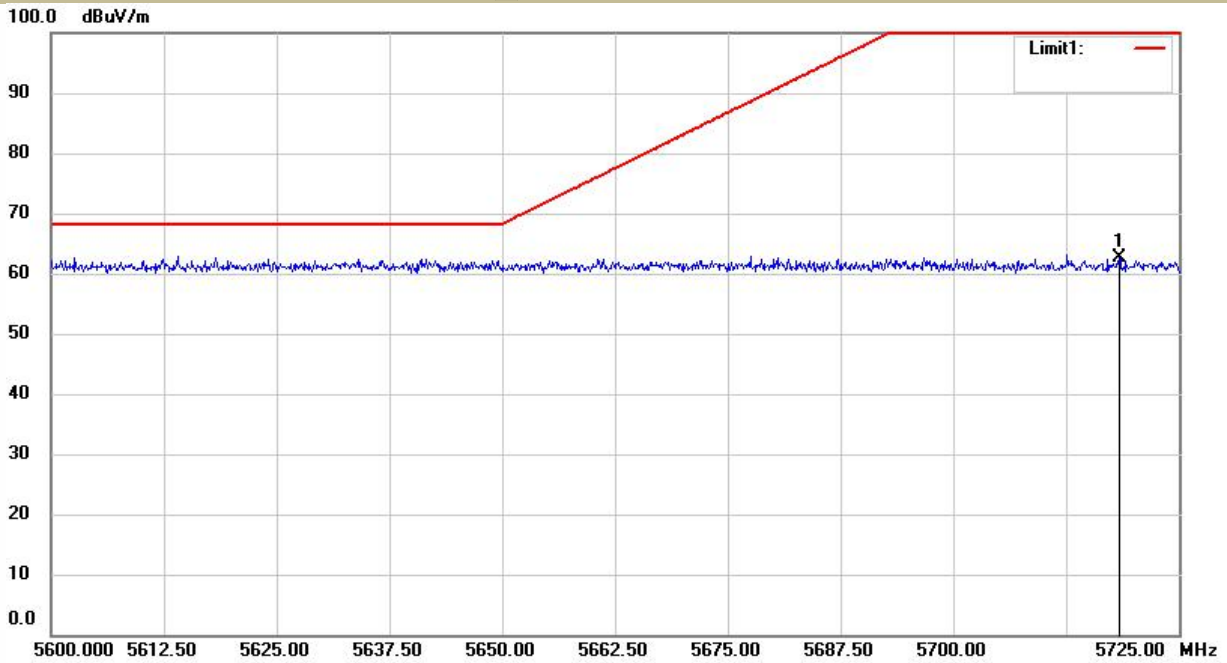

U-NII -3

Test Model	Undesirable radiated <input checked="" type="checkbox"/> 802.11a	Undesirable radiated <input type="checkbox"/> 802.11n(HT20)	Spurious Emission in Band Edge <input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> 5745		Ant.Pol V

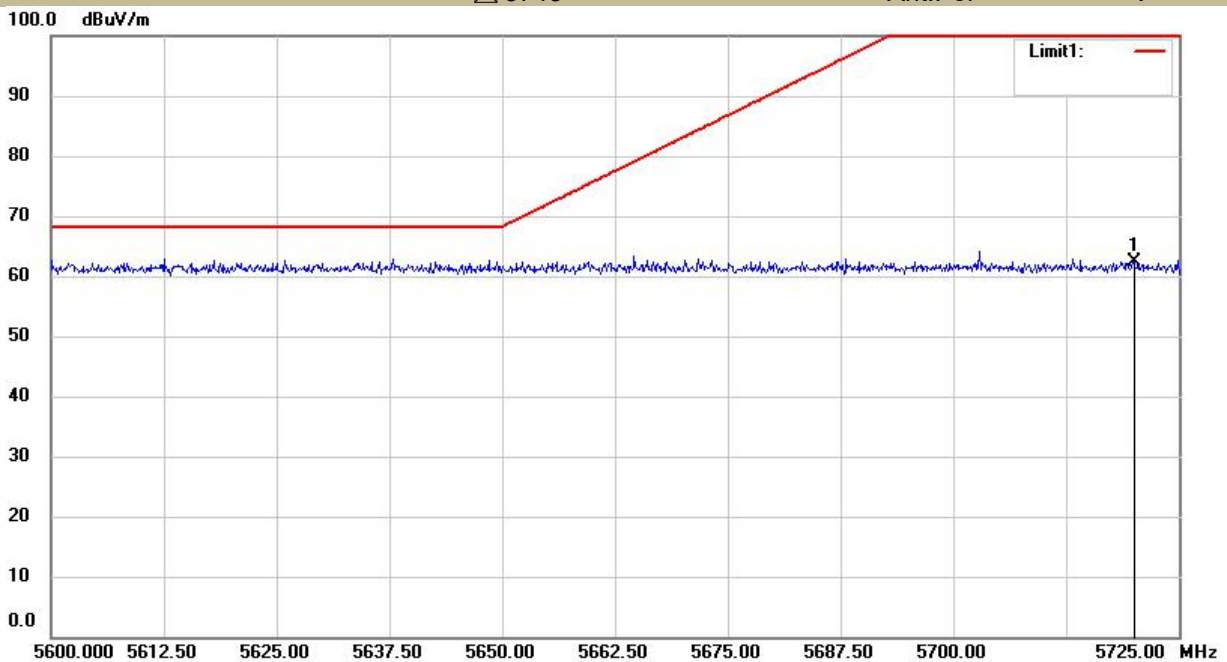


U-NII -3

Test Model Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

802.11a 802.11n(HT20) 802.11n(HT40)

5825 Ant.Pol H

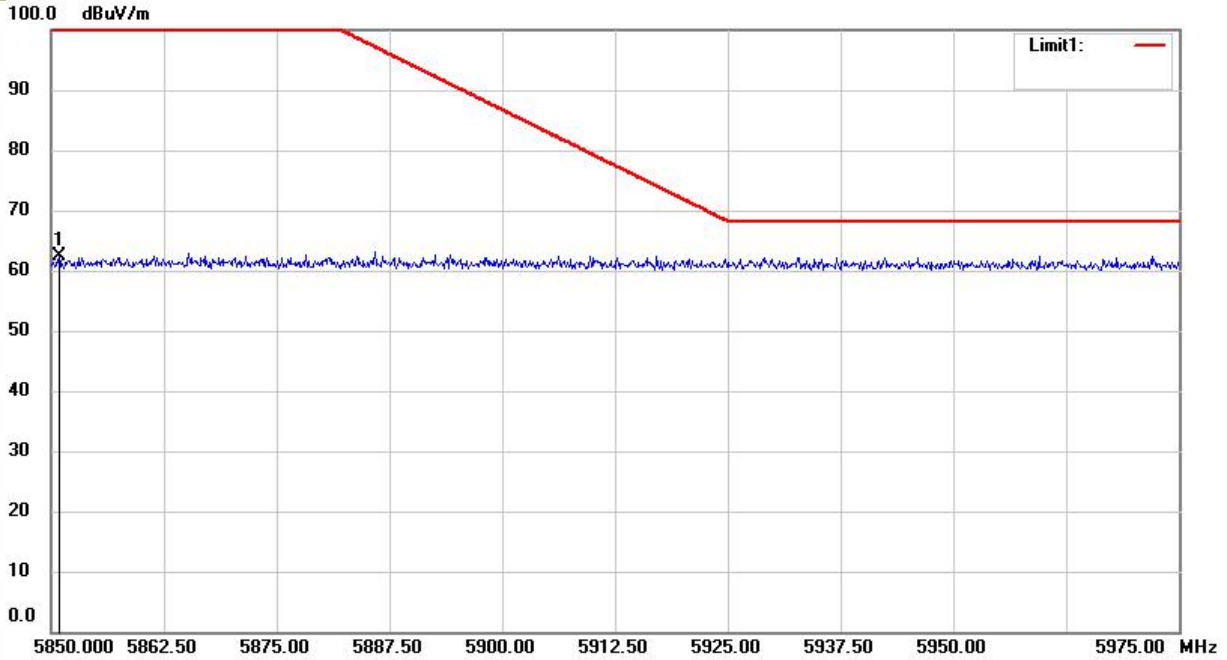


U-NII -3


Test Model Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

802.11a 802.11n(HT20) 802.11n(HT40)

5825 Ant.Pol V

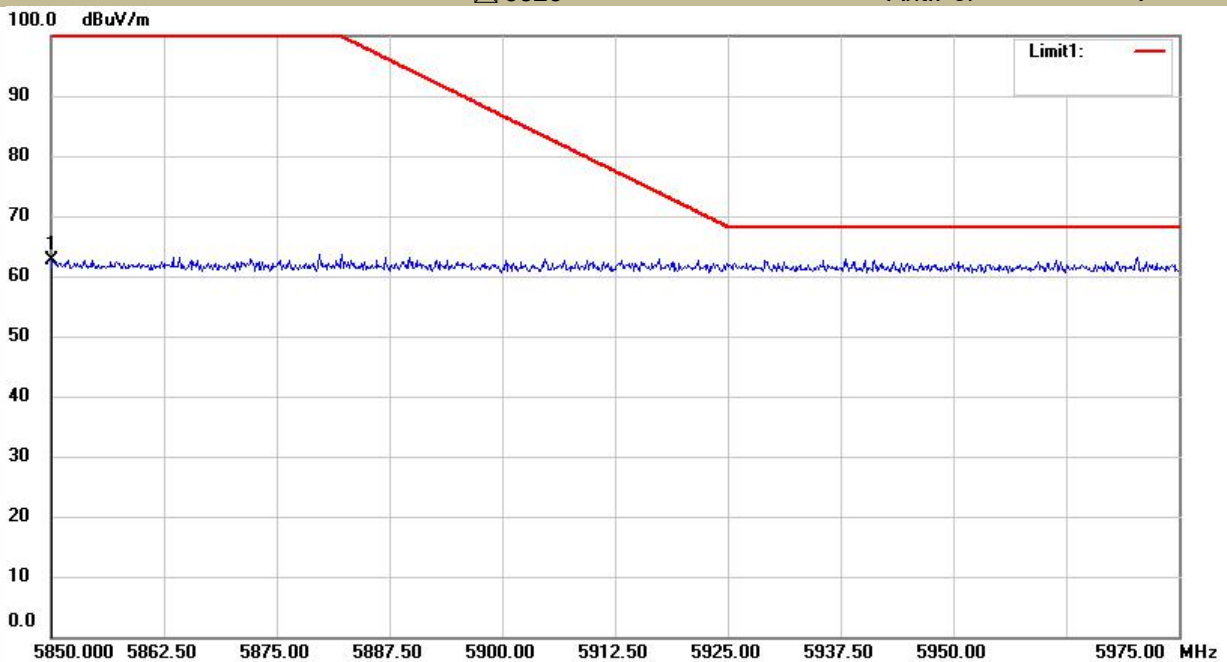

- Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)
All the modes 802.11a/n/ac has been tested and the worst result 802.11ac recorded as below:

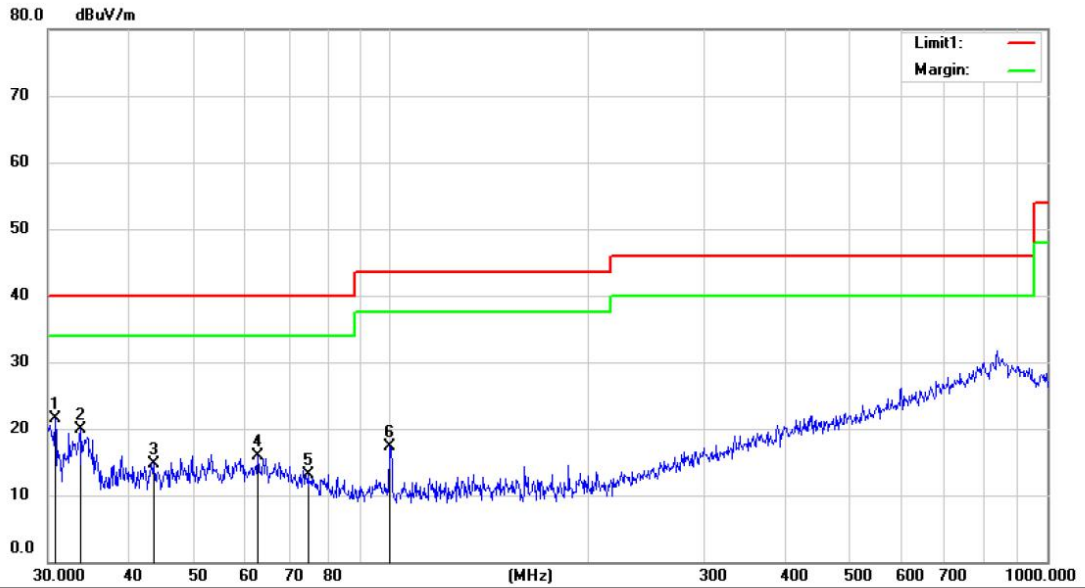


Site: 3m Chamber #1 Polarization: *Horizontal* Temperature: 23.4 C
 Limit: (RE)FCC PART 15 CLASS B Power: Humidity: 50 %
 Mode: WIFI 5G 5180
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	30.8400	35.95	-14.53	21.42	40.00	-18.58			QP	
2		33.6361	34.19	-14.20	19.99	40.00	-20.01			QP	
3		43.5440	27.34	-12.71	14.63	40.00	-25.37			QP	
4		62.7056	27.95	-12.06	15.89	40.00	-24.11			QP	
5		74.8535	27.34	-14.17	13.17	40.00	-26.83			QP	
6		99.7902	31.97	-14.76	17.21	43.50	-26.29			QP	

*:Maximum data x:Over limit !:over margin

Operator: WHZ

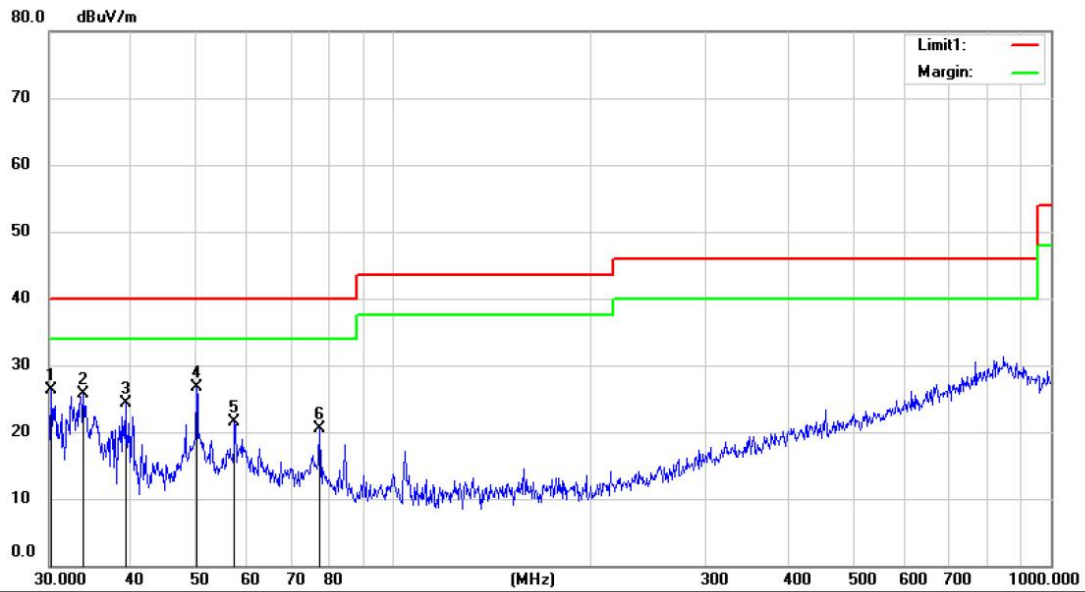

Site 3m Chamber #1

Polarization: *Vertical*

Temperature: 23.4 C

Limit: (RE)FCC PART 15 CLASS B

Power:

Humidity: 50 %


Mode:WIFI 5G 5180

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		30.2111	40.82	-14.57	26.25	40.00	-13.75	QP			
2		33.7986	39.79	-14.18	25.61	40.00	-14.39	QP			
3		39.2131	37.33	-13.06	24.27	40.00	-15.73	QP			
4	*	50.3206	38.63	-11.97	26.66	40.00	-13.34	QP			
5		57.4427	33.63	-12.08	21.55	40.00	-18.45	QP			
6		77.4230	35.04	-14.55	20.49	40.00	-19.51	QP			

*:Maximum data x:Over limit !:over margin

Operator: WHZ

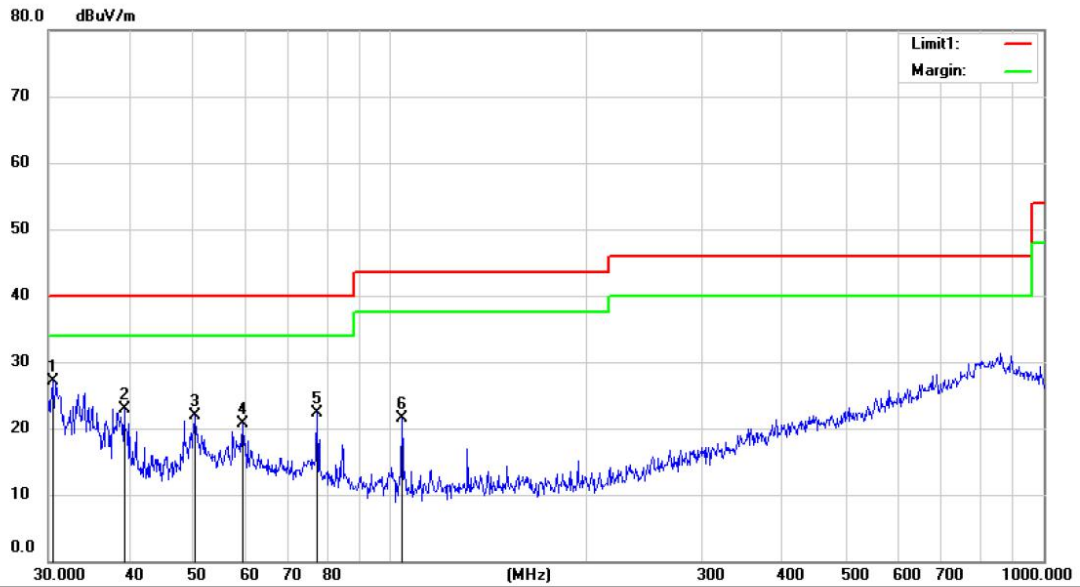

Site 3m Chamber #1 Polarization: **Vertical** Temperature: 23.4 C

Limit: (RE)FCC PART 15 CLASS B Power:

Humidity: 50 %


Mode: WIFI 5G 5200

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	30.5708	41.73	-14.54	27.19	40.00	-12.81	QP			
2		39.2820	36.01	-13.04	22.97	40.00	-17.03	QP			
3		50.2986	33.83	-11.97	21.86	40.00	-18.14	QP			
4		59.5971	32.63	-12.00	20.63	40.00	-19.37	QP			
5		77.3551	36.84	-14.54	22.30	40.00	-17.70	QP			
6		104.4445	35.83	-14.36	21.47	43.50	-22.03	QP			

*:Maximum data x:Over limit !:over margin

Operator: WHZ

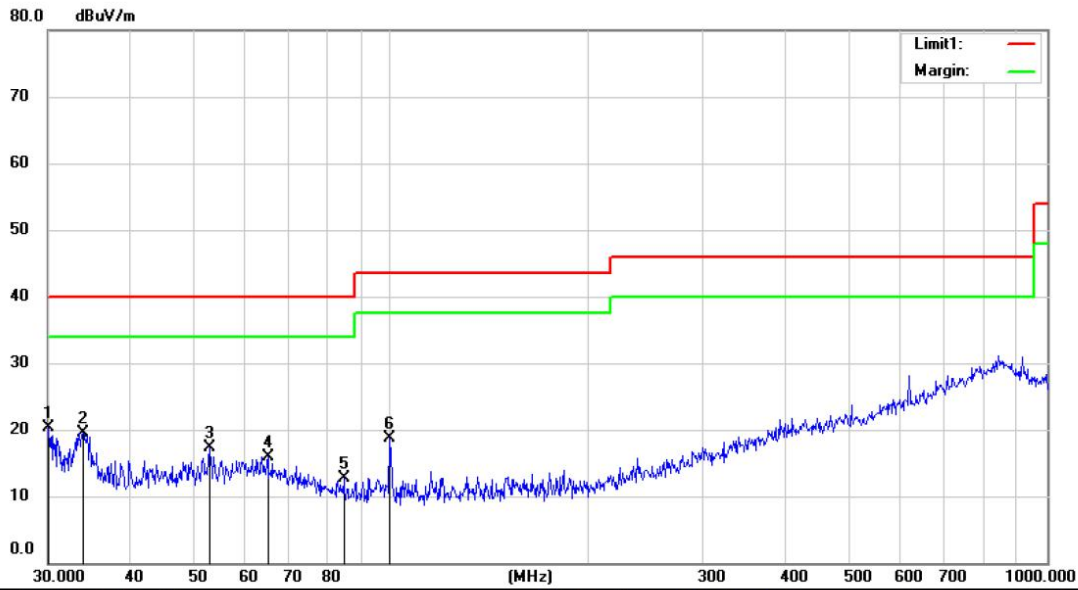

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 23.4 C

Limit: (RE)FCC PART 15 CLASS B

Power:

Humidity: 50 %


Mode:WIFI 5G 5200

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	30.1054	34.87	-14.57	20.30	40.00	-19.70	QP		
2		33.9471	33.58	-14.15	19.43	40.00	-20.57	QP		
3		52.9453	29.08	-11.85	17.23	40.00	-22.77	QP		
4		65.0004	28.05	-12.11	15.94	40.00	-24.06	QP		
5		84.8134	28.22	-15.45	12.77	40.00	-27.23	QP		
6		99.7902	33.51	-14.76	18.75	43.50	-24.75	QP		

*:Maximum data x:Over limit !:over margin

Operator: WHZ

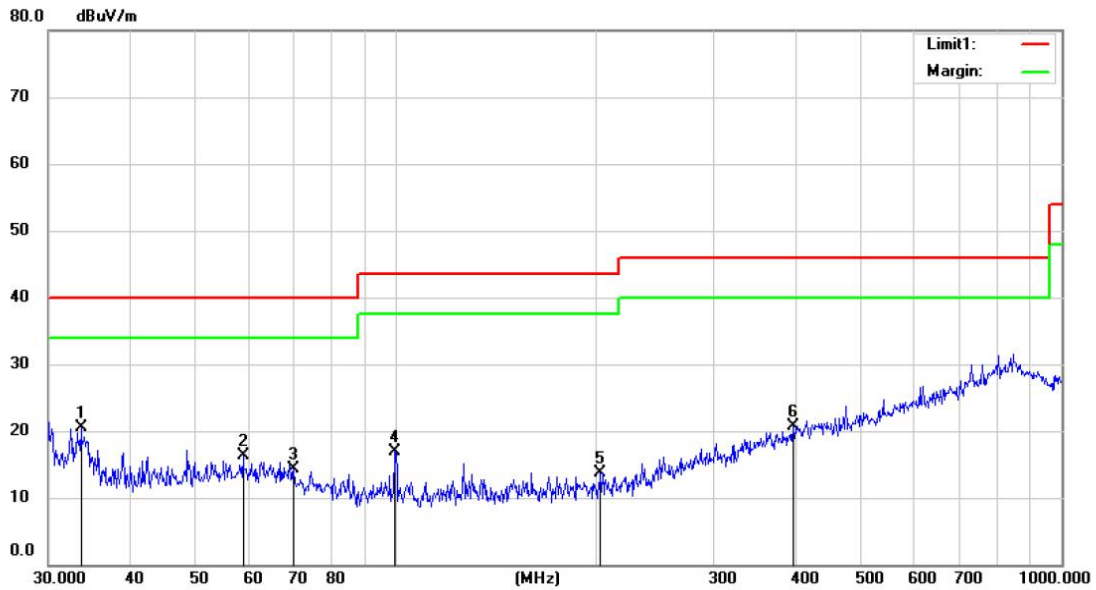


Site: 3m Chamber #1 Polarization: **Horizontal** Temperature: 23.4 C
 Limit: (RE)FCC PART 15 CLASS B Power: Humidity: 50 %
 Mode: WIFI 5G 5240
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	33.5770	34.69	-14.21	20.48	40.00	-19.52	QP		
2		58.8701	28.32	-12.05	16.27	40.00	-23.73	QP		
3		70.3057	27.46	-13.22	14.24	40.00	-25.76	QP		
4		99.7902	31.71	-14.76	16.95	43.50	-26.55	QP		
5		203.0772	27.42	-13.66	13.76	43.50	-29.74	QP		
6		395.0276	27.33	-6.54	20.79	46.00	-25.21	QP		

*:Maximum data x:Over limit !:over margin

Operator: WHZ

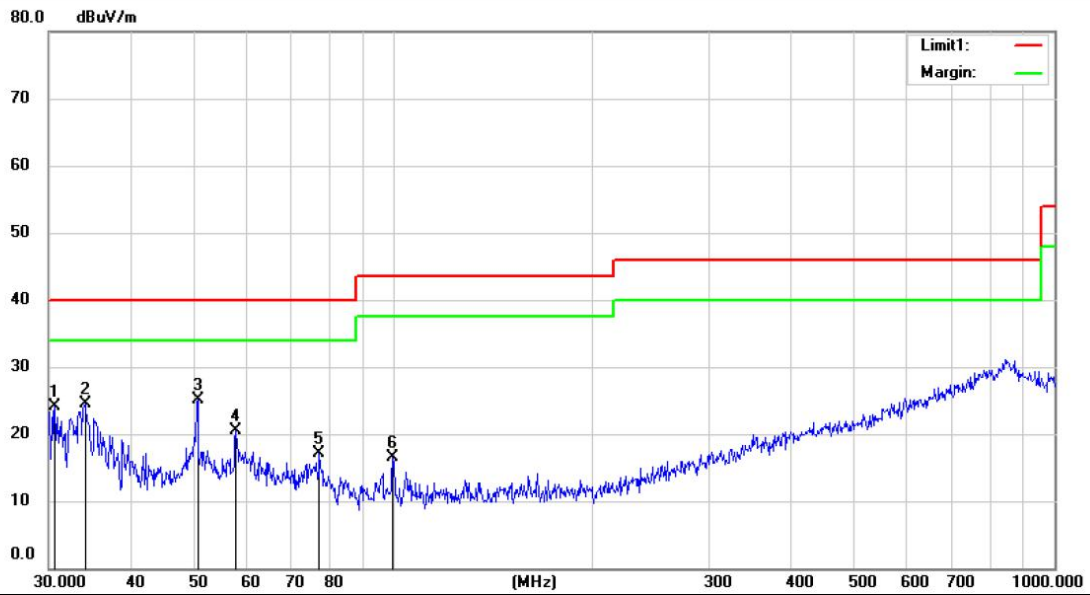

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 23.4 C

Limit: (RE)FCC PART 15 CLASS B

Power:

Humidity: 50 %

Mode:WIFI 5G 5240

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.6380	38.56	-14.54	24.02	40.00	-15.98			QP
2		34.1112	38.67	-14.11	24.56	40.00	-15.44			QP
3	*	50.4531	37.02	-11.95	25.07	40.00	-14.93			QP
4		57.6192	32.58	-12.08	20.50	40.00	-19.50			QP
5		77.2534	31.65	-14.52	17.13	40.00	-22.87			QP
6		99.8340	31.26	-14.76	16.50	43.50	-27.00			QP

*:Maximum data x:Over limit !:over margin

Operator: WHZ

8.6 POWER LINE CONDUCTED EMISSIONS

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration


Test according to clause 6.3 conducted emission test setup

8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.


8.6.5 Test Results

PASS

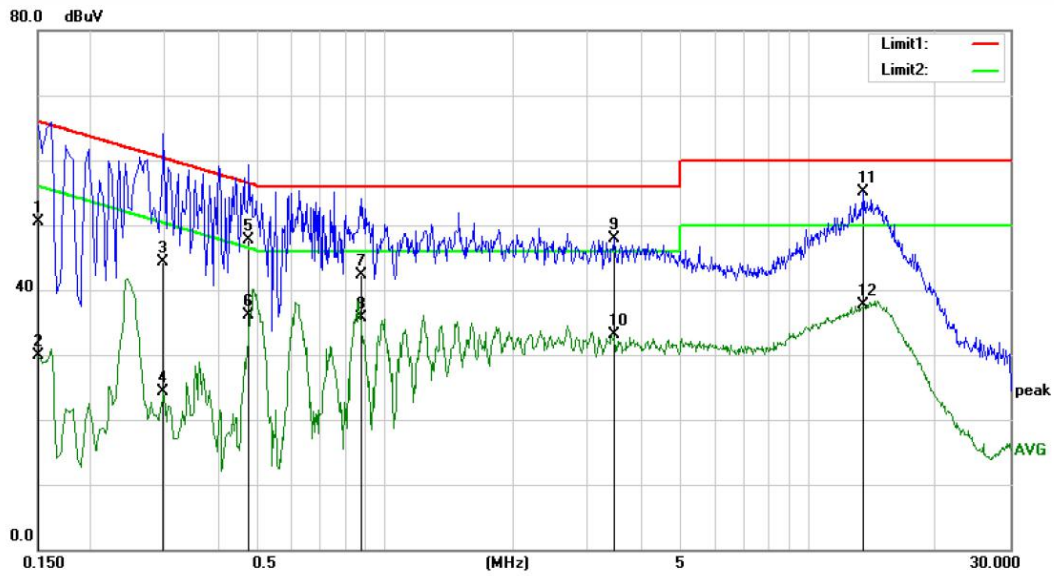

Site Conduction #2 Phase: **N** Temperature: 25.3
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 37 %
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	40.08	10.52	50.60	66.00	-15.40	QP	
2		0.1500	19.46	10.52	29.98	56.00	-26.02	AVG	
3		0.2980	33.91	10.39	44.30	60.30	-16.00	QP	
4		0.2980	13.95	10.39	24.34	50.30	-25.96	AVG	
5		0.4740	37.37	10.33	47.70	56.44	-8.74	QP	
6		0.4740	25.86	10.33	36.19	46.44	-10.25	AVG	
7		0.8780	32.05	10.35	42.40	56.00	-13.60	QP	
8		0.8780	25.26	10.35	35.61	46.00	-10.39	AVG	
9		3.4740	37.47	10.40	47.87	56.00	-8.13	QP	
10		3.4740	22.71	10.40	33.11	46.00	-12.89	AVG	
11	*	13.5100	44.40	10.66	55.06	60.00	-4.94	QP	
12		13.5100	26.95	10.66	37.61	50.00	-12.39	AVG	

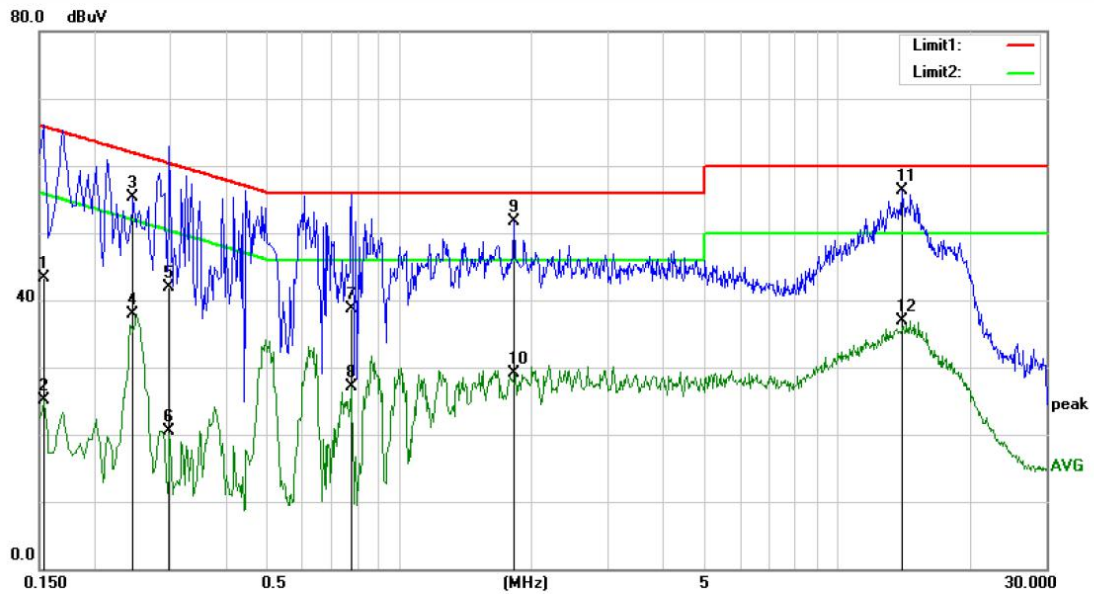

Site Conduction #2

Phase: **L1**

Temperature: 25.3

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 37 %

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1540	32.78	10.52	43.30	65.78	-22.48	QP	
2		0.1540	14.52	10.52	25.04	55.78	-30.74	AVG	
3		0.2460	44.93	10.41	55.34	61.89	-6.55	QP	
4		0.2460	27.52	10.41	37.93	51.89	-13.96	AVG	
5		0.2980	31.61	10.39	42.00	60.30	-18.30	QP	
6		0.2980	10.12	10.39	20.51	50.30	-29.79	AVG	
7		0.7780	28.38	10.32	38.70	56.00	-17.30	QP	
8		0.7780	16.83	10.32	27.15	46.00	-18.85	AVG	
9		1.8260	41.46	10.32	51.78	56.00	-4.22	QP	
10		1.8260	18.78	10.32	29.10	46.00	-16.90	AVG	
11	*	14.0060	45.58	10.65	56.23	60.00	-3.77	QP	
12		14.0060	26.30	10.65	36.95	50.00	-13.05	AVG	

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS.

- The EUT has antennas: an Internal Antenna for WIFI 5G, the antenna gain is 6.88 dBi;
- Note:
- Antennas use a permanently attached antenna which is not replaceable.
 - Not using a standard antenna jack or electrical connector for antenna replacement
 - The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos.

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

----- END OF REPORT -----