

# TEST REPORT

FCC ID..... :	2A2EK-RV0300	
Test Report No..... :	TCT210617E004	
Date of issue..... :	Jul. 01, 2021	
Testing laboratory .....	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name..... :	Shenzhen Tecronic Technology Company Limited	
Address..... :	3F., Building#18, Linguosuo, Taoyuan Community, Xixiang Street, Bao'an District, Shenzhen, China	
Manufacturer's name ... :	Shenzhen Tecronic Technology Company Limited	
Address..... :	3F., Building#18, Linguosuo, Taoyuan Community, Xixiang Street, Bao'an District, Shenzhen, China	
Standard(s) .....	FCC CFR Title 47 Part 15 Subpart C	
Test item description .....	10W Rubberized Qi Wireless Charger	
Trade Mark .....	<b>ROVE</b>	
Model/Type reference..... :	RV0300	
Rating(s) .....	DC 5V/2A, DC 9V/1.8A	
Date of receipt of test item .....	Jun. 17, 2021	
Date (s) of performance of test..... :	See dates for each test case	
Tested by (+signature) ... :	Brews Xu	
Check by (+signature).... :	Beryl Zhao	
Approved by (+signature):	Tomsin	



**General disclaimer:**

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

**TABLE OF CONTENTS**

**1. General Product Information ..... 3**  
1.1. EUT description..... 3  
1.2. Model(s) list ..... 3

**2. Test Result Summary ..... 4**

**3. General Information..... 5**  
3.1. Test environment and mode ..... 5  
3.2. Description of Support Units ..... 5

**4. Facilities and Accreditations ..... 6**  
4.1. Facilities ..... 6  
4.2. Location ..... 6  
4.3. Measurement Uncertainty ..... 6

**5. Test Results and Measurement Data ..... 7**  
5.1. Antenna requirement ..... 7  
5.2. Conducted Emission..... 8  
5.3. Radiated Field Strength and Spurious Emission Measurement ..... 12

**Appendix A: Photographs of Test Setup**  
**Appendix B: Photographs of EUT**

## 1. General Product Information

### 1.1. EUT description

Test item description .....	10W Rubberized Qi Wireless Charger
Model/Type reference.....	RV0300
Sample Number.....	TCT210617E004 -0101
Operation Frequency .....	125.37kHz - 160.58kHz
Modulation Technology .....	Load modulation
Antenna Type.....	Inductive loop coil Antenna
Rating(s) .....	DC 5V/2A, DC 9V/1.8A
Remark.....	/

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

### 1.2. Model(s) list

None.

## 2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209(a)(f)	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 3. General Information

#### 3.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	25.0 °C	25.0 °C
Humidity:	55 % RH	55 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Mode:		
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations.	

The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case( Z axis) are shown in Test Results of the following pages. All types of input and output have been tested. The worst mode charging(9V/1.67A) and discharging(10w) at the same time are shown in this report.

#### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Mobile Phone	SM-G9350	R28HA2ER3GT	/	SAMSUNG
Adapter	EP-TA20CBC	R37HAEY0DT1RT3	/	SAMSUNG

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 4. Facilities and Accreditations

### 4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

### 4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

### 4.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 3.10$ dB
2	RF power, conducted	$\pm 0.12$ dB
3	Spurious emissions, conducted	$\pm 0.11$ dB
4	All emissions, radiated(<1 GHz)	$\pm 4.56$ dB
5	All emissions, radiated(1 GHz - 18 GHz)	$\pm 4.22$ dB
6	All emissions, radiated(18 GHz- 40 GHz)	$\pm 4.36$ dB

## 5. Test Results and Measurement Data

### 5.1. Antenna requirement

**Standard requirement:**


FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**E.U.T Antenna:**

The antenna is inductive loop coil antenna which permanently attached.

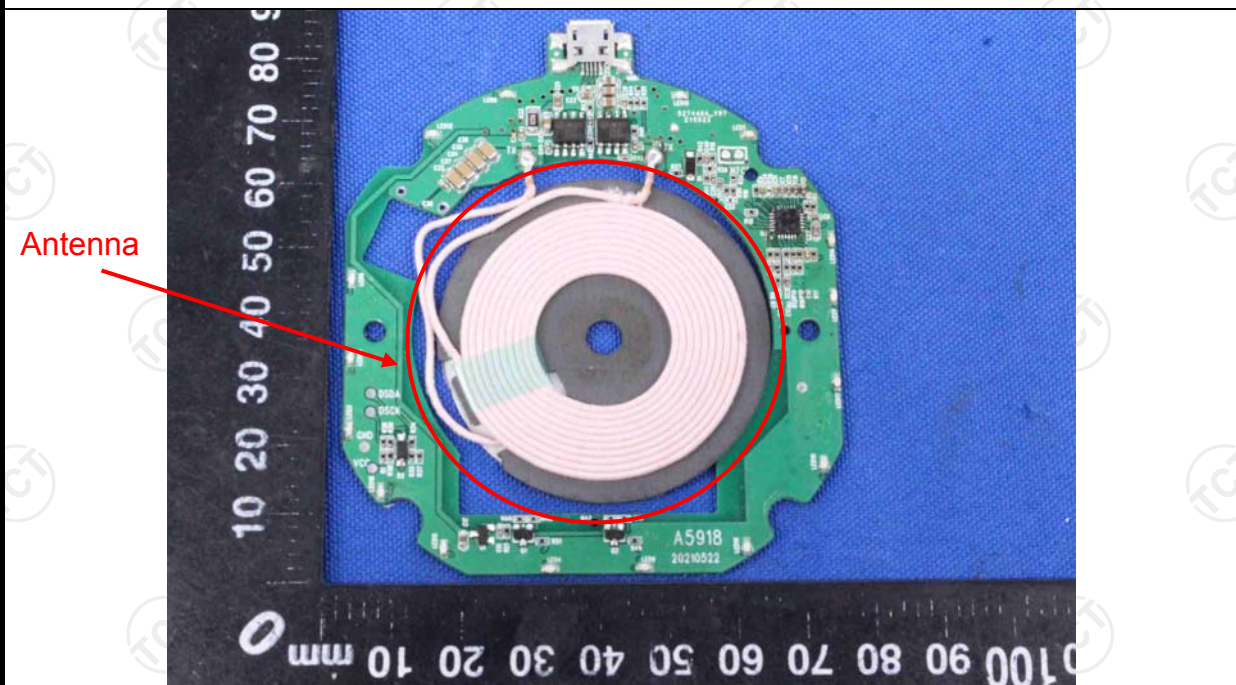

## 5.2. Conducted Emission

### 5.2.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.10:2013														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
<b>Test Mode:</b>	Charging + Transmitting Mode														
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>														
<b>Test Result:</b>	PASS														


**5.2.2. Test Instruments**

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	R&S	ESCI3	100898	Jul. 27, 2021
LISN-2	Schwarzbeck	NSLK 8126	8126453	Sep. 11, 2021
Line-5	TCT	CE-05	N/A	Sep. 02, 2021
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

5.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

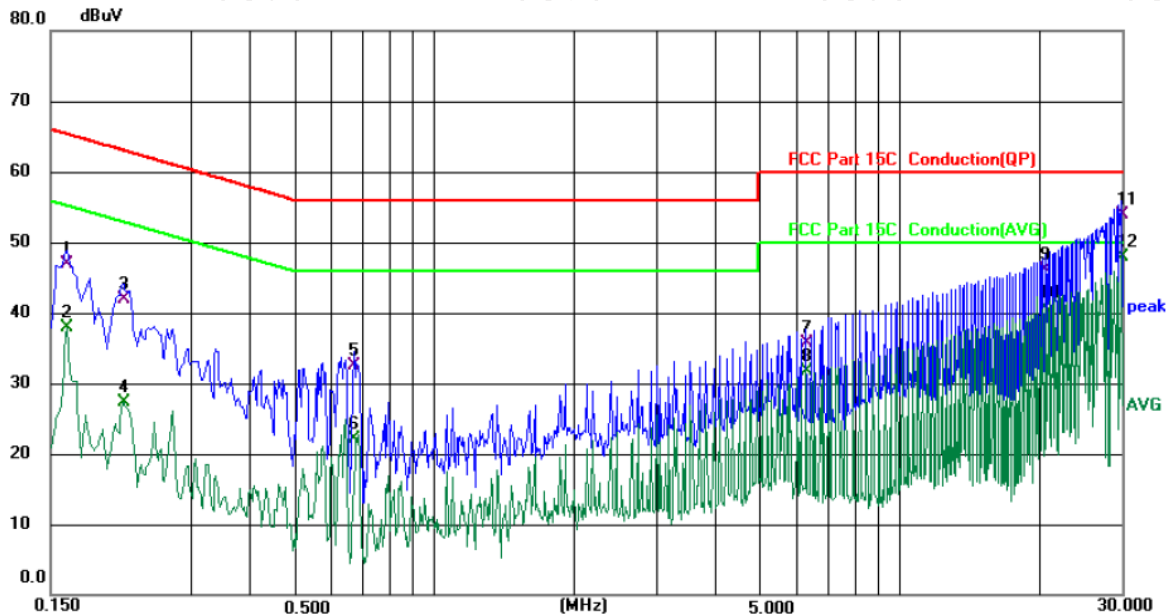


Site: \_\_\_\_\_ Phase: **L1** Temperature: 27.6 (°C)  
 Limit: FCC Part 15C Conduction(QP) Power: \_\_\_\_\_ Humidity: 45 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	37.34	9.60	46.94	65.36	-18.42	QP	
2		0.1620	28.31	9.60	37.91	55.36	-17.45	AVG	
3		0.2140	32.60	9.39	41.99	63.05	-21.06	QP	
4		0.2140	18.01	9.39	27.40	53.05	-25.65	AVG	
5		0.6740	23.30	9.24	32.54	56.00	-23.46	QP	
6		0.6740	12.89	9.24	22.13	46.00	-23.87	AVG	
7		6.3020	26.10	9.62	35.72	60.00	-24.28	QP	
8		6.3020	22.18	9.62	31.80	50.00	-18.20	AVG	
9		20.5500	36.10	10.08	46.18	60.00	-13.82	QP	
10		20.5500	30.54	10.08	40.62	50.00	-9.38	AVG	
11		29.8660	43.80	10.02	53.82	60.00	-6.18	QP	
12	*	29.8660	37.89	10.02	47.91	50.00	-2.09	AVG	

**Note:**

- Freq. = Emission frequency in MHz
- Reading level (dBuV) = Receiver reading
- Corr. Factor (dB) = LISN factor + Cable loss
- Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)
- Limit (dBuV) = Limit stated in standard
- Margin (dB) = Measurement (dBuV) – Limits (dBuV)
- Q.P. =Quasi-Peak
- AVG =average
- \* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

## Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

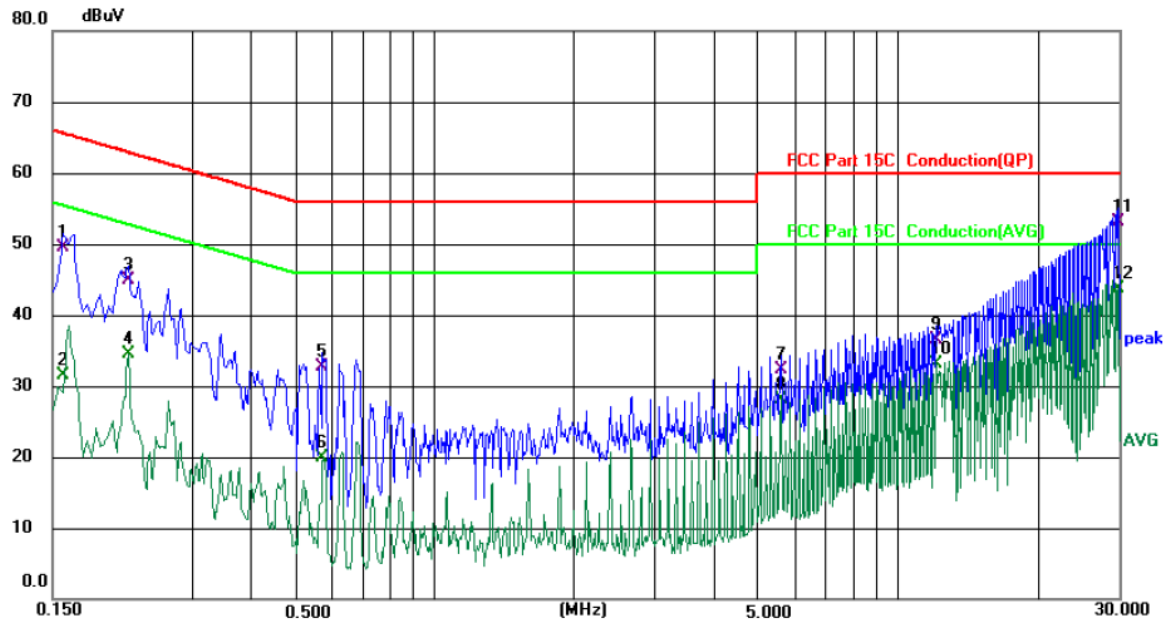

Site: \_\_\_\_\_ Phase: **N** Temperature: 27.6 (°C)  
 Limit: FCC Part 15C Conduction(QP) Power: \_\_\_\_\_ Humidity: 45 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	39.90	9.60	49.50	65.57	-16.07	QP	
2		0.1580	21.86	9.60	31.46	55.57	-24.11	AVG	
3		0.2179	35.60	9.33	44.93	62.90	-17.97	QP	
4		0.2179	25.23	9.33	34.56	52.90	-18.34	AVG	
5		0.5738	23.50	9.27	32.77	56.00	-23.23	QP	
6		0.5738	10.68	9.27	19.95	46.00	-26.05	AVG	
7		5.5939	22.70	9.57	32.27	60.00	-27.73	QP	
8		5.5939	18.58	9.57	28.15	50.00	-21.85	AVG	
9		12.1219	26.70	9.75	36.45	60.00	-23.55	QP	
10		12.1219	23.38	9.75	33.13	50.00	-16.87	AVG	
11		29.9700	43.10	10.05	53.15	60.00	-6.85	QP	
12	*	29.9700	33.64	10.05	43.69	50.00	-6.31	AVG	

**Note1:**


- Freq. = Emission frequency in MHz
- Reading level (dBuV) = Receiver reading
- Corr. Factor (dB) = LISN factor + Cable loss
- Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)
- Limit (dBuV) = Limit stated in standard
- Margin (dB) = Measurement (dBuV) – Limits (dBuV)
- Q.P. =Quasi-Peak    AVG =average
- \* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

**Note2:** Both 5V/2A&9V/1.8A input modes are tested, and the test data of worse mode 5V/2A be listed


### 5.3. Radiated Field Strength and Spurious Emission Measurement

#### 5.3.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.209				
<b>Test Method:</b>	ANSI C63.10: 2013				
<b>Frequency Range:</b>	9 kHz to 25 GHz				
<b>Measurement Distance:</b>	3 m				
<b>Antenna Polarization:</b>	Horizontal & Vertical				
<b>Operation mode:</b>	Refer to item 4.1				
<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
<b>Limit:</b>	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)		
	0.009-0.490	2400/F(KHz)	300		
	0.490-1.705	24000/F(KHz)	30		
	1.705-30	30	30		
	30-88	100	3		
	88-216	150	3		
	216-960	200	3		
	Above 960	500	3		
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector		
Above 1GHz	500	3	Average		
	5000	3	Peak		
<b>Test setup:</b>	For radiated emissions below 30MHz				
	<p>Distance = 3m</p> <p>0.8m</p> <p>Turn table</p> <p>1m</p> <p>Ground Plane</p> <p>Computer</p> <p>Pre-Amplifier</p> <p>Receiver</p>				
	30MHz to 1GHz				

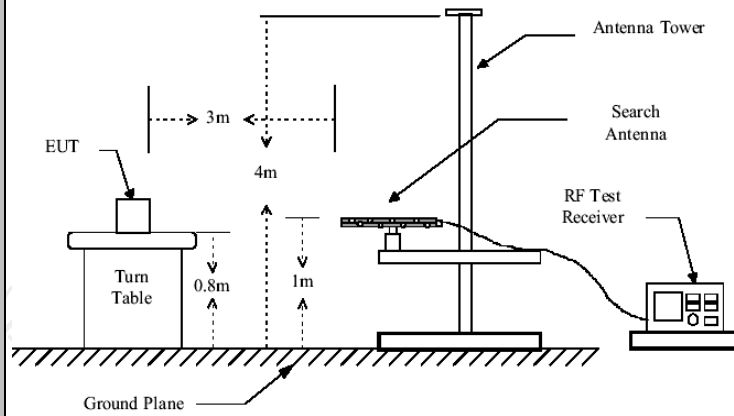

Above 1GHz

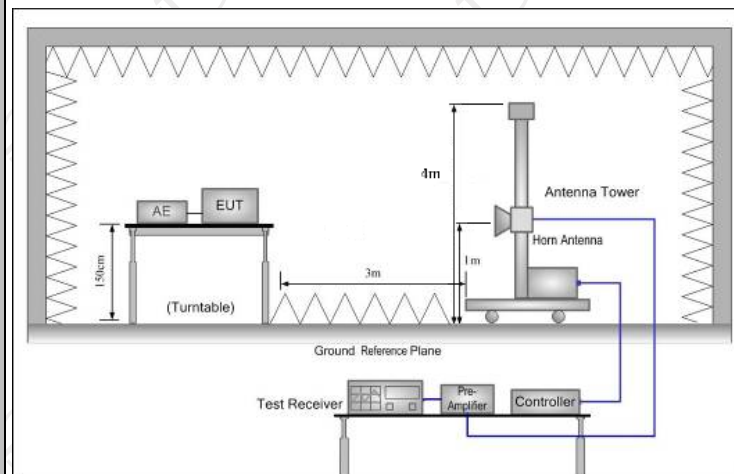

**Test Procedure:**

1. For the radiated emission test below 1GHz:  
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
- For the radiated emission test above 1GHz:  
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final


	<p>measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>4. Use the following spectrum analyzer settings:</p> <p>(1) Span shall wide enough to fully capture the emission being measured;</p> <p>(2) Set RBW=120 kHz for <math>f &lt; 1</math> GHz; <math>VBW \geq RBW</math>; Sweep = auto; Detector function = peak; Trace = max hold;</p> <p>(3) Set RBW = 1 MHz, <math>VBW = 3</math> MHz for <math>f \geq 1</math> GHz for peak measurement.</p> <p>For average measurement: <math>VBW = 10</math> Hz, when duty cycle is no less than 98 percent. <math>VBW \geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
<b>Test mode:</b>	Refer to section 4.1 for details
<b>Test results:</b>	PASS

5.3.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	ROHDE&SCHW ARZ	ESIB7	100197	Jul. 27, 2021
Spectrum Analyzer	ROHDE&SCHW ARZ	FSQ40	200061	Sep. 11, 2021
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 02, 2021
Pre-amplifier	HP	8447D	2727A05017	Sep. 02, 2021
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 05, 2022
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 04, 2022
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 04, 2022
Horn Antenna	A-INFO	LB-180400-KF	J211020657	Sep. 04, 2022
Antenna Mast	Keleto	RE-AM	N/A	N/A
Line-4	TCT	RE-high-04	N/A	Sep. 02, 2021
Line-8	TCT	RE-01	N/A	Jul. 27, 2021
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

5.3.3. Test Data

Fundamental Field Strength

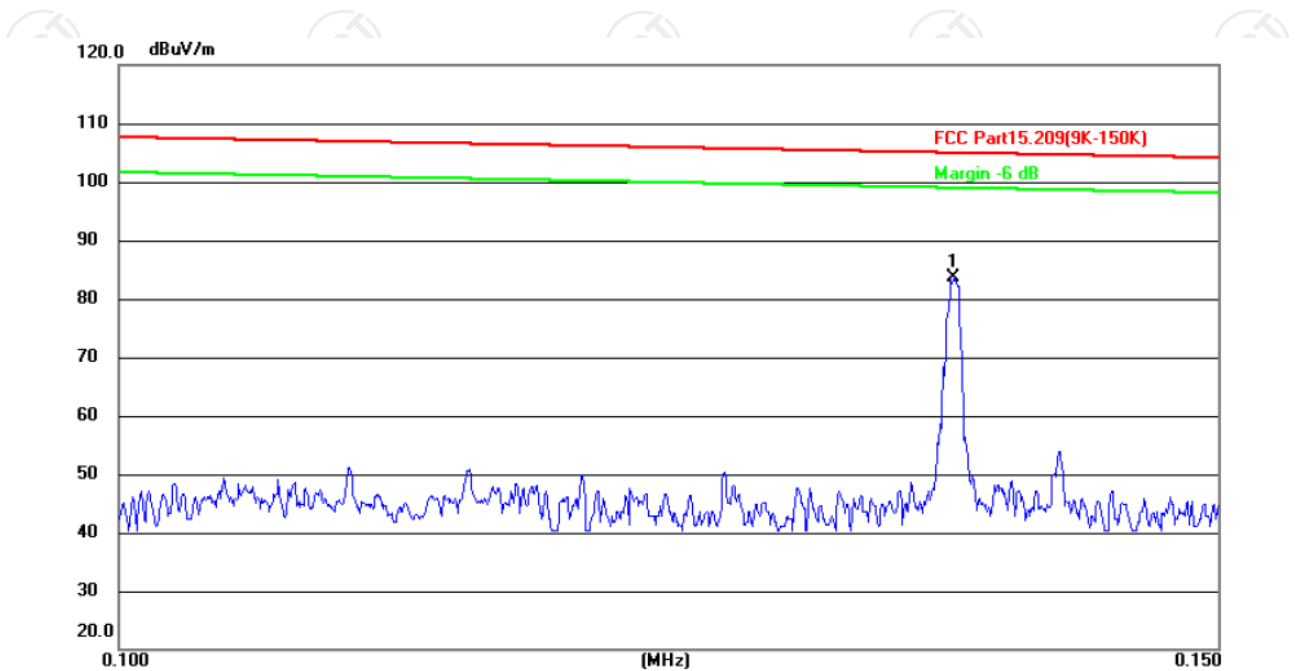

Site: Polarization: **Vertical** Temperature: 25(C)  
Limit: FCC Part15.209(9K-150K) Power: DC 5 V(Adapter Input AC 120 V/60 Hz) Humidity: 55 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	0.1360	60.96	22.64	83.60	104.95	-21.35	peak	P	

**Spurious Emission**

Please refer to following diagram for individual

**9KHz-30MHz**


9KHz-150KHz:

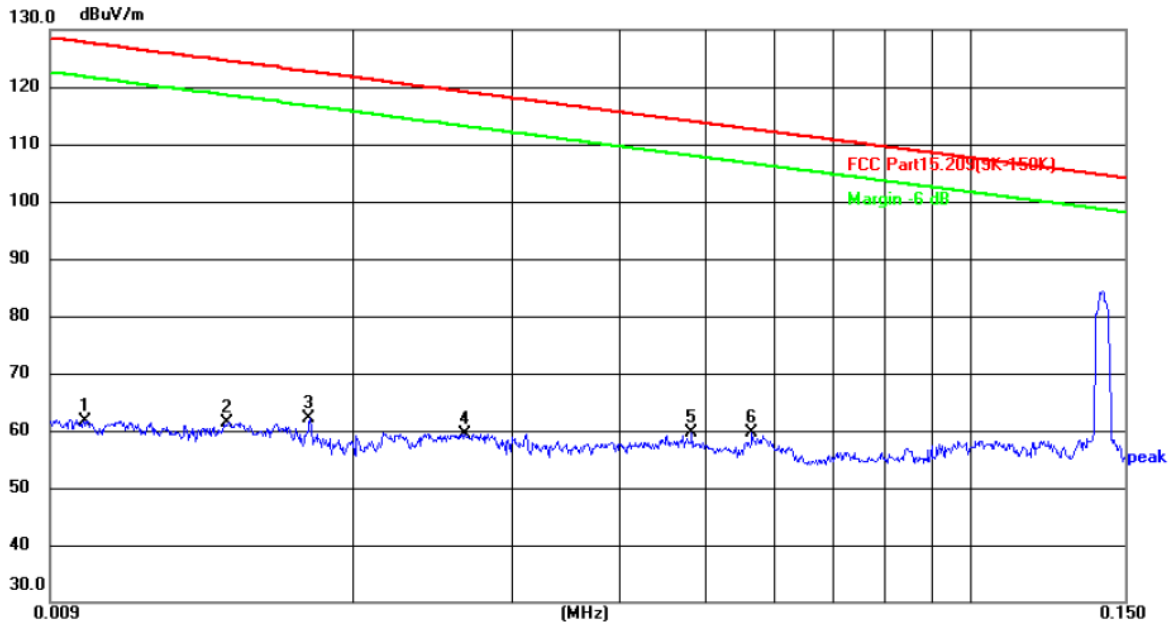

Site: Polarization: **Vertical** Temperature: 25.2(°C)  
Limit: FCC Part15.209(9K-150K) Power: DC 5 V(Adapter Input AC 120 V/60 Hz) Humidity: 55 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.0100	37.87	23.81	61.68	127.60	-65.92	peak			P	
2	0.0143	39.91	21.54	61.45	124.50	-63.05	peak			P	
3	0.0177	42.48	19.74	62.22	122.65	-60.43	peak			P	
4	0.0267	40.43	18.99	59.42	119.08	-59.66	peak			P	
5	0.0483	39.22	20.43	59.65	113.93	-54.28	peak			P	
6 *	0.0565	38.56	20.98	59.54	112.57	-53.03	peak			P	

150KHz-30MHz:

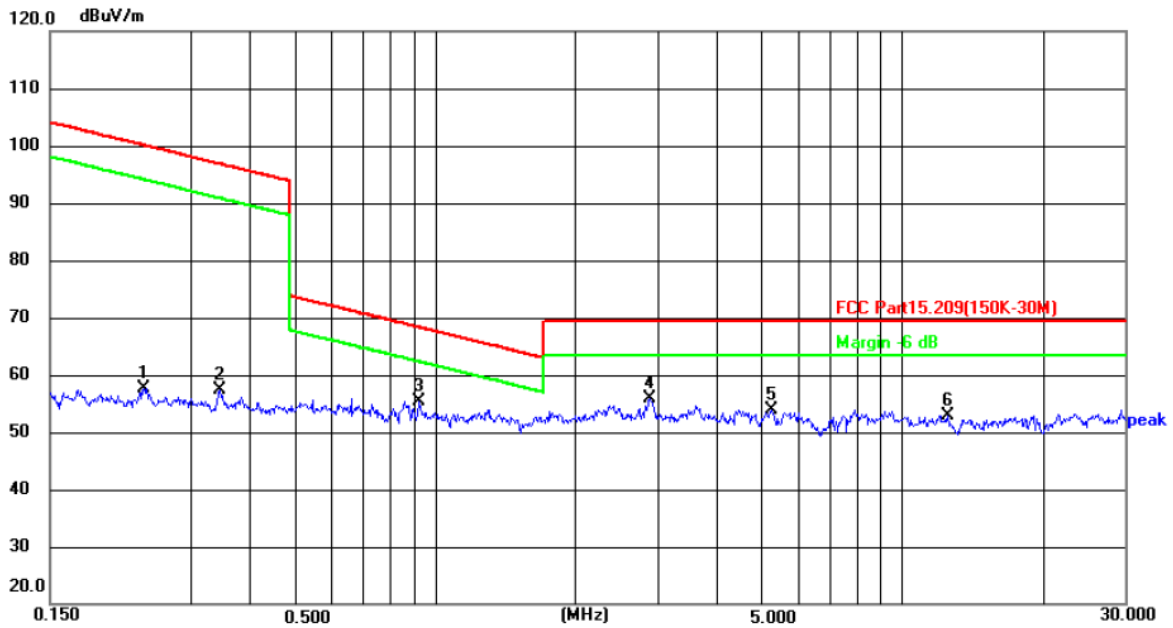

Site

Polarization: **Vertical**

Temperature: 25.2(°C)

Limit: FCC Part15.209(150K-30M)


Power: DC 5 V(Adapter Input AC 120 V/60 Hz)

Humidity: 55 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	0.2378	31.38	26.34	57.72	100.09	-42.37	peak			P	
2	0.3462	31.05	26.37	57.42	96.82	-39.40	peak			P	
3 *	0.9233	28.25	27.16	55.41	68.31	-12.90	peak			P	
4	2.8845	25.25	30.73	55.98	69.50	-13.52	peak			P	
5	5.2490	18.46	35.44	53.90	69.50	-15.60	peak			P	
6	12.5152	27.06	25.91	52.97	69.50	-16.53	peak			P	

30MHz-1GHz


Horizontal:

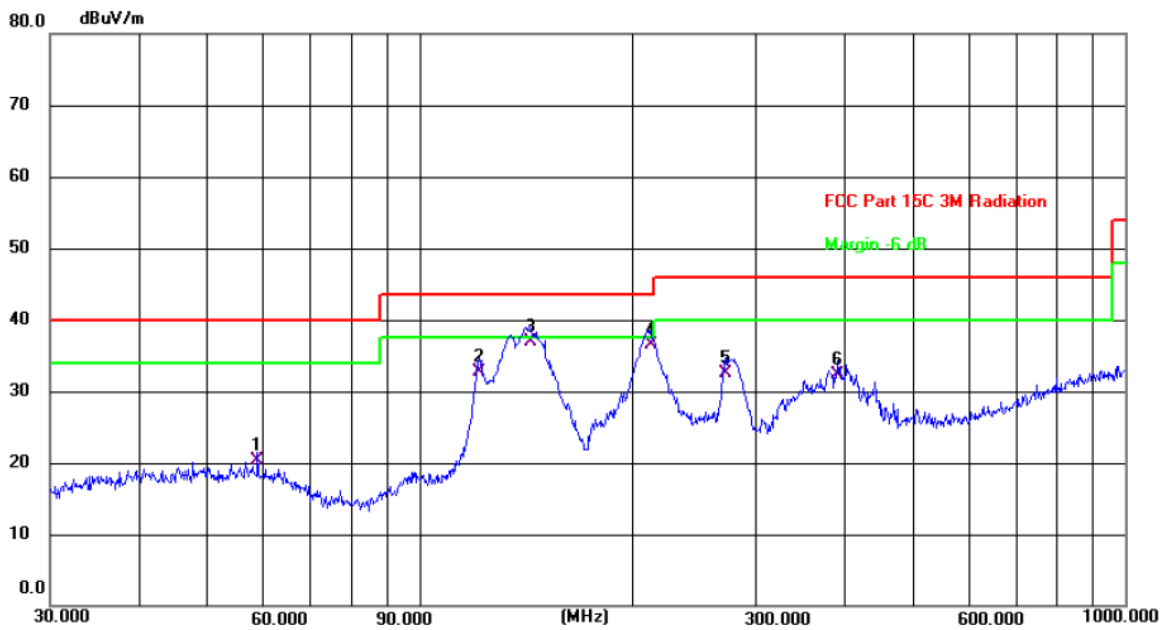

Site: Polarization: **Horizontal** Temperature: 24.5(C)  
Limit: FCC Part 15C 3M Radiation Power: DC 5 V(Adapter Input AC 120 V/60 Hz) Humidity: 54 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	59.0251	7.20	13.20	20.40	40.00	-19.60	QP	P	
2	121.5485	20.64	12.06	32.70	43.50	-10.80	QP	P	
3 *	143.3261	23.73	13.27	37.00	43.50	-6.50	QP	P	
4	212.2695	25.52	10.98	36.50	43.50	-7.00	QP	P	
5	271.3245	19.12	13.48	32.60	46.00	-13.40	QP	P	
6	392.0950	15.32	16.98	32.30	46.00	-13.70	QP	P	

Vertical:

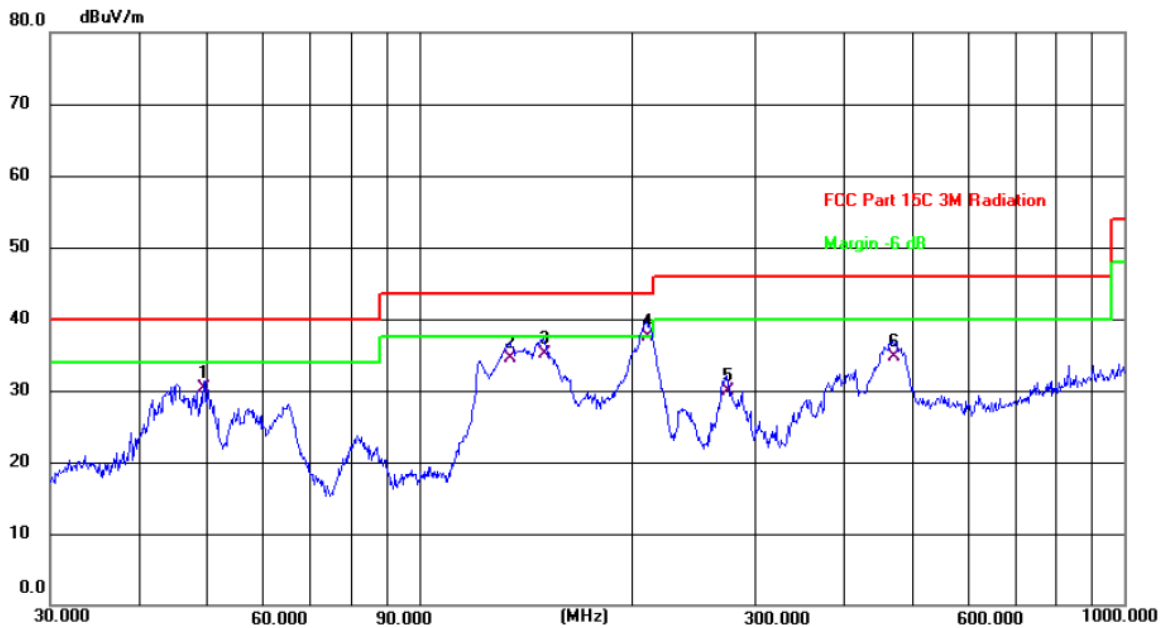

Site: Polarization: **Vertical** Temperature: 24.5(C)  
 Limit: FCC Part 15C 3M Radiation Power: DC 5 V(Adapter Input AC 120 V/60 Hz) Humidity: 54 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	49.5328	16.52	13.78	30.30	40.00	-9.70	QP	P	
2	134.5591	21.71	12.89	34.60	43.50	-8.90	QP	P	
3	150.0108	21.87	13.33	35.20	43.50	-8.30	QP	P	
4 *	210.0482	26.74	10.86	37.60	43.50	-5.90	QP	P	
5	273.2340	16.37	13.63	30.00	46.00	-16.00	QP	P	
6	470.5232	16.04	18.76	34.80	46.00	-11.20	QP	P	

**Note1:**

Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

**Note2:** Both 5V/2A&9V/1.8A input modes are tested, and the test data of worse mode 5V/2A be listed

## Appendix A: Photographs of Test Setup

Product: 10W Rubberized Qi Wireless Charger

Model: RV0300


Radiated Emission






Conducted Emission




**Appendix B: Photographs of EUT**  
**Product: 10W Rubberized QI Wireless Charger**  
**Model: RV0300**  
**External Photos**


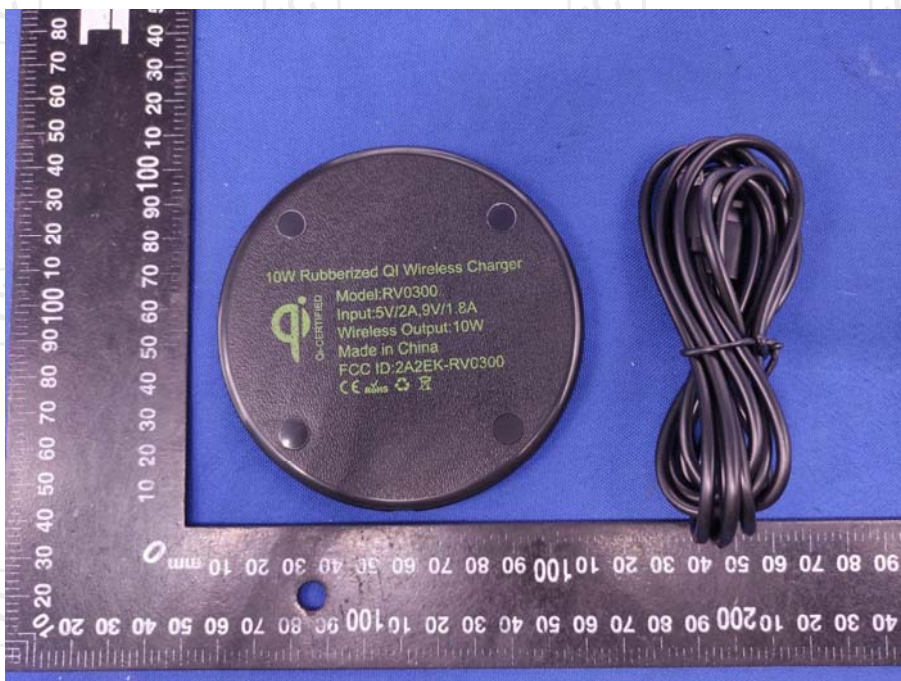



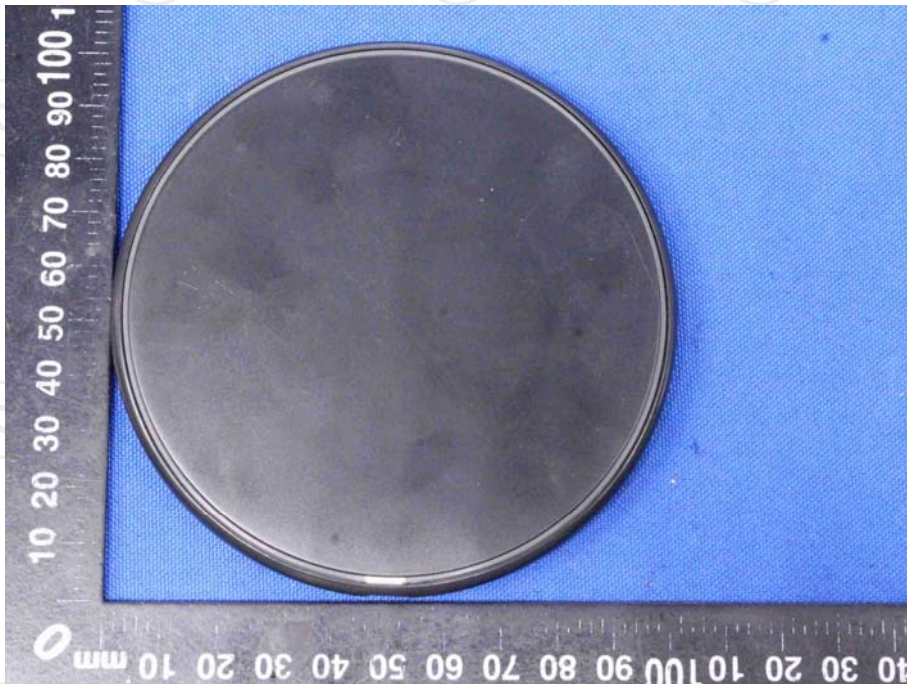


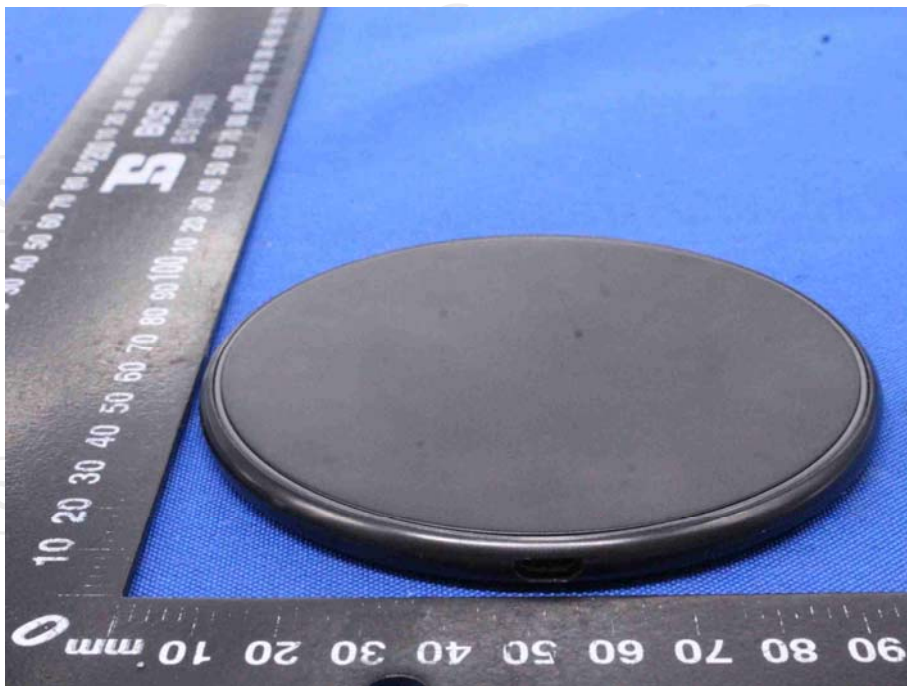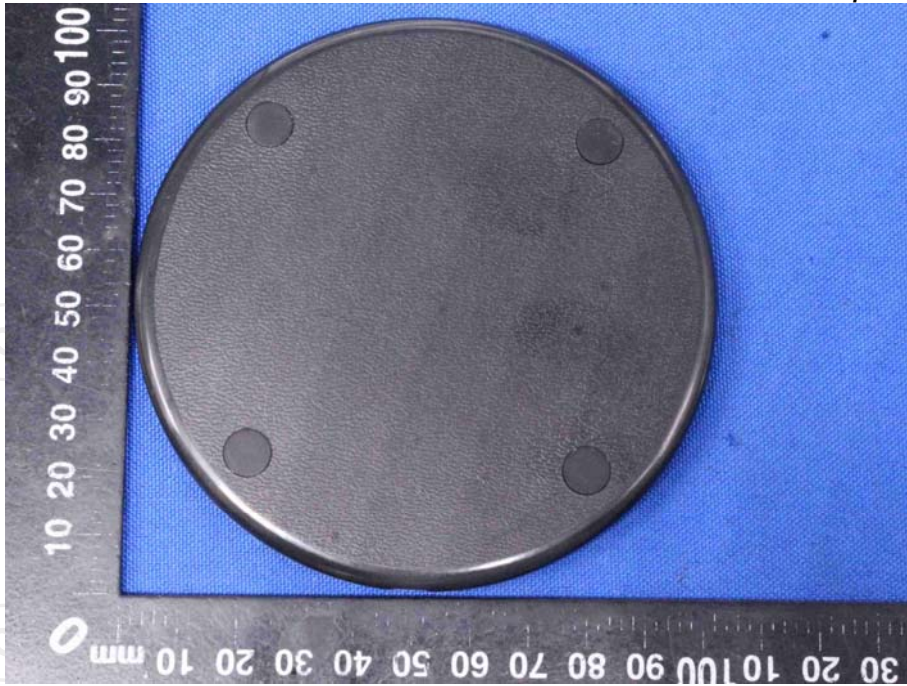


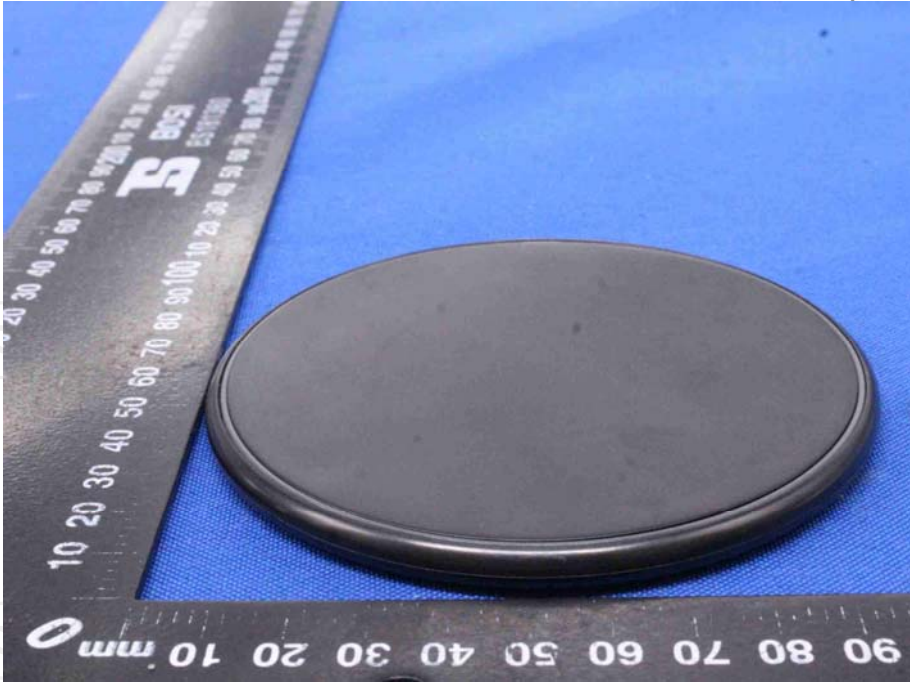

**Product: 10W Rubberized Qi Wireless Charger**  
**Model: RV0300**  
**Internal Photos**

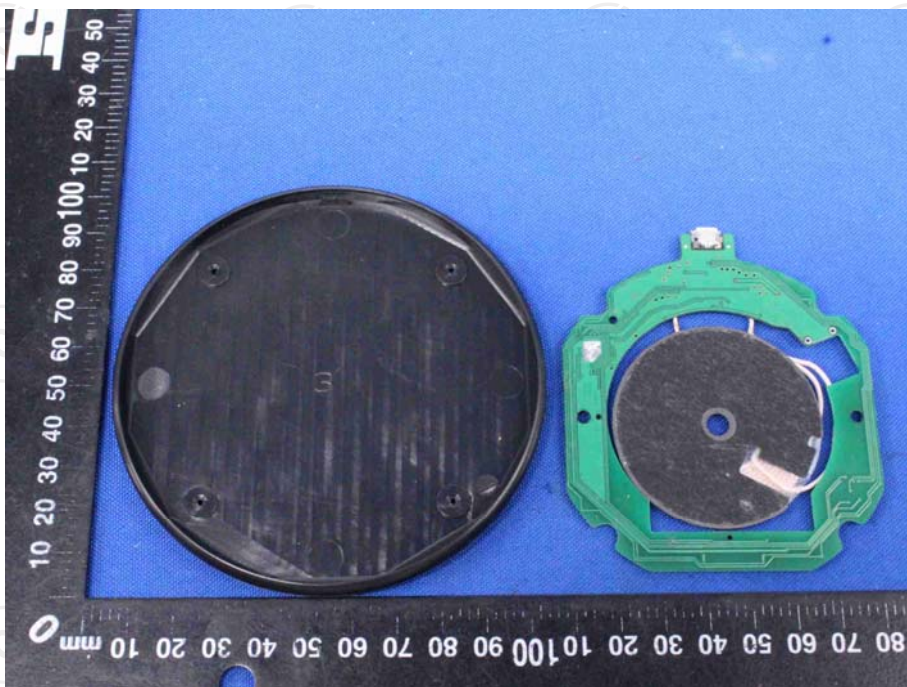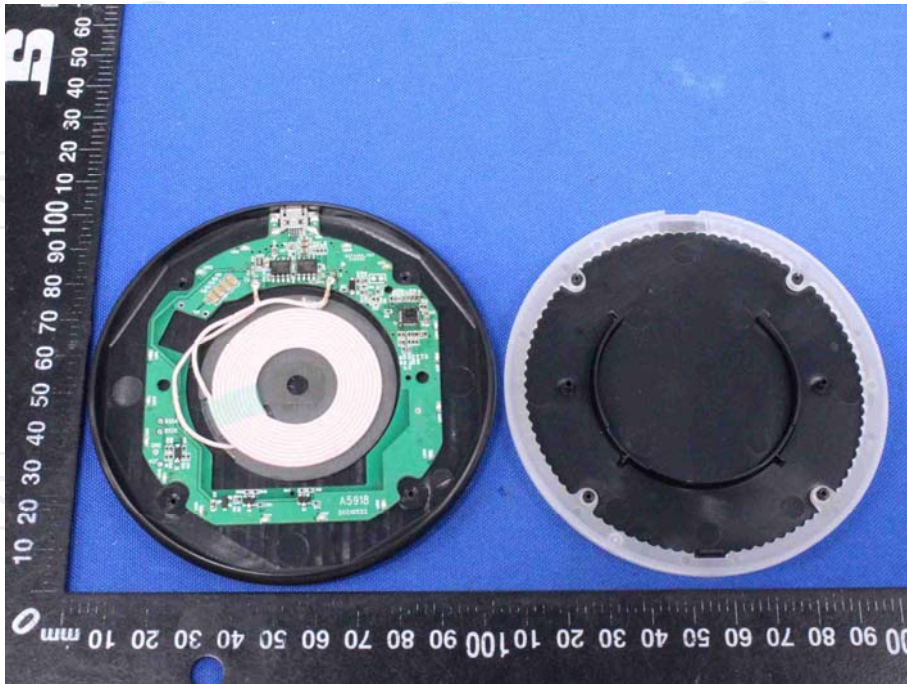

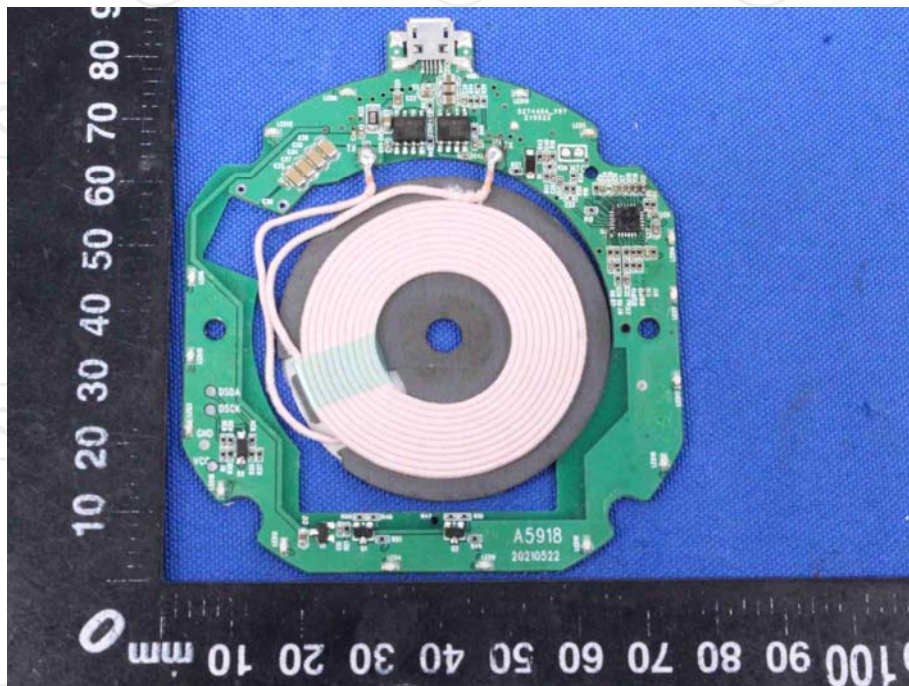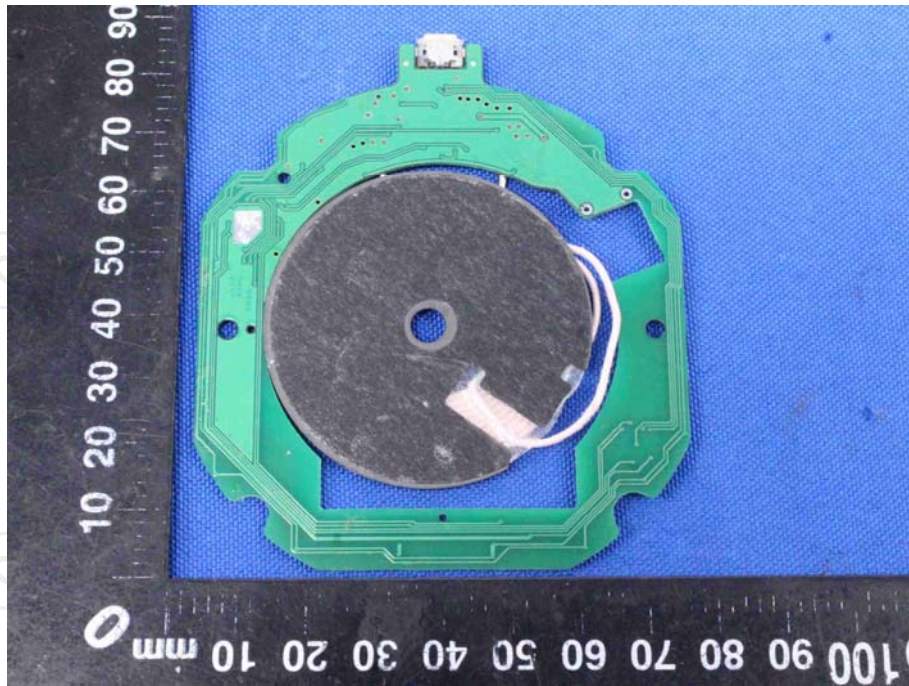

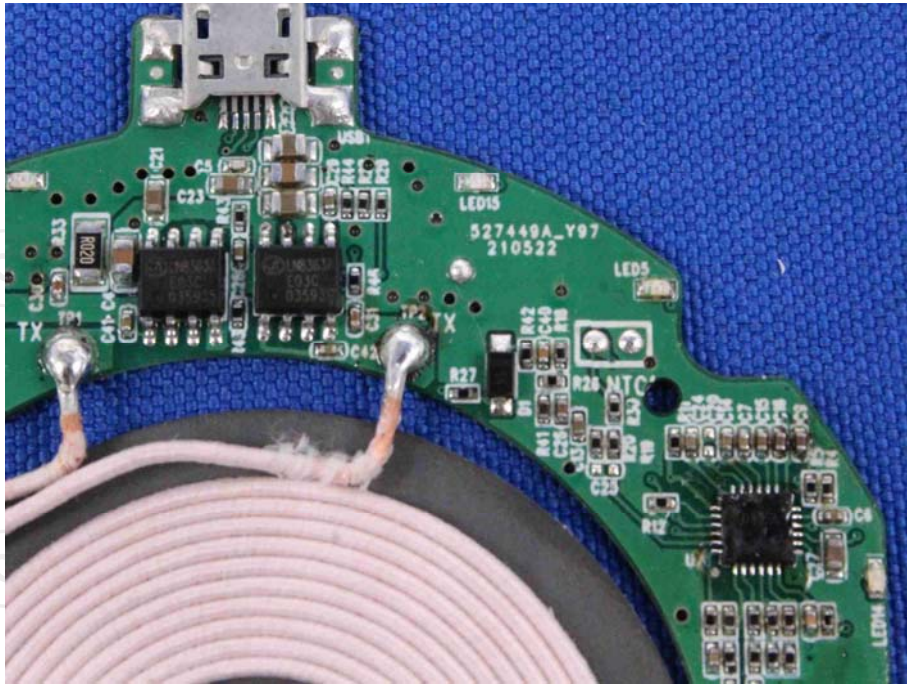

**\*\*\*\*\*END OF REPORT\*\*\*\*\***