

# TEST REPORT

Product Name: Doodle Smart night light  
FCC ID: 2A2P4-HR-D1  
Trademark: N/A  
Model Number: HR-D1  
Prepared For: Yunfu Hongrui Intelligent Equipment Co., Ltd.  
Address: Room 101, Ground Floor, No.15, Guanwu, Xingyun Middle Road, Yuncheng District, Yunfu City, China  
Manufacturer: Yunfu Hongrui Intelligent Equipment Co., Ltd.  
Address: Room 101, Ground Floor, No.15, Guanwu, Xingyun Middle Road, Yuncheng District, Yunfu City, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China  
Sample Received Date: Oct. 9, 2021  
Sample tested Date: Oct. 9, 2021 to Oct. 13, 2021  
Issue Date: Oct. 13, 2021  
Report No.: CTB211013010RFX  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is Bluetooth radio test report.

Compiled by:

He Xiaona

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## TABLE OF CONTENT

Test Report Declaration	Page
<b>1. VERSION</b> .....	4
<b>2. TEST SUMMARY</b> .....	5
<b>3. MEASUREMENT UNCERTAINTY</b> .....	6
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment .....	7
4.4 Channel List .....	8
4.5 Test Mode .....	8
4.6 Test Environment .....	8
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	9
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	12
6.1 Block Diagram Of Test Setup .....	12
6.2 Limit .....	12
6.3 Test procedure .....	12
6.4 Test Result .....	14
<b>7. RADIATED SPURIOUS EMISSION</b> .....	16
7.1 Block Diagram Of Test Setup .....	16
7.2 Limit .....	16
7.3 Test procedure .....	17
7.4 Test Result .....	18
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	25
8.1 Block Diagram Of Test Setup .....	25
8.2 Limit .....	25
8.3 Test procedure .....	25
8.4 Test Result .....	26
<b>9. CONDUCTED PEAK OUTPUT POWER</b> .....	28
9.1 Block Diagram Of Test Setup .....	28
9.2 Limit .....	28
9.3 Test procedure .....	28
9.4 Test Result .....	29
<b>10. 6DB OCCUPIED BANDWIDTH</b> .....	31
10.1 Block Diagram Of Test Setup .....	31
10.2 Limit .....	31
10.3 Test procedure .....	31
10.4 Test Result .....	31
<b>11. POWER SPECTRAL DENSITY</b> .....	33
11.1 Block Diagram Of Test Setup .....	33
11.2 Limit .....	33

11.3 Test procedure ..... 33  
11.4 Test Result ..... 33  
**12. ANTENNA REQUIREMENT ..... 35**  
**13. EUT TEST SETUP PHOTOGRAPHS ..... 36**

*(Note: N/A means not applicable)*



## 1. VERSION

Report No.	Issue Date	Description	Approved
CTB211013010RFX	Oct. 13, 2021	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v04	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	$1 \times 10^{-7}$
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB



## 4. PRODUCT INFORMATION AND TEST SETUP

### 4.1 Product Information

Model(s):	HR-D1
Model Description:	N/A
Bluetooth Version:	Bluetooth 5.1
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth:1.672dBm
Type of Modulation:	Bluetooth: GFSK
Antenna installation:	PCB Antenna
Antenna Gain:	Bluetooth:1dBi
Ratings:	INPUT:100~240V~50/60Hz, 0.5A OUTPUT:5V $\overline{=}$ 2A

### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type	Series No.	Note
1	AC adapter	DONG GUAN To ye electronics technology co.,ltd	H-05-10	N/A	AE

#### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK)	2402MHz	2440MHz	2480MHz

#### 4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	40



## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2022.08.05
4	Communication test set	R&S	CMW500	108058	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.10.30
6	Signal Generator	Agilent	N5181A	MY49060920	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2022.08.05
16	966 chamber	C.R.T.	966 Room	966	2024.08.11
17	Receiver	R&S	ESPI	100362	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2022.08.07

21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.10.30
25	Horn antenna	A/H/System	SAS-574	588	2021.10.30
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.10.30


Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2022.08.16
7	Communication test set	R&S	CMW500	108058	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.11.01
3	Amplifier	Agilent	8449B	3008A01838	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2022.08.16
11	Communication test set	R&S	CMW500	108058	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/



## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

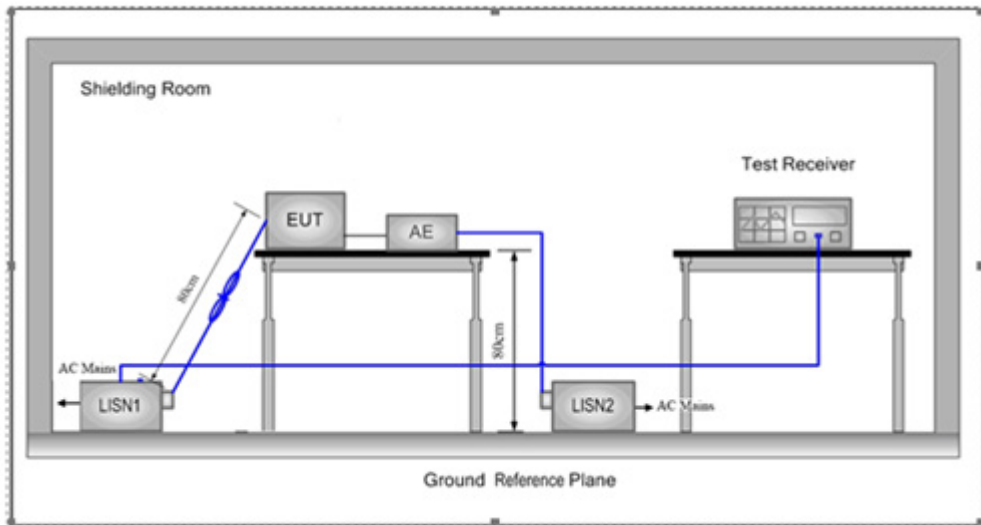

### 6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dB $\mu$ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference

plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

## 6.4 Test Result

Test Specification: Neutral

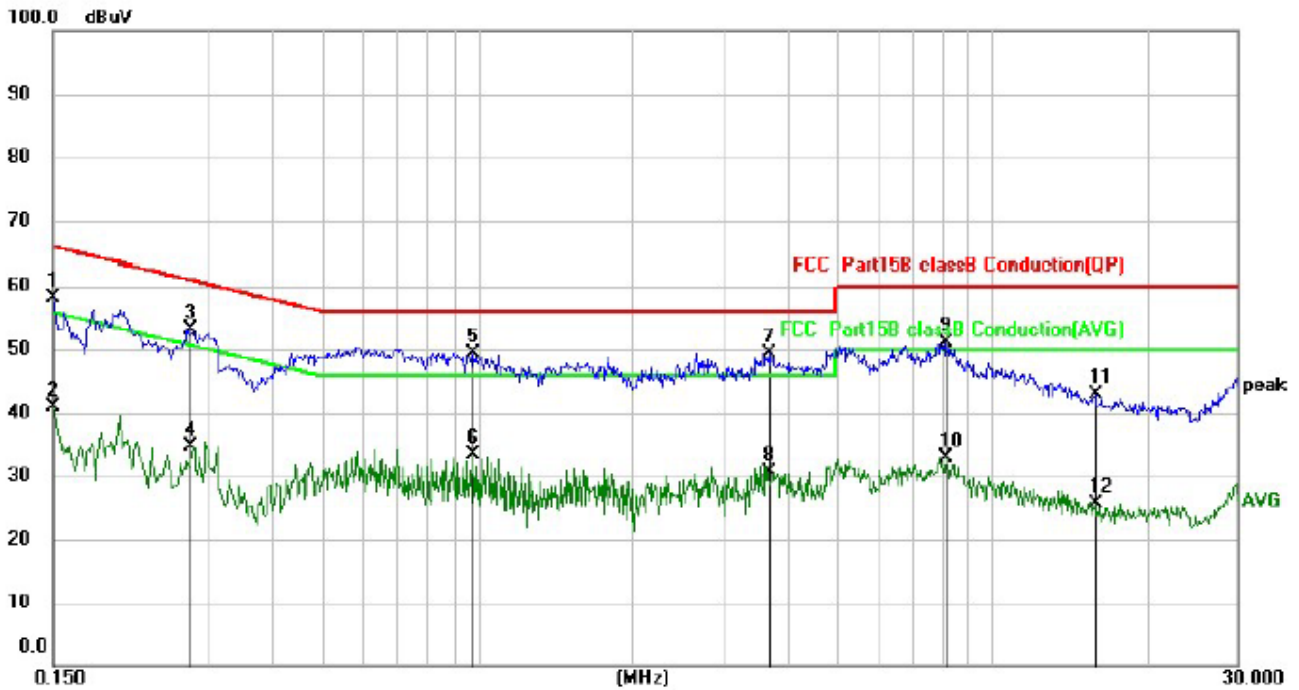


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1500	48.12	9.96	58.08	66.00	-7.92	QP
2		0.1500	30.96	9.96	40.92	56.00	-15.08	AVG
3		0.2787	43.17	9.96	53.13	60.85	-7.72	QP
4		0.2787	24.74	9.96	34.70	50.85	-16.15	AVG
5	*	0.9778	39.51	9.96	49.47	56.00	-6.53	QP
6		0.9778	23.52	9.96	33.48	46.00	-12.52	AVG
7		3.6900	39.21	10.10	49.31	56.00	-6.69	QP
8		3.6900	20.47	10.10	30.57	46.00	-15.43	AVG
9		8.1178	40.65	10.56	51.21	60.00	-8.79	QP
10		8.1178	22.21	10.56	32.77	50.00	-17.23	AVG
11		15.9138	31.94	11.00	42.94	60.00	-17.06	QP
12		15.9138	14.51	11.00	25.51	50.00	-24.49	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit



Test Specification: Line

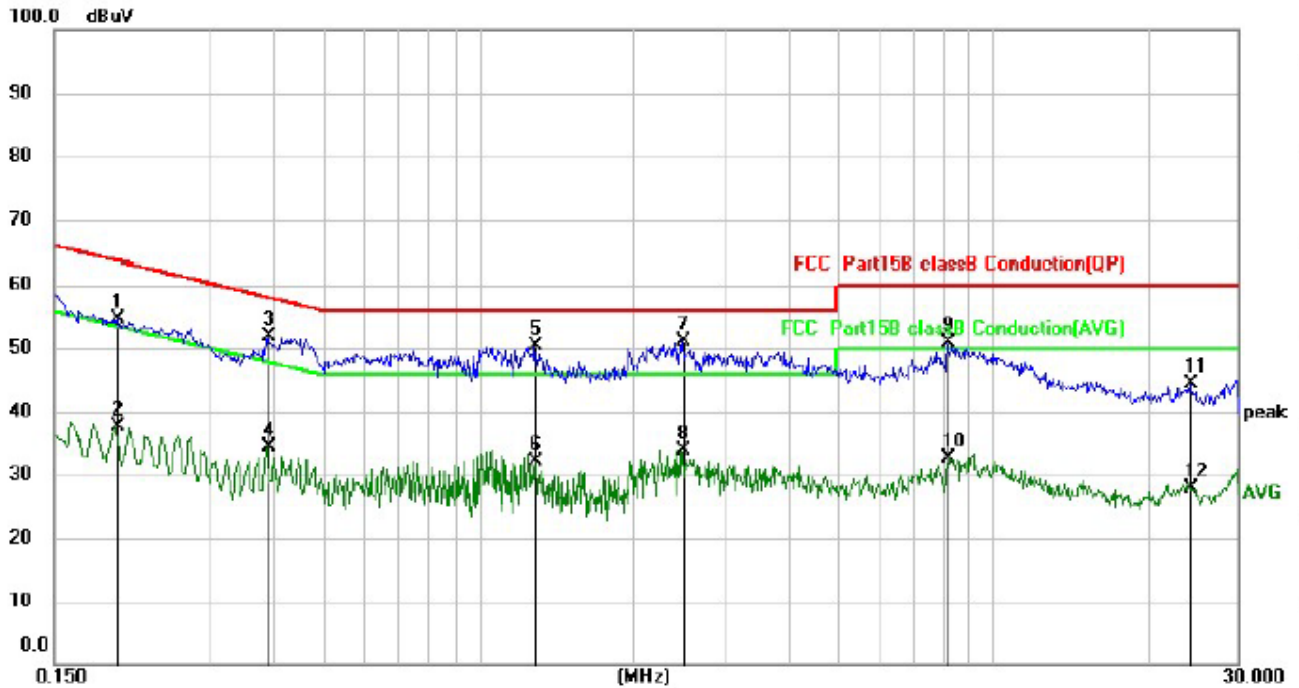

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1995	44.77	9.96	54.73	63.63	-8.90	QP
2		0.1995	27.57	9.96	37.53	53.63	-16.10	AVG
3		0.3914	41.81	9.96	51.77	58.03	-6.26	QP
4		0.3914	24.42	9.96	34.38	48.03	-13.65	AVG
5		1.2860	40.29	9.98	50.27	56.00	-5.73	QP
6		1.2860	22.24	9.98	32.22	46.00	-13.78	AVG
7	*	2.4900	41.00	10.04	51.04	56.00	-4.96	QP
8		2.4900	23.95	10.04	33.99	46.00	-12.01	AVG
9		8.1577	40.19	10.57	50.76	60.00	-9.24	QP
10		8.1577	21.95	10.57	32.52	50.00	-17.48	AVG
11		24.3380	33.08	11.21	44.29	60.00	-15.71	QP
12		24.3380	16.70	11.21	27.91	50.00	-22.09	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

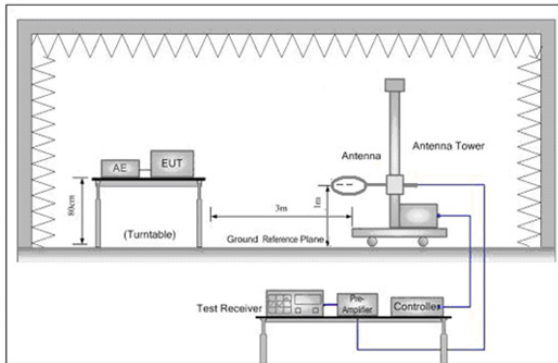


Figure 1. Below 30MHz


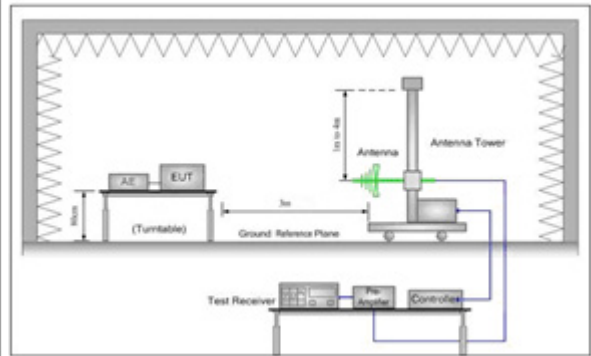


Figure 2. 30MHz to 1GHz

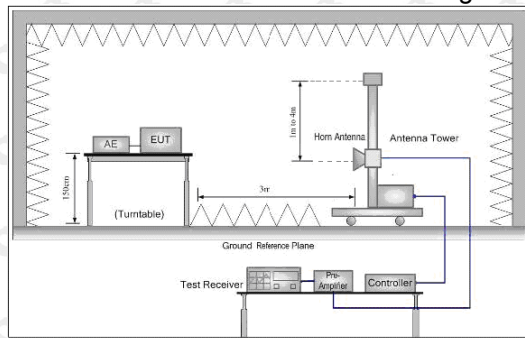

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



### 7.3 Test procedure

**Below 1GHz test procedure as below:**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average



### 7.4 Test Result


Below 1GHz Test Results:  
Antenna polarity: H

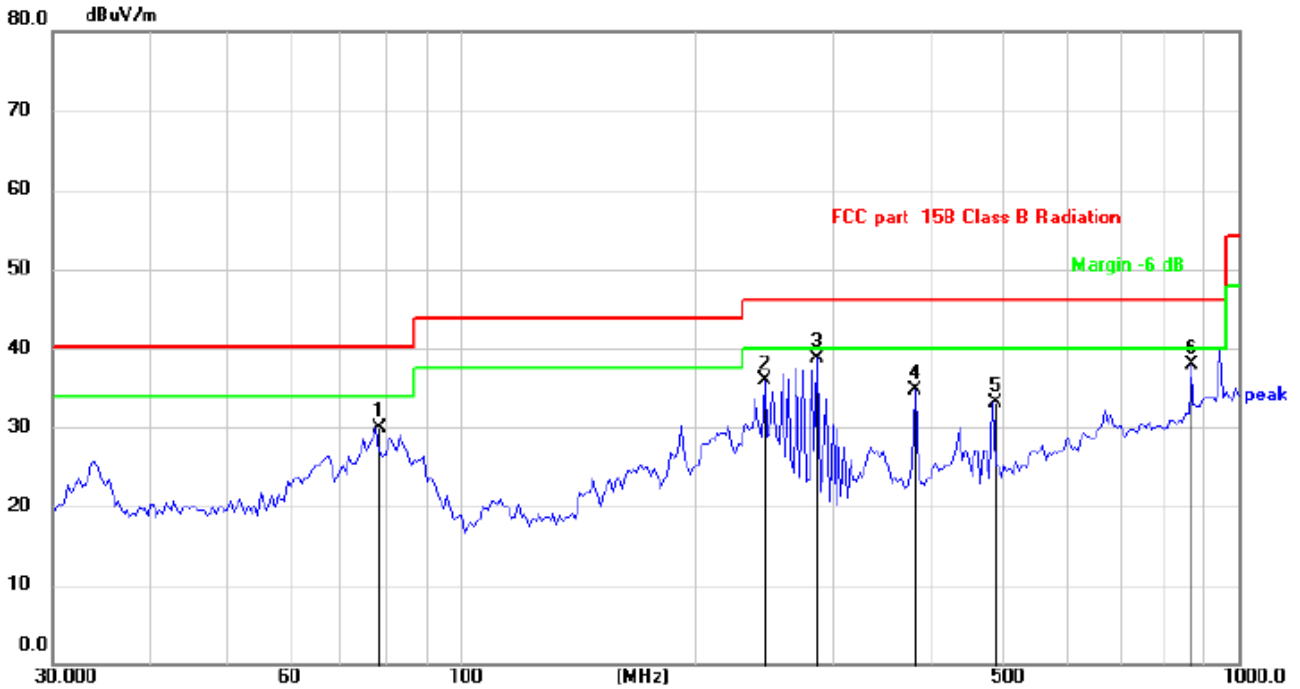

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		78.0020	41.06	-11.20	29.86	40.00	-10.14	QP
2		245.9509	44.02	-8.19	35.83	46.00	-10.17	QP
3	*	287.9904	45.86	-7.08	38.78	46.00	-7.22	QP
4		384.6055	39.75	-4.98	34.77	46.00	-11.23	QP
5		483.0618	35.79	-2.71	33.08	46.00	-12.92	QP
6		869.1302	32.17	5.67	37.84	46.00	-8.16	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

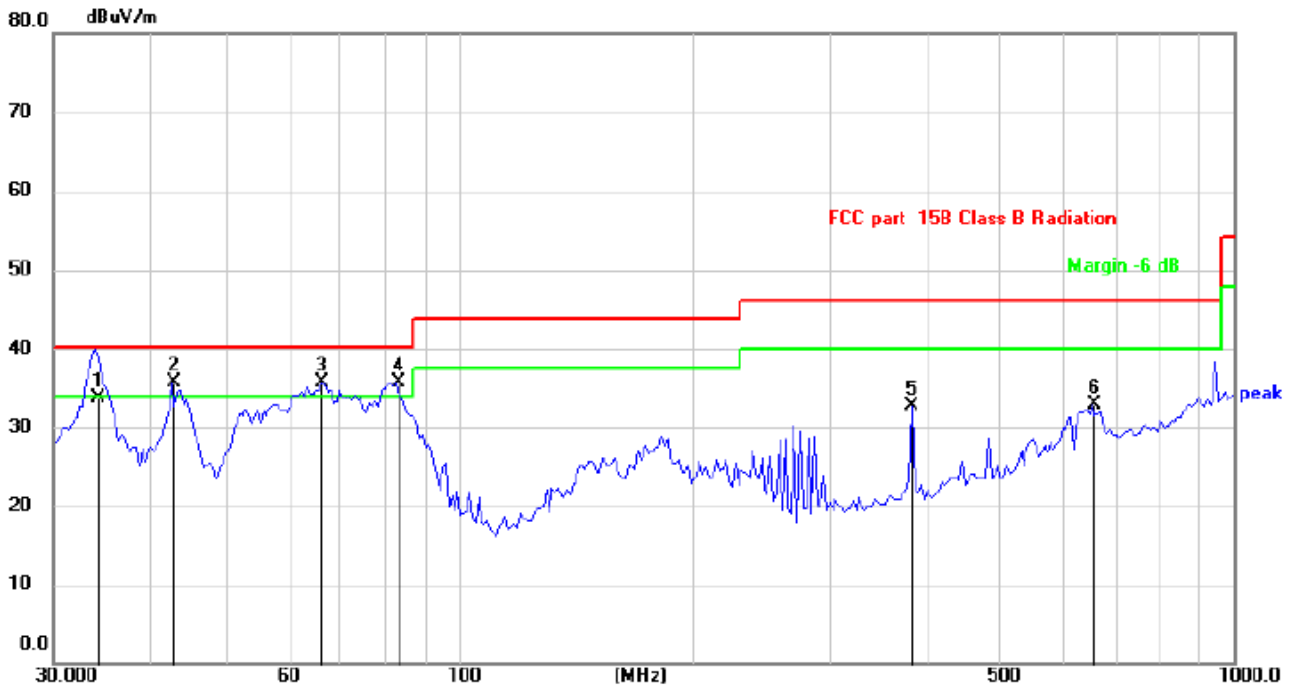

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		34.1774	41.23	-7.46	33.77	40.00	-6.23	QP
2	*	42.6000	42.59	-6.86	35.73	40.00	-4.27	QP
3	!	66.6156	44.77	-9.10	35.67	40.00	-4.33	QP
4	!	82.9385	47.08	-11.47	35.61	40.00	-4.39	QP
5		384.6055	37.63	-4.98	32.65	46.00	-13.35	QP
6		656.5300	30.95	1.93	32.88	46.00	-13.12	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

## Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2402	110.65	-5.84	104.81	N/A	N/A	peak
2402	93.04	-5.84	87.20	N/A	N/A	AVG
4804	56.73	-3.64	53.09	74	-20.91	peak
4804	48.48	-3.64	44.84	54	-9.16	AVG
7206	58.18	-0.95	57.23	74	-16.77	peak
7206	48.94	-0.95	47.99	54	-6.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2402	110.34	-5.84	104.50	N/A	N/A	peak
2402	93.31	-5.84	87.47	N/A	N/A	AVG
4804	58.54	-3.64	54.90	74	-19.10	peak
4804	49.67	-3.64	46.03	54	-7.97	AVG
7206	60.90	-0.95	59.95	74	-14.05	peak
7206	50.73	-0.95	49.78	54	-4.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH Middle (2440MHz)

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2440	107.53	-5.71	101.82	N/A	N/A	peak
2440	91.88	-5.71	86.17	N/A	N/A	AVG
4880	54.64	-3.51	51.13	74	-22.87	peak
4880	45.78	-3.51	42.27	54	-11.73	AVG
7320	57.77	-0.82	56.95	74	-17.05	peak
7320	47.63	-0.82	46.81	54	-7.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2440	107.94	-5.71	102.23	N/A	N/A	peak
2440	91.55	-5.71	85.84	N/A	N/A	AVG
4880	55.50	-3.51	51.99	74	-22.01	peak
4880	46.40	-3.51	42.89	54	-11.11	AVG
7320	57.06	-0.82	56.24	74	-17.76	peak
7320	46.66	-0.82	45.84	54	-8.16	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH High (2480MHz)  
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2480	108.08	-5.65	102.43	N/A	N/A	peak
2480	91.95	-5.65	86.30	N/A	N/A	AVG
4960	55.56	-3.43	52.13	74	-21.87	peak
4960	46.07	-3.43	42.64	54	-11.36	AVG
7440	56.82	-0.75	56.07	74	-17.93	peak
7440	46.14	-0.75	45.39	54	-8.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2480	106.09	-5.65	100.44	N/A	N/A	peak
2480	92.32	-5.65	86.67	N/A	N/A	AVG
4960	55.27	-3.43	51.84	74	-22.16	peak
4960	46.14	-3.43	42.71	54	-11.29	AVG
7440	55.77	-0.75	55.02	74	-18.98	peak
7440	47.33	-0.75	46.58	54	-7.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2). All modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 Low Channel was reported for below 1GHz test.
- (3). For BT above 1GHz test all modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

### Restricted bands around fundamental frequency (Radiated)

Operation Mode: TX CH Low (2402MHz)  
Horizontal (Worst case)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310	54.66	-5.81	48.85	74	-25.15	peak
2310	/	-5.81	/	54	/	AVG
2390	53.65	-5.84	47.81	74	-26.19	peak
2390	/	-5.84	/	54	/	AVG
2400	54.74	-5.84	48.90	74	-25.10	peak
2400	/	-5.84	/	54	/	AVG

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310	56.53	-5.81	50.72	74	-23.28	peak
2310	/	-5.81	/	54	/	AVG
2390	54.88	-5.84	49.04	74	-24.96	peak
2390	/	-5.84	/	54	/	AVG
2400	56.84	-5.84	51.00	74	-23.00	peak
2400	/	-5.84	/	54	/	AVG



Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case)

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	54.52	-5.65	48.87	74	-25.13	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	53.01	-5.65	47.36	74	-26.64	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:


Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	54.58	-5.65	48.93	74	-25.07	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	54.38	-5.65	48.73	74	-25.27	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

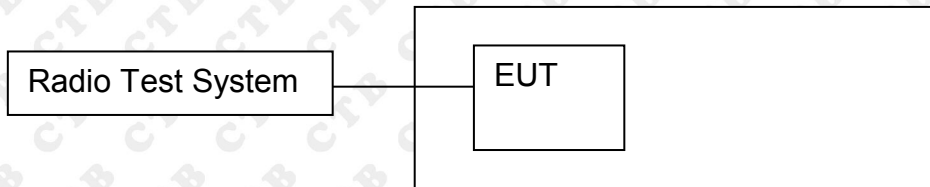


### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
Blow 30MHz:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold  
Above 30MHz:  
RBW = 100KHz, VBW = 300KHz, Sweep = auto  
Detector function = peak, Trace = max hold


### 8.4 Test Result

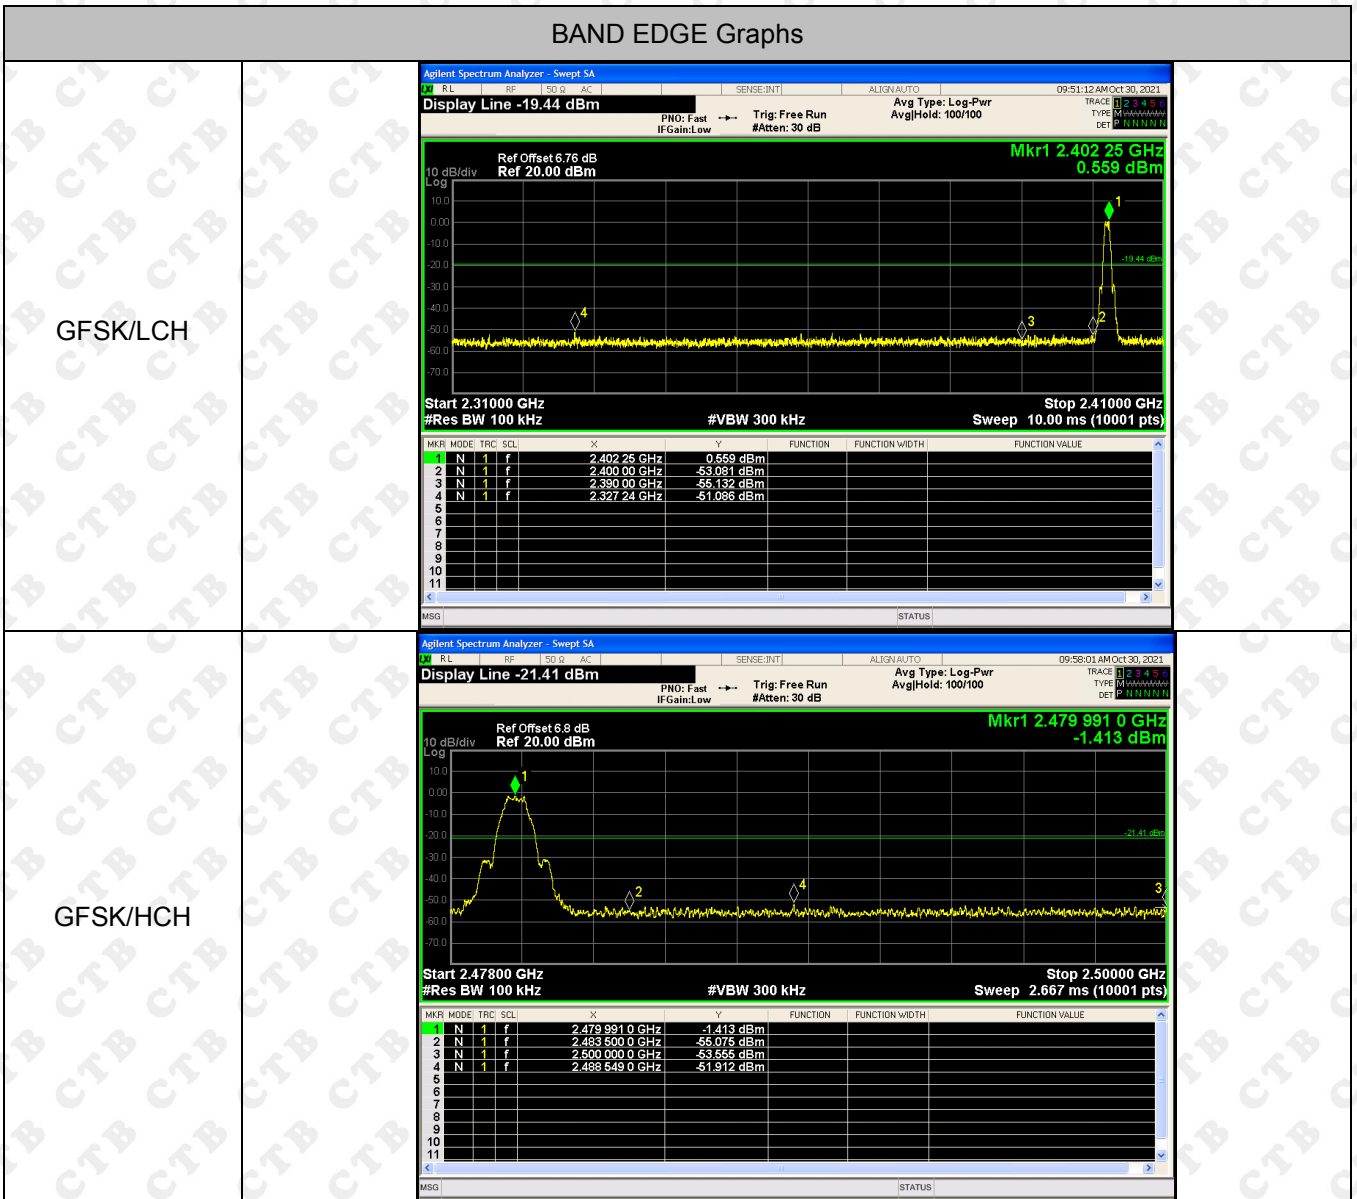




RF Conducted Spurious Emissions Graphs


GFSK/LCH

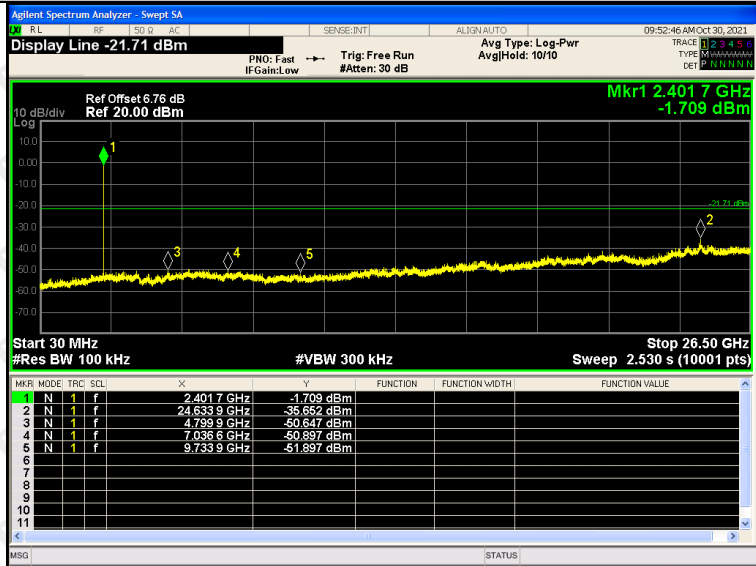

GFSK/MCH

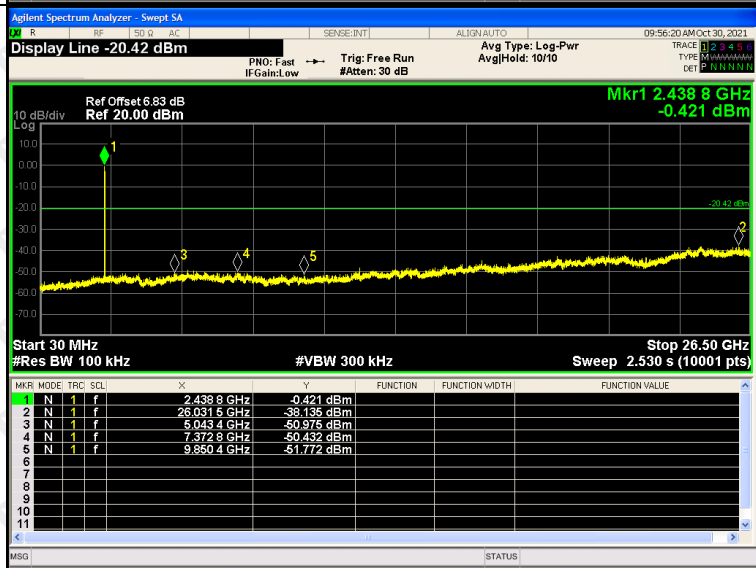


GFSK/HCH

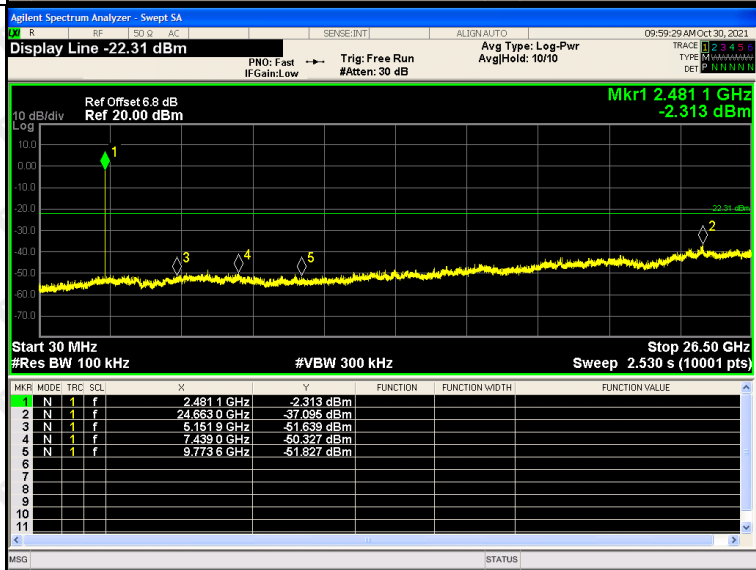

## 9. COUDUCTED OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

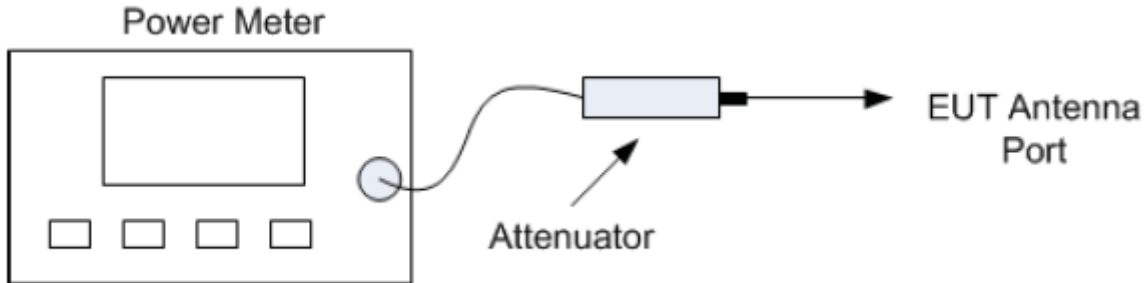

### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 9.3 Test procedure

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied:

1)The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.

2)At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.

3)The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle, D, of the transmitter output signal as described in 11.6.

c) Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.

d) Adjust the measurement in dBm by adding  $[10 \log (1 / D)]$ , where D is the duty cycle.

## 9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm]	Limit[dBm]	Verdict
GFSK	LCH	1.646	30	PASS
	MCH	1.46	30	PASS
	HCH	1.672	30	PASS

### Duty Cycle

Mode	Channel.	Duty Cycle(%)	Correction Factor (dB)
GFSK	LCH	100	0
	MCH	100	0
	HCH	100	0




**Test Graph:**

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Swept SA          Marker 1 <math>\Delta</math> 152.000 <math>\mu</math>s          Ref 10.00 dBm          Mkr1 152.0 <math>\mu</math>s          -2.759 dBm          Center 2.40200000 GHz          Res BW 1.0 MHz #VBW 3.0 MHz Span 0 Hz          Sweep 1.000 ms (1001 pts)</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Swept SA          Marker 1 <math>\Delta</math> 790.000 <math>\mu</math>s          Ref 10.00 dBm          Mkr1 790.0 <math>\mu</math>s          -2.090 dBm          Center 2.44000000 GHz          Res BW 1.0 MHz #VBW 3.0 MHz Span 0 Hz          Sweep 1.000 ms (1001 pts)</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Swept SA          Marker 1 <math>\Delta</math> 342.000 <math>\mu</math>s          Ref 10.00 dBm          Mkr1 342.0 <math>\mu</math>s          -3.339 dBm          Center 2.48000000 GHz          Res BW 1.0 MHz #VBW 3.0 MHz Span 0 Hz          Sweep 1.000 ms (1001 pts)</p>

## 10. 6DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

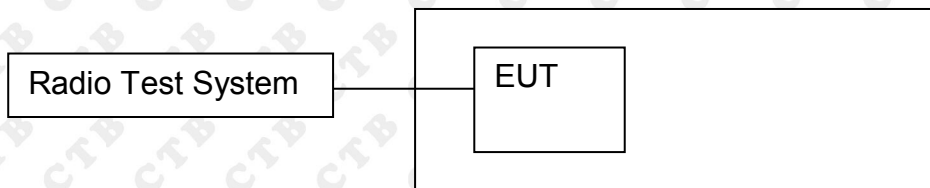

### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

### 10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Result
GFSK	Low channel	0.719	PASS
	Mid channel	0.687	PASS
	High channel	0.695	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.


Test Graph:

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.76 dB Ref 26.76 dBm Mkr3 2.402364 GHz -4.7913 dBm</p> <p>Center 2.402 GHz #Res BW 100 kHz #VBW 300 kHz Span 2 MHz Sweep 1.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.81 dBm</td> </tr> <tr> <td>1.0441 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>4.124 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>719.1 kHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	9.81 dBm	1.0441 MHz			Transmit Freq Error	OBW Power	99.00 %	4.124 kHz			x dB Bandwidth	x dB	-6.00 dB	719.1 kHz		
Occupied Bandwidth	Total Power	9.81 dBm																	
1.0441 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
4.124 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
719.1 kHz																			
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44000000 GHz Center Freq: 2.44000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.83 dB Ref 26.83 dBm Mkr3 2.440349 GHz -3.0790 dBm</p> <p>Center 2.44 GHz #Res BW 100 kHz #VBW 300 kHz Span 2 MHz Sweep 1.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>10.5 dBm</td> </tr> <tr> <td>1.0434 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>5.668 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>686.9 kHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	10.5 dBm	1.0434 MHz			Transmit Freq Error	OBW Power	99.00 %	5.668 kHz			x dB Bandwidth	x dB	-6.00 dB	686.9 kHz		
Occupied Bandwidth	Total Power	10.5 dBm																	
1.0434 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
5.668 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
686.9 kHz																			
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.8 dB Ref 26.80 dBm Mkr3 2.48035 GHz -3.9694 dBm</p> <p>Center 2.48 GHz #Res BW 100 kHz #VBW 300 kHz Span 2 MHz Sweep 1.333 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.13 dBm</td> </tr> <tr> <td>1.0486 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>3.067 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>694.7 kHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	9.13 dBm	1.0486 MHz			Transmit Freq Error	OBW Power	99.00 %	3.067 kHz			x dB Bandwidth	x dB	-6.00 dB	694.7 kHz		
Occupied Bandwidth	Total Power	9.13 dBm																	
1.0486 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
3.067 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
694.7 kHz																			



## 11. POWER SPECTRAL DENSITY

### 11.1 Block Diagram Of Test Setup

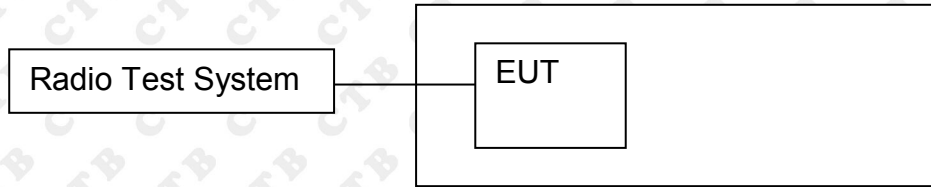

### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

### 11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = Peak
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 11.4 Test Result

Mode	Channel.	Power Spectral Density (dBm/100KHz)	Limit(dBm/3KHz)	Verdict
GFSK	LCH	-4.5	8	PASS
GFSK	MCH	-4.028	8	PASS
GFSK	HCH	-6.256	8	PASS

Test Graph

Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.40200000 GHz          Ref Offset 6.76 dB          Ref 20.00 dBm          Mkr1 2.401950 GHz          -4.500 dBm          Center 2.402000 GHz          #Res BW 100 kHz          #VBW 300 kHz*          Span 5.000 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.44000000 GHz          Ref Offset 6.83 dB          Ref 20.00 dBm          Mkr1 2.439925 GHz          -4.028 dBm          Center 2.440000 GHz          #Res BW 100 kHz          #VBW 300 kHz*          Span 5.000 MHz          Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.48000000 GHz          Ref Offset 6.9 dB          Ref 20.00 dBm          Mkr1 2.479870 GHz          -6.256 dBm          Center 2.480000 GHz          #Res BW 100 kHz          #VBW 300 kHz*          Span 5.000 MHz          Sweep 1.000 ms (1001 pts)</p>

## 12. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:


The antenna is PCB antenna. The best case gain of the antenna is 1.0dBi.




### 13. EUT TEST SETUP PHOTOGRAPHS


#### Radiated Emissions

Below 1G

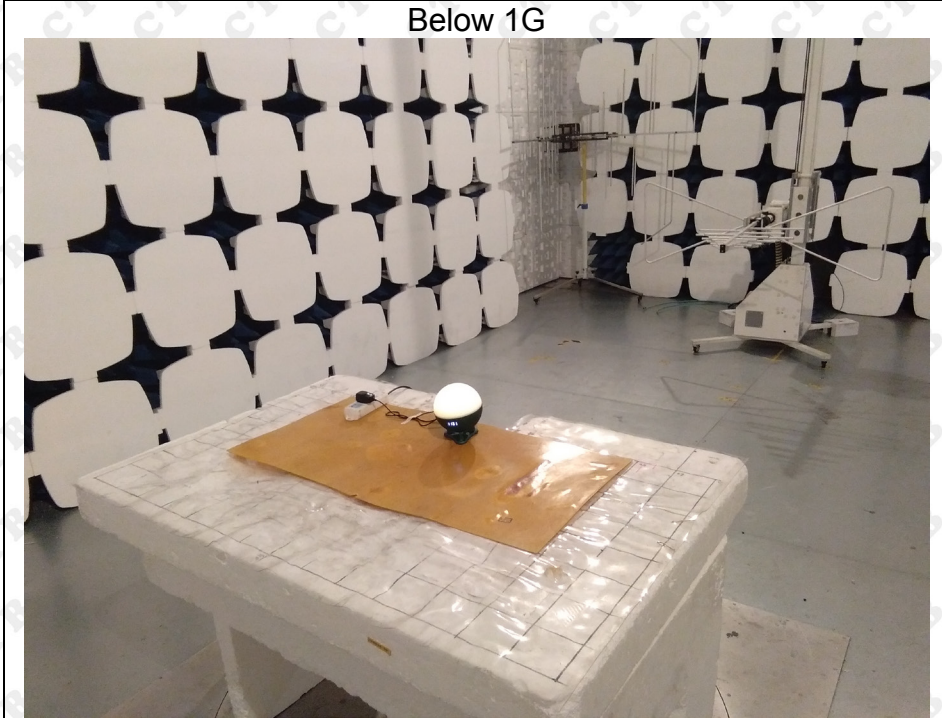

Above 1G

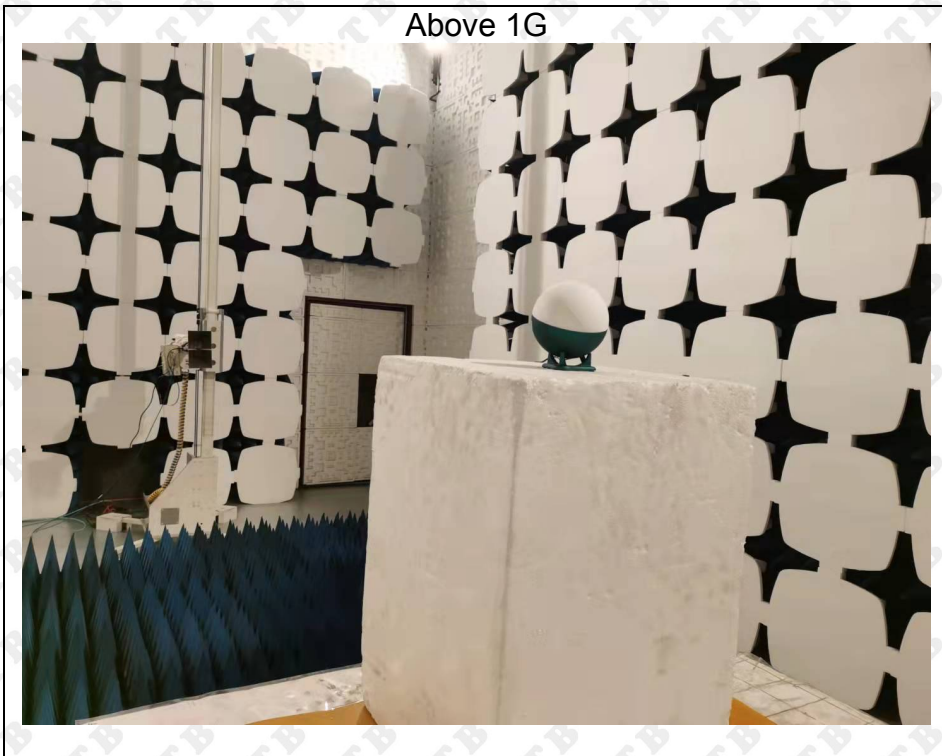

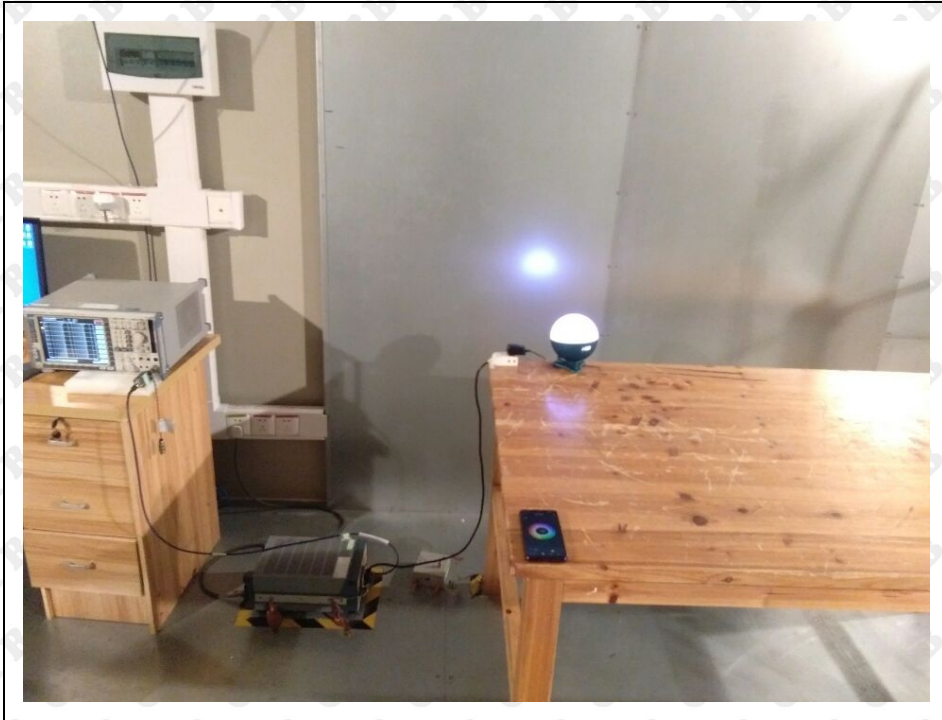**Conducted Emission**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***