

FCC Test Report

Product Name	BIKE POWER TRAINER
Model No.	NOZA ONE
FCC ID.	2A2P5NOZAONE

Applicant	Acer Gadget Inc.
Address	6th Floor, No. 68 Ruiguang Road, Neihu District, Taipei City

Date of Receipt	Jul. 13, 2021
Issued Date	Aug. 03, 2021
Report No.	2170524R-RFUSOTHV13
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test Report

Issued Date: Aug. 03, 2021


Report No.: 2170524R-RFUSOTHV13



Product Name	BIKE POWER TRAINER
Applicant	Acer Gadget Inc.
Address	6th Floor, No. 68 Ruiguang Road, Neihu District, Taipei City
Manufacturer	Acer Gadget Inc.
Model No.	NOZA ONE
FCC ID.	2A2P5NOZAONE
EUT Rated Voltage	DC 5V (Power by USB)
EUT Test Voltage	DC 5V (Power by USB)
Trade Name	XPLOVA
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By


:

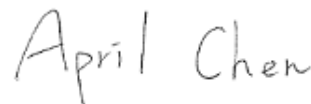

 (Senior Project Specialist / April Chen)

Tested By

:

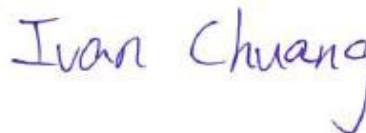

 (Senior Engineer / Ivan Chuang)

Approved By

:



 (Senior Engineer / Jack Hsu)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Tested System Details.....	6
1.3. Configuration of Tested System	6
1.4. EUT Exercise Software	6
1.5. Test Facility	7
1.6. List of Test Equipment.....	8
1.7. Uncertainty	9
2. CONDUCTED EMISSION	10
2.1. Test Setup	10
2.2. Limits.....	10
2.3. Test Procedure	11
2.4. Test Result of Conducted Emission.....	12
3. PEAK POWER OUTPUT	13
3.1. Test Setup	13
3.2. Limit	13
3.3. Test Procedure	13
3.4. Test Result of Peak Power Output	14
4. RADIATED EMISSION	15
4.1. Test Setup	15
4.2. Limits.....	16
4.3. Test Procedure	17
4.4. Test Result of Radiated Emission.....	19
5. RF ANTENNA CONDUCTED TEST	23
5.1. Test Setup	23
5.2. Limits.....	23
5.3. Test Procedure	23
5.4. Test Result of RF Antenna Conducted Test.....	24
6. BAND EDGE	25
6.1. Test Setup	25
6.2. Limit	26
6.3. Test Procedure	26
6.4. Test Result of Band Edge	28
7. 6DB BANDWIDTH	32
7.1. Test Setup	32
7.2. Limits.....	32
7.3. Test Procedure	32
7.4. Test Result of 6dB Bandwidth.....	33
8. POWER DENSITY	34
8.1. Test Setup	34
8.2. Limits.....	34
8.3. Test Procedure	34
8.4. Test Result of Power Density	35
9. DUTY CYCLE.....	36
9.1. Test Setup	36
9.2. Test Procedure	36
9.3. Test Result of Duty Cycle.....	37
10. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	38

Appendix 1: EUT Test Photographs

Product Photos: Please refer to the file: 2170524R-Product Photos

Revision History

Report No.	Version	Description	Issued Date
2170524R-RFUSOTHV13	V1.0	Initial issue of report.	2021-08-03

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	BIKE POWER TRAINER
Trade Name	XPLOVA
Model No.	NOZA ONE
FCC ID.	2A2P5NOZAONE
Frequency Range	2457MHz
Channel Number	1CH
Type of Modulation	GFSK
Antenna Type	Coil Antenna
Channel Control	Auto
Antenna Gain	Refer to the table "Antenna List"

Antenna List

No.	Manufacturer	Coil Antenna	Antenna Type	Peak Gain
1	Acer	NOZA ONE	Coil Antenna	4.3dBi for 2.4GHz

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel:

Channel Frequency

Channel 01: 2457 MHz

Note:

1. The EUT is an BIKE POWER TRAINER with built-in Bluetooth V5.0 and ANT+ transceiver, this report for ANT+.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode	Mode 1: Transmit
-----------	------------------


1.2. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord	
1	Notebook PC	DELL	Latitude 5580	GDZN7H2	N/A
2	Test Fixture	TaiwanIOT Studio	CP2102 USB to TTL	N/A	N/A

Signal Cable Type	Manufacturer	Model No.	Signal cable Description	
A	Signal Cable	Acer	Test cable	Non-shielded, 0.1m
B	USB Cable	cingkang	UB-192	Non-shielded, 1.8m

1.3. Configuration of Tested System

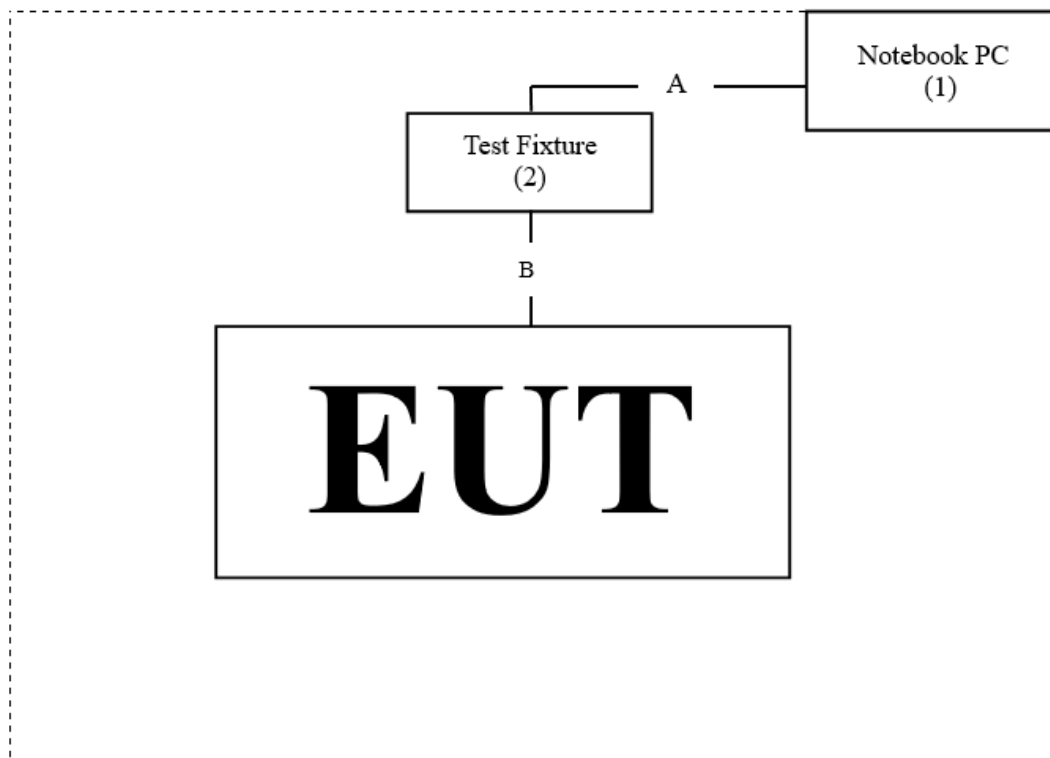

1.4. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.3.
- (2) Execute “nRFgo Studio ver.1.21.2.10” on the Notebook.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.5. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Radiated Emission	Temperature (°C)	10~40 °C	23.5 °C
	Humidity (%RH)	10~90 %	62.5 %
Conductive	Temperature (°C)	10~40 °C	22 °C
	Humidity (%RH)	10~90 %	55 %

USA : FCC Registration Number: TW0033

Canada : IC Registration Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No. 26, Huaya 1st Rd., Guishan Dist.,
Taoyuan City 333411, Taiwan, R.O.C.

Phone number : +886-3-275-7255
Fax number : +866-3-327-5505
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.6. List of Test Equipment

For Conducted measurements /SH2

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103466	2020.12.28	2021.12.27
X	Peak Power Analyzer	KEYSIGHT	8900B	MY51000539	2021.06.07	2022.06.06
X	Power Sensor	KEYSIGHT	N1923A	MY59240002	2021.05.17	2022.05.16
X	Power Sensor	KEYSIGHT	N1923A	MY59240003	2021.05.17	2022.05.16

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Conduction Test System V9.0.5

For Radiated measurements /966-3

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	AMETEK	HLA6121	56736	2021.04.14	2022.04.13
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-678	2020.09.04	2021.09.03
X	Horn Antenna	ETS-Lindgren	3117	00201259	2020.10.23	2021.10.22
X	Horn Antenna	Com-Power	AH-840	101087	2021.06.16	2022.06.15
X	Pre-Amplifier	SGH	EM330	60736	2020.08.03	2021.08.02
X	Pre-Amplifier	EMCI	EMC051835SE	980313	2020.11.25	2021.11.24
X	Pre-Amplifier	EMCI	EMC05820SE	980309	2020.09.26	2021.09.25
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2021.06.24	2022.06.23
X	Filter	MICRO TRONICS	BRM50702	G251	2020.09.17	2021.09.16
	Filter	MICRO TRONICS	BRM50716	G188	2020.09.17	2021.09.16
X	EMI Test Receiver	R&S	ESR	102793	2020.12.17	2021.12.16
X	Spectrum Analyzer	R&S	FSV3044	101113	2021.02.03	2022.02.02
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2021.03.03	2022.03.02
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2021.06.25	2022.06.24

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : DEKRA Testing System V2.0

1.7. Uncertainty

Uncertainties have been calculated according to the DEKRA internal document, and is described in each test chapter of this report.


The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty	
Conducted Emission	±3.42 dB	
Peak Power Output	±0.91 dB	
Radiated Emission	Under 1GHz ±4.06 dB	Above 1GHz ±3.73 dB
RF Antenna Conducted Test	±2.53 dB	
Band Edge	Under 1GHz ±4.06 dB	Above 1GHz ±3.73 dB
6dB Bandwidth	±682.83 Hz	
Power Density	±2.53 dB	
Duty Cycle	±2.31 ms	

2. Conducted Emission

2.1. Test Setup

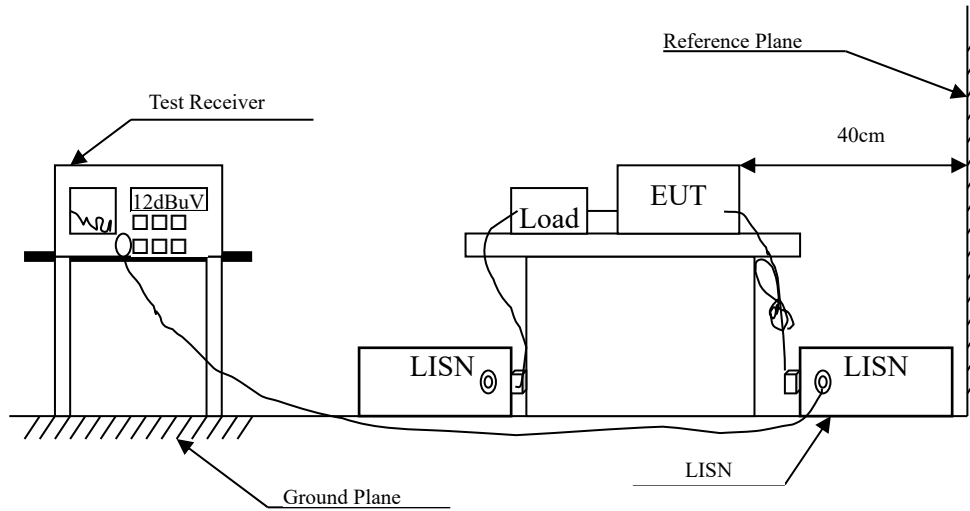

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.


The EUT was setup to ANSI C63.4, 2014; tested to DTS test procedure of FCC KDB-558074 for compliance to FCC 47CFR Subpart C requirements.

2.4. Test Result of Conducted Emission

Owing to the EUT use battery supply voltage, this test item is not performed.

3. Peak Power Output

3.1. Test Setup

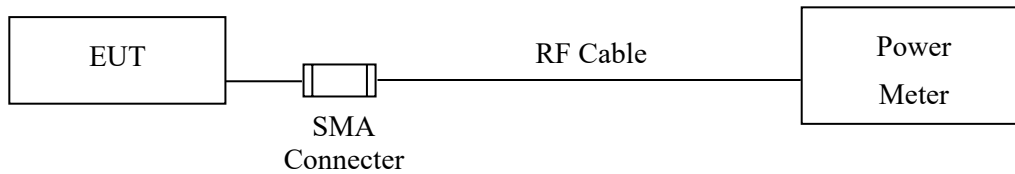

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method.

3.4. Test Result of Peak Power Output

Product : BIKE POWER TRAINER
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit
Test Date : 2021/07/20


Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
01	2457	5.33	1 Watt= 30 dBm	Pass

Test Result of Peak Power Output	PASS
----------------------------------	-------------


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

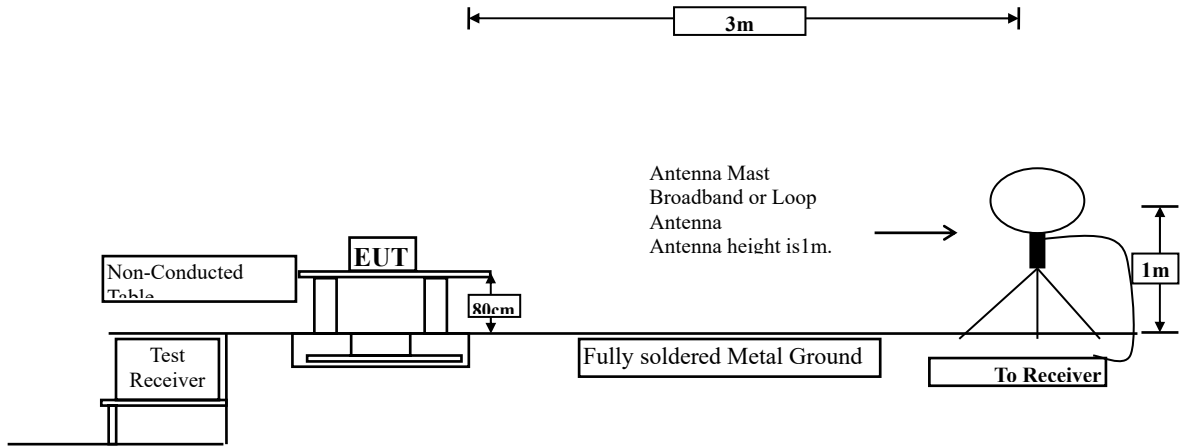

Radiated Emission Below 1GHz

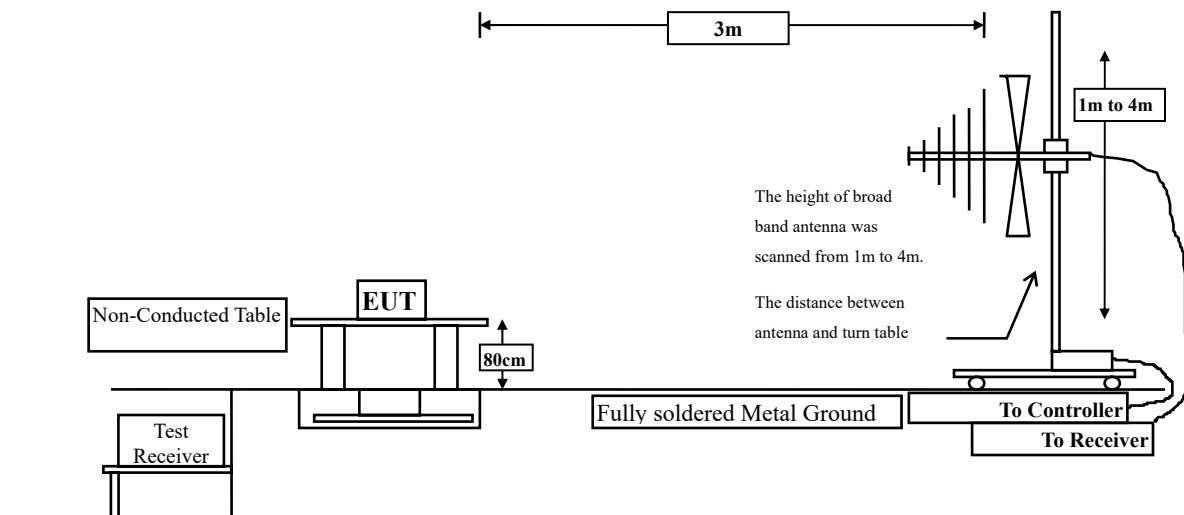

Radiated Emission Above 1GHz

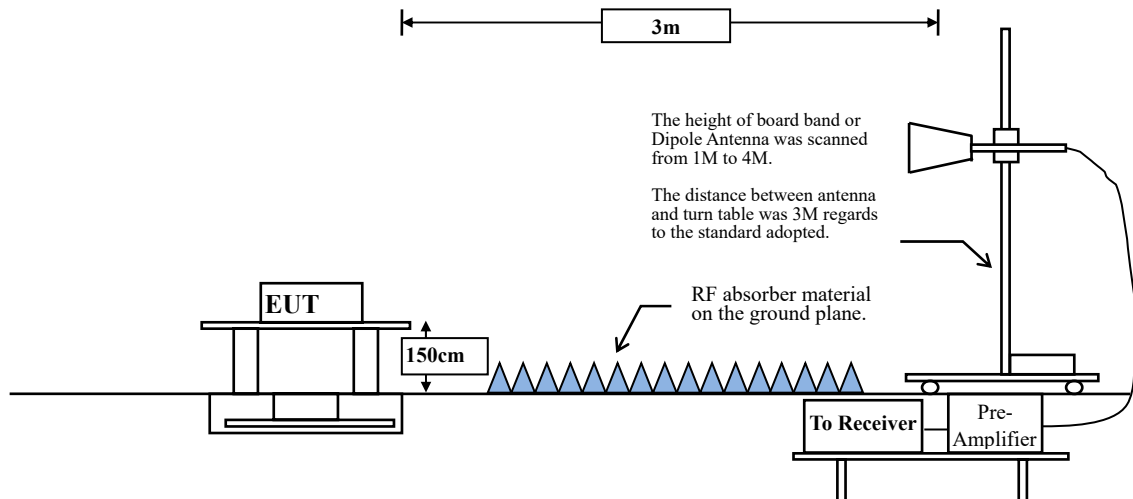

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna. The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98 \%$

$VBW \geq 1/T$, when duty cycle $< 98 \%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
ANT+	85.37	2.1360	468	500

Note: Duty Cycle Refer to Section 9.

4.4. Test Result of Radiated Emission

Product : BIKE POWER TRAINER
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit
 Test Date : 2021/07/21

Horizontal

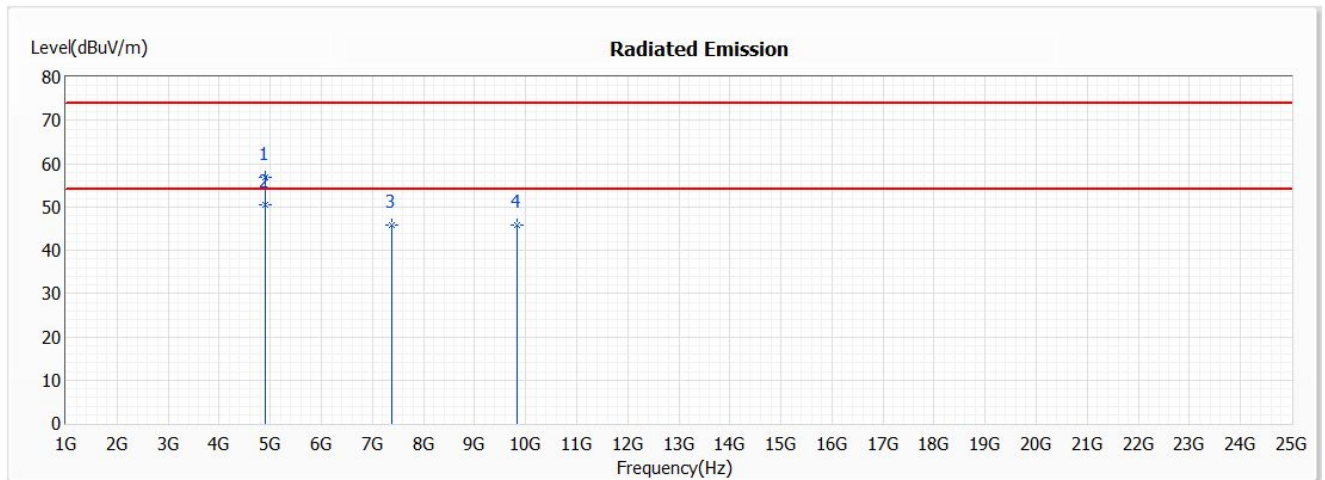


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4914.000	56.81	74.00	-17.19	58.20	-1.39	PK
* 2	4914.000	50.35	54.00	-3.65	51.74	-1.39	AV
3	7371.000	45.84	74.00	-28.16	42.88	2.96	PK
4	9828.000	45.68	74.00	-28.32	40.36	5.32	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : BIKE POWER TRAINER
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit
 Test Date : 2021/07/21

Vertical

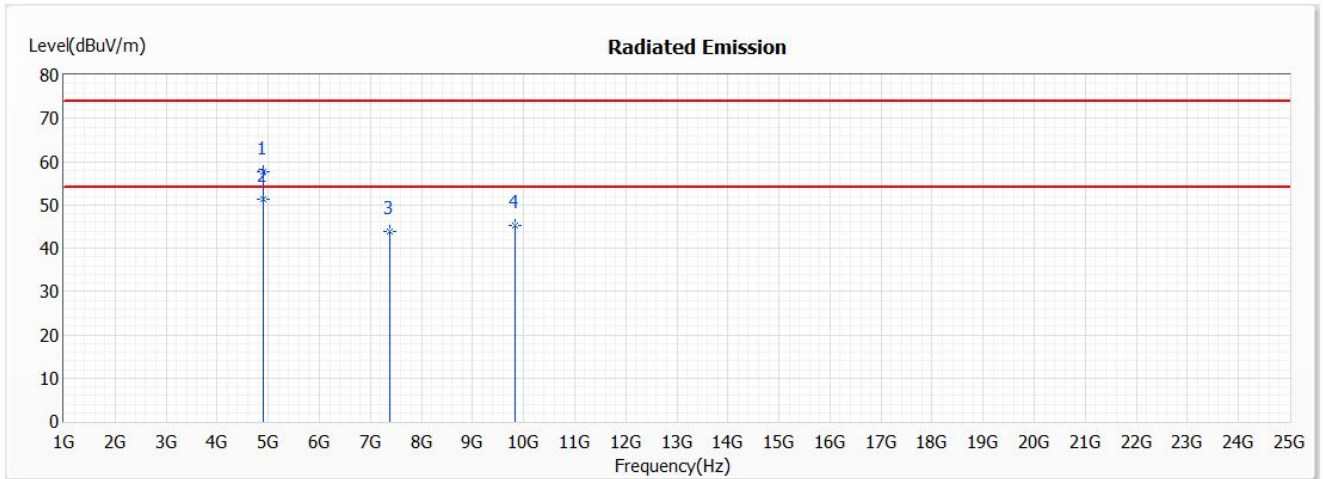


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4914.000	57.68	74.00	-16.32	59.07	-1.39	PK
* 2	4914.000	51.23	54.00	-2.77	52.62	-1.39	AV
3	7371.000	43.86	74.00	-30.14	40.90	2.96	PK
4	9828.000	45.15	74.00	-28.85	39.83	5.32	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : BIKE POWER TRAINER
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit
 Test Date : 2021/07/20

Horizontal

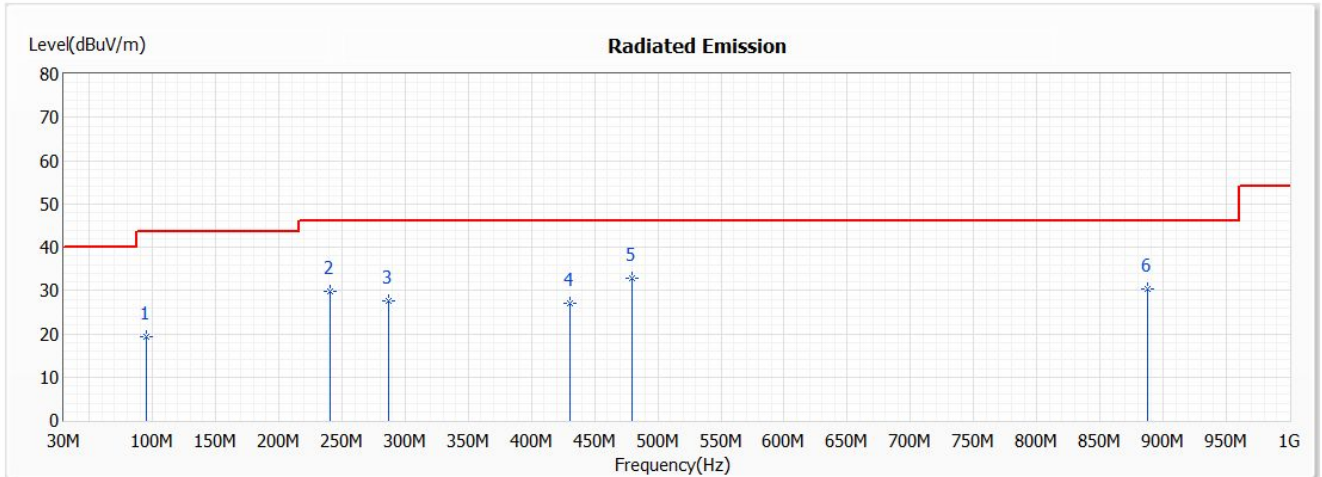


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	94.990	19.33	43.50	-24.17	44.53	-25.20	QP
2	240.490	29.79	46.00	-16.21	49.89	-20.10	QP
3	287.050	27.47	46.00	-18.53	46.04	-18.57	QP
4	430.610	27.07	46.00	-18.93	41.98	-14.91	QP
* 5	479.110	32.93	46.00	-13.07	46.91	-13.98	QP
6	887.480	30.43	46.00	-15.57	37.66	-7.23	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : BIKE POWER TRAINER
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit
 Test Date : 2021/07/20

Vertical

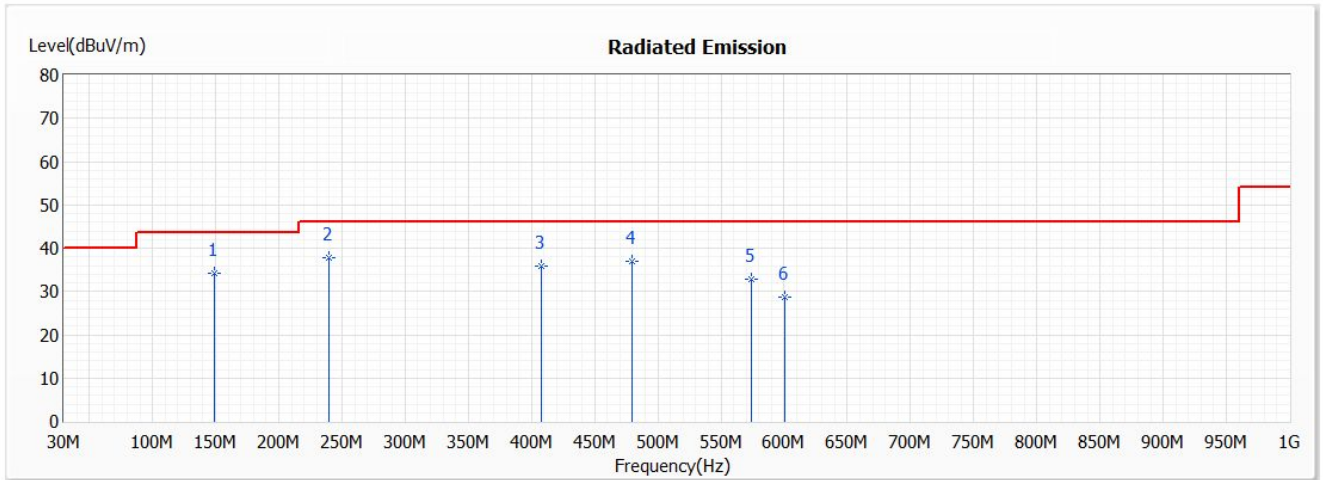

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	149.310	34.15	43.50	-9.35	53.18	-19.03	QP
* 2	239.520	37.85	46.00	-8.15	57.96	-20.11	QP
3	407.330	35.86	46.00	-10.14	51.34	-15.48	QP
4	479.110	37.09	46.00	-8.91	51.07	-13.98	QP
5	574.170	32.87	46.00	-13.13	44.86	-11.99	QP
6	600.360	28.67	46.00	-17.33	39.93	-11.26	QP


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Test Result of Radiated Emission	PASS
----------------------------------	-------------

5. RF Antenna Conducted Test

5.1. Test Setup

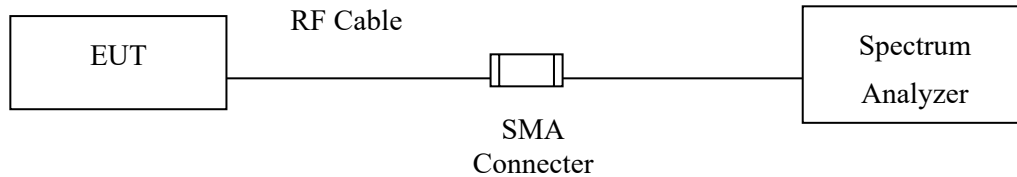

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


5.3. Test Procedure

The EUT was tested according to C63.10:2013 Section 11.11 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.4. Test Result of RF Antenna Conducted Test

Product : BIKE POWER TRAINER
 Test Item : RF Antenna Conducted Test
 Test Mode : Mode 1: Transmit
 Test Date : 2021/07/20

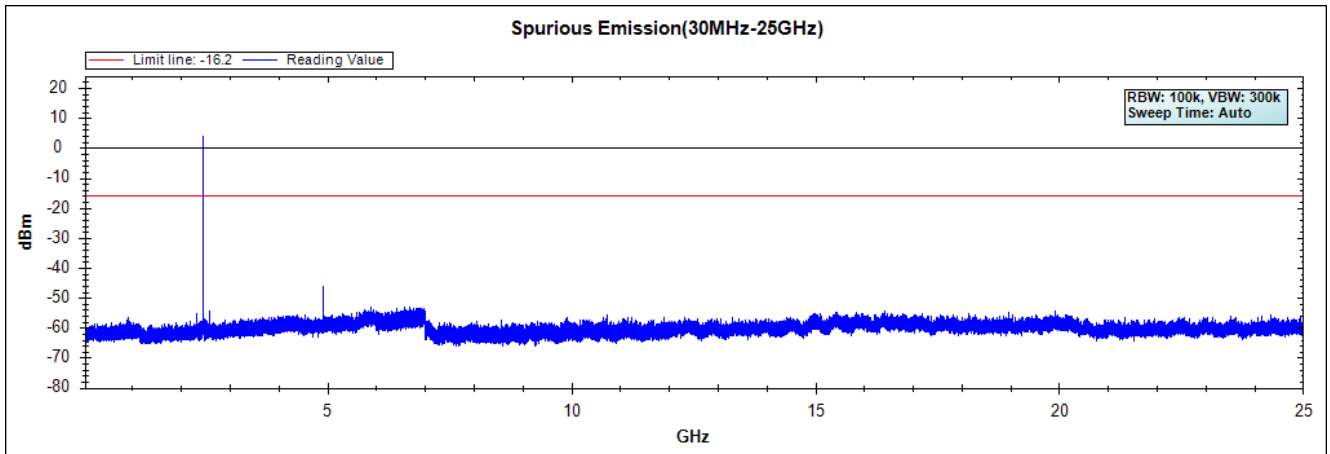


Note: The above test pattern is synthesized by multiple of the frequency range.

Test Result of RF Antenna Conducted Test	PASS
--	-------------


6. Band Edge

6.1. Test Setup

RF Conducted Measurement

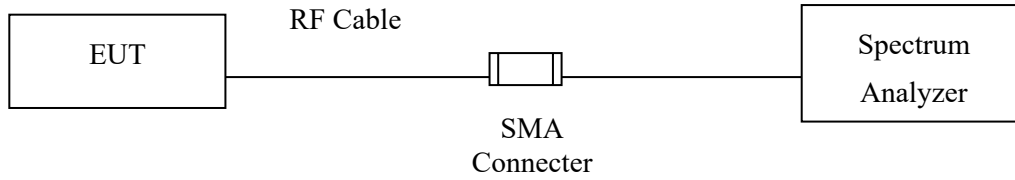

RF Radiated Measurement:

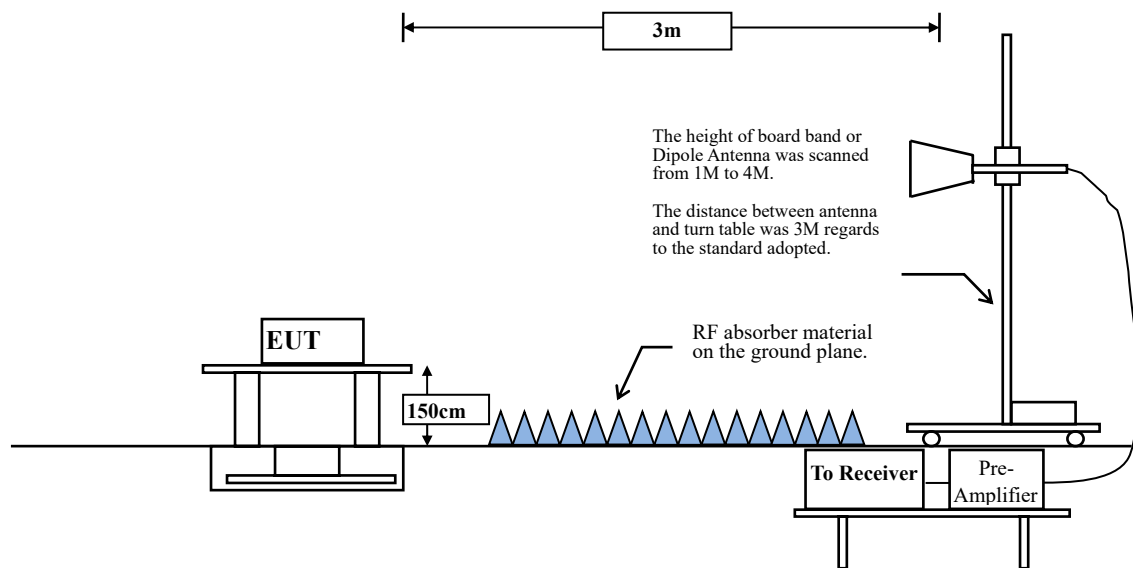

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure.

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure.

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$

$VBW \geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)


2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
ANT+	85.37	2.1360	468	500

Note: Duty Cycle Refer to Section 9.

6.4. Test Result of Band Edge

Product : BIKE POWER TRAINER
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit
 Test Date : 2021/07/21

Horizontal

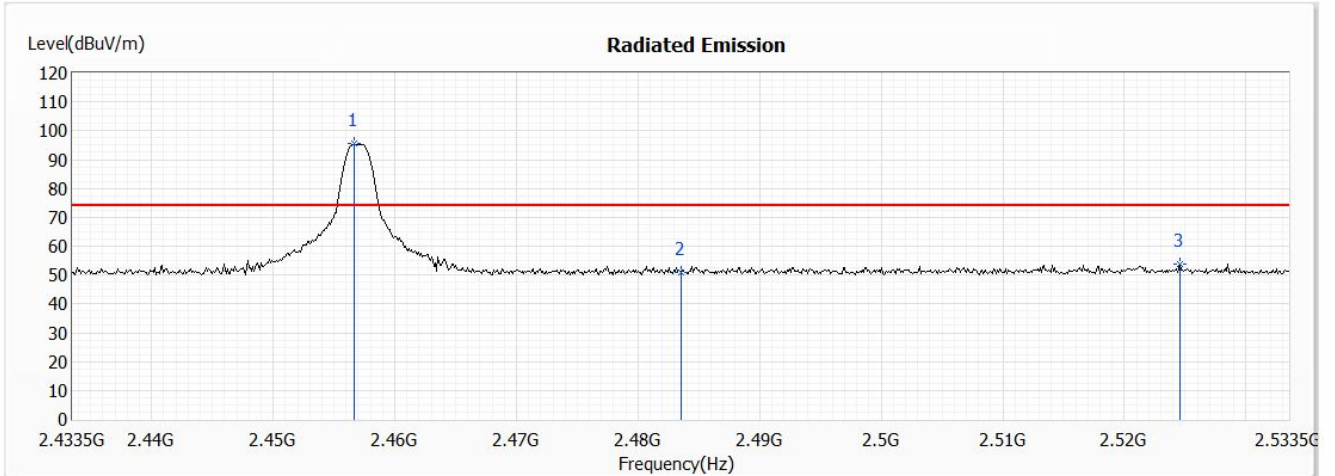


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2456.700	95.40	74.00	21.40	82.76	12.64	PK
2	2483.500	50.73	74.00	-23.27	38.00	12.73	PK
3	2524.600	53.83	74.00	-20.17	41.07	12.76	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : BIKE POWER TRAINER
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit
 Test Date : 2021/07/21

Horizontal

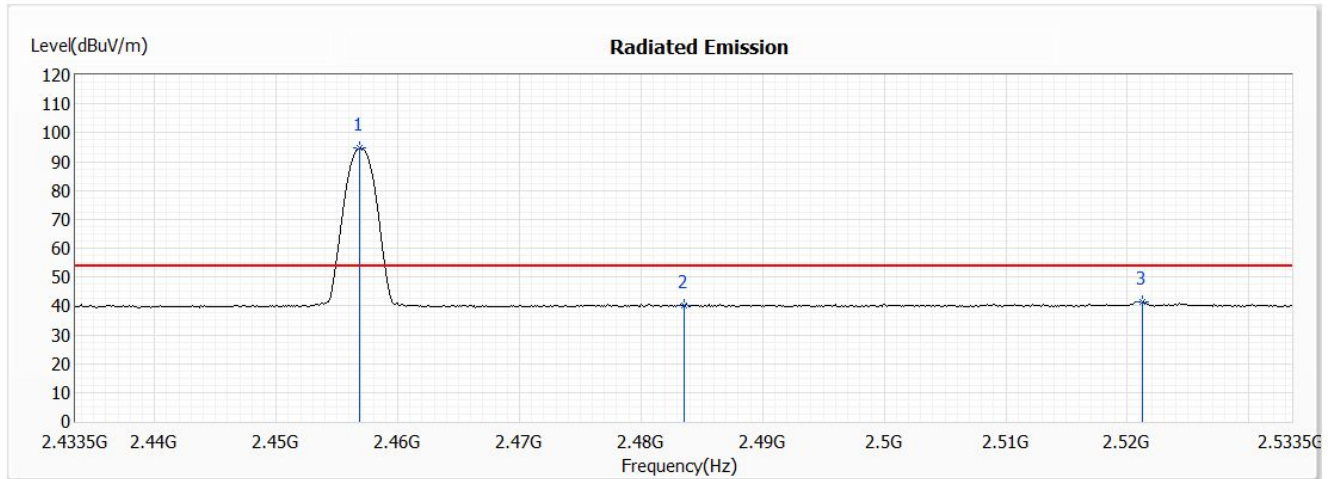


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2456.900	94.64	54.00	40.64	82.00	12.64	AV
2	2483.500	40.10	54.00	-13.90	27.37	12.73	AV
3	2521.200	41.40	54.00	-12.60	28.64	12.76	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : BIKE POWER TRAINER
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit
 Test Date : 2021/07/21

Vertical

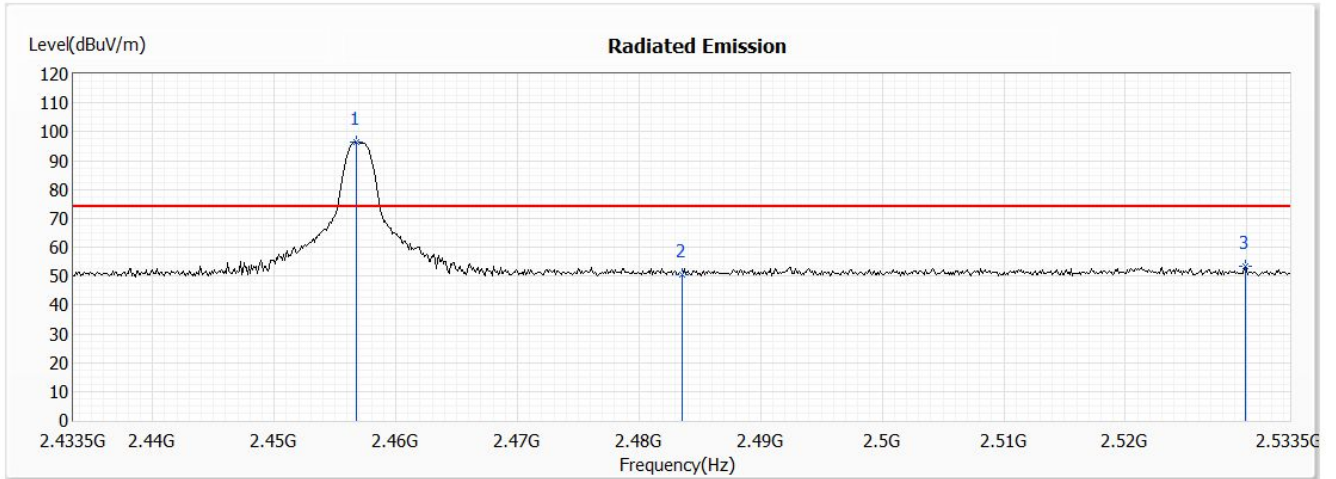


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2456.800	96.33	74.00	22.33	83.69	12.64	PK
2	2483.500	50.57	74.00	-23.43	37.84	12.73	PK
3	2529.900	53.38	74.00	-20.62	40.63	12.75	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : BIKE POWER TRAINER
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit
 Test Date : 2021/07/21

Vertical

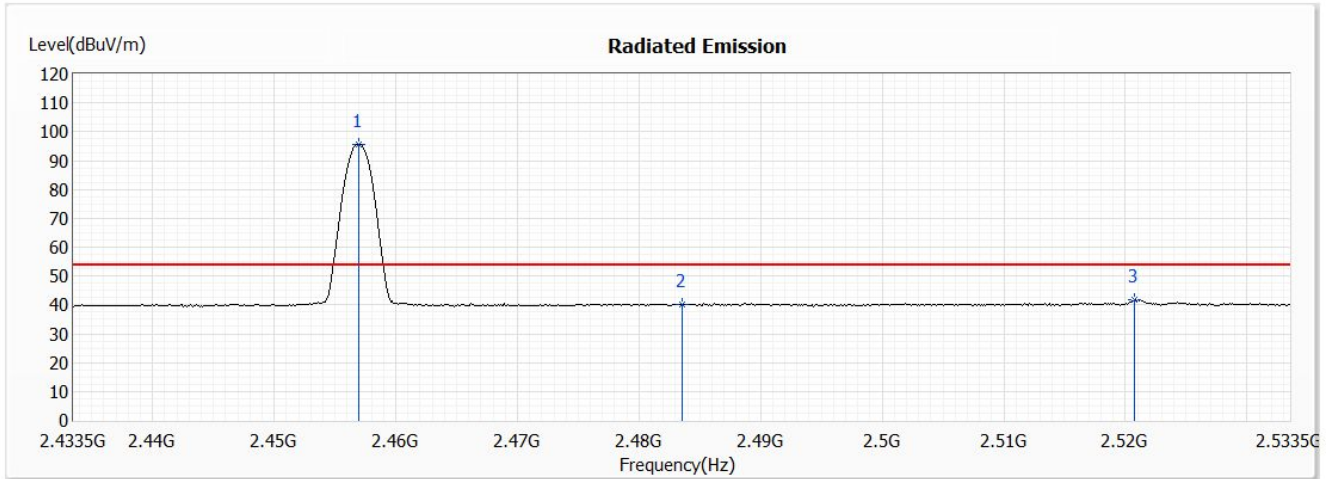

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2457.000	95.60	54.00	41.60	82.96	12.64	AV
2	2483.500	40.06	54.00	-13.94	27.33	12.73	AV
3	2520.700	41.59	54.00	-12.41	28.84	12.75	AV


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Test Result of Band Edge	PASS
--------------------------	-------------

7. 6dB Bandwidth

7.1. Test Setup

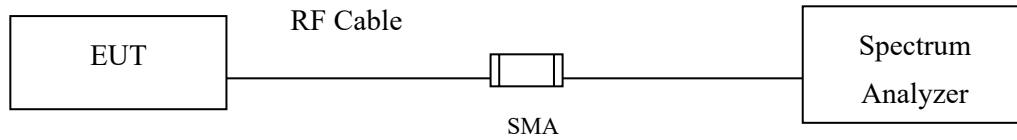

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.


7.3. Test Procedure

The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 11.8 for compliance to FCC 47CFR 15.247 requirements.

7.4. Test Result of 6dB Bandwidth

Product : BIKE POWER TRAINER
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 1: Transmit

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2457	1165	>500	Pass

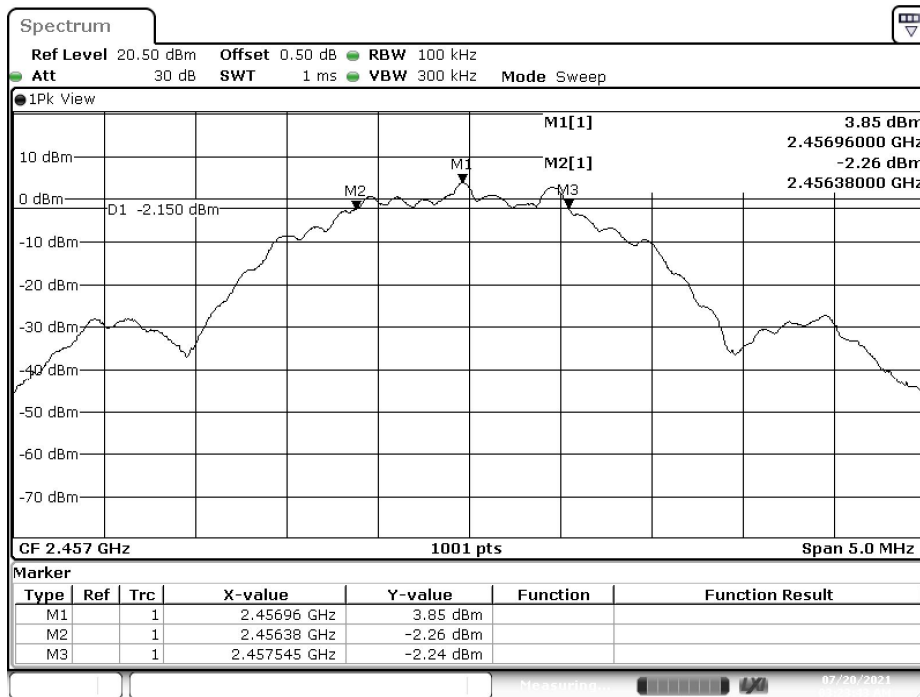


Date: 20.JUL.2021 03:23:43

Test Result of 6dB Bandwidth	PASS
------------------------------	-------------

8. Power Density

8.1. Test Setup

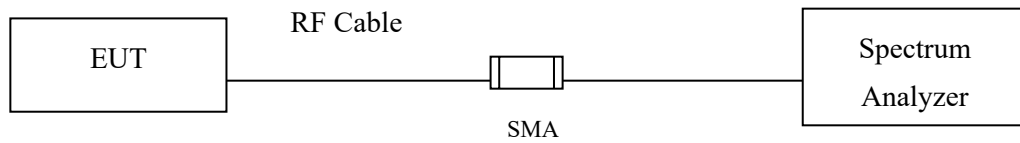

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.


The maximum power spectral density using C63.10 Section 11.10.2 Method PKPSD (peak PSD)

8.4. Test Result of Power Density

Product : BIKE POWER TRAINER
 Test Item : Power Density Data
 Test Mode : Mode 1: Transmit

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
01	2457	3.80	≤ 8dBm	Pass


Figure Channel 00:

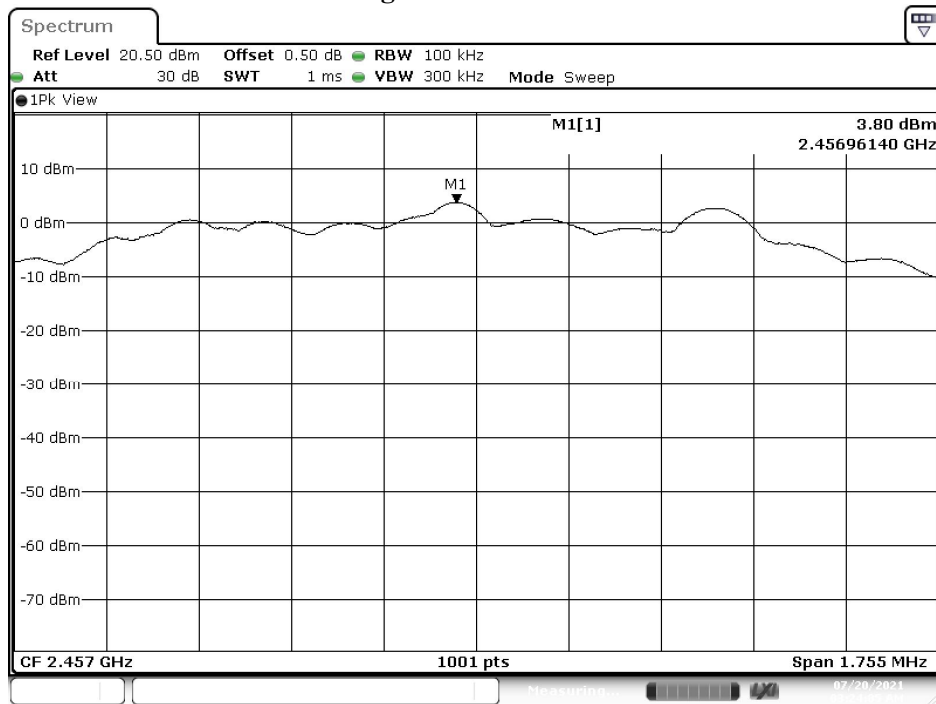

Test Result of Power Density	PASS
------------------------------	------

9. Duty Cycle

9.1. Test Setup

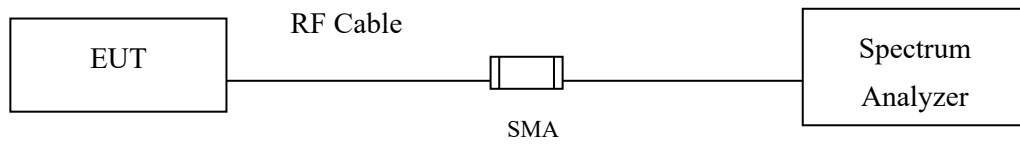

9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

9.3. Test Result of Duty Cycle

Product : BIKE POWER TRAINER
 Test Item : Duty Cycle
 Test Mode : Mode 1: Transmit


Duty Cycle Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \text{ Log} (1/\text{Duty Cycle})$$

Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
ANT+	2.1360	2.5020	85.37	0.69

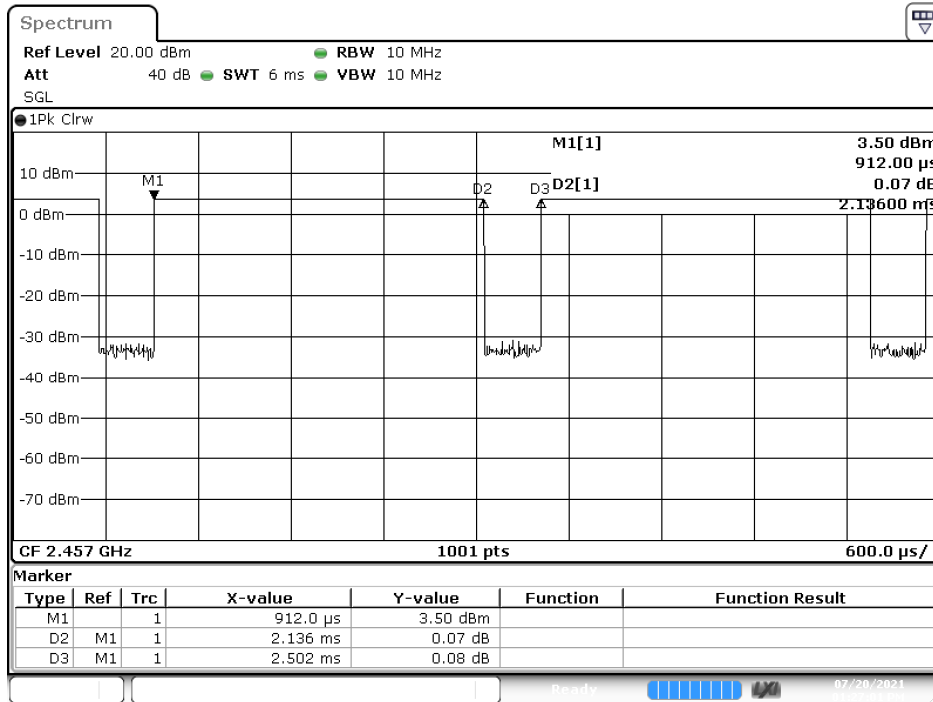

Date: 20.JUL.2021 13:27:01

10. EMI Reduction Method During Compliance Testing

No modification was made during testing.