





Appendix B1:Occupied Channel Bandwidth


Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
b	2412	Ant1	12.849
b	2437	Ant1	12.891
b	2462	Ant1	12.98
g	2412	Ant1	16.416
g	2437	Ant1	16.446
g	2462	Ant1	16.439
n20	2412	Ant1	17.522
n20	2437	Ant1	17.519
n20	2462	Ant1	17.52
n40	2422	Ant1	33.399
n40	2437	Ant1	33.39
n40	2452	Ant1	33.397
ax20	2412	Ant1	17.507
ax20	2437	Ant1	17.505
ax20	2462	Ant1	17.541

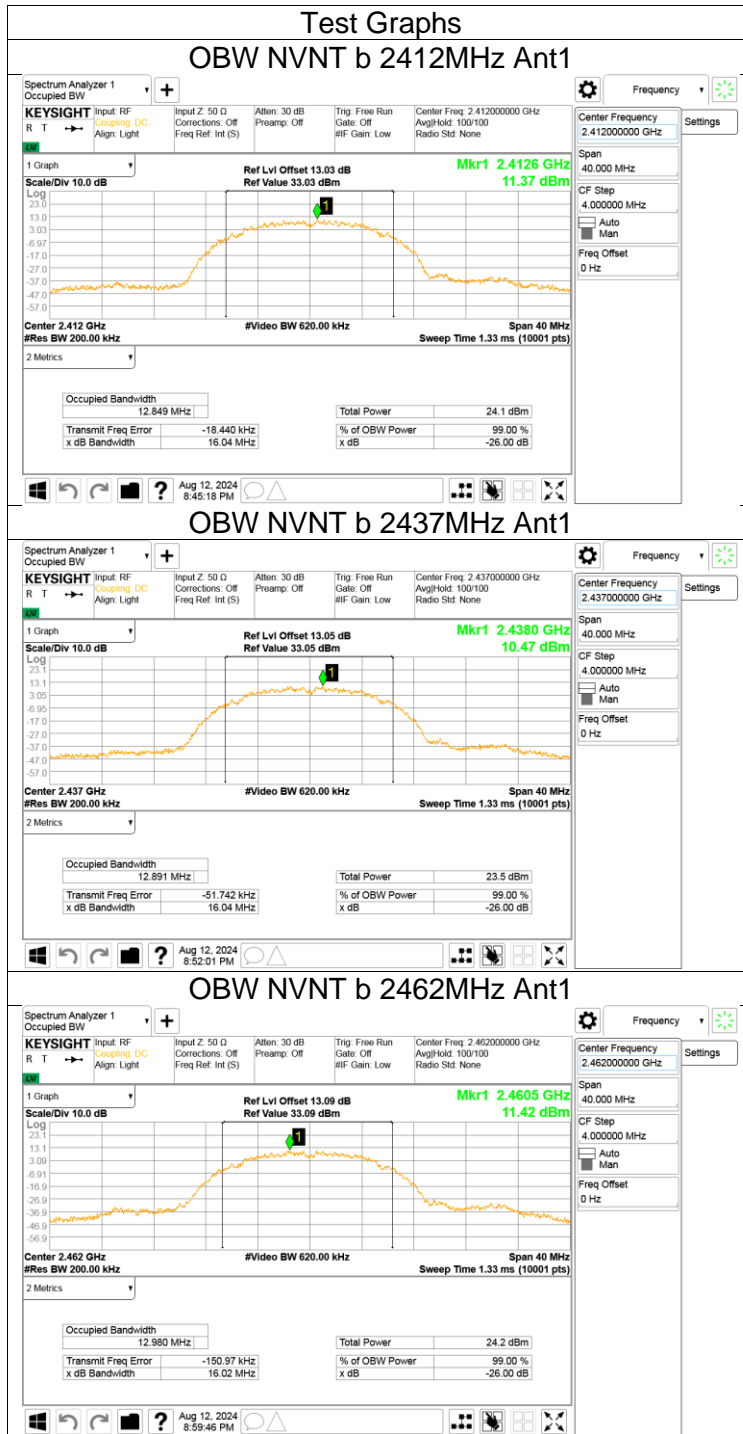

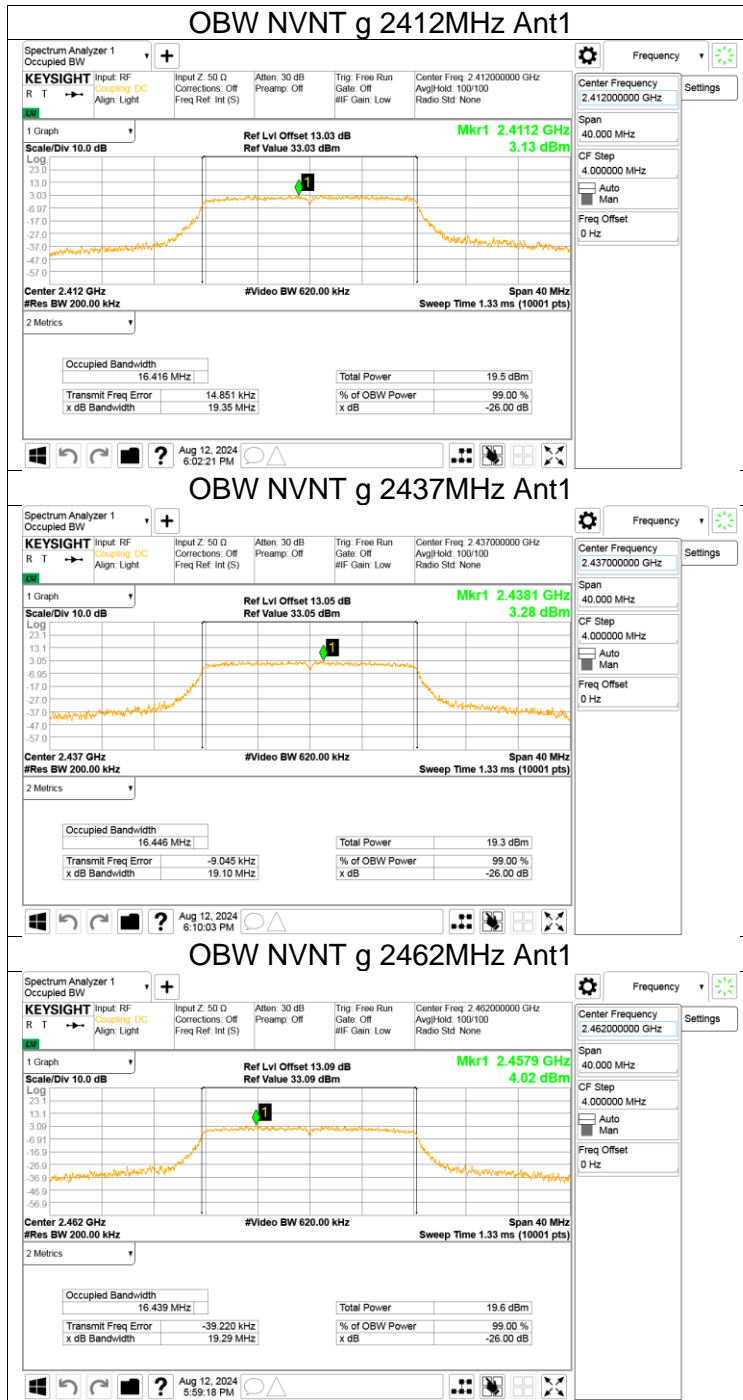

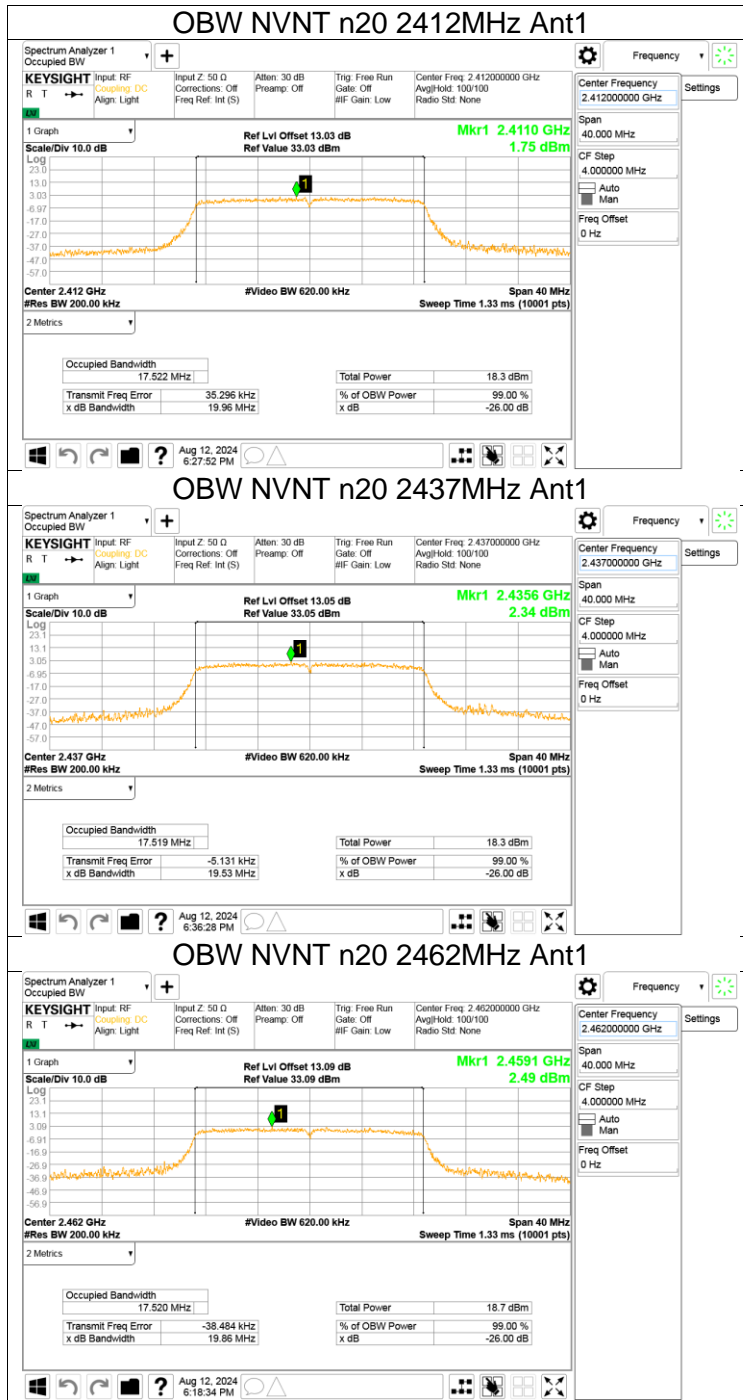

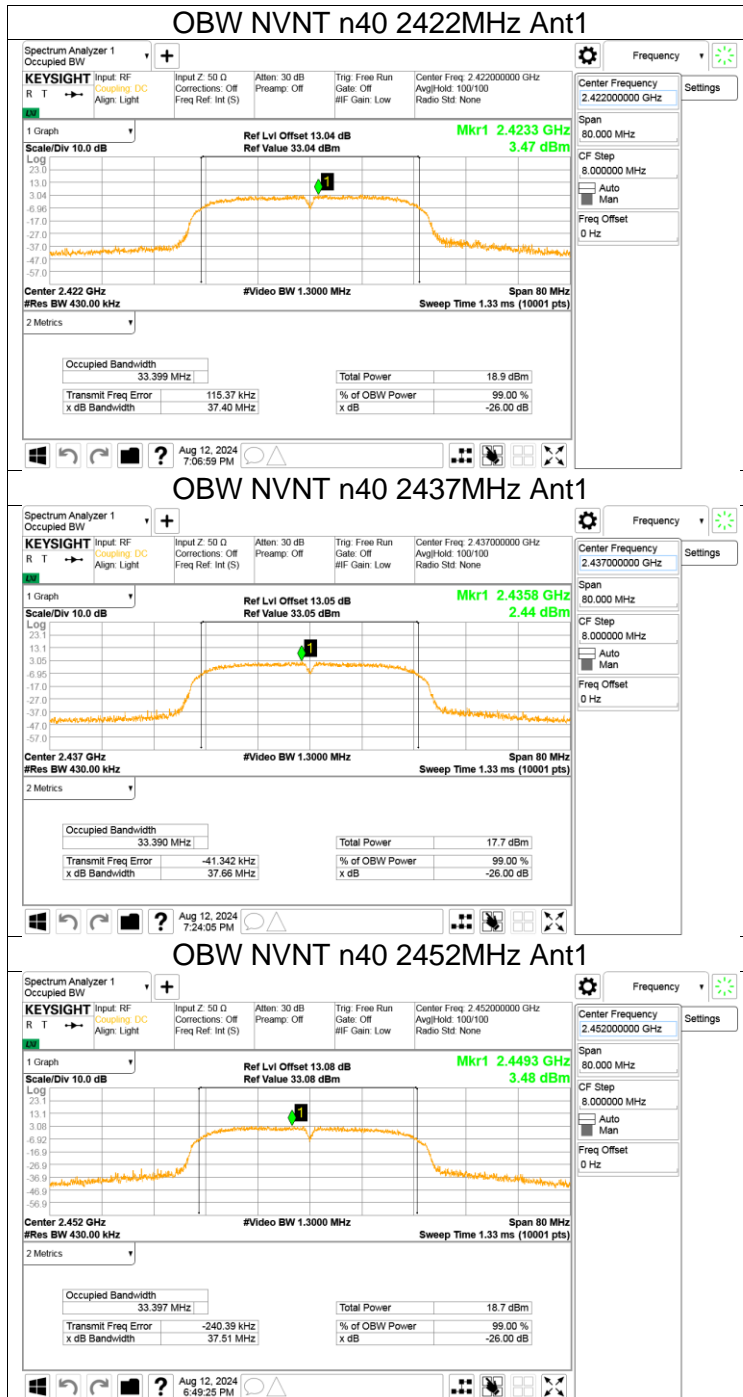

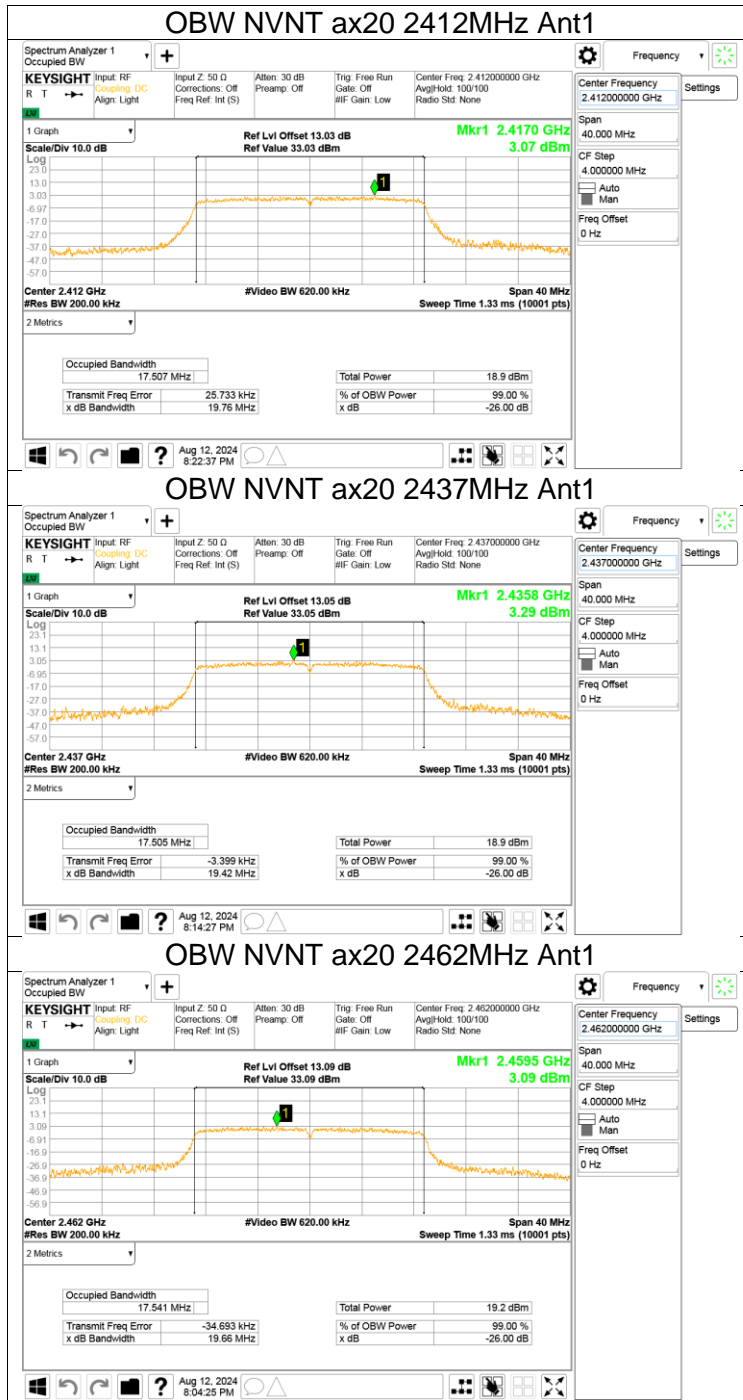

Appendix C1:Maximum Conducted Output Power

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
b	2412	Ant1	17.88	≤30	Pass
b	2437	Ant1	17.01	≤30	Pass
b	2462	Ant1	17.56	≤30	Pass
g	2412	Ant1	14.07	≤30	Pass
g	2437	Ant1	13.9	≤30	Pass
g	2462	Ant1	14.16	≤30	Pass
n20	2412	Ant1	13.16	≤30	Pass
n20	2437	Ant1	13.15	≤30	Pass
n20	2462	Ant1	13.03	≤30	Pass
n40	2422	Ant1	13.47	≤30	Pass
n40	2437	Ant1	13.2	≤30	Pass
n40	2452	Ant1	13.17	≤30	Pass
ax20	2412	Ant1	13.68	≤30	Pass
ax20	2437	Ant1	13.54	≤30	Pass
ax20	2462	Ant1	13.69	≤30	Pass


Note: 1. Conducted Power=Meas. Level+ Correction Factor


2. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.


Appendix D1:Maximum Power Spectral Density Level


Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	Ant1	-13.28	≤8	Pass
b	2437	Ant1	-14.83	≤8	Pass
b	2462	Ant1	-13.81	≤8	Pass
g	2412	Ant1	-18.49	≤8	Pass
g	2437	Ant1	-18.62	≤8	Pass
g	2462	Ant1	-18.18	≤8	Pass
n20	2412	Ant1	-20.34	≤8	Pass
n20	2437	Ant1	-19.79	≤8	Pass
n20	2462	Ant1	-19.33	≤8	Pass
n40	2422	Ant1	-21.12	≤8	Pass
n40	2437	Ant1	-20.93	≤8	Pass
n40	2452	Ant1	-21.09	≤8	Pass
ax20	2412	Ant1	-19.33	≤8	Pass
ax20	2437	Ant1	-19.75	≤8	Pass
ax20	2462	Ant1	-19.19	≤8	Pass


Note: 1. The Duty Cycle Factor (refer to section 7.5) had already compensated to the test data.

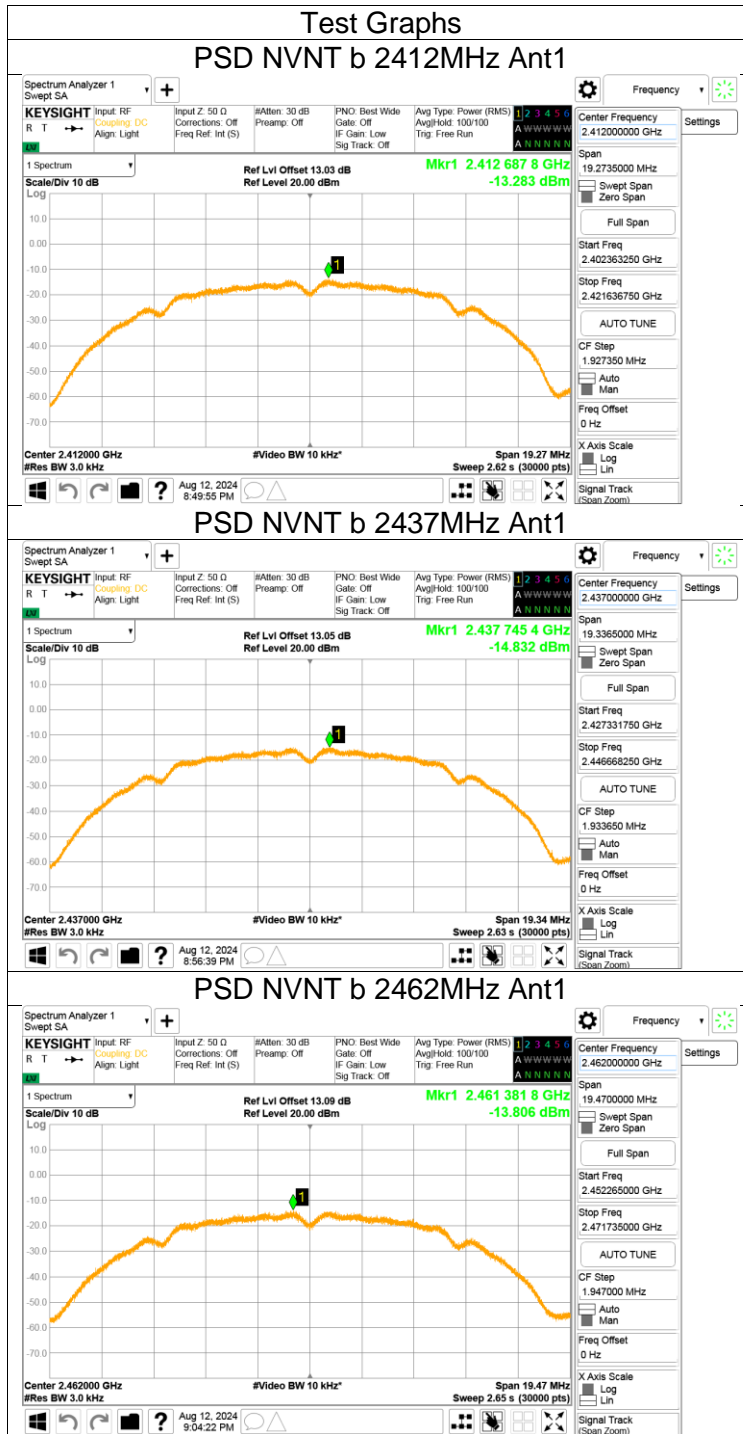

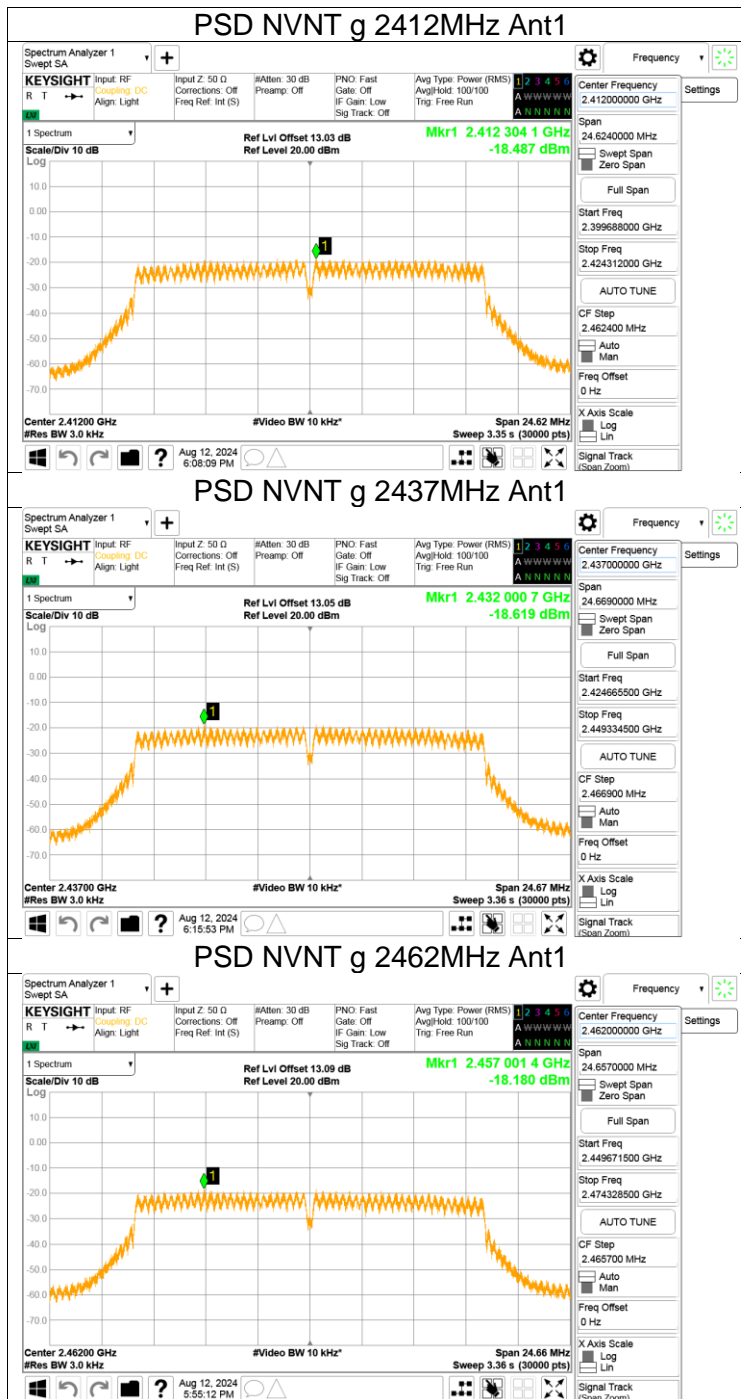

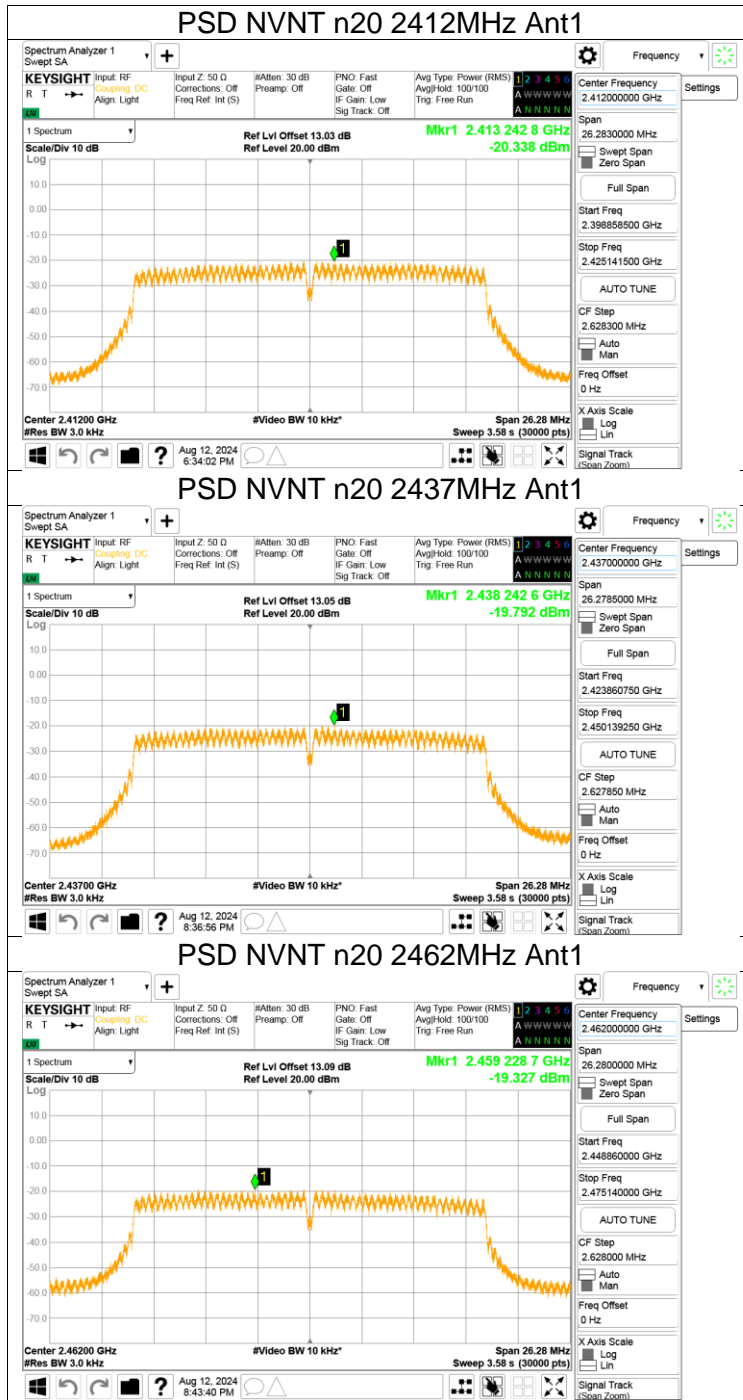


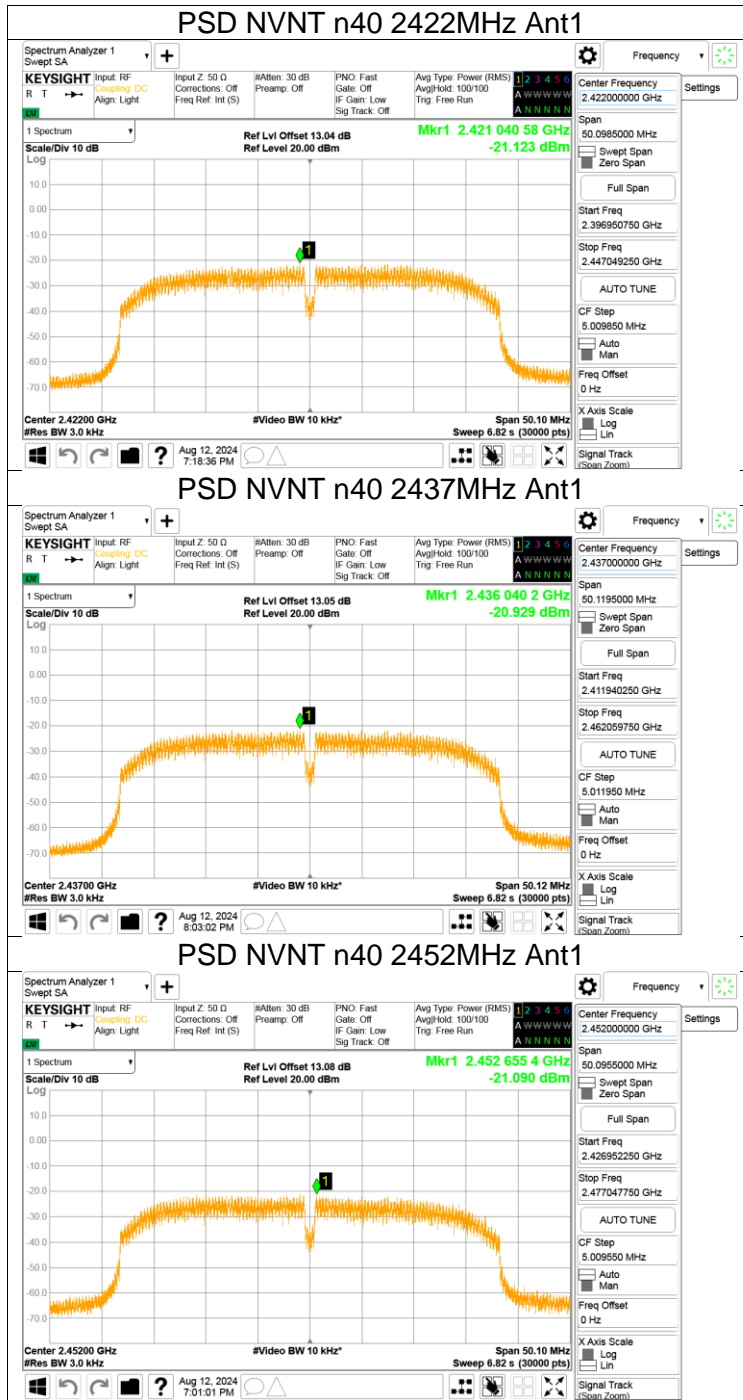


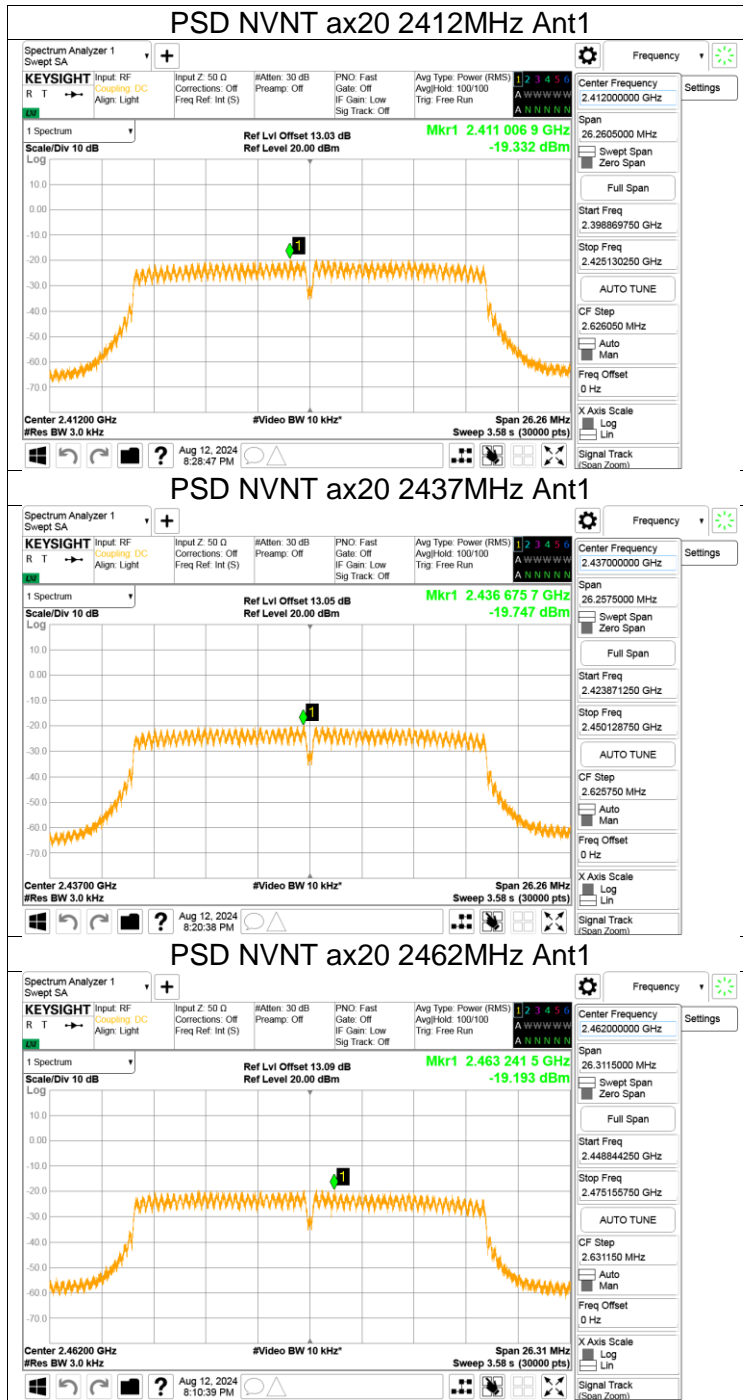



Appendix E1:Band Edge


Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-48.24	-30	Pass
b	2462	Ant1	-52.59	-30	Pass
g	2412	Ant1	-37.24	-30	Pass
g	2462	Ant1	-44.89	-30	Pass
n20	2412	Ant1	-40.25	-30	Pass
n20	2462	Ant1	-41.01	-30	Pass
n40	2422	Ant1	-42.93	-30	Pass
n40	2452	Ant1	-40.09	-30	Pass
ax20	2412	Ant1	-39.31	-30	Pass
ax20	2462	Ant1	-41.12	-30	Pass

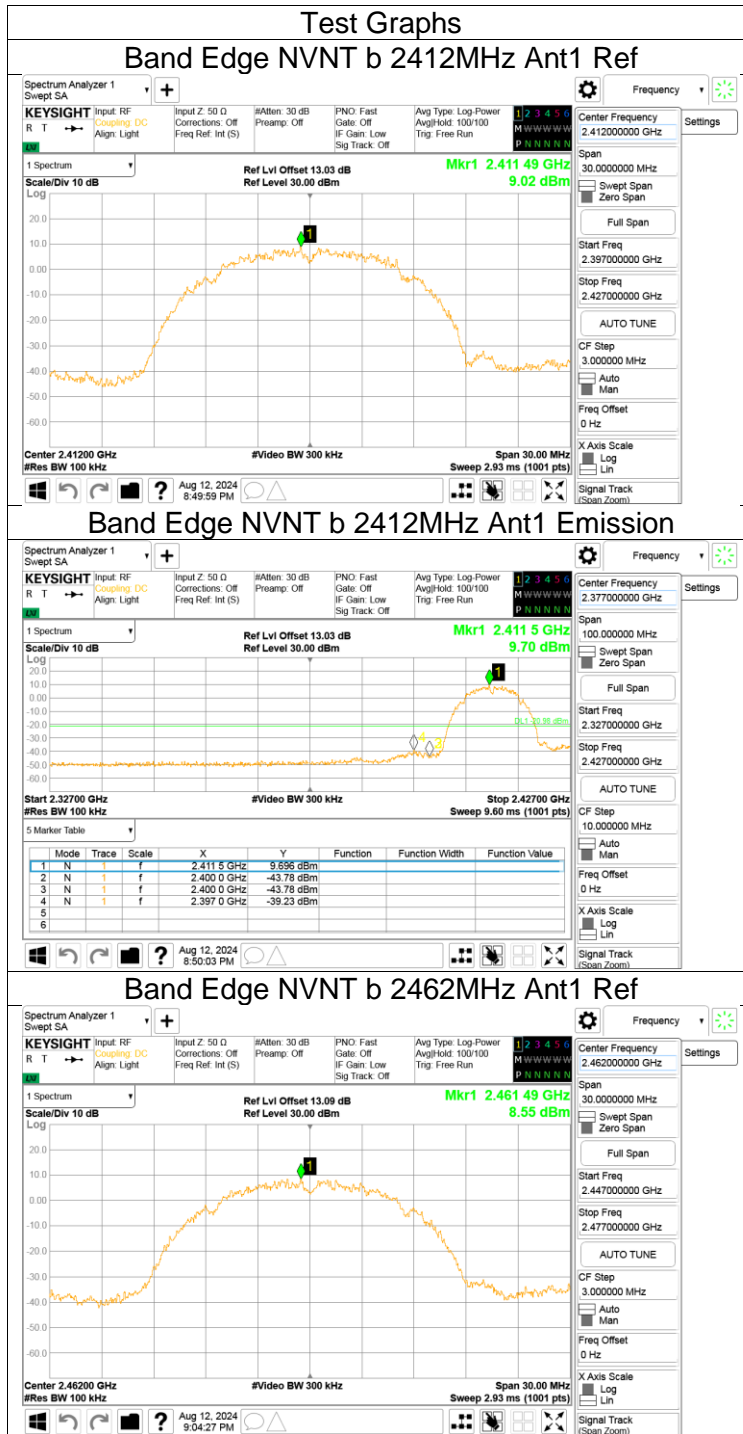


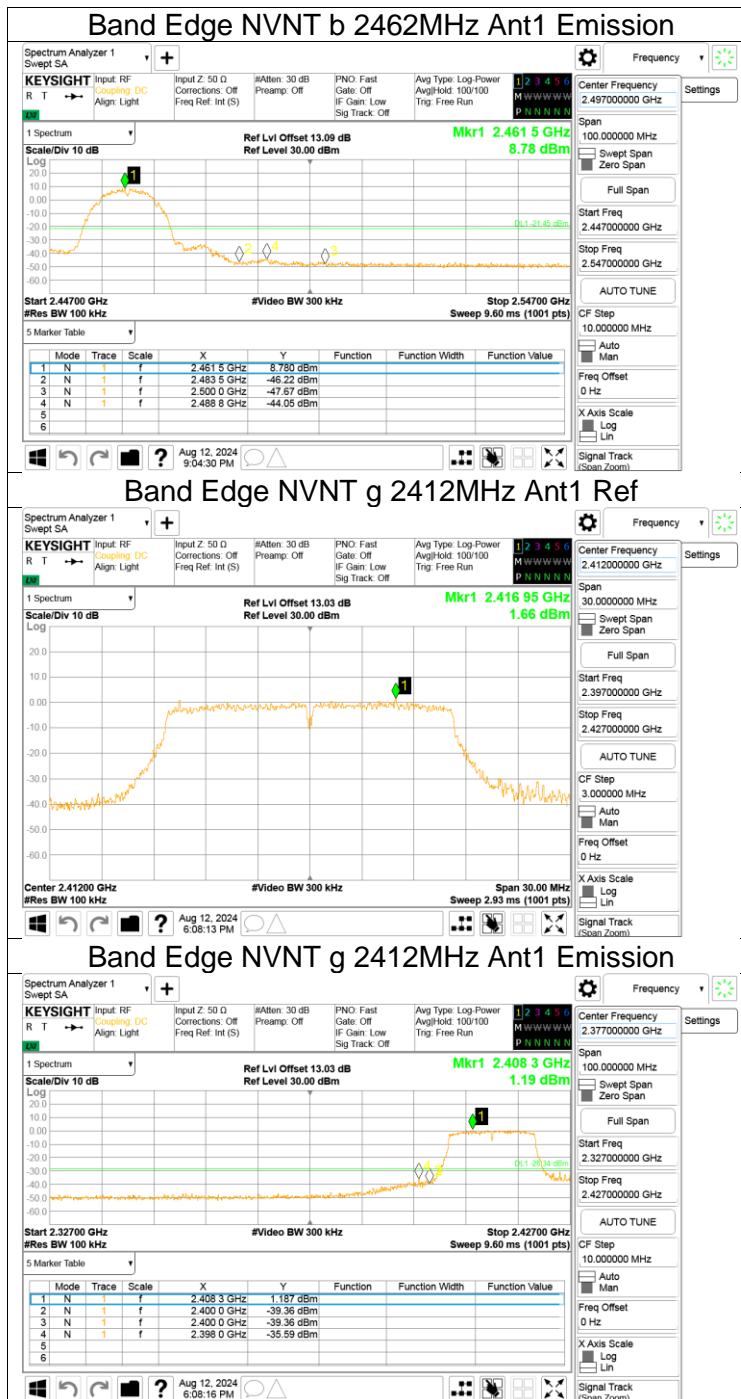


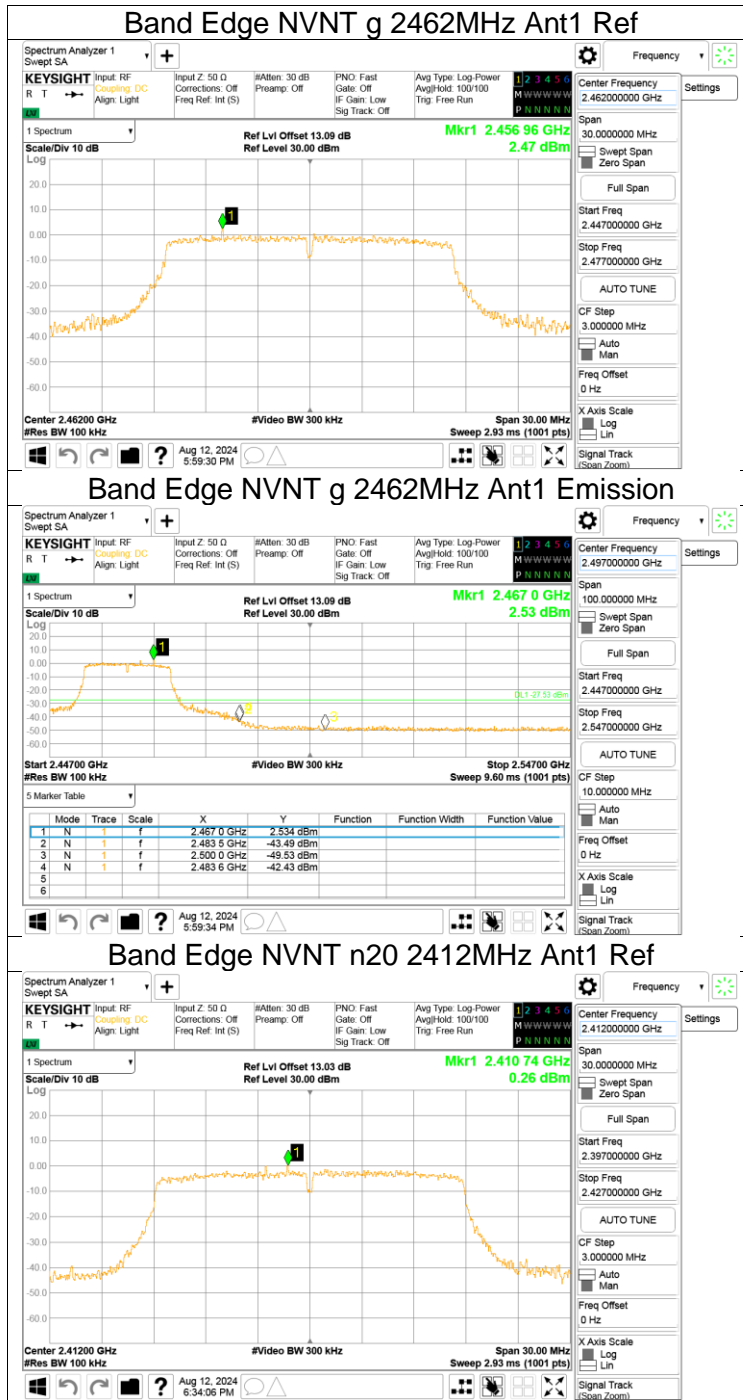

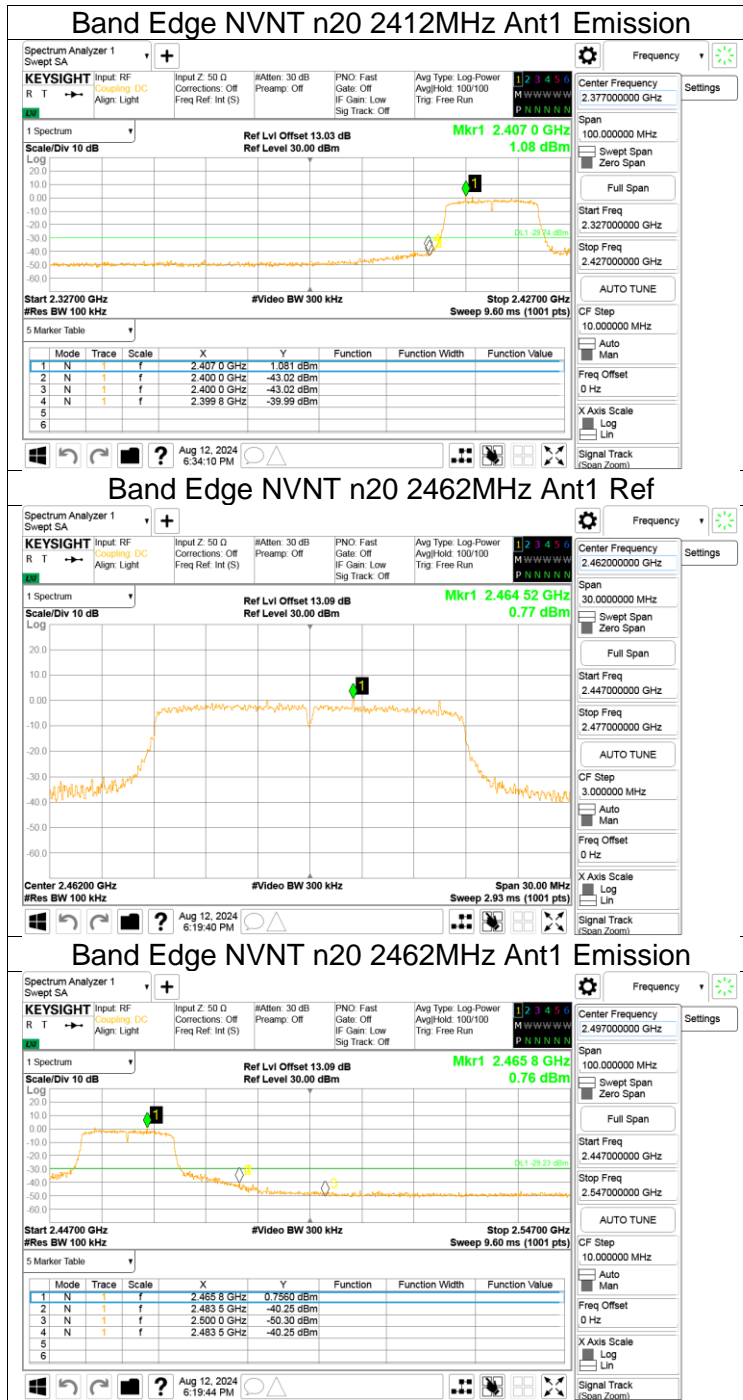

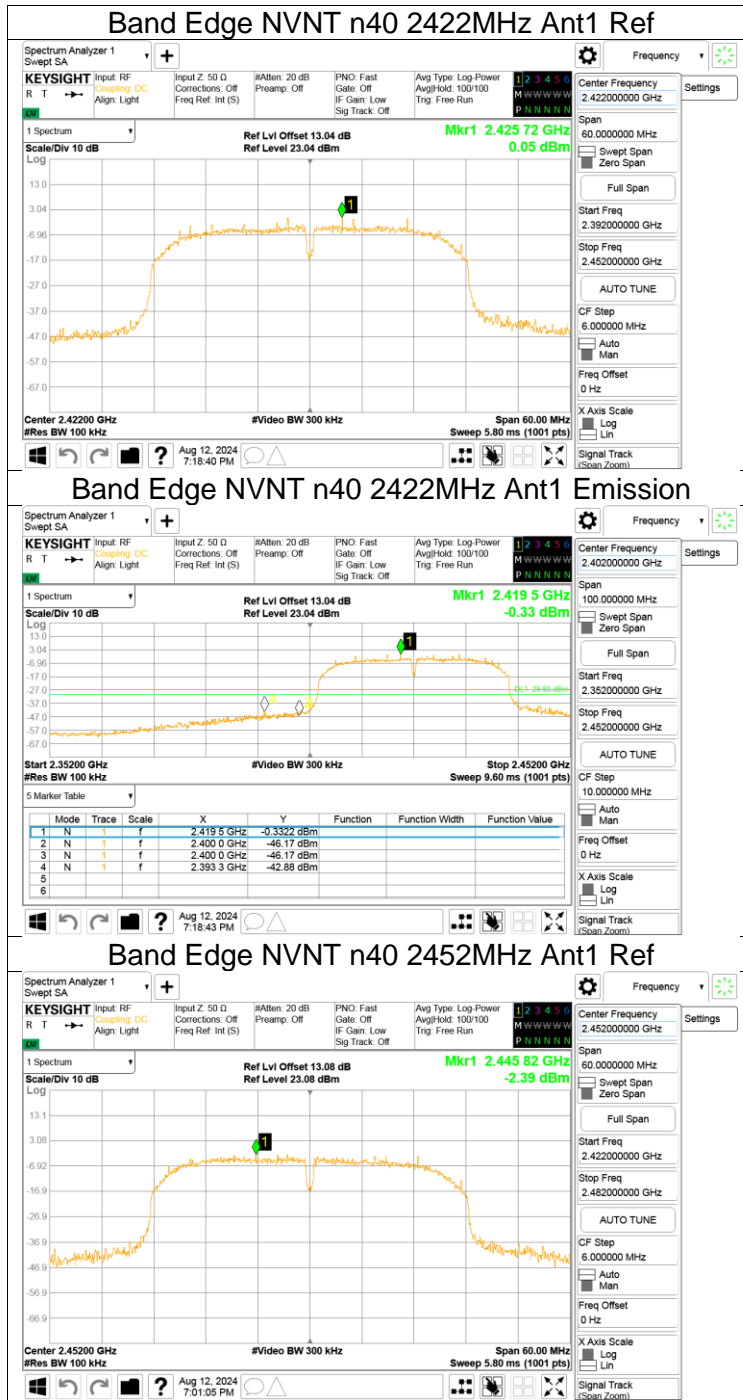

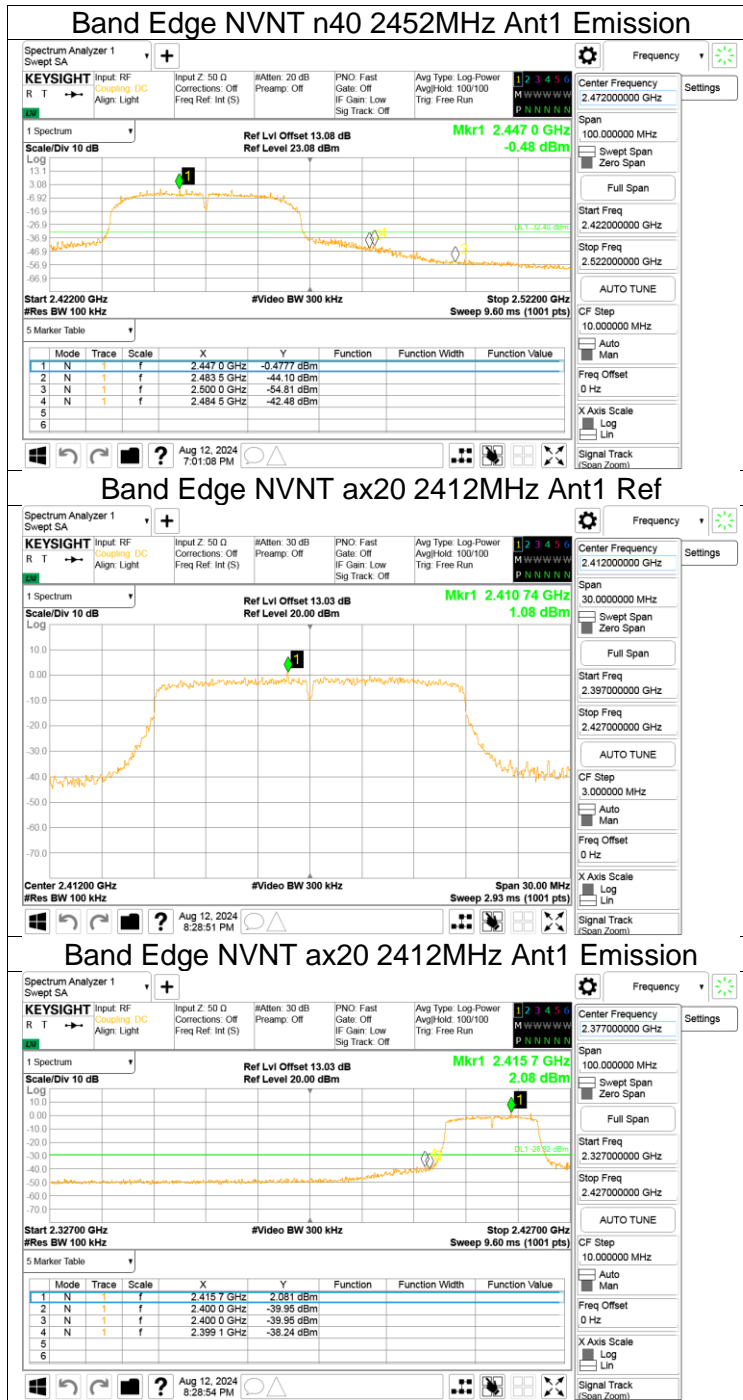

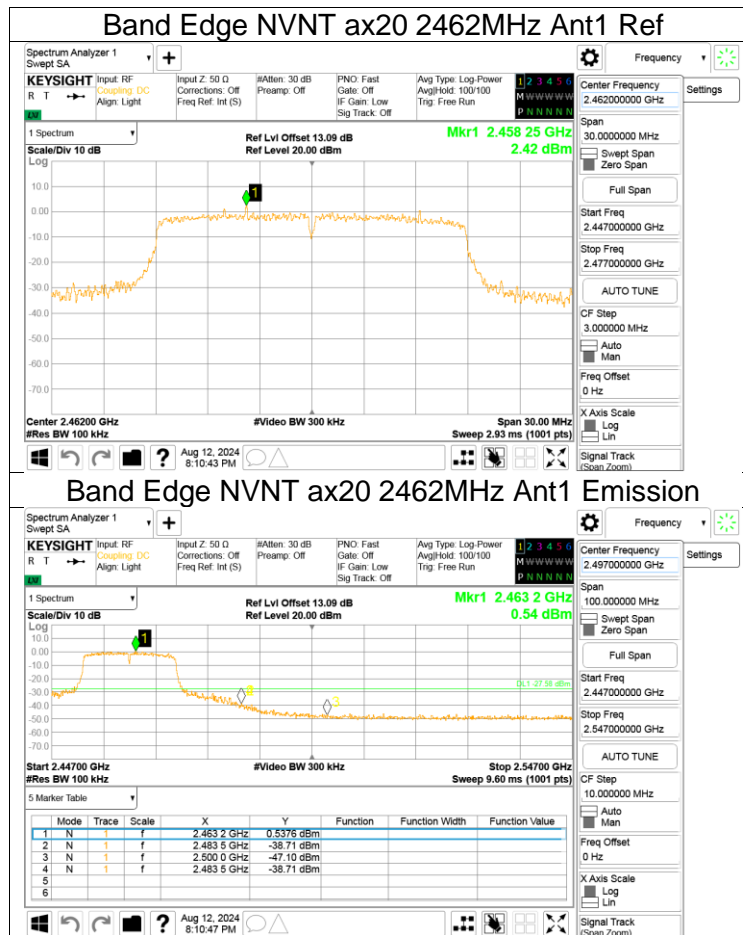

Appendix F1: Conducted RF Spurious Emission

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
b	2412	Ant1	-47.57	-30	Pass
b	2437	Ant1	-47.62	-30	Pass
b	2462	Ant1	-47.8	-30	Pass
g	2412	Ant1	-39.27	-30	Pass
g	2437	Ant1	-40.53	-30	Pass
g	2462	Ant1	-39.39	-30	Pass
n20	2412	Ant1	-40.09	-30	Pass
n20	2437	Ant1	-51.39	-30	Pass
n20	2462	Ant1	-41.06	-30	Pass
n40	2422	Ant1	-48.76	-30	Pass
n40	2437	Ant1	-38.63	-30	Pass
n40	2452	Ant1	-48.46	-30	Pass
ax20	2412	Ant1	-41.43	-30	Pass
ax20	2437	Ant1	-39.19	-30	Pass
ax20	2462	Ant1	-41.86	-30	Pass

