



Instruction Manual

KB02027 Bluetooth Keyboard

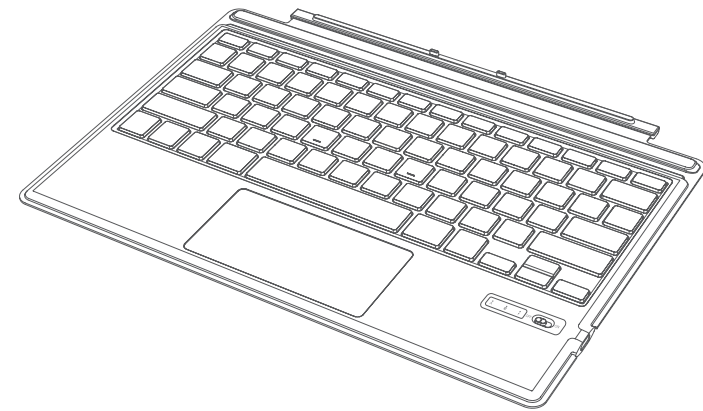

English

· Product Diagram

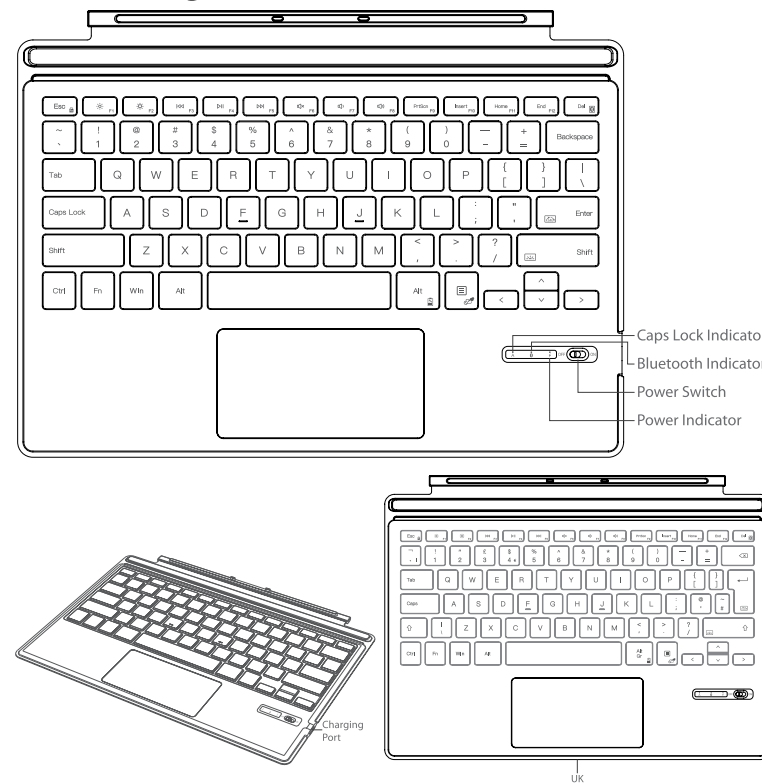

1. Power ON/OFF KB02027

Power ON: Toggle the switch to ON.
Power OFF: Toggle the switch to OFF.

2. Pair KB02027 with a Surface Pro

Step 1: For the first time you pair KB02027 with a Surface Pro, you just need to toggle the switch on the KB02027 to "ON" position and KB02027 will enter Bluetooth pairing mode automatically. To enter this mode, you can also hold **Fn** + **Del** simultaneously for 3 seconds and then the Bluetooth indicator will flash to indicate that KB02027 is under pairing mode.

Step 2: On the Surface Pro, select All Settings - Devices - Add Bluetooth or Other Device - Bluetooth and then "Inateck KB02027" will show up as an available device.

Step 3: Select "Inateck KB02027" on Surface Pro.

Step 4: When the blue indicator keeps on, it means that KB02027 is paired with the Surface Pro successfully.

Note: If KB02027 doesn't work even though the blue indicator stays on, it might have been paired with other nearby computer. In this case, please follow steps in "Troubleshooting in Bluetooth Pairing" to resolve the issue.

3. Troubleshooting in Bluetooth Pairing

Step 1: Delete all the Bluetooth pairing records related to KB02027 on the Surface Pro.

Step 2: Hold **Esc** + **+** simultaneously for 3 seconds. The 3 indicators will flash 3 times simultaneously and then the blue indicator will flash, which means that the keyboard enters Bluetooth pairing mode. Under this mode, please re-pair the keyboard with the Surface Pro.

4. LED Indicator

Indicator	Status	Meaning
Charging Indicator-Red	Blinking	Low Battery, <20%
	Solid	Charging
Charging Indicator-Green	Solid	Fully Charged
Caps Lock Indicator-White	Solid	Caps Lock On
	Off	Caps Lock Off
Bluetooth Indicator-Blue	Solid	Bluetooth Connected
	Off	Bluetooth Unconnected
	Fast Blinking	Bluetooth Pairing
	Slow Blinking	Bluetooth Reconnecting

5. Keyboard Backlight

1) Hold **Fn** + **Enter** simultaneously to adjust the backlight color. 7 colors are available in total.

2) Hold **Fn** + **Shift** simultaneously to adjust the backlight brightness. 3 levels are at your choice.

Note: When the battery level is lower than 20%, the backlight turns off automatically.

6. Function Keys

Esc (F0)	Undo Enable Fn Lock	F1	Brightness- F1	F2	Brightness+ F2
Left Arrow (F3)	Last track F3	Right Arrow (F4)	Play/Pause F4	Next Arrow (F5)	Next track F5
Mute (F6)	Mute F6	Volume Down (F7)	Volume- F7	Volume Up (F8)	Volume+ F8
Print Screen (F9)	Take a screenshot F9	Insert (F10)	Insert F10	Home (F11)	Home F11
End (F12)	End F12	Del (F12)	Delete		

6.2 How to Use F1-F12

You may press the **Fn** + **Esc** keys to enable/disable the Fn lock. (The keyboard disables **Fn** lock by default.)

When the Fn lock is enabled:

Press can trigger the functionality owned by **F1**;

Press **Fn** + **F1** to dim the brightness of the screen;

This method applies to all F Keys (**F1** - **End F12**).

When the Fn lock is disabled (Default Status):

Press the **F1** to dim the brightness of the screen. Press **Fn** + **F1** simultaneously to use the functionality

owned by **F1**.

6.3 Fn+Key Combinations

Fn + Alt	Check the Battery Level
Fn + Touch Pad	Turn on/off Touch Pad
Fn + Del	Enter Bluetooth Pairing Mode
Fn + Esc	Enable/Disable Fn Lock

7. Restore Factory Settings

If you are unsure what settings you have made on KB02027, you may hold **Esc** + **+** simultaneously for 3 seconds to restore the factory setting.

Note: After factory reset, the keyboard would enter Bluetooth pairing mode automatically. You need to re-pair KB02027 with your Surface Pro.

8. Check Battery Level

Press **Fn** + **Alt** simultaneously to check the battery level when KB02027 is not being charged.

Blinking Frequency	Battery Level
Once	0-25%
Twice	25%-50%
Three Times	50%-75%
Four Times	75%-100%

9. Charging

When the battery level is under 20%, the red indicator will flash. Please recharge the KB02027 in time. The recommended charging voltage is 5V. To charge KB02027, you can connect the USB cable to the charger of a cellphone or the USB port of a computer. The keyboard will be fully charged after 3 hours.

Note: It is not recommended to charge KB02027 with a fast charger.

10. Product Specification


Bluetooth Version	V5.3
Bluetooth Range	10m
Charging Time	2-3h
Operating Current (Backlight on)	About 5h
Operating Current (Backlight off)	About 50h
Operating Temperature	-10°C -55°C
Bluetooth Frequency Range	2402-2480MHz
Actuation Force	60 ± 10g
Battery Capacity	500mAh

11. Packing List

KB02027 *1
Charging Cable *1
Instruction Manual *1

Deutsch

· Produkt-Diagramm

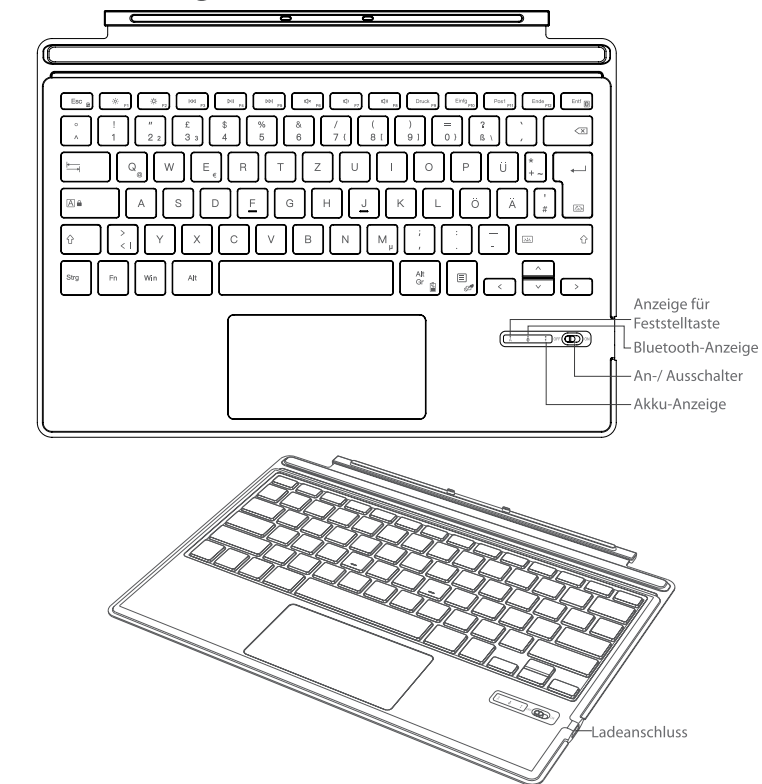

1. Ein-/ Ausschalten der KB02027

Einschalten: Schalten Sie den Schalter auf ON.
Ausschalten: Schalten Sie den Schalter auf OFF.

2. Koppeln Sie KB02027 mit einem Surface Pro

Schritt 1: Wenn Sie die KB02027 zum ersten Mal mit einem Surface Pro koppeln, müssen Sie nur den Schalter an der KB02027 in die Position "ON" bringen und die KB02027 wird automatisch in den Bluetooth-Kopplungsmodus wechseln. Um in diesen Modus zu gelangen, können Sie auch **Fn** + **Entf** gleichzeitig für 3 Sekunden gedrückt halten. Dann blinkt die Bluetooth-Anzeige, um anzuzeigen, dass sich die KB02027 im Kopplungs-Modus befindet.

Schritt 2: Wählen Sie auf dem Surface Pro Alle Einstellungen - Geräte - Bluetooth oder anderes Gerät hinzufügen - Bluetooth und dann wird "Inateck KB02027" als ein verfügbares Gerät angezeigt.

Schritt 3: Wählen Sie "Inateck KB02027" auf dem Surface Pro.

Schritt 4: Wenn die blaue Anzeige weiterhin leuchtet, bedeutet dies, dass KB02027 erfolgreich mit dem Surface Pro gekoppelt wurde.

Hinweis: Wenn KB02027 nicht funktioniert, obwohl die blaue Anzeige weiterhin leuchtet, wurde das Gerät möglicherweise mit einem anderen Computer in der Nähe gekoppelt. In diesem Fall befolgen Sie bitte die Schritte unter "Fehlerbehebung bei der Bluetooth-Kopplung", um das Problem zu lösen.

3. Fehlersuche bei der Bluetooth-Kopplung

Schritt 1: Löschen Sie alle Bluetooth-Kopplungsdatensätze im Zusammenhang mit KB02027 auf dem Surface Pro.

Halten Sie **Esc** + **+** gleichzeitig für 3 Sekunden gedrückt. Die drei Anzeigen blinken dreimal gleichzeitig und dann blinkt die blaue Anzeige, was bedeutet, dass die Tastatur in den Bluetooth-Kopplungsmodus übergeht. In diesem Modus müssen Sie die Tastatur erneut mit dem Surface Pro koppeln.

4. LED-Anzeige

Anzeige	Status	Bedeutung
Ladeanzeige - Rot	Blinkend	Niedriger Akkustand, <20%
	Immer an	Aufladen
Ladeanzeige - Grün	Immer an	Voll aufgeladen
Anzeige Feststelltaste - Weiß	Immer an	Feststelltaste Ein
	Aus	Feststelltaste Aus
Bluetooth-Anzeige - Blau	Immer an	Bluetooth - verbunden
	Aus	Bluetooth - nicht verbunden
	Schnell Blinkend	Bluetooth-Kopplung
	Langsam Blinkend	Bluetooth - Wiederherstellung der Verbindung

5. Hintergrundbeleuchtung der Tastatur

1) Halten Sie die **Fn** + **Enter** gleichzeitig gedrückt, um die Farbe der Hintergrundbeleuchtung einzustellen. Es sind insgesamt 7 Farben verfügbar.

2) Halten Sie die **Fn** + **Shift** gleichzeitig gedrückt, um die Helligkeit der Hintergrundbeleuchtung einzustellen.

Es stehen 3 Stufen zur Auswahl.

Anmerkung: Wenn der Akkustand weniger als 20% beträgt, schaltet sich die Hintergrundbeleuchtung automatisch aus.

6. Tastenkürzel

6.1

Esc (F0)	Rückgängig Fn Lock aktivieren	F1	Helligkeit- F1	F2	Helligkeit+ F2
Left Arrow (F3)	Letzter Titel F3	Right Arrow (F4)	Wiedergabe/Pause F4	Next Arrow (F5)	Nächster Titel F5
Mute (F6)	Stumm F6	Volume Down (F7)	Lautstärke- F7	Volume Up (F8)	Lautstärke+ F8
Print Screen (F9)	Screenshot machen F9	Insert (F10)	Einfügen F10	Home (F11)	Home F11
End (F12)	Ende F12	Entf (F12)	Löschen		

6.2 So verwenden Sie F1-F12

Sie können die Tasten **Fn** + **Esc** drücken, um die Fn-Sperre zu aktivieren/deaktivieren. (Die Tastatur deaktiviert die **Fn** Tastensperre standardmäßig.)

Wenn die Fn-Sperre aktiviert ist:

Durch Drücken der Taste kann die Funktion der Taste **F1** ausgelöst werden;

Drücken Sie **Fn** + **F1** um die Helligkeit des Bildschirms zu dimmen;

Diese Methode gilt für alle F-Tasten (**F1** - **Ende F12**).

说明书尺寸：折后 120*180mm

材质：100g 双胶纸

此页不做印刷