
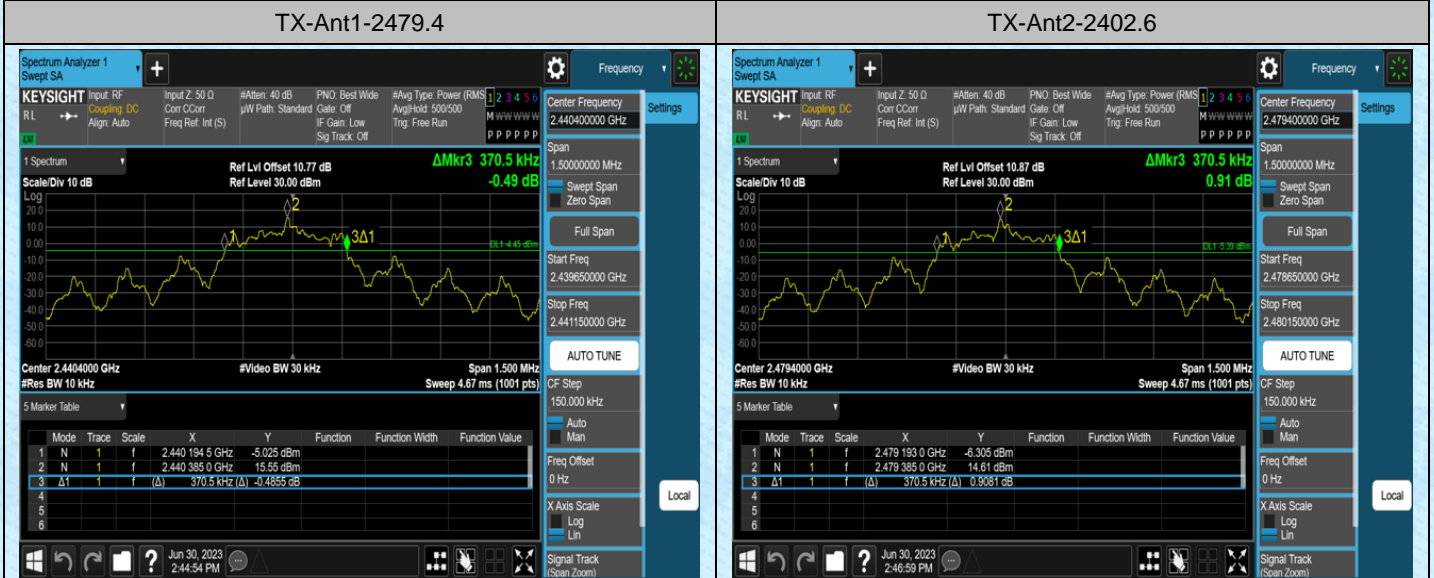


**AppendixA: 20dB Emission Bandwidth****Test Result**

Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	2402.6	0.367	2402.393	2402.761	---	---
TX	Ant1	2440.4	0.370	2440.193	2440.564	---	---
TX	Ant1	2479.4	0.369	2479.193	2479.562	---	---
TX	Ant2	2402.6	0.370	2402.395	2402.765	---	---
TX	Ant2	2440.4	0.370	2440.195	2440.565	---	---
TX	Ant2	2479.4	0.370	2479.193	2479.564	---	---

## Test Graphs


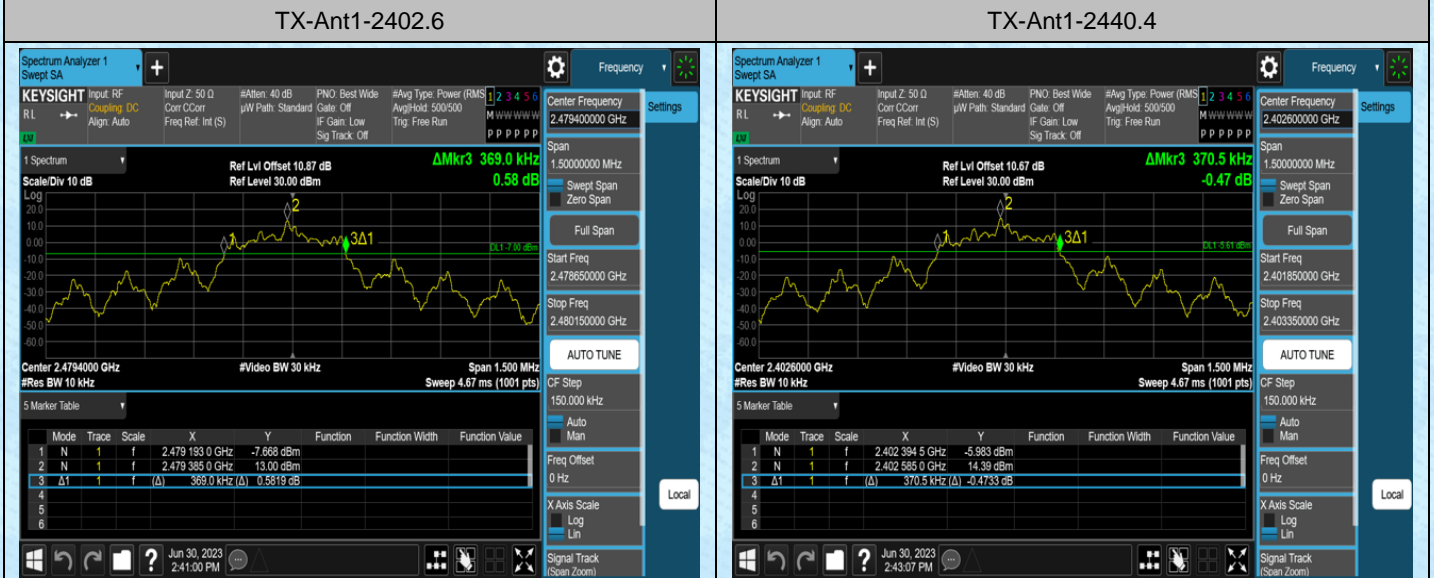


## AppendixB: Occupied Channel Bandwidth

### Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
TX	Ant1	2402.6	0.39145	2402.3860	2402.7775	---	---
TX	Ant1	2440.4	0.38276	2440.1909	2440.5736	---	---
TX	Ant1	2479.4	0.39170	2479.1833	2479.5750	---	---
TX	Ant2	2402.6	0.38588	2402.3895	2402.7753	---	---
TX	Ant2	2440.4	0.38314	2440.1912	2440.5743	---	---
TX	Ant2	2479.4	0.38656	2479.1879	2479.5744	---	---

## Test Graphs

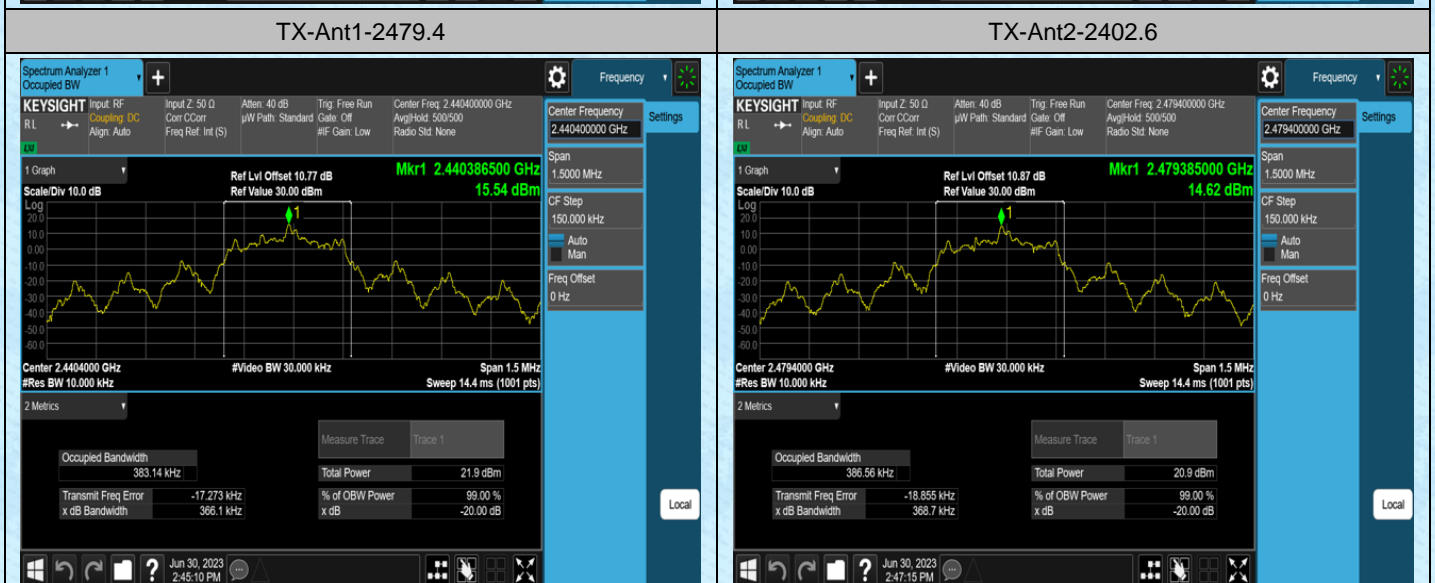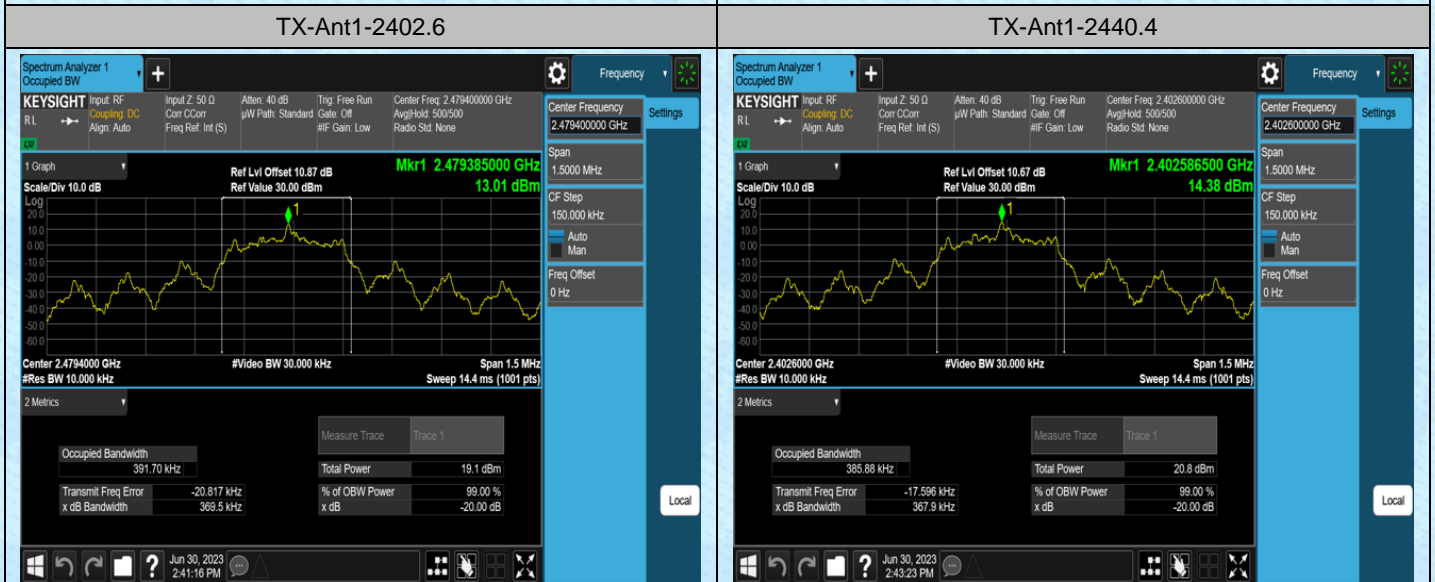

## AppendixC: Maximum conducted output power

### Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
TX	Ant1	2402.6	15.15	≤20.97	PASS
TX	Ant1	2440.4	15.80	≤20.97	PASS
TX	Ant1	2479.4	13.89	≤20.97	PASS
TX	Ant2	2402.6	15.44	≤20.97	PASS
TX	Ant2	2440.4	16.44	≤20.97	PASS
TX	Ant2	2479.4	15.44	≤20.97	PASS

## Test Graphs




## AppendixD: Carrier frequency separation

### Test Result

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
TX	Ant1	Hop_2402.6	1.274	≥0.367	PASS
TX	Ant1	Hop_2440.4	1.302	≥0.370	PASS
TX	Ant1	Hop_2479.4	1.708	≥0.369	PASS
TX	Ant2	Hop_2402.6	1.246	≥0.370	PASS
TX	Ant2	Hop_2440.4	1.218	≥0.370	PASS
TX	Ant2	Hop_2479.4	2.408	≥0.370	PASS

## Test Graphs

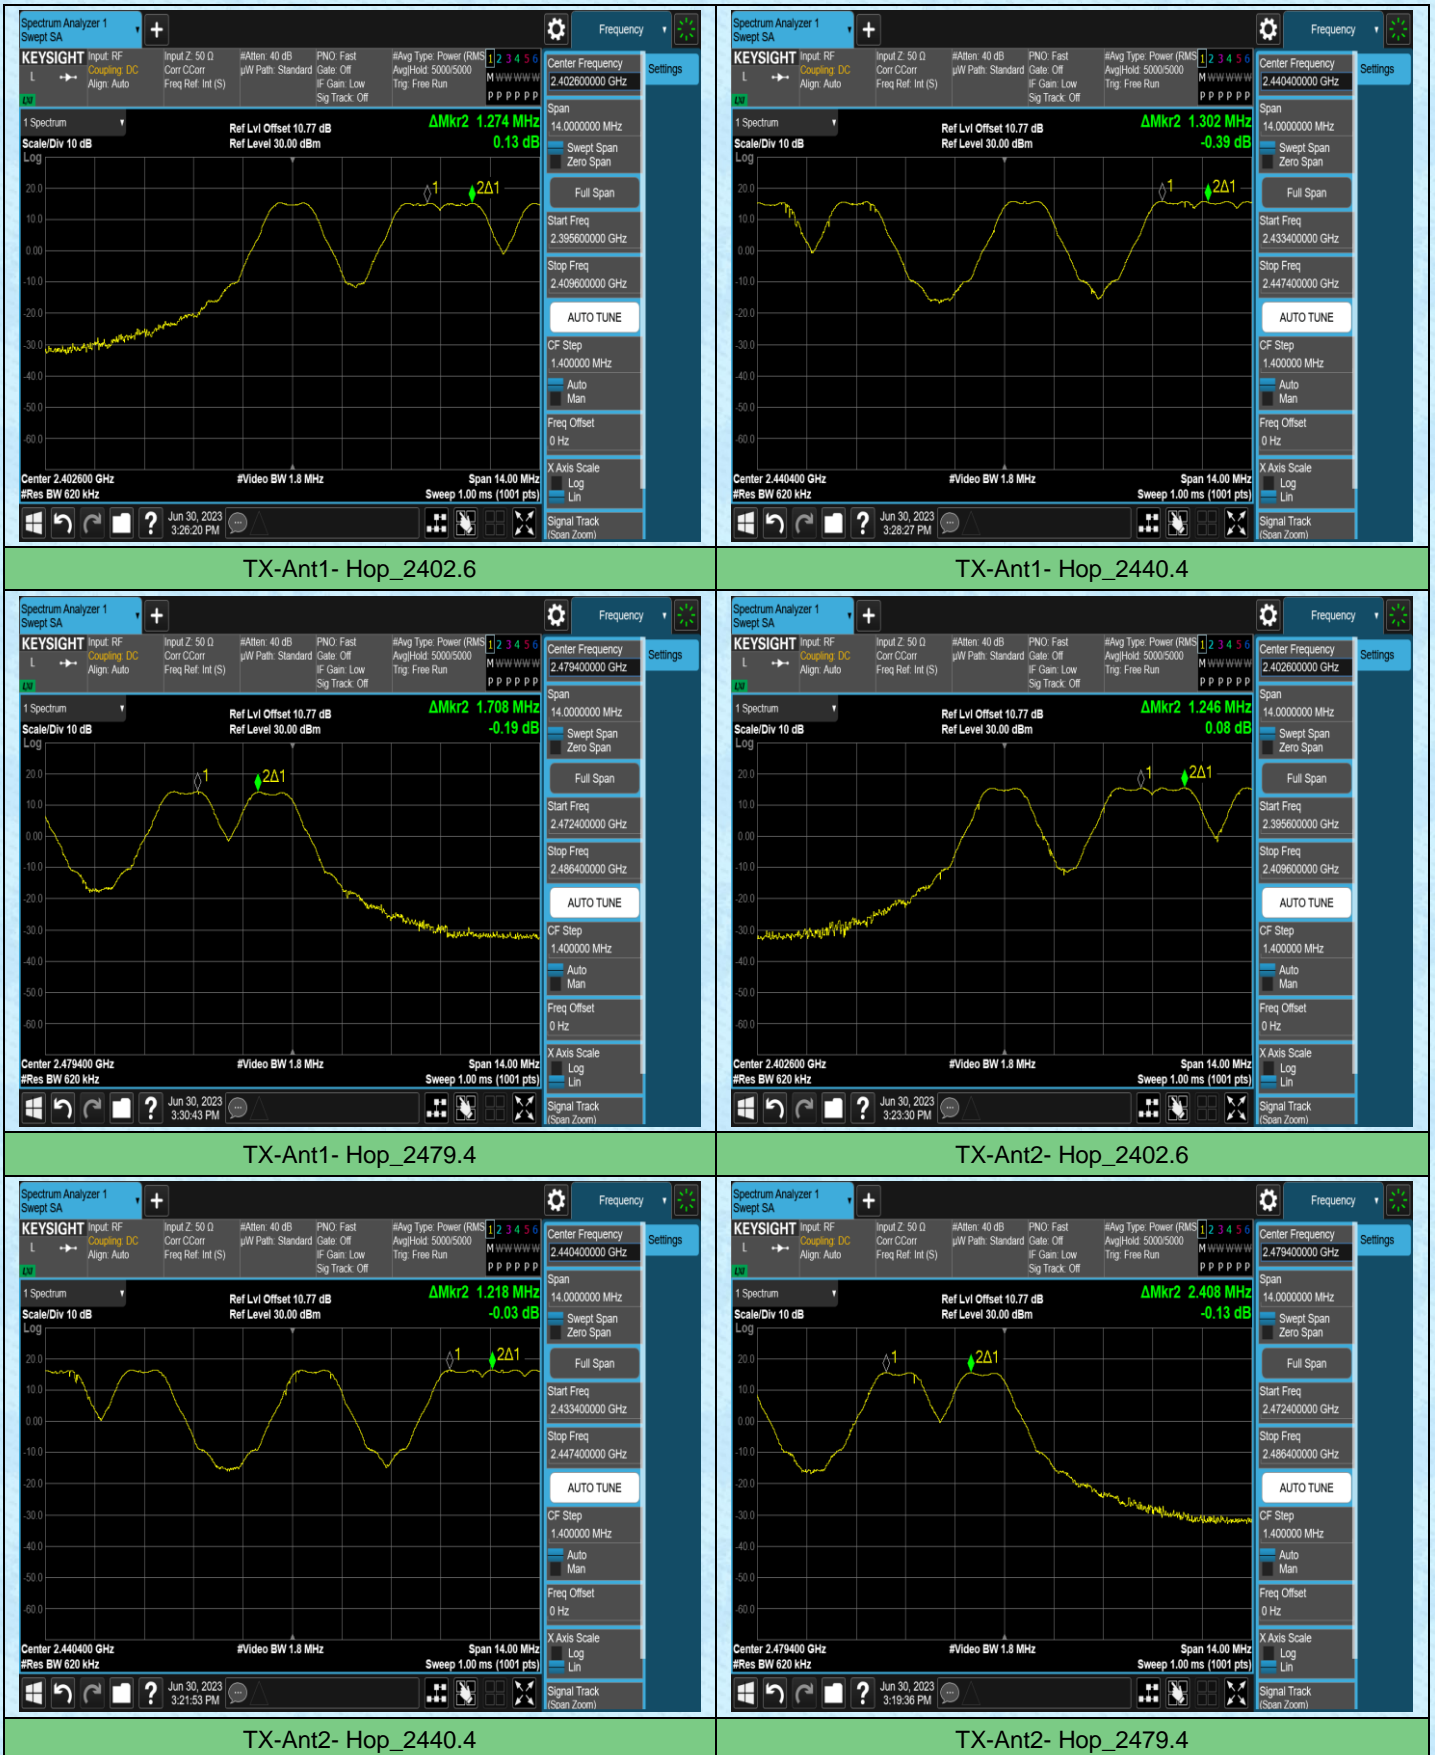



## AppendixE: Time of occupancy

### Test Result

Test Mode	Antenna	Frequency[MHz]	BurstWidth [ms]	Observation Period[s]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
TX	Ant1	Hop_2440.4	0.4269	12.8	37	0.01580	≤0.4	PASS
TX	Ant2	Hop_2440.4	0.4307	12.8	37	0.01594	≤0.4	PASS

### Test Graphs

