


## AppendixA: 20dB Emission Bandwidth

### Test Result

Test Mode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
Tx	Ant1	2408	0.582	2407.694	2408.276	---	---
Tx	Ant1	2440	0.582	2439.703	2440.285	---	---
Tx	Ant1	2475	0.582	2474.694	2475.276	---	---

### Test Graphs

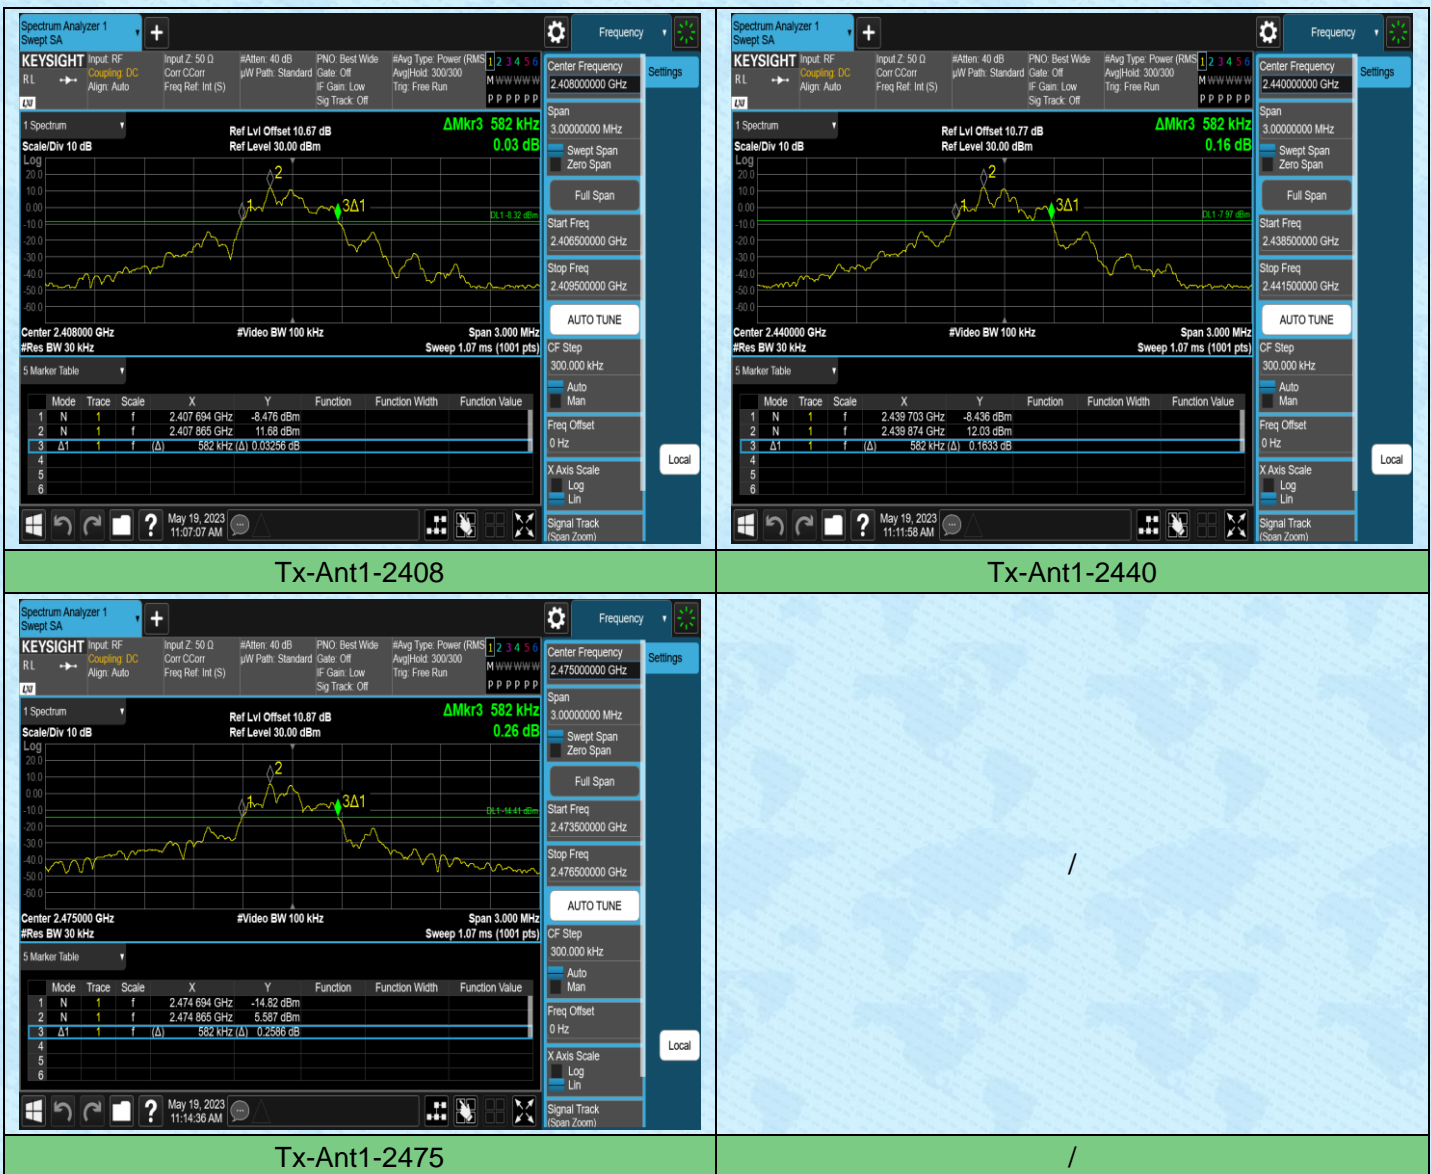


## AppendixB: Occupied Channel Bandwidth

### Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	Limit[MHz]	Verdict
Tx	Ant1	2408	0.55863	---	---
Tx	Ant1	2440	0.55057	---	---
Tx	Ant1	2475	0.56166	---	---

### Test Graphs

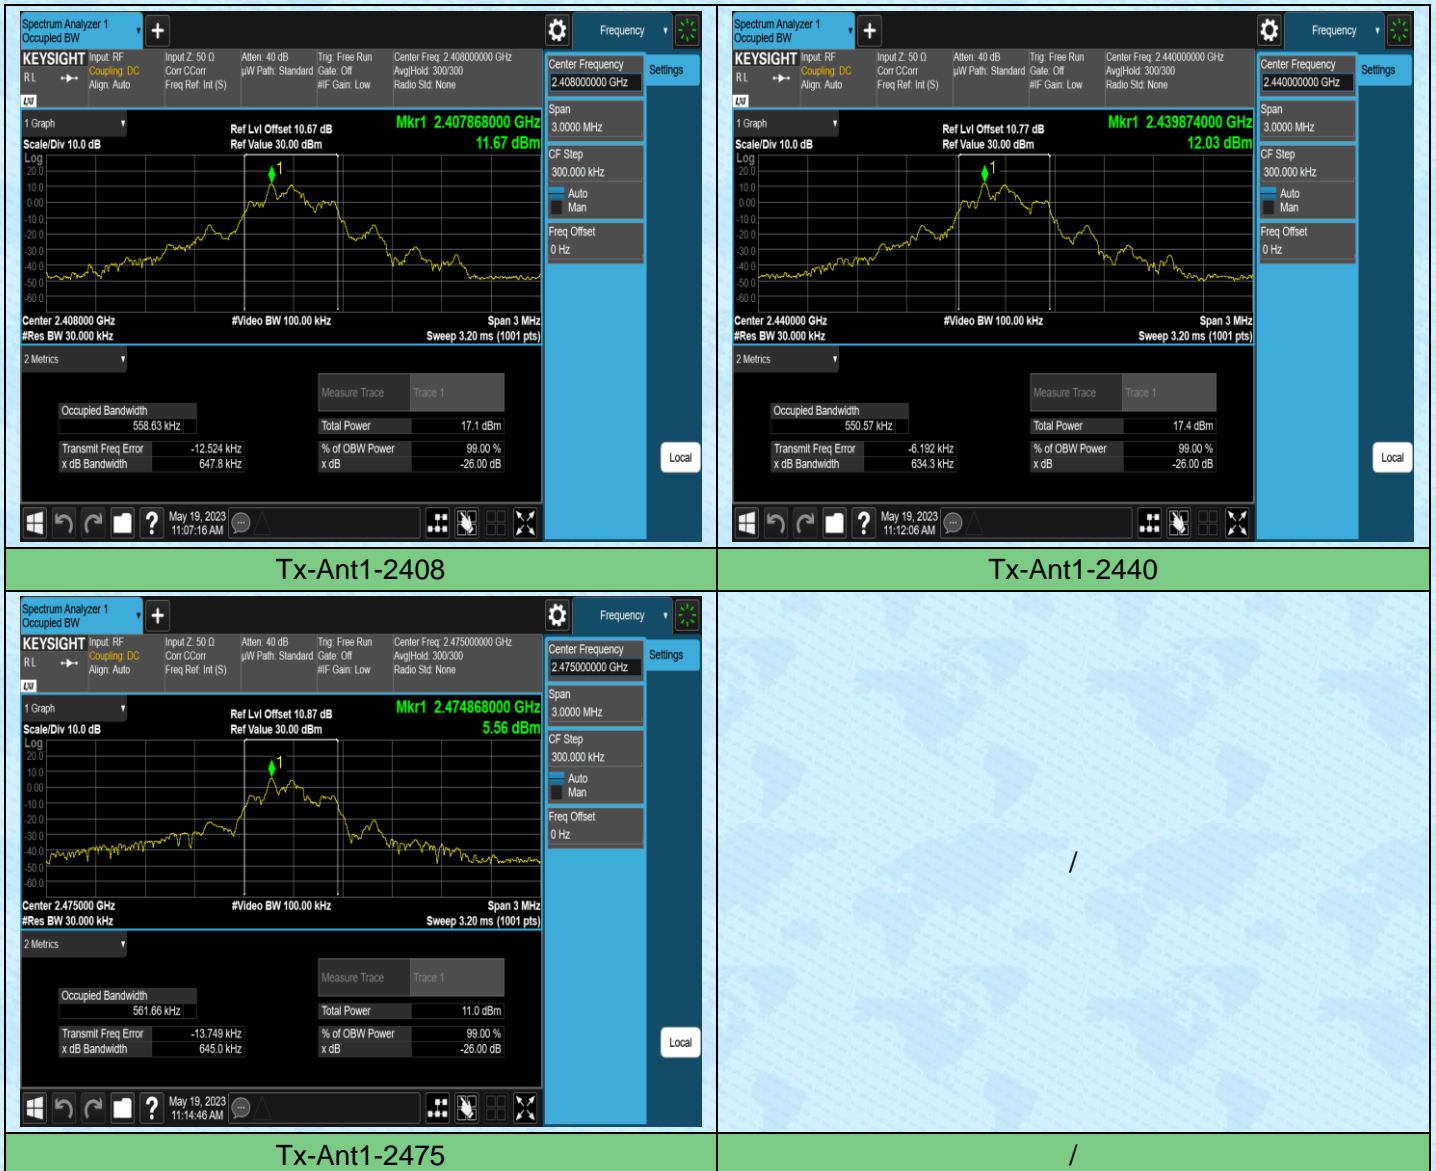


## AppendixC: Maximum conducted output power

### Test Result

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
Tx	Ant1	2408	11.78	≤20.97	PASS
Tx	Ant1	2440	12.10	≤20.97	PASS
Tx	Ant1	2475	7.57	≤20.97	PASS

### Test Graphs

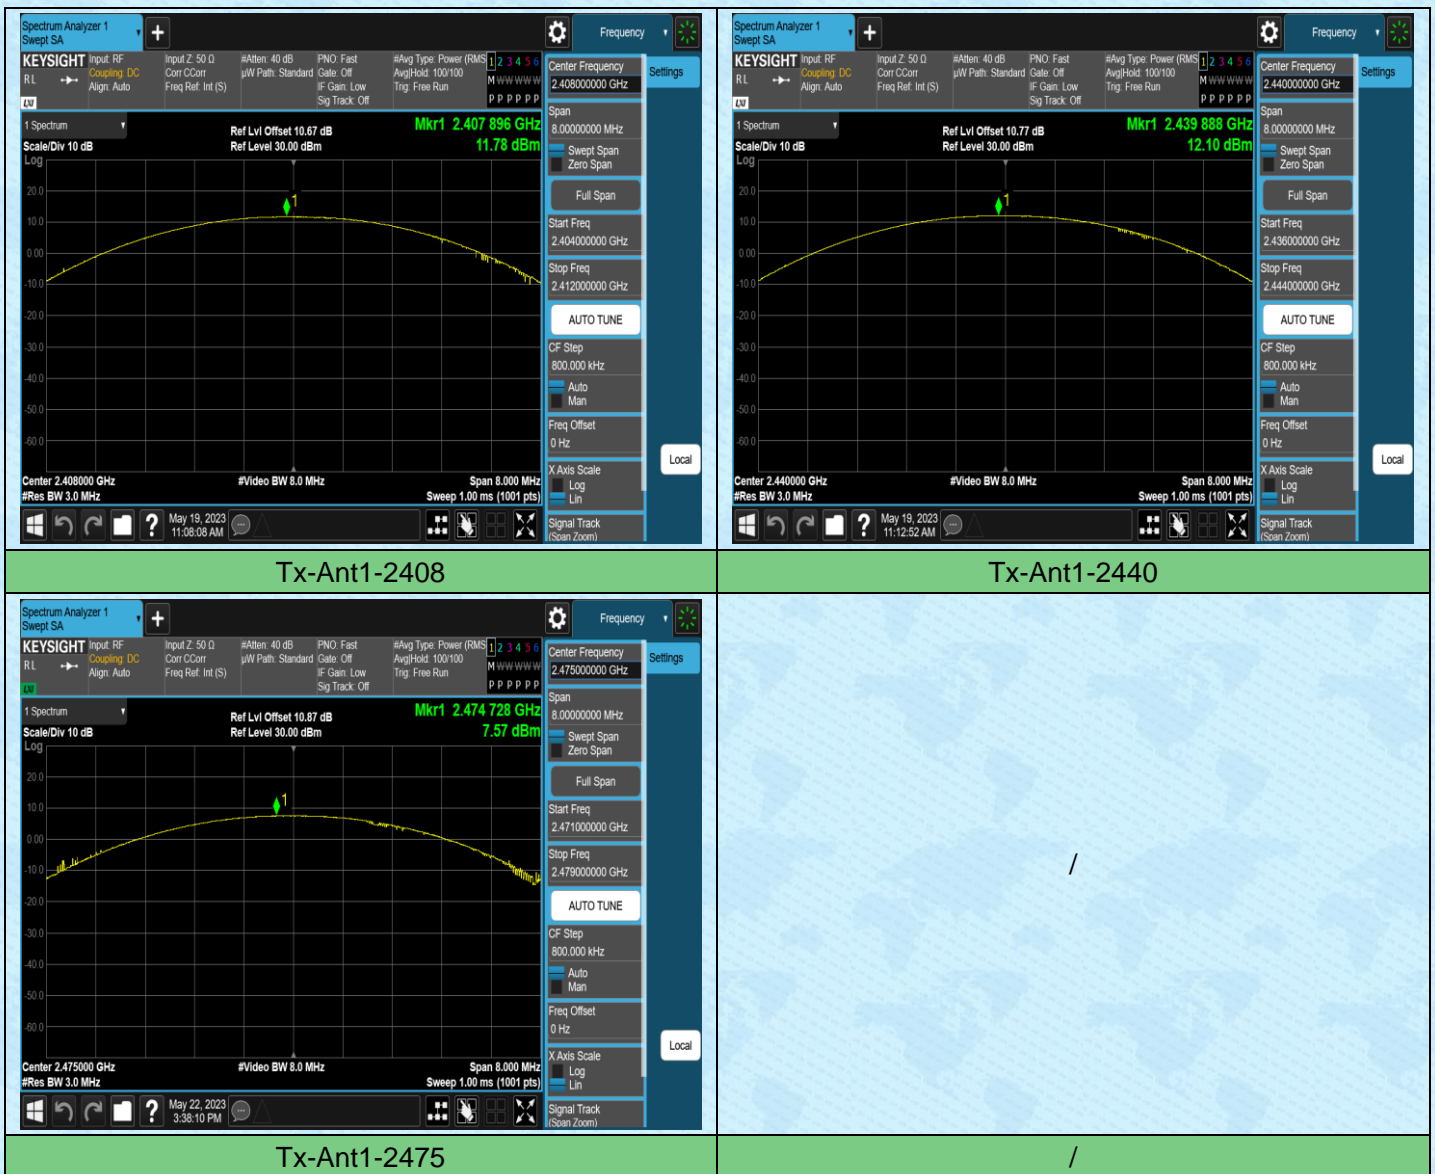


## AppendixD: Carrier frequency separation

### Test Result

Test Mode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
Tx	Ant1	Hop_2408	1.992	≥0.582	PASS
Tx	Ant1	Hop_2440	1.996	≥0.582	PASS
Tx	Ant1	Hop_2475	2.020	≥0.582	PASS

### Test Graphs

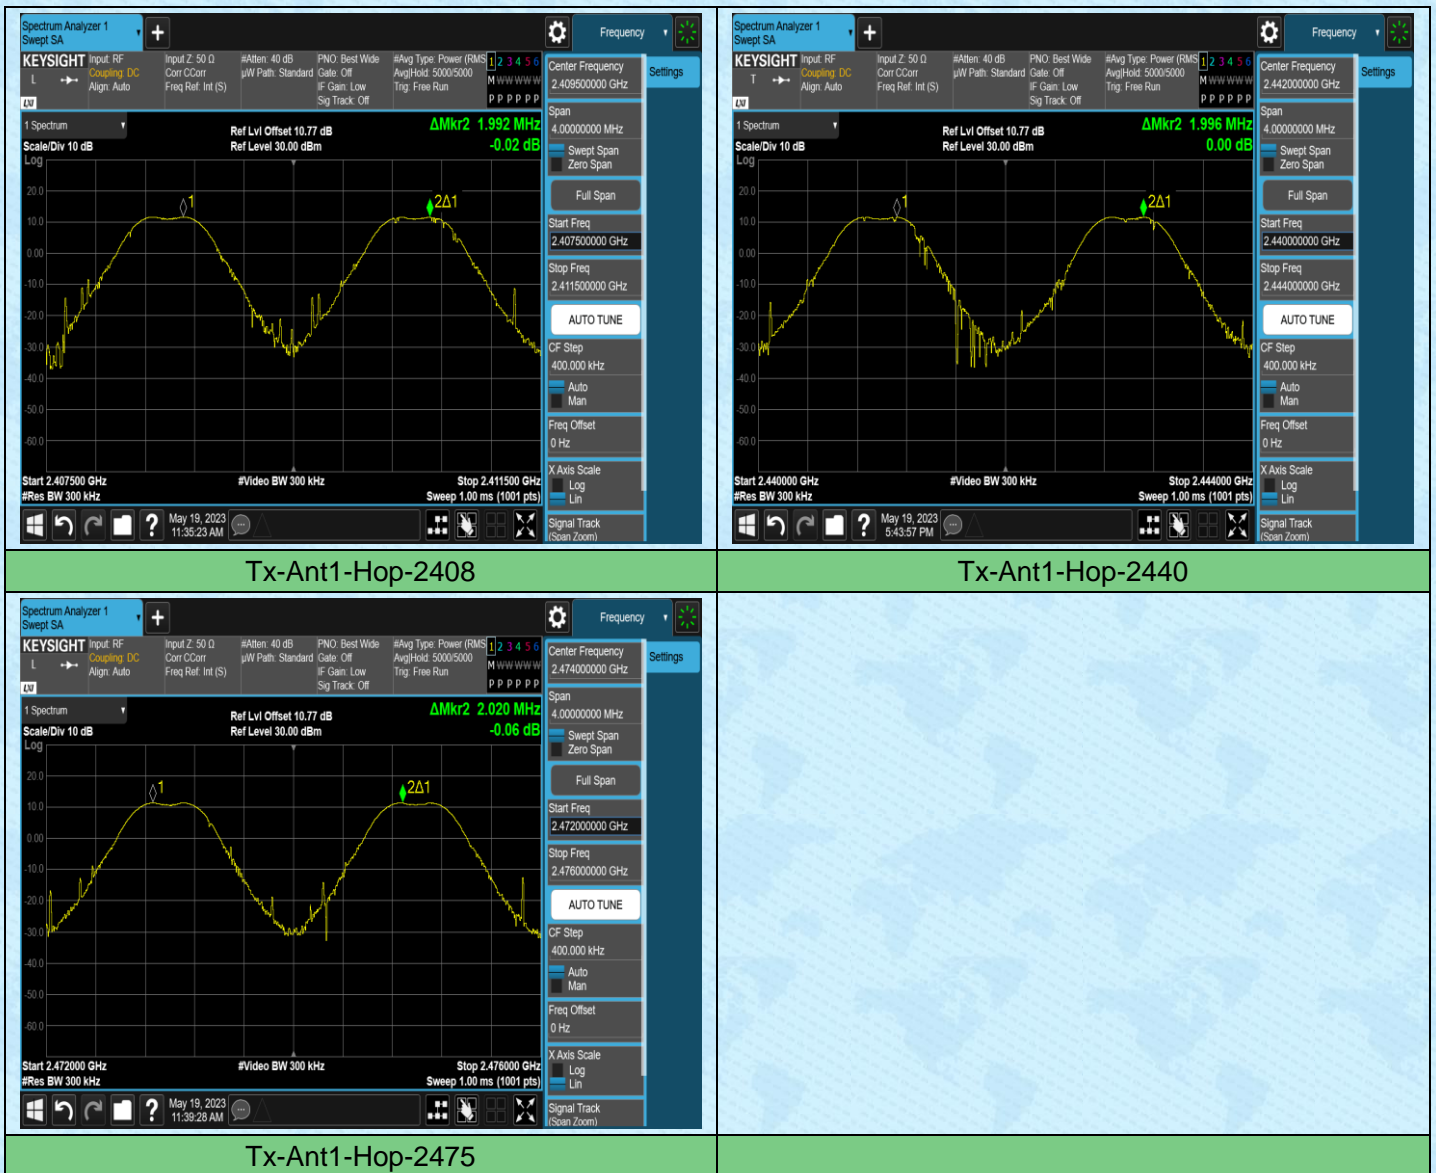


## AppendixE: Time of occupancy

### Test Result

Test Mode	Antenna	Frequency[MHz]	BurstWidth [ms]	Observation Period[s]	TotalHops [[Num]	Result[s]	Limit[s]	Verdict
Tx	Ant1	Hop_2408	0.770	6.4	8	0.0062	≤0.4	PASS

### Test Graphs

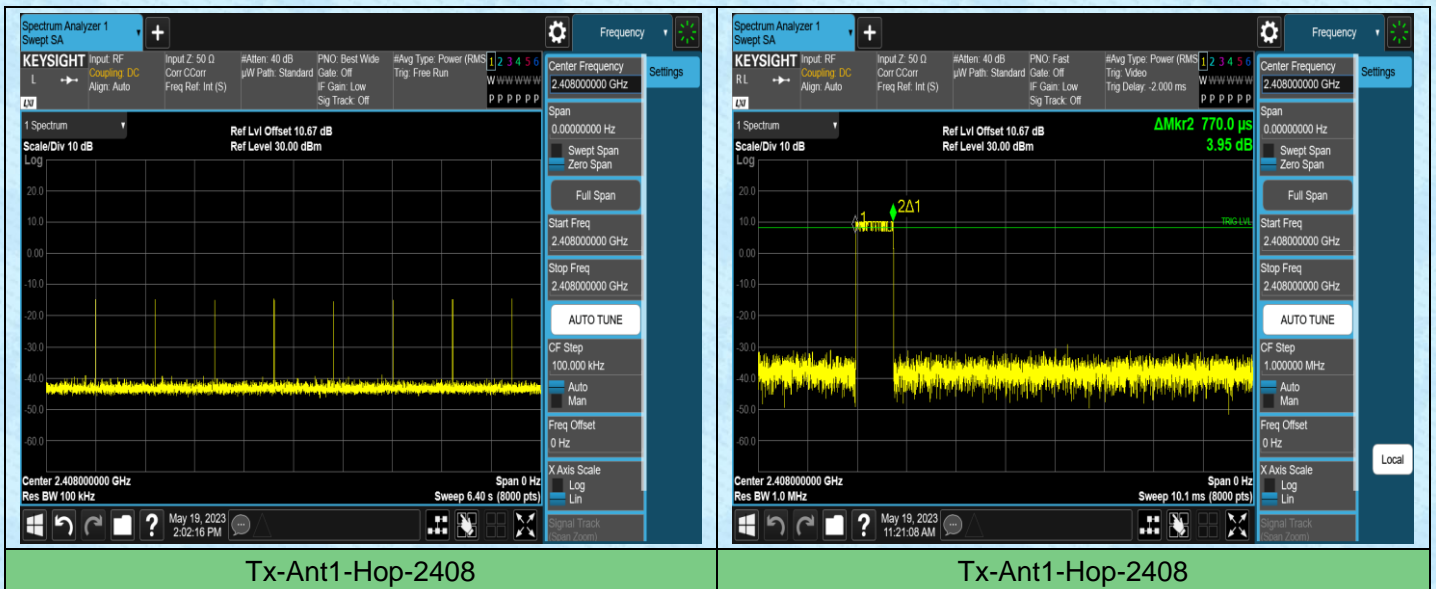


## AppendixF: Number of hopping channels

### Test Result

Test Mode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
Tx	Ant1	Hop	16	≥15	Verdict

### Test Graphs

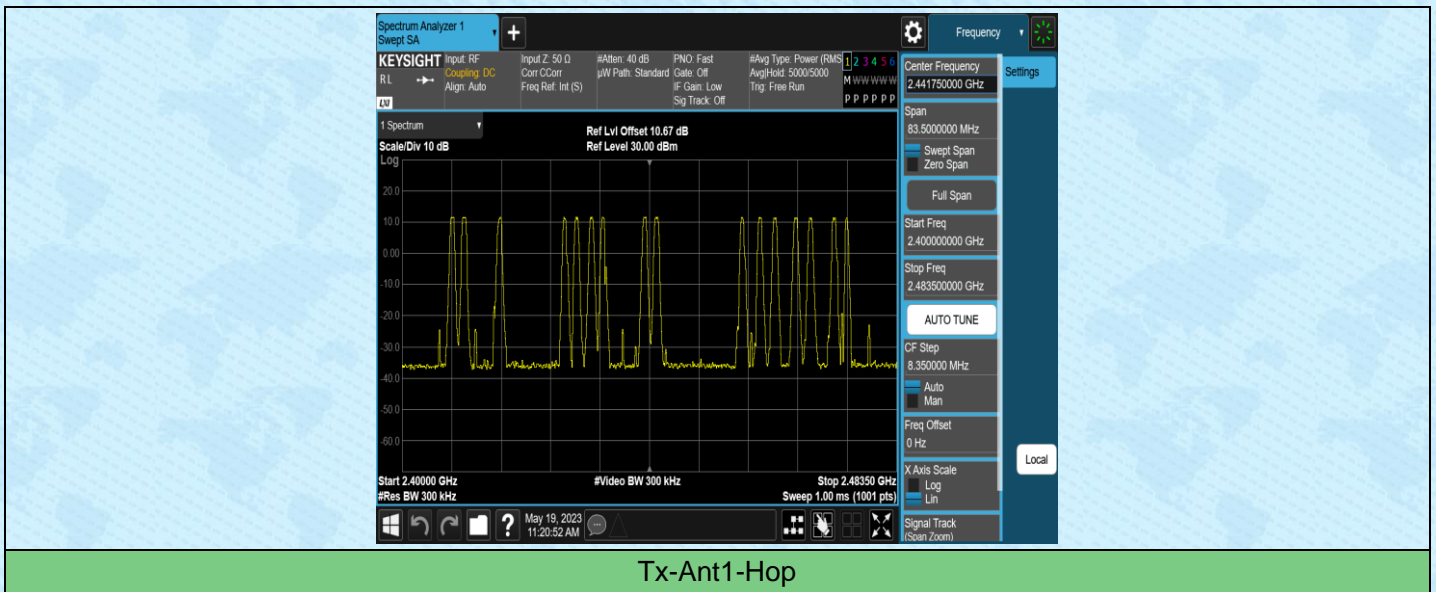


## Appendix G: Band edge measurements

### Test Result

Test Mode	Antenna	ChName	Frequency[MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
Tx	Ant1	Low	2408	11.61	-39.00	≤-8.39	PASS
Tx	Ant1	High	2475	5.50	-44.80	≤-14.51	PASS
Tx	Ant1	Low	Hop	11.37	-49.22	≤-8.53	PASS
Tx	Ant1	High	Hop	11.32	-50.50	≤-8.68	PASS

### Test Graphs

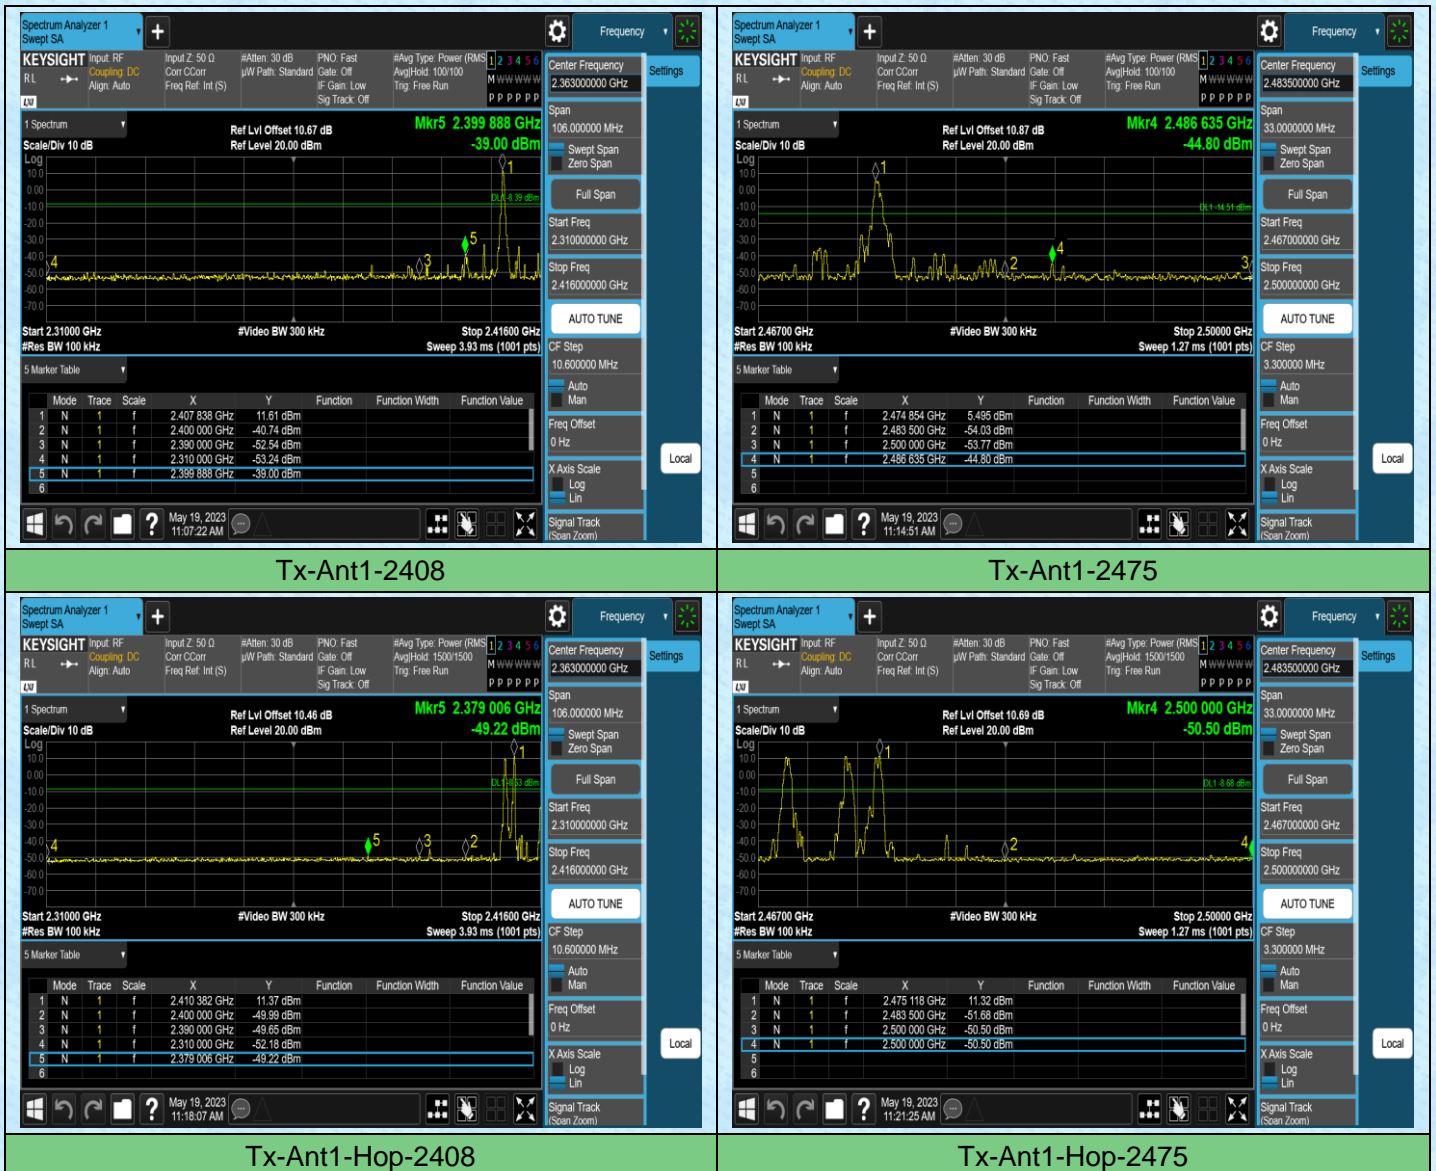

## AppendixH:Conducted Spurious Emission

### Test Result


Test Mode	Antenna	Frequency[MHz]	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
Tx	Ant1	2408	0~Reference	11.61	11.61	---	PASS
Tx	Ant1	2408	30~1000	11.61	-58.55	≤-8.39	PASS
Tx	Ant1	2408	1000~26500	11.61	-36.43	≤-8.39	PASS
Tx	Ant1	2440	0~Reference	12.04	12.04	---	PASS
Tx	Ant1	2440	30~1000	12.04	-56.93	≤-7.96	PASS
Tx	Ant1	2440	1000~26500	12.04	-40.56	≤-7.96	PASS
Tx	Ant1	2475	0~Reference	5.54	5.54	---	PASS
Tx	Ant1	2475	30~1000	5.54	-61.07	≤-14.46	PASS
Tx	Ant1	2475	1000~26500	5.54	-29.13	≤-14.46	PASS



## Test Graphs



Tx-Ant1-2408-0~Reference

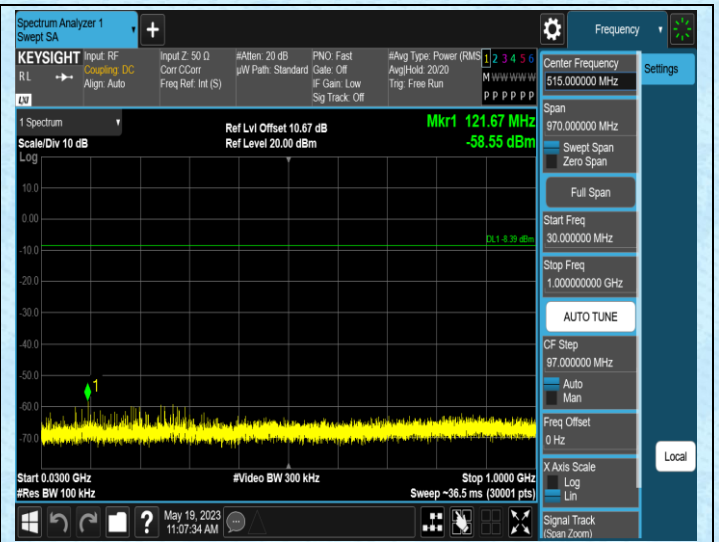


Tx-Ant1-2408-30~1000




Tx-Ant1-2408-1000~26500



Tx-Ant1-2440-0~Reference

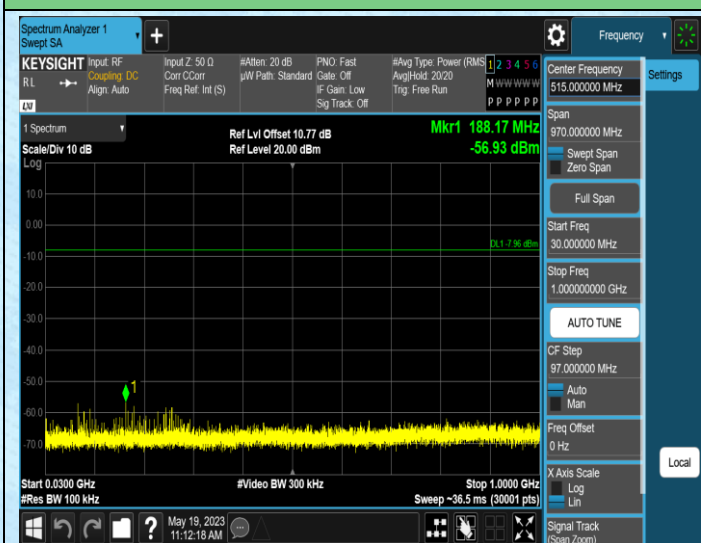

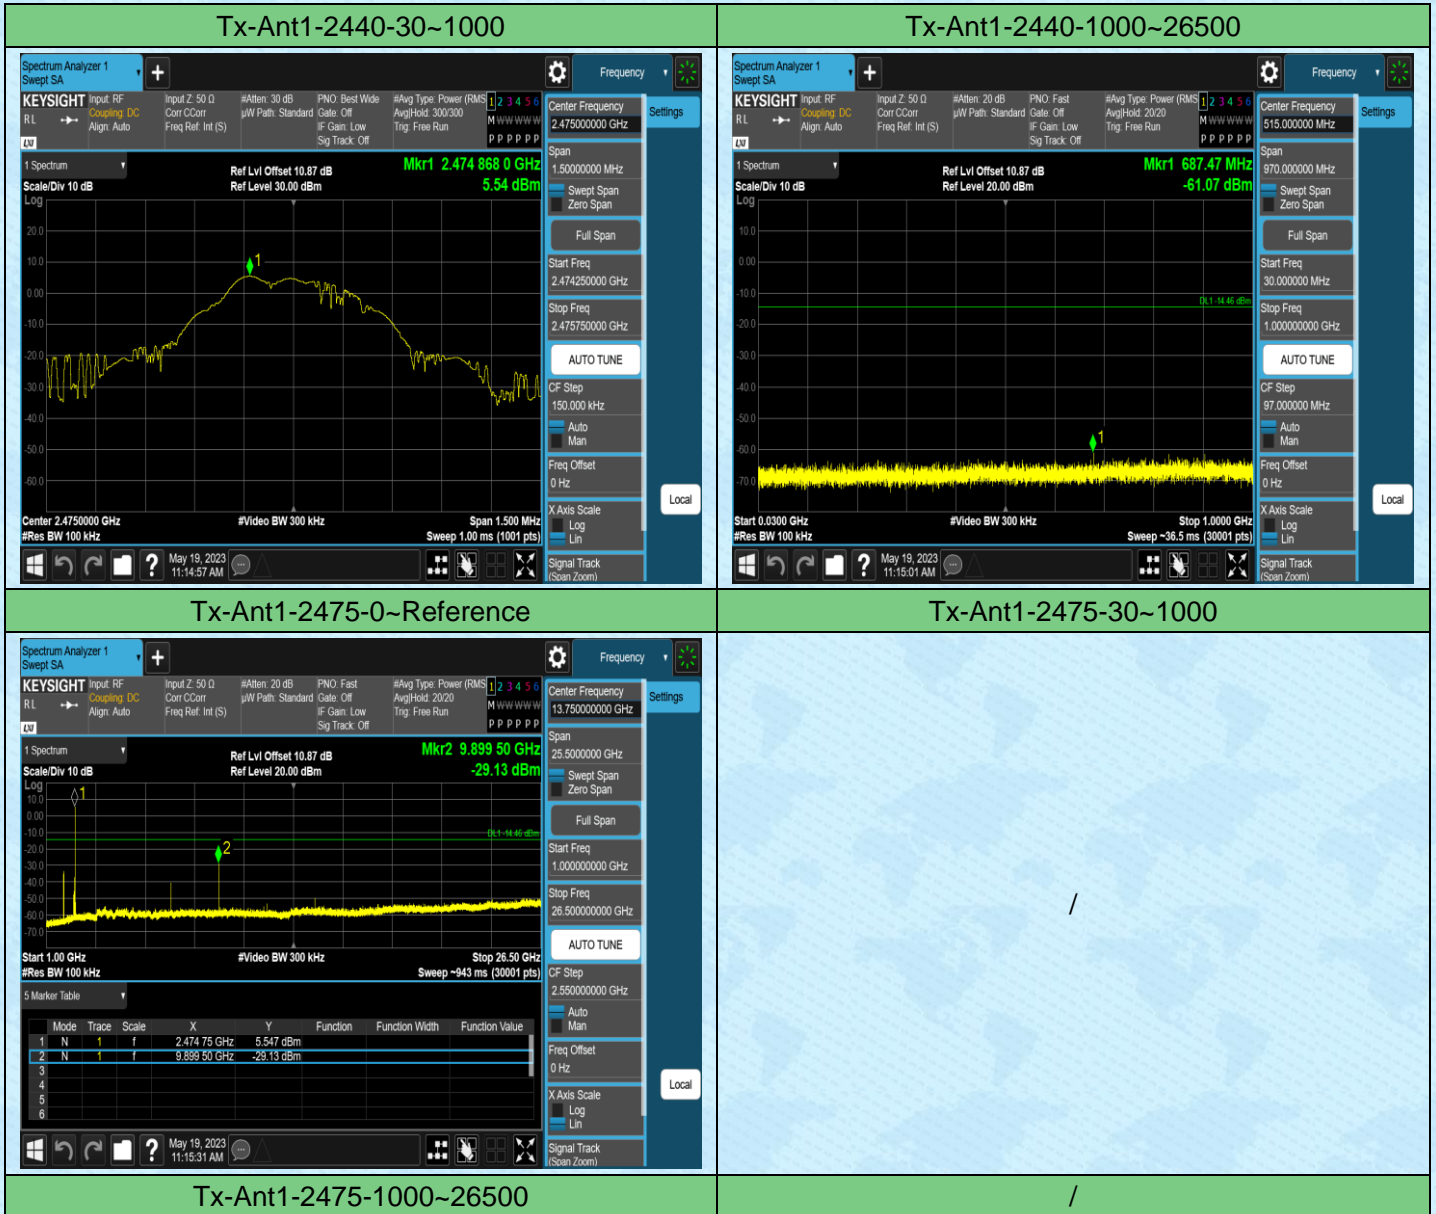

-----End-----