


eBULLY MUSIC OUTLET(MO)

Thank you for purchasing eBully Sight & Sound Music Outlet MO-411. Transform your music into synchronized dancing light. Enhance your audible enjoyment with visual experience. Decorate your Christmas tree, Halloween scary decorations, Birthday parties or just use it with your own imagination...

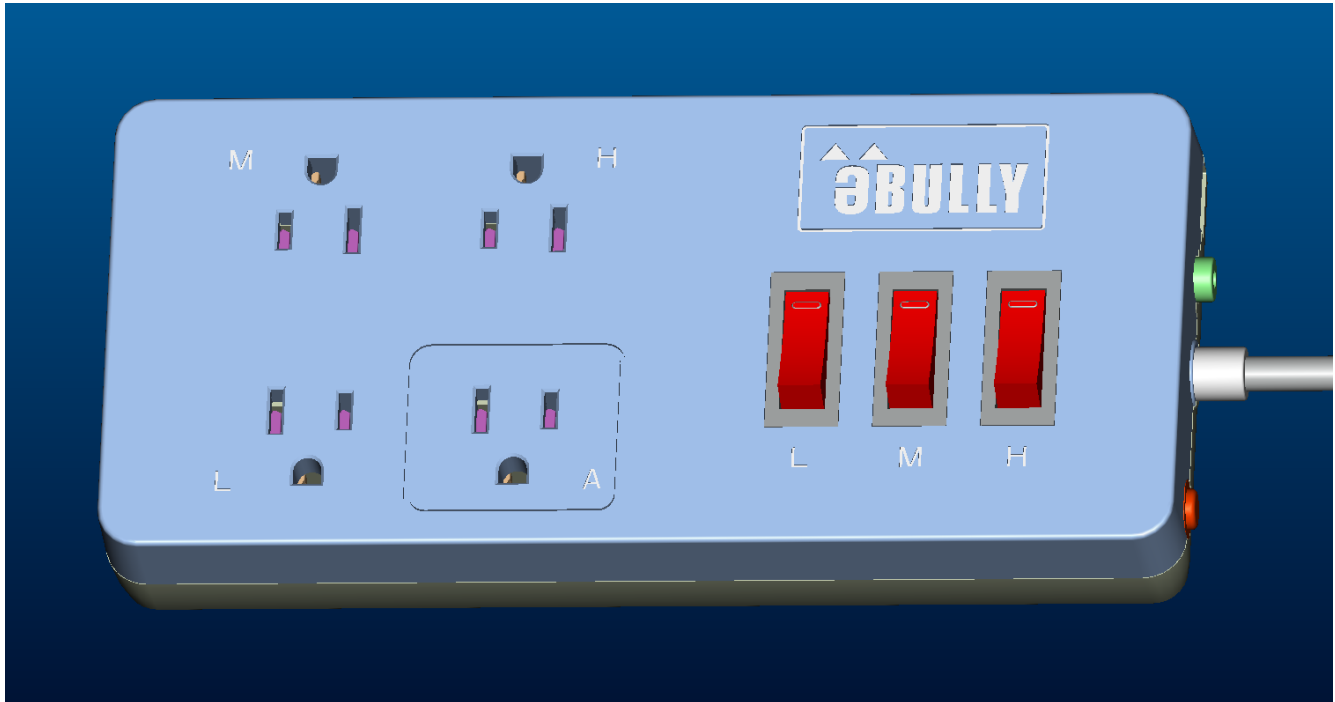

Four outlets are labelled “L”, “M”, “H”, and “A”

“L” represents LOW frequencies

“M” represent MID frequencies


“H” represents HIGH frequencies

“A” represents ALWAYS ON

“L”, “M”, and “H” are individually controlled by three 3-position toggle switch. Position “O” is OFF; Position “I” is ON; Position “II” is Music controlled.


Tandem Stereo Configuration

MO-411 RCA jack can either be an output jack or input jack controlled by a sliding switch next to the RCA jack. MO-411 is equipped with a Bluetooth receiver that can be optionally turned on or off. When slide the switch to “E”, the MO-411 will assume RCA as input to receive an “external” music source. When slide the switch to “B”, the internal Bluetooth LEFT channel is used to modulate power outlets while the RCA jack at this time becomes an output for the “RIGHT” audio channel. Connect another MO-411 through RCA cable with switch on “E” will work in tandem stereo mode.

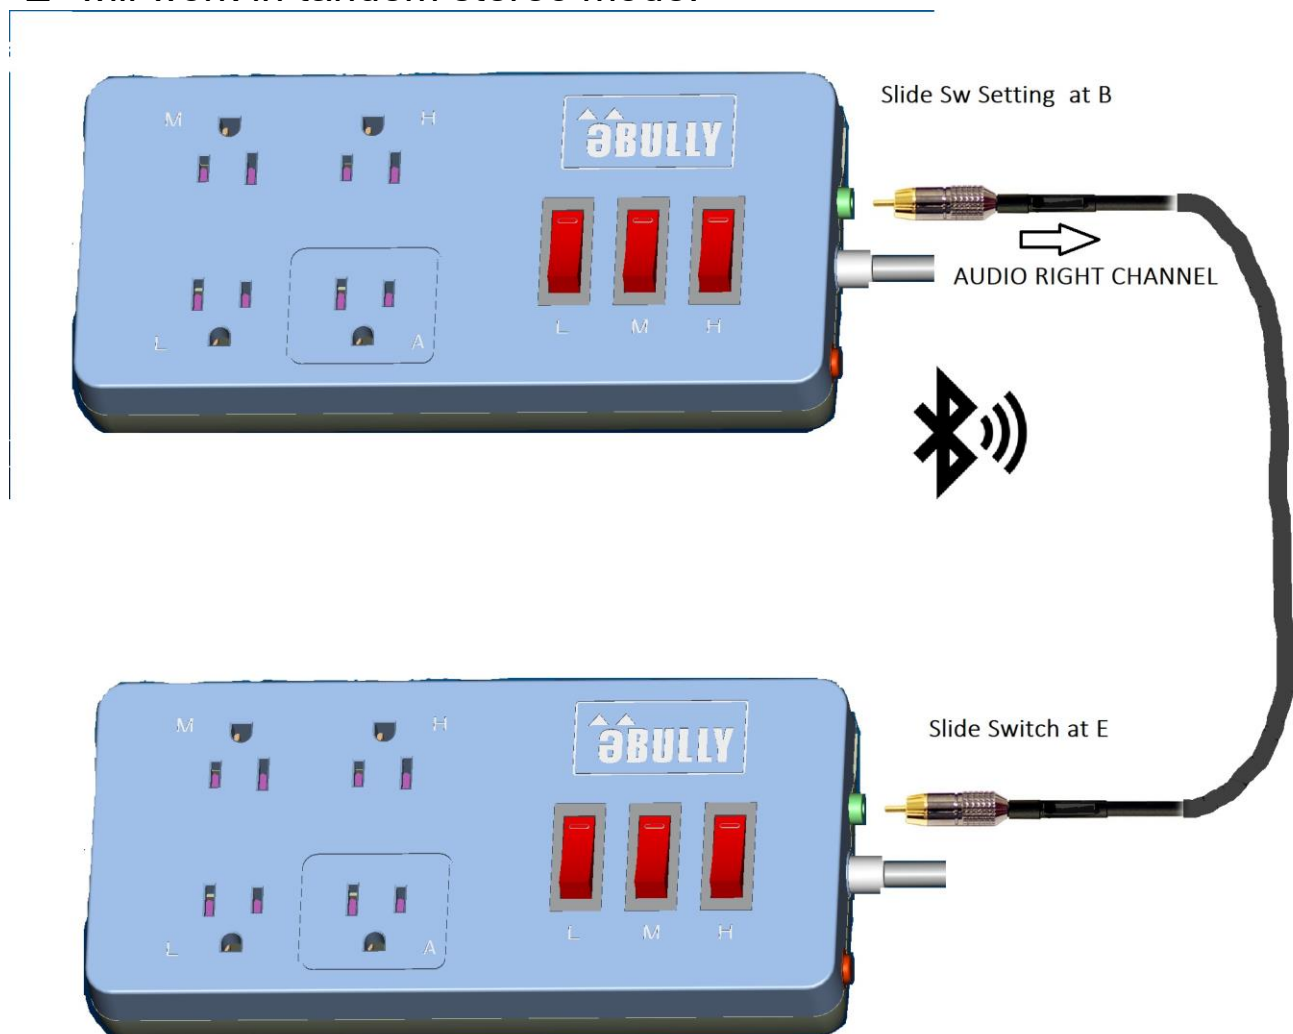

Introducing eBully Pipe Speaker

Pipe Speaker series is one of eBully Sight and Sound products. The speaker shape is borrowed from musical pipe instruments where sound gets a natural amplification. The main feature of the pipe speaker is the speaker top has a changing color halo. As frequencies of your music change, so do the halo colors. See below for one application with the MO-411.

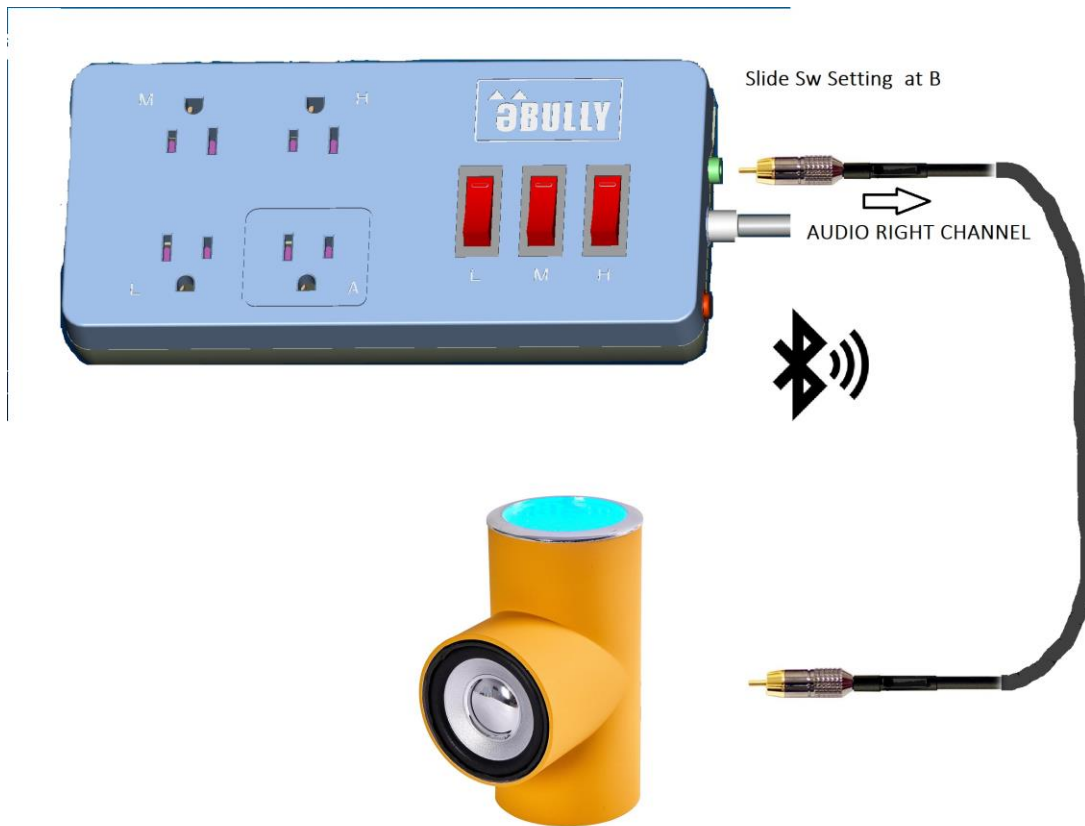

Frequency Parameters:

Label	Description	Frequency Range
L	Low Frequencies	Approx $f < 500\text{Hz}$
M	Mid Frequencies	$500\text{Hz} < f < 6500\text{Hz}$
H	High Frequencies	$f > 6500\text{Hz}$

Power Parameters:

Ports	Modulated Power	Max Power
L/M/H	2A@220V	10A@220V
A	N/A	10A@220V
USB (some model)	N/A	1000mA

Port Description:

Port	Description
RCA	Switch@E: Input from External source Switch@B: Output Audio Right Channel
Slide Switch (3-pos)	E: External Source B: Built in Bluetooth
Speaker	4 Ohm 5W

Model Parameters:

Model	Description	Dimension
MO-411	4 Outlet USA version 1	195mm x 90mm x 35mm

AC Cord Parameters:

Country	Construction	Length
3 prongs USA plug	3 strands x 1.31	1.5m

WARNING:

- 1) Indoor Use Application.
- 2) Do not overload the power outlet.
- 3) eBully will not be responsible for any damages due to misusing the unit.

FCC Statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

--Reorient or relocate the receiving antenna.

--Increase the separation between the equipment and receiver.

--Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

--Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Radiation Exposure Statement

This device complies with RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.