

TEST REPORT

Product Name Model Number FCC ID	r :	Creative Portable WH-J08 2A2Y2-WH-J08
Prepared for Address	:::	Guangzhou Tuoke Commerce Trade Co Ltd Room 416, No.101, Wanggang Dexing Road, Jiahe Stress, Baiyun District, Guangzhou, China
Prepared by Address	:	EMTEK (DONGGUAN) CO., LTD. -1&2/F.,Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base, No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China
		TEL: +86-0769-22807078 FAX: +86-0769-22807079
Report Number Date(s) of Tests Date of issue		EDG2210170012E00301R October 17, 2022 to October 25, 2022 October 25, 2022



Table of Contents

1 TEST RESULT CERTIFICATION	
2 EUT TECHNICAL DESCRIPTION	5
3 SUMMARY OF TEST RESULT	6
4 TEST METHODOLOGY	7
 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS 4.2 MEASUREMENT EQUIPMENT USED	7
5 FACILITIES AND ACCREDITATIONS	9
5.1 FACILITIES 5.2 EQUIPMENT 5.3 LABORATORY ACCREDITATIONS AND LISTINGS	9
6 TEST SYSTEM UNCERTAINTY	
7 SETUP OF EQUIPMENT UNDER TEST	
 7.1 RADIO FREQUENCY TEST SETUP 1 7.2 RADIO FREQUENCY TEST SETUP 2 7.3 CONDUCTED EMISSION TEST SETUP 7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM 7.5 SUPPORT EQUIPMENT 	11 13 14
8 FREQUENCY HOPPING SYSTEM REQUIREMENTS	15
 8.1 Standard Applicable 8.2 EUT Pseudorandom Frequency Hopping Sequence 8.3 Equal Hopping Frequency Use 8.4 Frequency Hopping System 	
9 TEST REQUIREMENTS	17
 9.1 20DB&99%BANDWIDTH 9.2 CARRIER FREQUENCY SEPARATION 9.3 NUMBER OF HOPPING FREQUENCIES 9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME) 9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER	
9.6 CONDUCTED SUPRIOUS EMISSION 9.7 RADIATED SPURIOUS EMISSION	
9.8 CONDUCTED EMISSION TEST	61



TEST RESULT CERTIFICATION 1

Applicant	:	Guangzhou Tuoke Commerce Trade Co Ltd				
Address	:	Room 416, No.101, Wanggang Dexing Road, Jiahe Stress, Baiyun District, Guangzhou, China				
Manufacturer	:	TK Co., Ltd.				
Address	:	Room 416, No.101, Wanggang Dexing Road, Jiahe Stress, Baiyun District, Guangzhou, China				
Factory		Guangzhou Dingsheng Industry Co.,Ltd.				
Address		NO.24,Zhenghe Road, Wuxi Village, Zhongluo Tan Town, Baiyun, Guangzhou				
EUT	:	Creative Portable				
Model Name	:	WH-J08				
Trademark	:	N/A				

Measurement Procedure Used:

APPLICABLE STANDARDS					
STANDARD	TEST RESULT				
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS				

The above equipment was tested by EMTEK (DONGGUAN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, Part 15.247.

The test results of this report relate only to the tested sample identified in this report

Date of Test :	October 17, 2022 to October 25, 2022				
Prepared by :	Warren Deng				
	Warren Deng /Editor				
Reviewer :	Tim Doly				
	Tim Dong /Supervisor				
	LTD & LTD				
Approve & Authorized Signer :	Sam Lv / Manager				



Modified History

Version	Report No.	Revision Date	Summary
V1.0 EDG2210170012E00301R		1	Original Report





2 EUT TECHNICAL DESCRIPTION

Characteristics	Description		
Product:	Creative Portable		
Model Number:	WH-J08		
Sample:	1#		
Data Rate:	1Mbps for GFSK modulation 2Mbps for π/4-DQPSK modulation 3Mbps for 8DPSK modulation		
Modulation:	GFSK, π/4-DQPSK, 8DPSK		
Operating Frequency Range(s) :	2402-2480MHz		
Number of Channels:	79 channels		
Transmit Power Max:	-0.95 dBm		
Antenna Type:	PCB Antenna		
Antenna Gain:	1.9 dBi		
Power supply:	DC 5.0V from USB 3.7V from battery		
Date of Received:	October 17, 2022		
Temperature Range:	0°C ~ +40°C		

Note: for more details, please refer to the User's manual of the EUT.

 东莞市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd
 Add: -18.2/F .,Building 2,Zone A,Zhongda Marine Blotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



FCC Part Clause	IC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(1)	RSS-247.5.1 RSS-Gen.6.7	Emission Bandwidth	PASS	
15.247(a)(1)	RSS-247.5.1	Carrier Frequency Separation	PASS	
15.247(a)(1)	RSS-247.5.1	Number of Hopping Frequencies	PASS	
15.247(a)(1)	RSS-247.5.1	Average Time of Occupancy (Dwell Time)	PASS	
15.247(b)(1)	RSS-247.5.4 RSS-Gen 6.12	Maximum Peak Conducted Output Power	PASS	
15.247(d)	RSS-247 5.5	Conducted Spurious Emissions	PASS	
15.247(d) 15.209 15.205	RSS-Gen 8.9 RSS-Gen 8.10 RSS-Gen 6.13 RSS-247 3.3 RSS-247 5.5	Radiated Spurious Emissions	PASS	
15.207	RSS-Gen 8.8	Conducted Emission	PASS	
15.203 15.247(b)	RSS-Gen 6.8 RSS-247 5.4	Antenna Application	PASS	
15.247 (a) (1)/g/h	-	Frequency Hopping System	PASS	

SUMMARY OF TEST RESULT 3

NOTE1: N/A (Not Applicable)

NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2A2Y2-WH-J08 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.



4 **TEST METHODOLOGY**

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards: FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C IC RSS-GEN, Issue 5(04-2018)+A1(03-2019)+A2(02-2021) IC RSS-247 Issue 2(02-2017) FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101415	2022/5/19	1Year
Power Amplifier	HP	8447F	OPTH64	2022/5/19	1Year
Bilog Antenna	Schwarzbeck	VULB9163	141	2022/5/22	1Year
Horn antenna	Schwarzbeck	BBHA9120D	1272	2022/5/22	1Year
Power Amplifier	LUNAR EM	LNA1G18-40	J1010000081	2022/5/19	1Year
Loop Antenna	Schwarzbeck	FMZB1513	1513-60	2022/05/22	2Year
Signal Analyzer	R&S	FSV30	103039	2022/5/19	1Year
Bilog Antenna	Schwarzbeck	VULB9163	141	2022/5/22	1Year
Band reject Filter(50dB)	WI/DE	WRCGV-2400(2400- 2485MHz)	2	2022/05/20	1 Year

For other test items:

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wireless Connectivity Tester	R&S	CMW270	102543	2022/6/21	1Year
Automatic Control Unit	Tonscend	JS0806-2	2118060480	2022/6/21	1Year
Signal Analyzer	KEYSIGHT	N9010B	MY60242456	2022/6/21	1Year
Analog Signal Generator	KEYSIGHT	N5173B	MY61252625	2022/6/21	1Year
UP/DOWN-Converter	R&S	R&S CMW-Z800A		2022/6/21	1Year
Vector Signal Generator	KEYSIGHT	N5182B	MY61252674	2022/6/21	1Year
Frequency Extender	KEYSIGHT	N5182BX07	MY59362541	2022/6/21	1Year
Temperature&Humidity test chamber	ESPEC	EL-02KA	12107166	2022/6/21	1 Year



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (1Mbps for GFSK modulation(DH5); 2Mbps for π /4-DQPSK modulation(2DH5); 3Mbps for 8DPSK modulation(3DH5);)were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	
0	2402	39	2441			
1	2403	40	2442	76	2478	
2	2404	41	2443	77	2479	
				78	2480	
Note: fc=2402MHz+(k-1)×1MHz k=1 to 79						

Test Frequency and channel for Bluetooth

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441	78	2480

 余亮市信源科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F "Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



FACILITIES AND ACCREDITATIONS 5

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at:

EMTEK (DONGGUAN) CO., LTD.

-1&2/F.,Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base, No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

LABORATORY ACCREDITATIONS AND LISTINGS 5.3

Site Description	
EMC Lab.	 Accredited by CNAS, 2020.08.27 The certificate is valid until 2024.07.05 The Laboratory has been assessed and proved to be in compliance with CNAS/CL01:2018 The Certificate Registration Number is L3150
	Accredited by FCC Designation Number: CN1300 Test Firm Registration Number: 945551
	Accredited by A2LA, April 05, 2021 The Certificate Registration Number is 4321.02
	Accredited by Industry Canada The Certificate Registration Number is CN0109
	 EMTEK (DONGGUAN) CO., LTD. -1&2/F.,Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base, No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China



6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Parameter	Measurement Uncertainty
Radio Frequency	±1x10^-5
Maximum Peak Output Power Test	±1.0dB
Conducted Emissions Test	±2.0dB
Radiated Emission Test	±2.0dB
Power Density	±2.0dB
Occupied Bandwidth Test	±1.0dB
Band Edge Test	±3dB
All emission, radiated	±3dB
Antenna Port Emission	±3dB
Temperature	±0.5°C
Humidity	±3%

Measurement Uncertainty for a level of Confidence of 95%

 东莞市信濃科技有限公司

 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK(Dongguan) Co., Ltd

 Add: -182/F ...,Building 2,Zone A,Zhongda Marine Blotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,
 Dongguan, Guangdong,China Http://www.emtek.com.cn



7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).



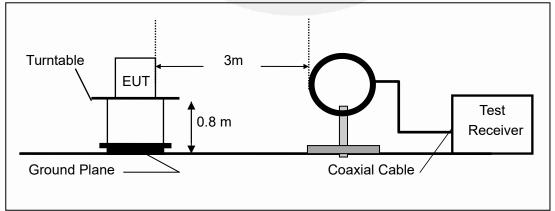




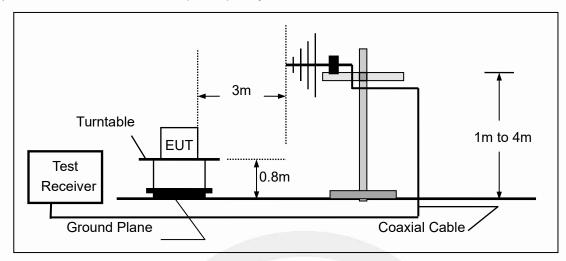

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

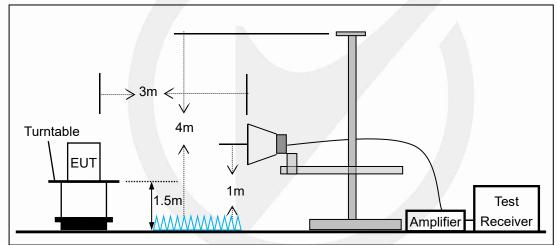

 家要市信測科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层,第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn




7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Perfect Share Mini) must be connected to LISN. The LISN shall be placed 0.8m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8m.


According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

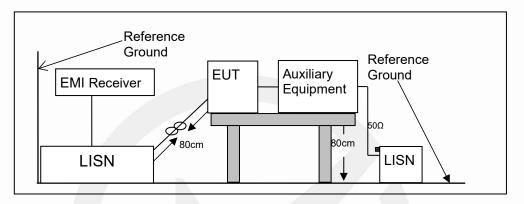

EMTEK (Dongguan) Co., Ltd.



7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

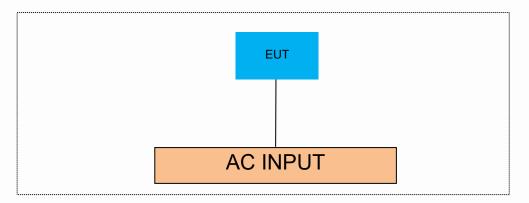

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB cable	1	Unshielded	/
AUX cable	1	Unshielded	Without Ferrite

Auxiliary Cable List and Deta	ls		
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	1	1

Auxiliary Equipment List and Details				
Description	Manufacturer	Model	Serial Number	
Notebook	Lenovo	E46L	11S168003748Z0LR06E0 HG	
adaptor	apple	1	1	

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



FREQUENCY HOPPING SYSTEM REQUIREMENTS 8

8.1 Standard Applicable

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

8.2 EUT Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divide into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The normal hop is 1 600 hops/s.

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: 29-1 = 511 bits Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

0246	62 64	78 1	73 75 77

TEK (Dongguan) Co., Ltd.



Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

8.3 Equal Hopping Frequency Use

All Bluetooth units participating in the piconet are time and hop-synchronized to the channel.

Example of a 79 hopping sequence in data mode: 35, 27, 6, 44, 14, 61, 74, 32, 1, 11, 23, 2, 55, 65, 29, 3, 9, 52, 78, 58, 40, 25, 0, 7, 18, 26, 76, 60, 47, 50, 2, 5, 16, 37, 70, 63, 66, 54, 20, 13, 4, 8, 15, 21, 26, 10, 73, 77, 67, 69, 43, 24, 57, 39, 46, 72, 48, 33, 17, 31, 75, 19, 41, 62, 68, 28, 51, 66, 30, 56, 34, 59, 71, 22, 49, 64, 38, 45, 36, 42, 53 Each Frequency used equally on the average by each transmitter

8.4 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH- enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.



9 **TEST REQUIREMENTS**

9.1 20DB BANDWIDTH

9.1.1 **Applicable Standard**

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1 and RSS-Gen.6.7

9.1.2 **Conformance Limit**

No limit requirement.

9.1.3 **Test Configuration**

Test according to clause 7.1 radio frequency test setup 1

9.1.4 **Test Procedure**

The EUT was operating in Bluetooth mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 30 kHz.

Set the video bandwidth (VBW) =100 kHz.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

EMTEK (Dongguan) Co., Ltd.



TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
	Ant1	2402	0.948	2401.577	2402.525		
DH5	Ant1	2441	0.951	2440.574	2441.525		
	Ant1	2480	0.954	2479.574	2480.528		
	Ant1	2402	1.332	2401.376	2402.708		
2DH5	Ant1	2441	1.341	2440.370	2441.711		
	Ant1	2480	1.341	2479.370	2480.711		
	Ant1	2402	1.287	2401.400	2402.687		
3DH5	Ant1	2441	1.323	2440.379	2441.702		
	Ant1	2480	1.290	2479.379	2480.669		

20dB Emission Bandwidth







EMTEK (Dongguan) Co., Ltd.





EMTEK (Dongguan) Co., Ltd.









 东赛市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Swept SA KEYSIGHT Input RF Coupling: DC Align: Auto	InpuiZ: 50 Ω #Atten: 40 dB PNO Best Wide Corr CCorr μW Path Standard Gate: Off Freq Ref. Int (S) Sig Track: Off Sig Track: Off	#Avg Type: Power (RMS <mark>123456</mark> Trig: Free Run M W/W W W P P P P P P	2.40000000 0112	Settings
1 Spectrum v Scale/Div 10 dB	Ref Lvi Offset 12.04 dB Ref Level 30.00 dBm	ΔMkr3 1.290 MHz 0.14 dB		
10.0	<u>\}2</u>		Full Span	
-10 0 -20 0 -30 0	Al market and the second		Start Freq 2.478500000 GHz	
-30 0 -40 0 -50 0 -60 0		man	Stop Freq 2.481500000 GHz	
Center 2.480000 GHz #Res BW 30 kHz	#Video BW 100 kHz	Span 3.000 MHz Sweep 1.07 ms (1001 pts)		
5 Marker Table •	X Y Function F	Function Width Function Value	300.000 kHz Auto Man	
1 N 1 f 2 N 1 f 3 Δ1 1 f	2.479 379 GHz -28.48 dBm 2.480 069 GHz -8.010 dBm (Δ) 1.290 MHz (Δ) 0.1415 dB		Freq Offset 0 Hz	
4 5 6			X Axis Scale Log Lin	Local
1501	? Oct 20, 2022		Scial Tito" ISaan Zoani	



9.2 CARRIER FREQUENCY SEPARATION

9.2.1 Applicable Standard

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

9.2.2 Conformance Limit

Frequency hopping systems operating in the 2400-2483.5MHz band shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

In case of an output power less than 125mW, the frequency hopping system may have channels separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

9.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.2.4 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings: Set the RBW =300kHz. Set VBW =300kHz.

Set the span = wide enough to capture the peaks of two adjacent channels

Set Sweep time = auto couple.

Set Detector = peak. Set Trace mode = max hold.

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Test Results

Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: For Limit = 20dB bandwidth * 2/3

 余亮市信源科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F "Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Нор	1.14	≥0.954	PASS
2DH5	Ant1	Нор	0.982	≥0.894	PASS
3DH5	Ant1	Нор	0.992	≥0.882	PASS



 东莞市信測科技有限公司

 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.

 Add: -1&2/F ., Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn






 东赛市信测科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd
 Add: -1&2/F .,Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,

 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



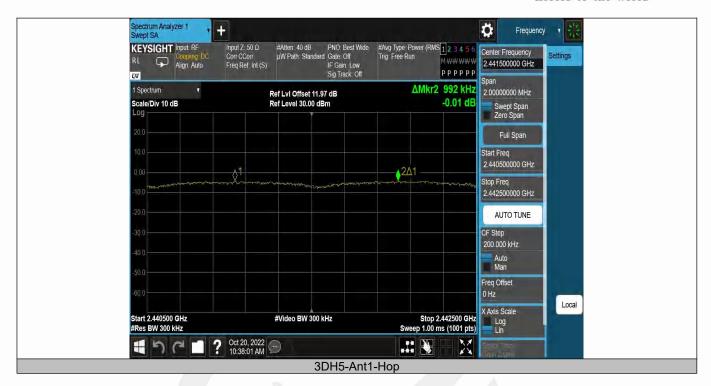

EMTEK (Dongguan) Co., Ltd.



9.3 NUMBER OF HOPPING FREQUENCIES

9.3.1 **Applicable Standard**

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

9.3.2 **Conformance Limit**

Frequency hopping systems operating in the 2400-2483.5MHz band shall use at least 15 channels.

9.3.3 **Test Configuration**

Test according to clause 7.1 radio frequency test setup 1

9.3.4 **Test Procedure**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation (2400-2483.5MHz) RBW = 300 KHzVBW ≥ RBW Sweep = auto Detector function = peak Trace = max hold Allow the trace to stabilize. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies.


Test Results


Temperature:	25° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Нор	79	≥15	PASS





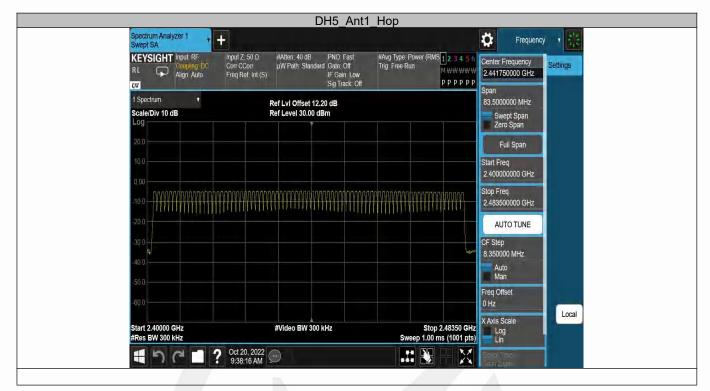

EMTEK (Dongguan) Co., Ltd.



9.4 AVERAGE TIME OF OCCUPANCY (DWELL TIME)

9.4.1 **Applicable Standard**

According to FCC Part 15.247(a)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.1

9.4.2 **Conformance Limit**

For frequency hopping systems operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4s within a period of 0.4s multiplied by the number of hopping channels employed.

9.4.3 **Test Configuration**

Test according to clause 7.1 radio frequency test setup 1

9.4.4 **Test Procedure**

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW ≥ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value

varies with different modes of operation (e.g., data rate, modulation format, etc.),

repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section.

9.4.5 **Test Results**

Temperature:	25° C		
Relative Humidity:	45%		
ATM Pressure:	1011 mbar		

Note: TotalHops(DH1)=(1600/2/79)*31.6 TotalHops(DH3)=(1600/4/79)*31.6 TotalHops(DH5)=(1600/6/79)*31.6 Dwell Time= BurstWidth* TotalHops


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Нор	0.395	320	0.126	≤0.4	PASS
DH3	Ant1	Нор	1.650	160	0.264	≤0.4	PASS
DH5	Ant1	Нор	2.898	106.67	0.309	≤0.4	PASS
2DH1	Ant1	Нор	0.405	320	0.13	≤0.4	PASS
2DH3	Ant1	Нор	1.656	160	0.265	≤0.4	PASS
2DH5	Ant1	Нор	2.904	106.67	0.31	≤0.4	PASS
3DH1	Ant1	Нор	0.407	320	0.13	≤0.4	PASS
3DH3	Ant1	Нор	1.656	160	0.265	≤0.4	PASS
3DH5	Ant1	Нор	2.907	106.67	0.31	≤0.4	PASS



pectrum Analyzer 1 wept SA Ö + Frequency #Atten: 40 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off Input Z: 50 Ω Corr CCorr Freq Ref. Int (S) #Avg Type: Power (RMS123456 Trig. Video Trig Delay. -2.000 ms KEYSIGHT Input RF Center Frequency Settings + Align Auto 2.441000000 GHz рррррр L)XI Span ΔMkr2 395.0 μs 1 Spectrum T 0.00000000 Hz Ref LvI Offset 11.97 dB Ref Level 30.00 dBm Scale/Div 10 dB 20.30 dE Swept Span Zero Span Full Span Start Freq 2.441000000 GHz 201 Stop Freq 2.441000000 GHz AUTO TUNE CF Step والمنافعة والمنافع المنافعة والمنافعة والمنافعة والمنافعة والمنافعة والمنافعة والمنافعة والمنافعة والمعافية وال 1.000000 MHz Auto Man Freq Offset 0 Hz Local X Axis Scale Center 2.441000000 GHz Res BW 1.0 MHz Span 0 Hz Sweep 10.1 ms (8000 pts) Log Lin Oct 20, 2022 ? X 50 H DH1-Ant1-Hop-0.395-320 Spectrum Analyzer 1 Wept SA Ö + Frequency #Atten: 40 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off Input Z: 50 Ω Corr CCorr Freq Ref. Int (S) #Avg Type: Power (RMS123456 Trig: Video Trig Delay. -2.000 ms KEYSIGHT Input RF Center Frequency Settings Align: Auto 2.441000000 GHz рррррр LXI. ban ΔMkr2 1,650 ms 1 Spectrum T 0.00000000 Hz Ref LvI Offset 11.97 dB Ref Level 30.00 dBm 22.44 dE Scale/Div 10 dB Swept Span Zero Span .og Full Span Start Freq 2.441000000 GHz 2Δ1 TRIG LV Stop Freq 2.441000000 GHz AUTO TUNE CF Step Atom balant Highman t 1.000000 MHz alla putannanana ang marang panan ali ang panang Auto Man Freq Offset 0 Hz Local X Axis Scale Center 2.441000000 GHz Span 0 Hz Sweep 10.1 ms (8000 pts) Log Lin Res BW 1.0 MHz ? Oct 25, 2022 7:16:03 PM X -うる **F** • 1 DH3-Ant1-Hop-1.650-160

EMTEK (Dongguan) Co., Ltd.



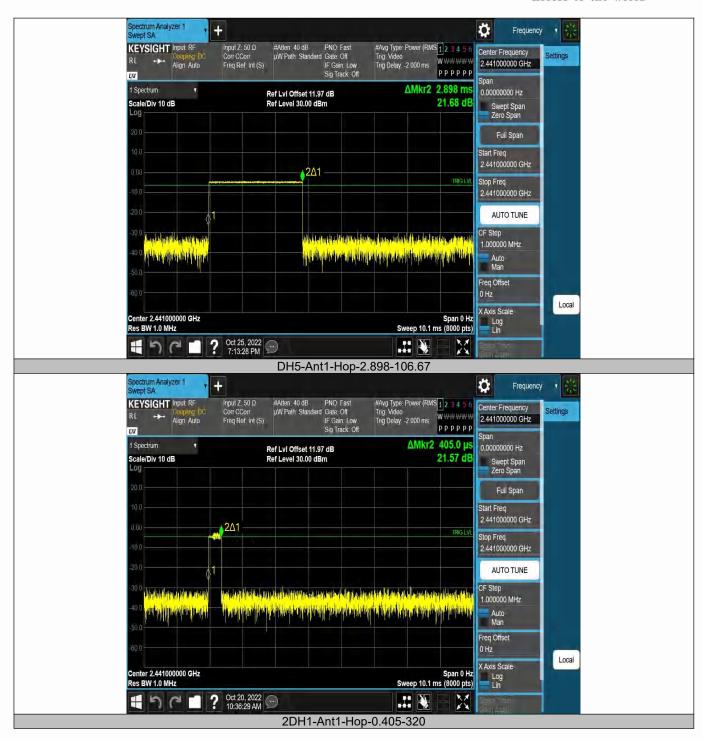

EMTEK (Dongguan) Co., Ltd.






EMTEK (Dongguan) Co., Ltd.



pectrum Analyzer 1 wept SA Ö + Frequency #Atten: 40 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off Input Z: 50 Ω Corr CCorr Freq Ref. Int (S) #Avg Type: Power (RMS123456 Trig. Video Trig Delay. -2.000 ms KEYSIGHT Input RF Center Frequency Settings + Align Auto 2.441000000 GHz рррррр L)XI Span ΔMkr2 407.0 µs 1 Spectrum 0.00000000 Hz Ref LvI Offset 11.97 dB Ref Level 30.00 dBm Scale/Div 10 dB 21.03 dE Swept Span Zero Span Full Span Start Freq 2.441000000 GHz 201 TRIG L Stop Freq 2.441000000 GHz AUTO TUNE CF Step PERSONAL PROPERTY AND and ditt. In this colony, and the dit. 1.000000 MHz Lander, a chart is a standart och hat samskingen upbriden gib den Auto Man Freq Offset 0 Hz Local X Axis Scale Center 2.441000000 GHz Res BW 1.0 MHz Span 0 Hz Sweep 10.1 ms (8000 pts) Log Lin Oct 20, 2022 ? X 50 H 3DH1-Ant1-Hop-0.407-320 Spectrum Analyzer 1 Wept SA Ö + v 57 Frequency #Atten: 40 dB PNO: Fast µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off #Avg Type: Power (RMS 1 2 3 4 5 6 Trig Video Trig Delay. -2.000 ms P P P P P P Input Z: 50 Ω Corr CCorr Freq Ref. Int (S) KEYSIGHT Input RF Center Frequency Settings Align Auto 2.441000000 GHz LNI . ban ΔMkr2 1,656 ms 1 Spectrum ٧ 0.00000000 Hz Ref LvI Offset 11.97 dB Ref Level 30.00 dBm 20.30 dE Scale/Div 10 dB Swept Span Zero Span .og Full Span Start Freq 2.441000000 GHz 20 TRIGLY Stop Freq 2.441000000 GHz AUTO TUNE CF Step anna ha dhadh ƙwa A us fail . A 1.000000 MHz Auto Man Freq Offset 0 Hz Local X Axis Scale Center 2.441000000 GHz Span 0 Hz Sweep 10.1 ms (8000 pts) Log Lin Res BW 1.0 MHz ? Oct 20, 2022 X -うる 3DH3-Ant1-Hop-1.656-160

EMTEK (Dongguan) Co., Ltd.



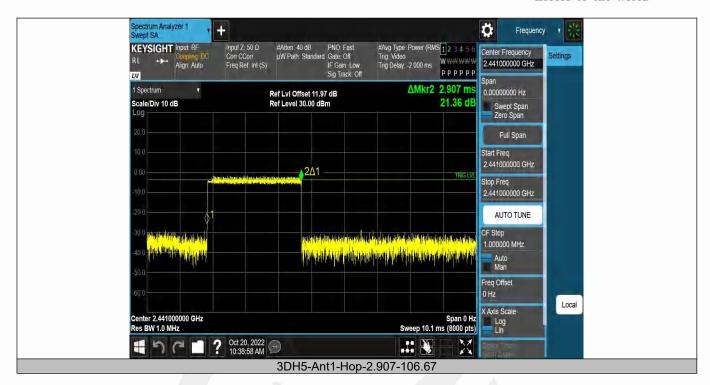

EMTEK (Dongguan) Co., Ltd.



9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247.5.4 and RSS-Gen 6.12

9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.5.4 Test Procedure

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel (about 8MHz)

Set RBW > the 20 dB bandwidth of the emission being measured (about 3MHz)

Set VBW \geq RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

Test Results

Temperature:	25° C		
Relative Humidity:	45%		
ATM Pressure:	1011 mbar		

Note: N/A

 余亮市信源科技有限公司
 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn

 EMTEK (Dongguan) Co., Ltd.
 Add: -1&2/F "Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone,


 Dongguan, Guangdong,China
 Http://www.emtek.com.cn
 E-mail: project@emtek.com.cn



Test Mode	Antenna	Frequency[MHz]	Conducted Peak Powert[dBm]	Conducted Limit[dBm]	Verdict
	Ant1	2402	-3.74	≤20.97	PASS
DH5	Ant1	2441	-3.69	≤20.97	PASS
	Ant1	2480	-4.21	≤20.97	PASS
	Ant1	2402	-1.47	≤20.97	PASS
2DH5	Ant1	2441	-1.5	≤20.97	PASS
	Ant1	2480	-2.13	≤20.97	PASS
	Ant1	2402	-0.95	≤20.97	PASS
3DH5	Ant1	2441	-0.96	≤20.97	PASS
	Ant1	2480	-1.56	≤20.97	PASS





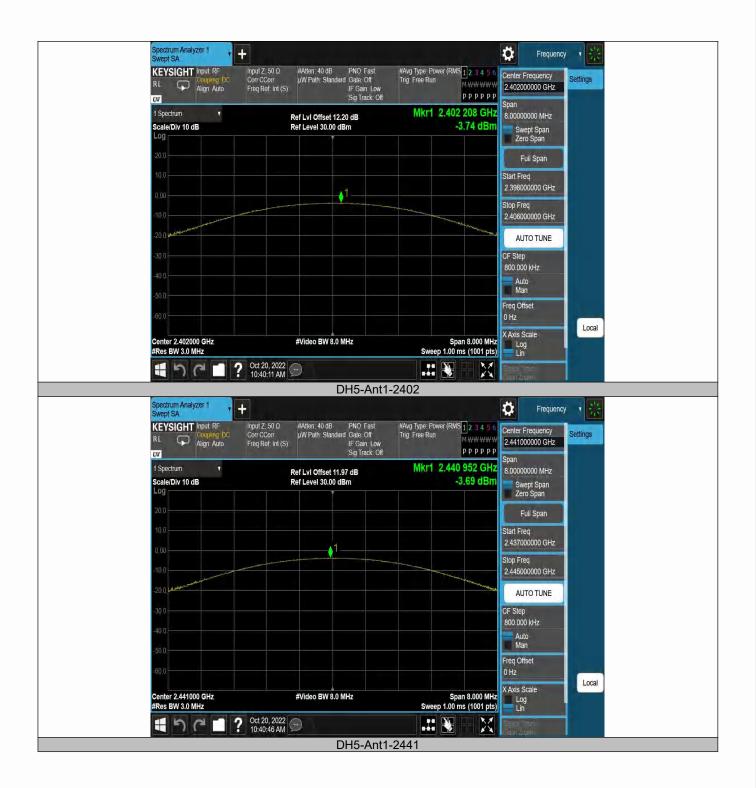


EMTEK (Dongguan) Co., Ltd.

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn







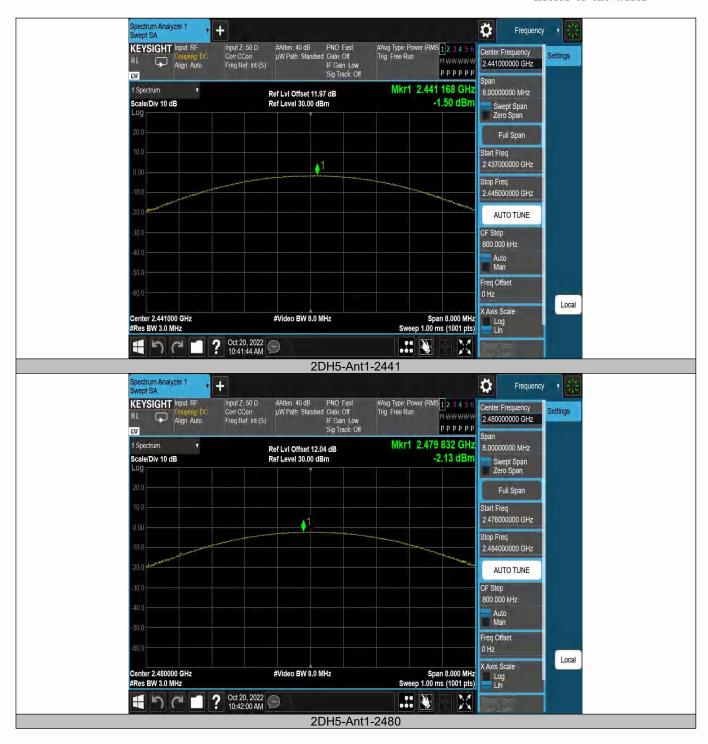









EMTEK (Dongguan) Co., Ltd.

东赛市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base, No.9, Xincheng Avenue, Songshanhu High-lechnology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



9.6 CONDUCTED SUPRIOUS EMISSION

9.6.1 **Applicable Standard**

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-247 5.5

9.6.2 **Conformance Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

9.6.3 **Test Configuration**

Test according to clause 7.1 radio frequency test setup 1

9.6.4 **Test Procedure**

The transmitter output (antenna port) was connected to the spectrum analyzer

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW \ge 3 x RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conduceted level.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

Band-edge measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW
$$\geq$$
 1% of the span=100kHz Set VBW \geq 3 x RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz). Set RBW = 100 kHz Set VBW ≥ RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.



9.6.5 Test Results

Temperature:	25°C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Note: N/A

Band edge measurements

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
	Ant1	Low	2402	-4.99	-47.63	≤-24.99	PASS
	Ant1	High	2480	-5.65	-48	≤-25.65	PASS
DH5	Ant1	Low	Hop_2402	-5.73	-48.14	≤-25.73	PASS
	Ant1	High	Hop_2480	-5.64	-48.16	≤-25.64	PASS



enept of t	Input Z: 50 Ω #Atten: 30 dB PNO Fast	#Avg Type: Power (RMS 1 2 3 4 5	Frequenc	y y 🔛
KEYSIGHT Input RF R L Coupling: DC Align: Auto	Corr CCorr WW Path: Standard Gate: Off Freq Ref. Int (S) Sig Track: Off	Trig Free Run	2.352500000 GHz	Settings
1 Spectrum Scale/Div 10 dB Log 100	Ref LvI Offset 12.20 dB Ref Level 20.00 dBm	Mkr5 2.375 600 GH -47.63 dBn	and the second se	
-10.0		↓ ↓	Full Span Start Freq	
-20 0 -30 0 -40 0 -50 0 -50 0 -60 0		BL124.99/B	2.300000000 GHz Stop Freq 2.405000000 GHz	
-00 0 -70 0 Start 2.30000 GHz #Res BW 100 kHz	#Video BW 300 kHz	Stop 2.40500 GH Sweep 3.87 ms (1001 pts	AUTO TUNE	
5 Marker Table Mode Trace Scale 1 N 1 f	2.401 850 GHz -4.993 dBm	unction Width Function Value	10.500000 MHz Auto Man	
2 N 1 F 3 N 1 F 4 N 1 F 5 N 1 F 6	2.400 000 GHz -50.35 dBm 2.390 000 GHz -50.59 dBm 2.310 000 GHz -50.78 dBm 2.375 600 GHz -47.63 dBm		Freq Offset 0 Hz X Axis Scale Log	Local
* 7 7 * ?	Oct 20, 2022 9:28:50 AM		Lin	
Spectrum Analyzer 1	DH5-Ant1-Low-2	24024.99	C Frequence	v v 🔛
Swept SA KEYSIGHT Input RF	Input Z: 50 Ω #Atten: 30 dB PNO: Fast Corr CCorr μW Path: Standard Gate: Off	#Avg Type: Power (RMS12345) Trig: Free Run M W/WW	Center Frequency 2.510000000 GHz	Settings
Align: Auto	Freq Ref. Int (S) IF Gain: Low Sig Track: Off	рррр	P	
Align Auto	Freq Ref. Int (S) IF Gain Low Sig Track: Off Ref LvI Offset 12.04 dB Ref Level 20.00 dBm	РРРРР Mkr4 2.508 08 GH: -48.00 dBn	Span 80.0000000 MHz	
Align Auto I Spectrum Scale/Div 10 dB Log 100 000 000 11 100 100 100 10	Sig Track: Off	Mkr4 2,508 08 GH	Span 80.0000000 MHz 9 Swept Span	
Align Auto	Sig Track: Off Ref LvI Offset 12.04 dB Ref Level 20.00 dBm	Mkr4 2,508 08 GH	Span 8.0000000 MHz Swept Span Zero Span Full Span Start Freq 2.470000000 GHz	
Align Auto CV 1 Spectrum Scale/Div 10 dB Log 10.0 0.0	Sig Track: Off Ref LvI Offset 12.04 dB Ref Level 20.00 dBm	Mkr4 2.508 08 GH: -48.00 dBn	Span 80.0000000 MHz Swept Span Zero Span Fuli Span Start Freq	
Align Auto	Sig Track: Off Ref LvI Offset 12.04 dB Ref Level 20.00 dBm	Mkr4 2.508 08 GH: -48.00 dBn	Span 8.0000000 MHz Swept Span Full Span Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step	
Align Auto TV Scale/Div 10 dB Cog	Sig Track Off Ref LvI Offset 12.04 dB Ref Level 20.00 dBm	Mkr4 2,508 08 GH -48.00 dBn -48.00 dBn 	Span 8.0000000 MHz Swept Span Zero Span Full Span Start Freq 2.470000000 GHz Stop Freq 2.550000000 GHz CF Step 8.00000 MHz CF Step 8.00000 MHz Juito	
Align Auto	Sig Track Off Ref LvI Offset 12.04 dB Ref Level 20.00 dBm	Mkr4 2.508 08 GH -48.00 dBn dC1-25 05 dBr	Span 80.0000000 MHz 90.000000 MHz 90.000000 MHz 90.000000 MHz 90.00000 MHz <td></td>	
Align Auto TV Scale/Div 10 dB Cog	Sig Track Off Ref LvI Offset 12.04 dB Ref Level 20.00 dBm 4 4 4 4 4 4 4 4 4 4 4 4 4	Mkr4 2,508 08 GH -48.00 dBn -48.00 dBn 	Span 8.0000000 MHz Swept Span Zero Span Full Span Start Freq 2.470000000 GHz Stop Freq 2.55000000 GHz CF Step 8.00000 MHz Auto Man Freq Offset	Local



Spectrum Analyzer 1 Swept SA	+		Frequenc	y - 1 🚉
KEYSIGHT Input RF RL Coupling: EIC Align: Auto	Input Z: 50 Ω #Atten: 30 dB PNO Fast Corr CCorr μW Path Standard Gate. Off Freq Ref. Int (S) Sig Track. Off Sig Track. Off	#Avg Type: Power (RMS 1 2 3 4 5 6 Trig Free Run M W/// W/// P P P P P P	Center Frequency 2.352500000 GHz	Settings
1 Spectrum Scale/Div 10 dB Log 10 0	Ref LvI Offset 11.94 dB Ref Level 20.00 dBm	Mkr5 2.364 995 GHz -48.14 dBm	Span 105.000000 MHz Swept Span Zero Span	
0.00 10.0			Full Span	
-20 0 -30 0 -40 0 -50 0 marcanosoft Anathenia		0c1 2573/dB#	Start Freq 2.300000000 GHz Stop Freq	
-60 0 -70 0 Start 2.30000 GHz	#Video BW 300 kHz	Stop 2.40500 GHz	2.405000000 GHz AUTO TUNE	
#Res BW 100 kHz 5 Marker Table r Mode Trace Scale	X Y Function Fi	Sweep 3.87 ms (1001 pts)	CF Step 10.500000 MHz Auto Man	
1 N 1 f 2 N 1 f 3 N 1 f 4 N 1 f	2.401 955 GHz -5.729 dBm 2.400 000 GHz -5.720 dBm 2.390 000 GHz -49.97 dBm 2.310 000 GHz -49.95 dBm		Freq Offset 0 Hz	Local
5 N 1 f	2.364 995 GHz 48.14 dBm		X Axis Scale Log Lin	Loui
1 n c 1	2 Oct 20, 2022 9:36:32 AM DH5-Ant1-Low-Hoj	24025 73	i Citan (Loan)	
Spectrum Analyzer 1	+		Frequenc	y y 👬
KEYSIGHT Input RF R L Coupling: DC Align: Auto	Input Z; 50 Ω #Atten: 30 dB PNO Fast Corr CCorr μW Path Standard Gate Off Freq Ref. Int (S) Sig Track: Off	#Avg Type: Power (RMS 1 2 3 4 5 6 Trig Free Run M WW WWW P P P P P P	Center Frequency 2.510000000 GHz	Settings
1 Spectrum	Ref Lvi Offset 11.99 dB Ref Level 20.00 dBm	Mkr4 2.522 08 GHz -48.15 dBm	Span 80.0000000 MHz Swept Span Zero Span	
			Fuli Span	
-20 0 Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y Y		Dicti-25 64 dBm	Start Freq 2.470000000 GHz Stop Freq	
-50.0 -60.0 -70.0	the foreign and and the set of the foreign of the foreign of the set		2.550000000 GHz	
Start 2.47000 GHz #Res BW 100 kHz 5 Marker Table	#Video BW 300 kHz	Stop 2.55000 GHz Sweep 3.00 ms (1001 pts)		
Mode Trace Scale 1 N 1 f 2 N 1 f	X Y Function Ft 2.471 04 GHz -5.639 dBm 2.483 50 GHz -50.67 dBm	inction Width Function Value	Auto Man Freq Offset	
3 N 1 f 4 N 1 f 5 6	2.500 00 GHz -50.04 dBm 2.522 08 GHz -48.15 dBm		0 Hz X Axis Scale Log Lin	Local
	? Oct 20, 2022		a giral Tiroc' Isoan Asani	
	DH5-Ant1-High-Ho			



TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
	Ant1	2402	0~Reference	-5.03	-5.03		PASS
	Anti	2402	30~1000	-5.03	-59.75	≤-25.03	PASS
	A pt1	Ant1 2441	1000~26500	-5.03	-50.51	≤-25.03	PASS
	DH5 Ant1		0~Reference	-4.99	-4.99		PASS
	Ant1	2490	30~1000	-4.99	-60.31	≤-24.99	PASS
		t1 2480	1000~26500	-4.99	-50.72	≤-24.99	PASS

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:













pectrum Analyzer 1 wept SA Ö + Frequency #Avg Type: Power (RMS 1 2 3 4 5 6 Trig: Free Run #Atten: 20 dB PNO: Fast pW Path: Standard Gate: Off IF Gain: Low Sig Track: Off Input Z: 50 Ω Corr CCorr Freq Ref. Int (S) KEYSIGHT Input RF Center Frequency Settings Align: Auto MWWWW 13.750000000 GHz рррррр L)XI Span Mkr2 26,098 80 GHz 1 Spectrum 25.5000000 GHz ٧ Ref LvI Offset 11.97 dB Ref Level 15.00 dBm Scale/Div 10 dB -50.72 dBm Swept Span Zero Span Full Span 1-24.99 dB Start Freq 1.000000000 GHz Stop Freq 26.500000000 GHz AUTO TUNE Start 1.00 GHz #Video BW 300 kHz Stop 26.50 GHz #Res BW 100 kHz Sweep ~943 ms (30001 pts) CF Step 2.550000000 GHz 5 Marker Table Auto Man Mode Trace Scale Х Y Function Function Width Function Value 2.440 75 GHz -5 665 dBm N Freq Offset 26.098 80 GHz -50.72 dBm Ν Local X Axis Scale Log Lin モッペロ? Oct 20, 2022 💬 X DH5-Ant1-2441-1000~26500--4.99 Spectrum Analyzer 1 Swept SA Ö + Frequency #Atten: 30 dB PNO: Best Wide µW Path: Standard Gate: Off IF Gain: Low Sig Track: Off Input Z: 50 Ω Corr CCorr Freq Ref: Int (S) KEYSIGHT Input RF #Avg Type: Power (RMS 1 2 3 4 5 6 Trig Free Run Center Frequency R L Coupling DC Align: Auto Settings 2.480000000 GHz рррррр LNI. ban Mkr1 2.479 884 5 GHz 1 Spectrum T 1.50000000 MHz Ref LvI Offset 12.04 dB Ref Level 30.00 dBm -5.49 dBm Scale/Div 10 dB Swept Span Zero Span .og Full Span Start Freq 2.479250000 GHz V Stop Freq 2.480750000 GHz AUTO TUNE CF Step 150.000 kHz 0.0 014 Auto Man Freq Offset 0 Hz Local X Axis Scale Span 1.500 MHz Sweep 1.00 ms (1001 pts) #Video BW 300 kHz Center 2.4800000 GHz #Res BW 100 kHz ? Oct 20, 2022 9:32:32 AM X -うで DH5-Ant1-2480-0~Reference--5.50

EMTEK (Dongguan) Co., Ltd.

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn







9.7 RADIATED SPURIOUS EMISSION

9.7.1 Applicable Standard

According to FCC Part 15.247(d), 15.205, 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02 According to IC RSS-Gen and RSS-247

9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.205, Restricted bands							
MHz	MHz	MHz	GHz				
0.090-0.110	0.090-0.110 16.42-16.423		4.5-5.15				
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46				
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75				
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5				
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2				
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5				
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7				
6.26775-6.26825	123-138	2200-2300	14.47-14.5				
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2				
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4				
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12				
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0				
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8				
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5				
12.57675-12.57725	322-335.4	3600-4400	(2)				
13.36-13.41							

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

 $VBW \ge RBW$

Sweep = auto



Detector function = peak Trace = max hold For Below 1GHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 100 kHz for $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold For Below 30MHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 9kHz $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold For Below 150KHz: The EUT was placed on a turn table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Span = wide enough to fully capture the emission being measured RBW = 200Hz $VBW \ge RBW$ Sweep = auto Detector function = peak Trace = max hold Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT,

measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log(dwell time/100 ms), in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

9.7.5 Test Results

Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	22° C
Relative Humidity:	45%
ATM Pressure:	1011 mbar

Freq.	Ant.Pol.	Pol. Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
(MHz)	H/V	PK `	AV	PK	AV	PK	AV

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor



Spurious Emission Above 1GHz (1GHz to 25GHz)

All the antenna(Antenna 1) and modes(GFSK, π /4-DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1, GFSK) result recorded was report as below:

Test mode:	GFSK		Freque	Frequency: Channe			0: 2402MHz		
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)			
(11112)	H/V	PK	AV	PK	AV	PK	AV		
7256	V	58.31	43.79	74	54	-15.69	-10.21		
9874	V	58.63	43.99	74	54	-15.37	-10.01		
13682	V	58.21	43.88	74	54	-15.79	-10.12		
8242	Н	57.34	43.48	74	54	-16.66	-10.52		
12492	Н	57.64	43.37	74	54	-16.36	-10.63		
14430	Н	57.67	43.25	74	54	-16.33	-10.75		

Channel 39: 2441MHz Test mode: **GFSK** Frequency: Ant.Pol. Emission Level(dBuV/m) Limit 3m(dBuV/m) Over(dB) Freq. (MHz) H/V PK AV PK AV ΡK AV 7494 V 57.34 43.02 74 54 -16.66 -10.98 43.2 9840 V 57.68 74 54 -10.80 -16.32 14124 V 74 58.48 43.82 54 -15.52 -10.18 7596 Н 58.24 43.36 74 54 -15.76 -10.64 Н 42.04 -17.07 -11.96 10146 56.93 74 54 14090 Н 58.99 44.1 74 54 -15.01 -9.90

GFSK Test mode:

Frequency:

Channel 78: 2480MHz

Freq.	Ant.Pol.	Emission Lev	vel(dBuV/m)	Limit 3m	(dBuV/m)	Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
8276	V	56.93	42.67	74	54	-17.07	-11.33
9908	V	57.08	43.02	74	54	-16.92	-10.98
13546	V	57.05	43.14	74	54	-16.95	-10.86
9636	Н	56.72	42.31	74	54	-17.28	-11.69
11608	Н	56.94	42.54	74	54	-17.06	-11.46
15042	Н	56.68	42.37	74	54	-17.32	-11.63

Note:

(1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor.

(3) Correct Factor= Ant_F + Cab_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

EMTEK (Dongguan) Co., Ltd.

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ..Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All the antenna(Antenna 1) and modes(GFSK, π/4-DQPSK, 8DPSK, Hopping) mode have been tested, and the worst(Antenna 1, GFSK, Hopping) result recorded was report as below:

Test mode: GFSK		Frequenc	cy: Ch	Channel 0: 2402MHz		
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	
2387.44	Н	46.15	74	32.86	54	
2388.24	V	46.66	74	33.84	54	

Test mode:	est mode: GFSK		cy: Ch	annel 78: 2480MHz		
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	
2483.929	Н	46.8	74	33.72	54	
2484.259	V	45.91	74	32.82	54	

Test mode:	GFSK	Frequency: Hopping						
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)			
2400	н	50.39	74	35.85	54			
2483.5	н	53.14	74	38.66	54			
2487.84	Н	50.73	74	36.32	54			
2400	V	51.84	74	38.11	54			
2483.5	V	50.8	74	36.69	54			
2489.74	V	52.01	74	37.3	54			

(1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz). Note:

(2) Emission Level= Reading Level+Correct Factor.


(3) Correct Factor= Ant_F + Cab_L - Preamp


(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

EMTEK (Dongguan) Co., Ltd.


东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层.第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



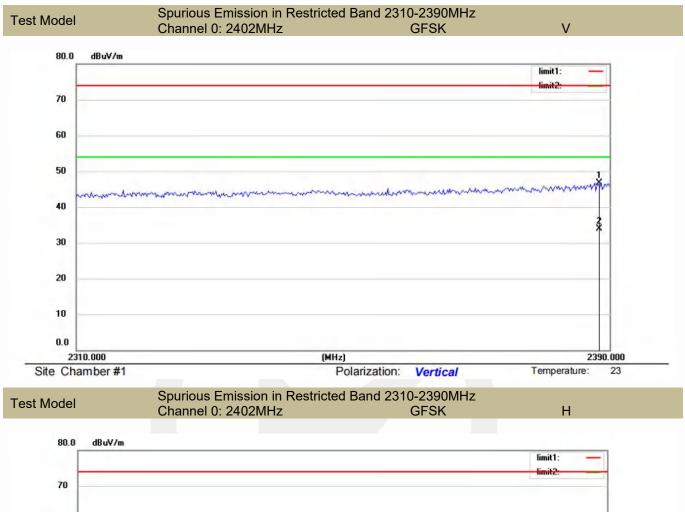


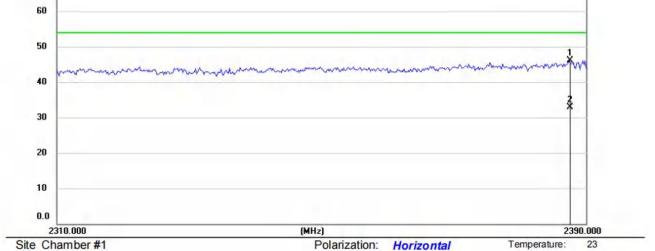




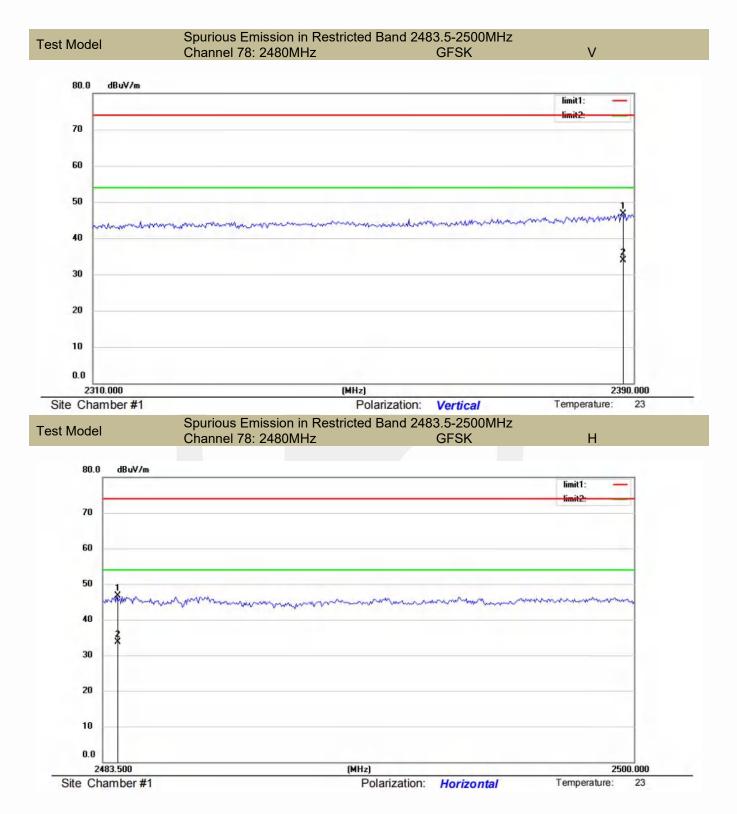



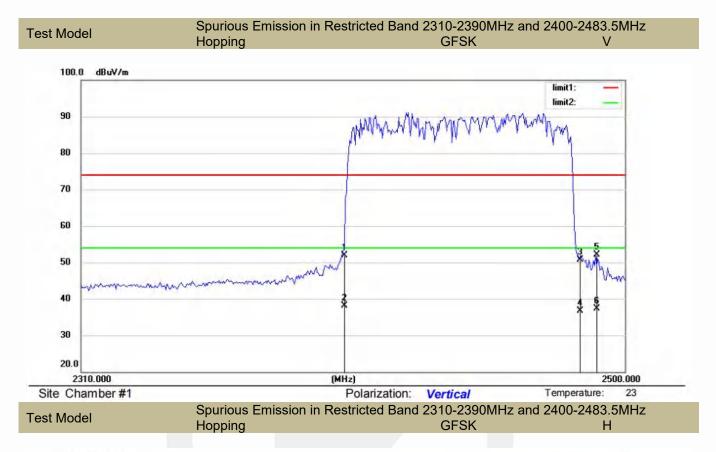


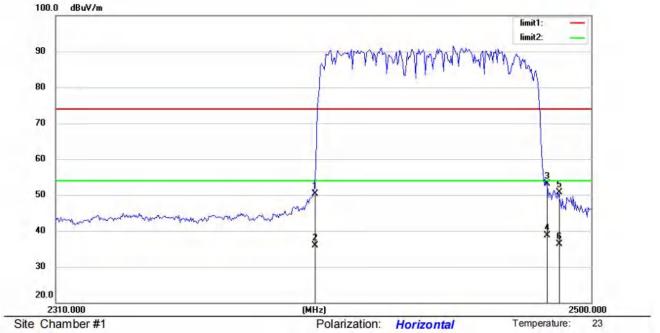



Spurious Emission below 1GHz (30MHz to 1GHz)

All the antenna(Antenna 1) and modes(GFSK, $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1, GFSK) result recorded was report as below:

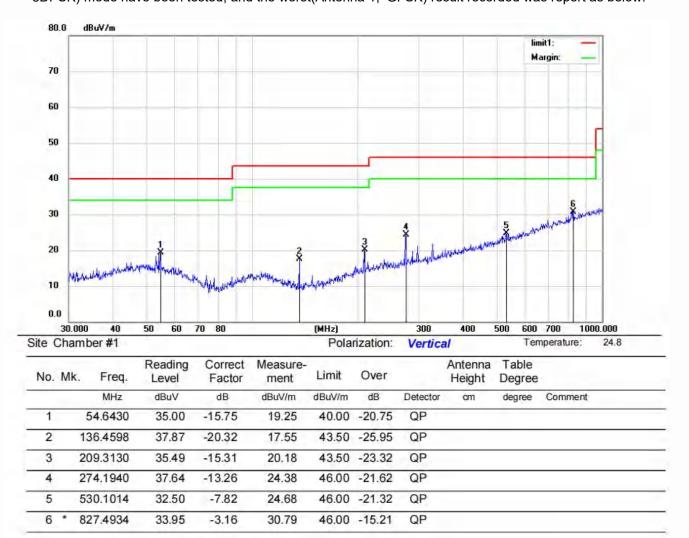


*:Maximum data x:Over limit !:over margin Operator: Ccyf

EMTEK (Dongguan) Co., Ltd.

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -1&2/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



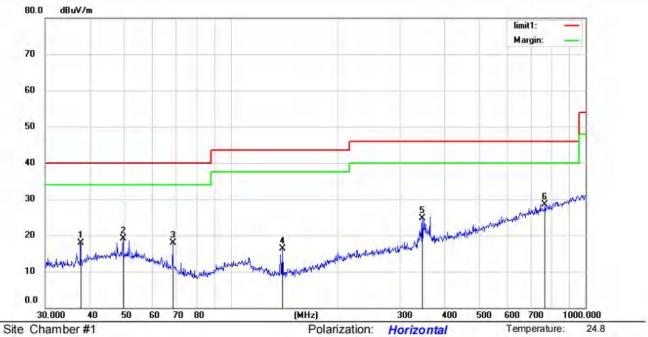

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	1	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	-	37.6798	35.01	-17.09	17.92	40.00	-22.08	QP			
2		49.7068	34.36	-15.32	19.04	40.00	-20.96	QP			
3		68.6310	36.81	-18.86	17.95	40.00	-22.05	QP			
4		139.8508	36.69	-20.34	16.35	43.50	-27.15	QP			
5		346.8092	36.25	-11.63	24.62	46.00	-21.38	QP			
6	*	768.7481	32.95	-4.35	28.60	46.00	-17.40	QP			

*: Maximum data x:Over limit !:over margin Operator: Ccyf

Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology. Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



9.8 CONDUCTED EMISSION TEST

9.8.1 Applicable Standard

According to FCC Part 15.207 According to IC RSS-Gen 8.8

9.8.2 Conformance Limit

Conducted Emission Limit										
Frequency(MHz) Quasi-peak Average										
0.15-0.5 66-56 56-46										
0.5-5.0	56	46								
5.0-30.0 60 50										
Note: 1 The lower limit shall apply at	the transition frequencies	Note: 1. The lower limit shall apply at the transition frequencies								

2. The lower limit shall apply at the transition frequencies
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

9.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

9.8.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Repeat above procedures until all frequency measured were complete.

9.8.5 Test Results

Pass

The AC120V &240V voltage have been tested, and the worst result recorded was report as below:



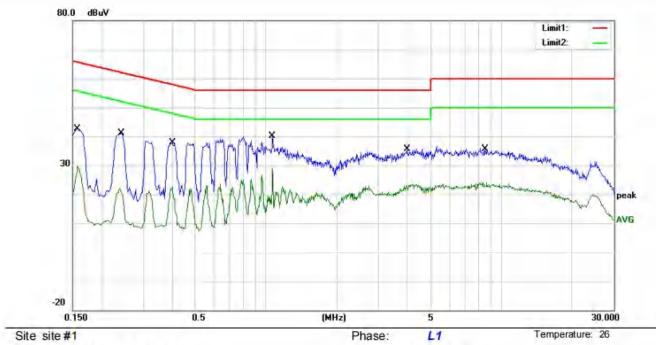

Limit: (CE)FCC PART 15 C_QP

Power: AC 120V/60Hz Humidity:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	1.00	
-		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1580	32.22	10.52	42.74	65.57	-22.83	QP	
2		0.1580	19.13	10.52	29.65	55.57	-25.92	AVG	
3		0.2420	30.73	10.43	41.16	62.03	-20.87	QP	
4		0.2420	11.68	10.43	22.11	52.03	-29.92	AVG	
5		0.3980	27.56	10.25	37.81	57.90	-20.09	QP	
6		0.3980	12.50	10.25	22.75	47.90	-25.15	AVG	
7	•	1.0620	30.11	10.12	40.23	56.00	-15.77	QP	
8		1.0620	19.02	10.12	29.14	46.00	-16.86	AVG	
9		3.9820	25.51	10.07	35.58	56.00	-20.42	QP	
10		3,9820	12.97	10.07	23.04	46.00	-22.96	AVG	
11	-	8.5140	25.57	10.04	35.61	60.00	-24.39	QP	
12		8.5140	14.00	10.04	24.04	50.00	-25.96	AVG	
	_								

*: Maximum data x:Over limit

l:over margin

Comment: Factor build in receiver.


Operator:

45 %

EMTEK (Dongguan) Co., Ltd.

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -182/F ..Building 2,Zone A,Zhongda Marine Biotechnology Research and Development Base ,No.9, Xincheng Avenue,Songshanhu High-technology. Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



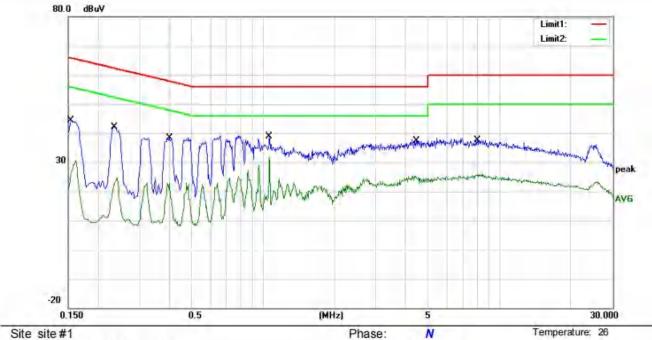

Limit: (CE)FCC PART 15 C_QP

Power: AC 120V/60Hz

Humidity:

45 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
-		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1540	33.93	10.53	44.46	65.78	-21.32	QP	
2		0.1540	20.12	10.53	30.65	55.78	-25.13	AVG	
3		0.2380	31.76	10.43	42.19	62.17	-19.98	QP	
4		0.2380	14.29	10.43	24.72	52.17	-27.45	AVG	
5	-	0.4020	28.10	10.24	38.34	57.81	-19.47	QP	
6		0.4020	12.75	10.24	22.99	47.81	-24.82	AVG	
7	C	1.0620	28.87	10.12	38.99	56.00	-17.01	QP	
8	*	1.0620	21.83	10.12	31.95	46.00	-14.05	AVG	
9	-	4.4540	27.42	10.06	37.48	56.00	-18.52	QP	
10	-	4.4540	15.19	10.06	25.25	46.00	-20.75	AVG	
11	-	8.0420	27.52	10.05	37.57	60.00	-22.43	QP	
12		8.0420	15.87	10.05	25.92	50.00	-24.08	AVG	

":Maximum data x:Over limit I:over margin

Comment: Factor build in receiver,

Operator:

EMTEK (Dongguan) Co., Ltd.

东莞市信测科技有限公司 地址:广东省东莞市松山湖高新技术产业开发区新城大道9号中大海洋生物科技研发基地A区2号办公楼负一层、第二层 网址:Http://www.emtek.com.cn 邮箱:E-mail: project@emtek.com.cn Add: -182/F ., Building 2, Zone A, Zhongda Marine Biotechnology Research and Development Base , No.9, Xincheng Avenue, Songshanhu High-technology Industrial Development Zone, Dongguan, Guangdong, China Http://www.emtek.com.cn E-mail: project@emtek.com.cn



9.9 ANTENNA APPLICATION

9.9.1 **Antenna Requirement**

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
FCC 47 CFR Part 15.247 (b)	If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.
RSS-247 Section 5.4	If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

9.9.2 Result

PASS.

- Note: \checkmark Antenna use a permanently attached antenna which is not replaceable.
 - Not using a standard antenna jack or electrical connector for antenna replacement
 - The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document Internal Photos to show the antenna connector.



Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	1	20.8
1	20.9	0.15	1	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

Detail of factor for radiated emission

*** End of Report ***



声 明

Statement

1. 本报告无授权批准人签字及"检验检测专用章"无效;

This report will be void without authorized signature or special seal for testing report.

2. 未经许可本报告不得部分复制;

This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效,委托方对样品的代表性和资料的真实性负责;

The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内,仅作为客户委托、科研、教学或内部 质量控制等目的使用;

The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定,未考虑不确定度所带来的风险,本实验室不承担相关责任,特别约定、 标准或规范中有明确规定的除外;

The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检验报告若有异议,请于收到报告之日起 20 日内提出;

Objections shall be raised within 20 days from the date receiving the report.