

TEST REPORT

Product Name: Robint-Clean
FCC ID: 2A3PX-RCL1
Trademark: ROBINT
Model Number: RCL1
Prepared For: Beijing Robint Technology Co., Ltd.
Address: Room 2006, Jinqiu International Building, No.6 Zhichun Road, Haidian District, Beijing, China
Manufacturer: Beijing Robint Technology Co., Ltd.
Address: Room 2006, Jinqiu International Building, No.6 Zhichun Road, Haidian District, Beijing, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jan. 22, 2024
Sample tested Date: Jan. 22, 2024 to Feb. 23, 2024
Issue Date: Feb. 23, 2024
Report No.: CTB240223015RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION.....	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration.....	7
4.3 Support Equipment.....	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup.....	11
6.2 Limit.....	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup.....	15
7.2 Limit.....	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	26
8.1 Block Diagram Of Test Setup.....	26
8.2 Limit.....	26
8.3 Test procedure	26
8.4 Test Result	27
9. CONDUCTED PEAK OUTPUT POWER	34
9.1 Block Diagram Of Test Setup.....	34
9.2 Limit.....	34
9.3 Test procedure	34
9.4 Test Result	35
10. 20DB OCCUPIED BANDWIDTH.....	39
10.1 Block Diagram Of Test Setup.....	39
10.2 Limit.....	39
10.3 Test procedure	39
10.4 Test Result	39
11. CARRIER FREQUENCIES SEPARATION	43
11.1 Block Diagram Of Test Setup.....	43
11.2 Limit.....	43
11.3 Test procedure	43
11.4 Test Result	43
12. HOPPING CHANNEL NUMBER	47
12.1 Block Diagram Of Test Setup.....	47
12.2 Limit.....	47
12.3 Test procedure	47
12.4 Test Result	47
13. DWELL TIME.....	49
13.1 Block Diagram Of Test Setup.....	49
13.2 Limit.....	49
13.3 Test procedure	49



13.4	Test Result.....	50
14.	PSEUDORANDOM FREQUENCY	54
14.1	Limit.....	54
14.2	Test procedure	54
14.3	Test Result.....	55
15.	ANTENNA REQUIREMENT.....	56
16.	EUT TEST SETUP PHOTOGRAPHS.....	57

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB240223015RFX	Feb. 23, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	25.9V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.07.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

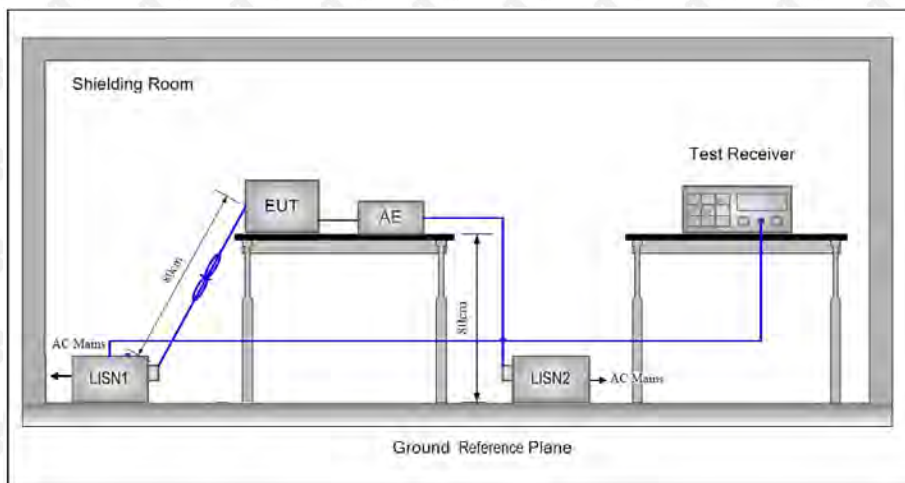

6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

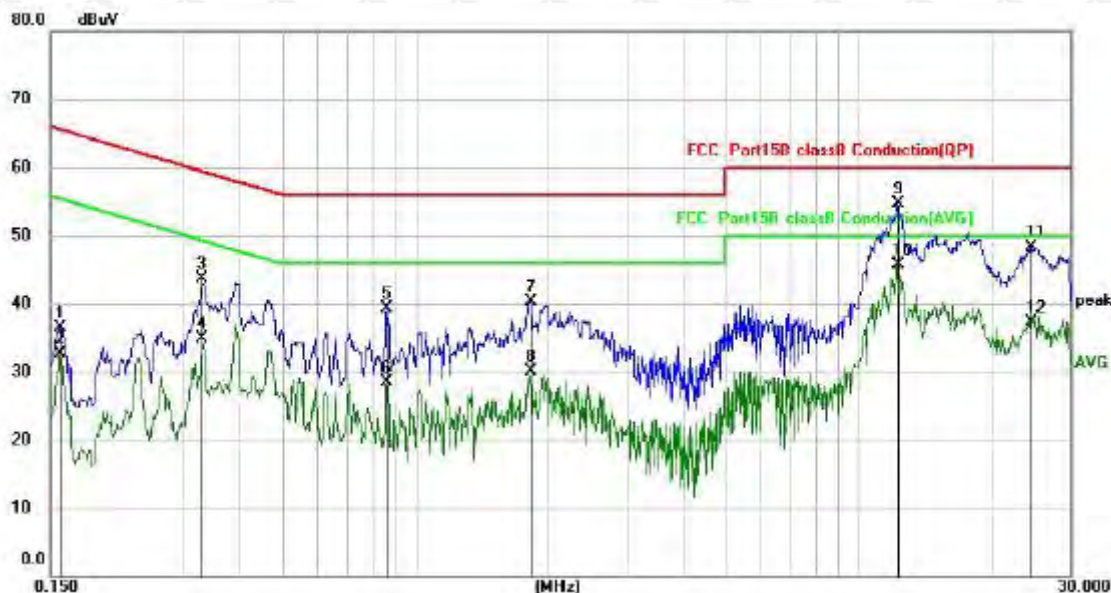


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1580	26.65	9.95	36.60	65.57	-28.97	QP
2		0.1580	22.66	9.95	32.61	55.57	-22.96	AVG
3		0.3300	33.73	9.97	43.70	59.45	-15.75	QP
4		0.3300	24.86	9.97	34.83	49.45	-14.62	AVG
5		0.8618	29.26	10.01	39.27	56.00	-16.73	QP
6		0.8618	18.45	10.01	28.46	46.00	-17.54	AVG
7		1.8180	30.32	10.08	40.40	56.00	-15.60	QP
8		1.8180	19.97	10.08	30.05	46.00	-15.95	AVG
9		12.2378	44.09	10.65	54.74	60.00	-5.26	QP
10	*	12.2378	35.05	10.65	45.70	50.00	-4.30	AVG
11		24.4817	37.36	10.99	48.35	60.00	-11.65	QP
12		24.4817	26.31	10.99	37.30	50.00	-12.70	AVG

Remark:

$$\text{Factor} = \text{Cable loss} + \text{LISN factor}, \text{Margin} = \text{Measurement} - \text{Limit}$$

N: Worst case-GFSK(low channel)

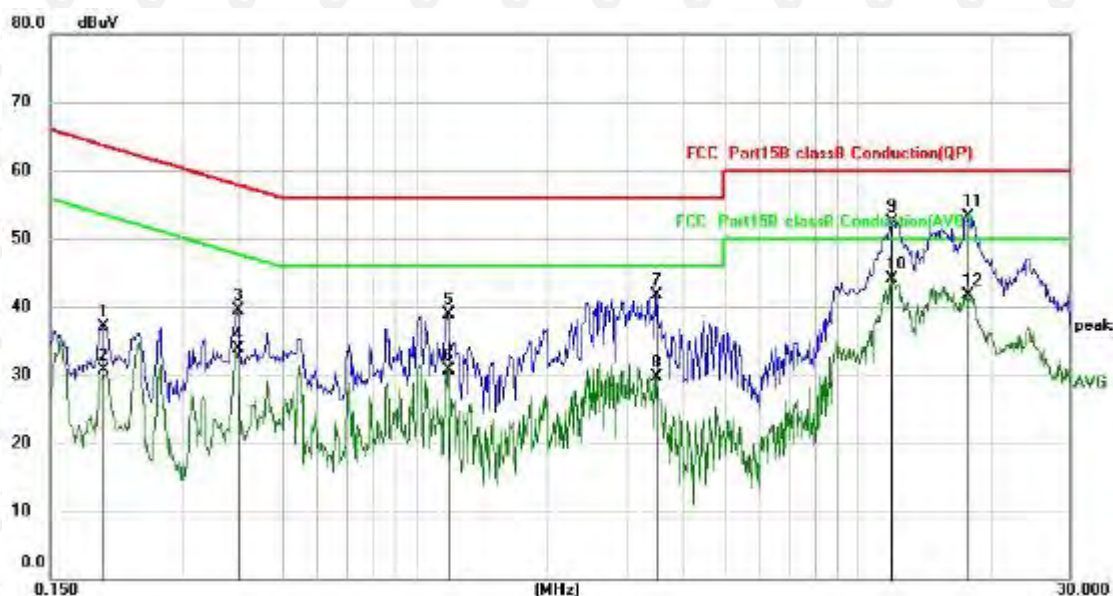

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1		0.1980	27.25	9.95	37.20	63.69	-26.49	QP
2		0.1980	20.70	9.95	30.65	53.69	-23.04	AVG
3		0.3980	29.55	9.98	39.53	57.90	-18.37	QP
4		0.3980	23.99	9.98	33.97	47.90	-13.93	AVG
5		1.1855	28.96	10.02	38.98	56.00	-17.02	QP
6		1.1855	20.59	10.02	30.61	46.00	-15.39	AVG
7		3.5059	31.37	10.24	41.61	56.00	-14.39	QP
8		3.5059	19.41	10.24	29.65	46.00	-16.35	AVG
9		11.9100	41.79	10.64	52.43	60.00	-7.57	QP
10	*	11.9100	33.42	10.64	44.06	50.00	-5.94	AVG
11		17.7334	42.52	10.78	53.30	60.00	-6.70	QP
12		17.7334	30.83	10.78	41.61	50.00	-8.39	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

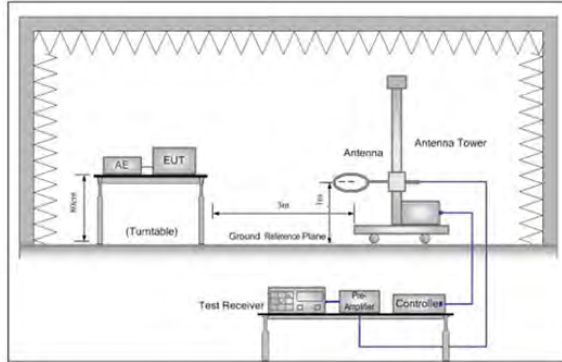


Figure 1. Below 30MHz

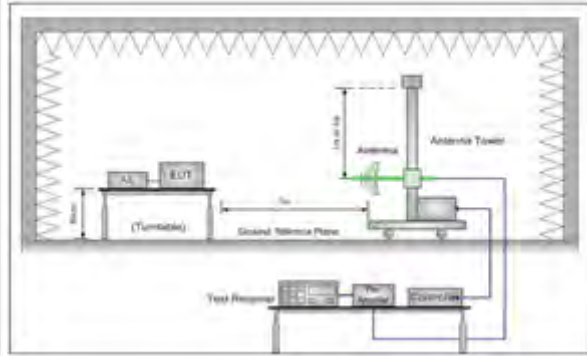


Figure 2. 30MHz to 1GHz

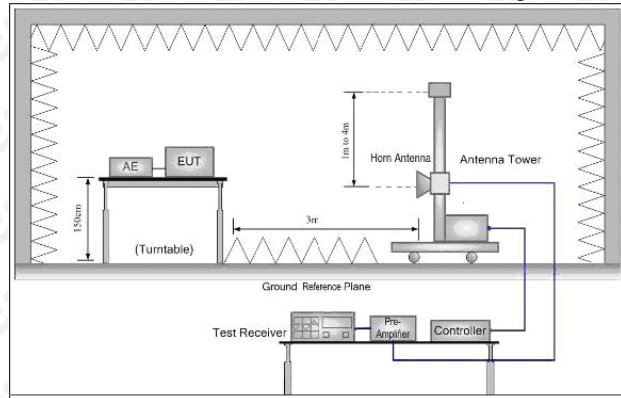


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:
 Antenna polarity: H
 Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	35.7490	42.38	-5.90	36.48	40.00	-3.52	QP
2	!	125.2258	43.23	-5.03	38.20	43.50	-5.30	QP
3	!	176.2684	42.77	-5.07	37.70	43.50	-5.80	QP
4	!	250.3009	48.76	-6.89	41.87	46.00	-4.13	QP
5		500.3009	36.97	0.05	37.02	46.00	-8.98	QP
6	!	869.1300	33.85	6.73	40.58	46.00	-5.42	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Antenna polarity: V
 Worst case-GFSK(low channel)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		36.3990	36.83	-5.73	31.10	40.00	-8.90	QP
2	*	188.2867	43.43	-7.21	36.22	40.00	-3.78	QP
3		302.6381	41.97	-4.67	37.30	47.00	-9.70	QP
4		383.6855	41.76	-2.57	39.19	47.00	-7.81	QP
5		503.8420	38.71	0.14	38.85	47.00	-8.15	QP
6		876.4939	30.56	6.76	37.32	47.00	-9.68	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Above 1 GHz Test Results:

 CH Low (2402MHz)
 Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	57.73	-3.65	54.08	74.00	-19.92	peak
4804	49.01	-3.65	45.36	54.00	-8.64	AVG
7206	59.53	-0.95	58.58	74.00	-15.42	peak
7206	40.15	-0.95	39.20	54.00	-14.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4804	57.31	-3.65	53.66	74.00	-20.34	peak
4804	50.92	-3.65	47.27	54.00	-6.73	AVG
7206	60.75	-0.95	59.80	74.00	-14.20	peak
7206	40.63	-0.95	39.68	54.00	-14.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	58.46	-3.54	54.92	74.00	-19.08	peak
4882.00	48.63	-3.54	45.09	54.00	-8.91	AVG
7323.00	57.41	-0.81	56.60	74.00	-17.40	peak
7323.00	43.10	-0.81	42.29	54.00	-11.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	56.90	-3.54	53.36	74.00	-20.64	peak
4882.00	48.81	-3.54	45.27	54.00	-8.73	AVG
7323.00	56.57	-0.81	55.76	74.00	-18.24	peak
7323.00	43.90	-0.81	43.09	54.00	-10.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	59.13	-3.43	55.70	74.00	-18.30	peak
4960	49.61	-3.44	46.17	54.00	-7.83	AVG
7440	59.92	-0.77	59.15	74.00	-14.85	peak
7440	40.09	-0.77	39.32	54.00	-14.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	58.45	-3.43	55.02	74.00	-18.98	peak
4960	48.38	-3.44	44.94	54.00	-9.06	AVG
7440	59.08	-0.77	58.31	74.00	-15.69	peak
7440	40.60	-0.77	39.83	54.00	-14.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping
 Operation Mode: TX CH Low (2402MHz)
 Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	58.23	-5.81	52.42	74.00	-21.58	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.55	-5.84	49.71	74.00	-24.29	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310.00	55.75	-5.81	49.94	74.00	-24.06	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.32	-5.84	49.48	74.00	-24.52	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	54.78	-5.81	48.97	74.00	-25.03	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.22	-6.06	48.16	74.00	-25.84	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.06	-5.81	51.25	74.00	-22.75	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.95	-6.06	47.89	74.00	-26.11	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	55.62	-5.81	49.81	74.00	-24.19	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.59	-5.84	49.75	74.00	-24.25	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.42	-5.81	50.61	74.00	-23.39	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	52.87	-5.84	47.03	74.00	-26.97	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.14	-5.81	49.33	74.00	-24.67	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.23	-6.06	48.17	74.00	-25.83	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.25	-5.81	49.44	74.00	-24.56	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.82	-6.06	47.76	74.00	-26.24	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

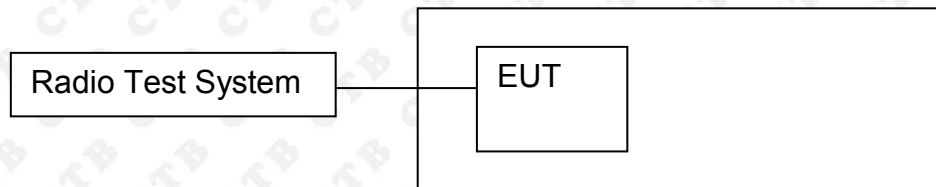


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).




8.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result

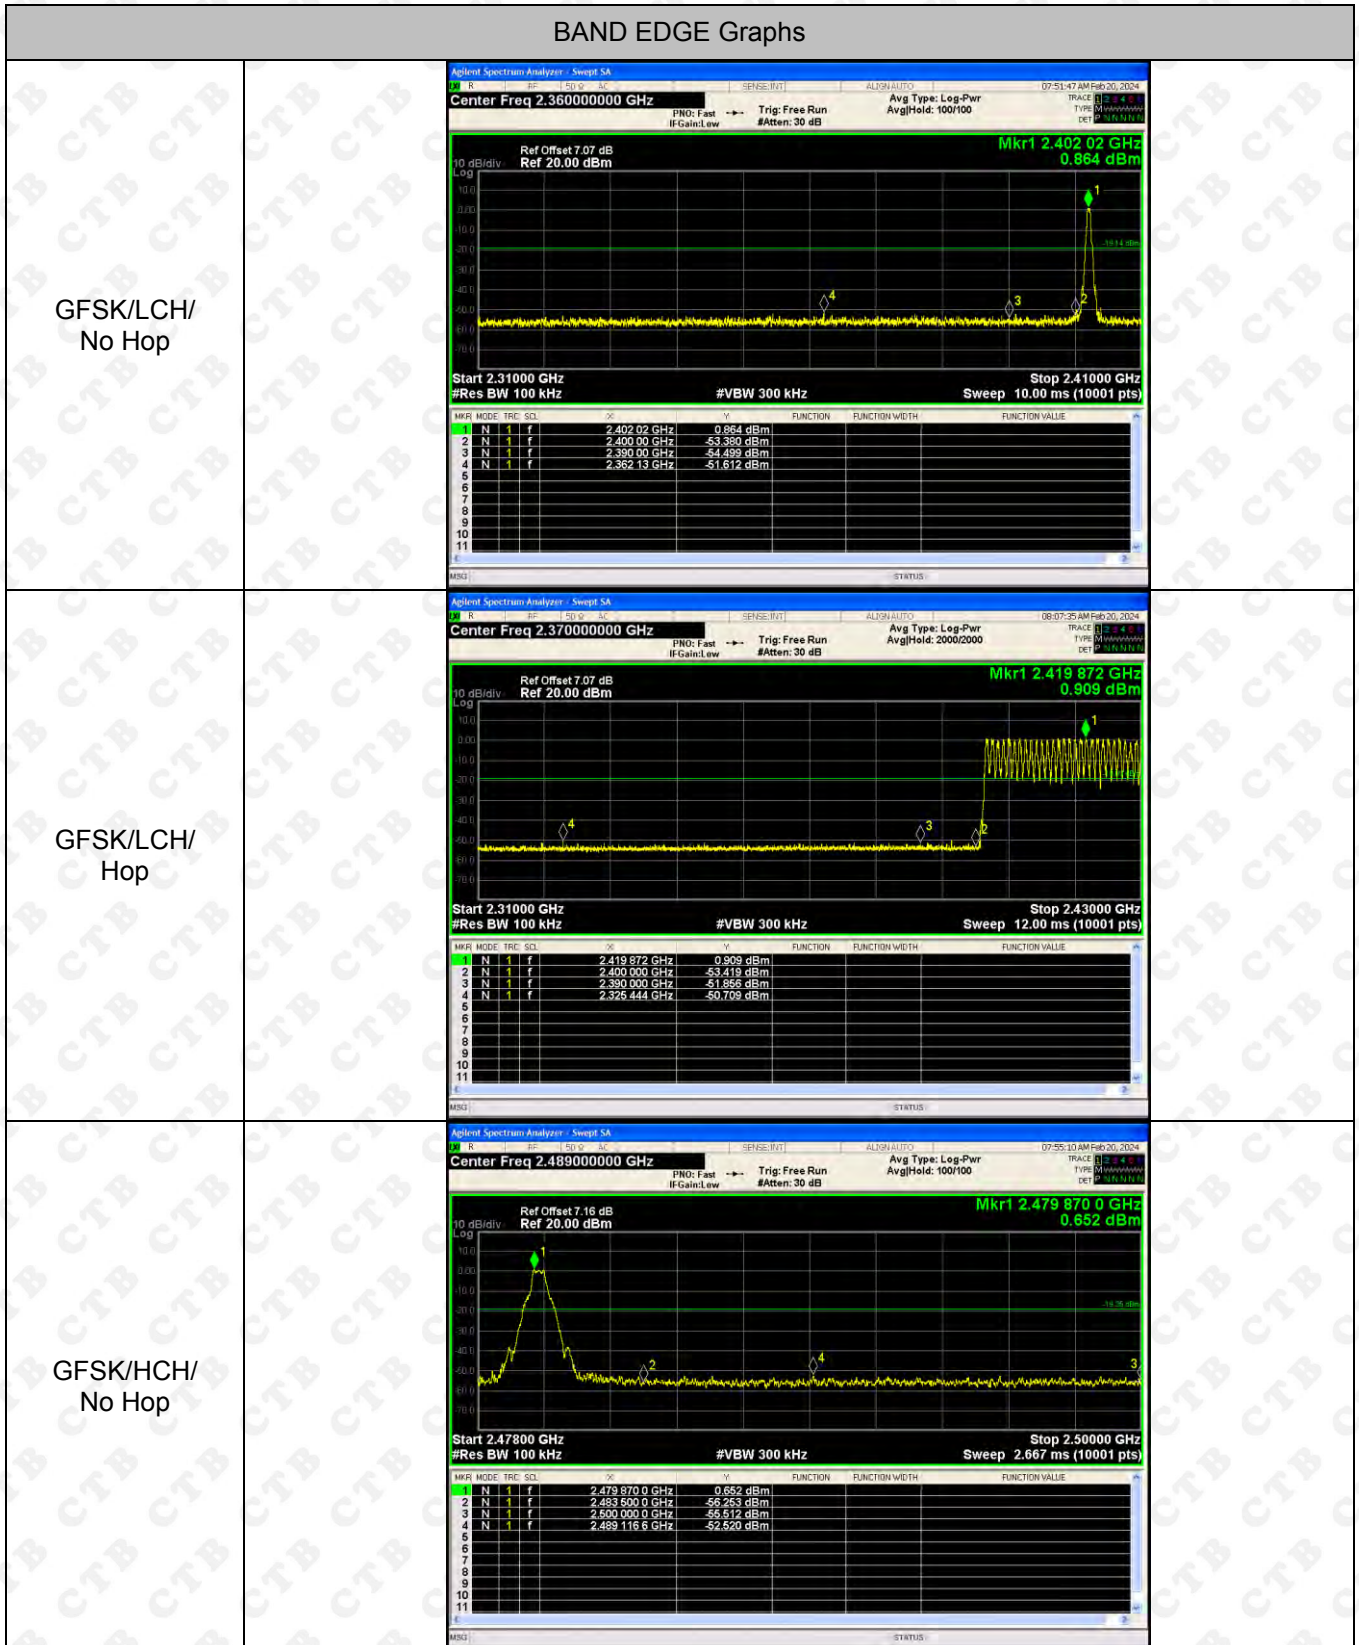


<p>GFSK/HCH/ Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>∞</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.46887500 GHz</td> <td></td> <td></td> <td>0.940 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.48350000 GHz</td> <td></td> <td></td> <td>-53.791 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.49000000 GHz</td> <td></td> <td></td> <td>-54.483 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.49906250 GHz</td> <td></td> <td></td> <td>-51.047 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	∞	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.46887500 GHz			0.940 dBm	2	N	1	f		2.48350000 GHz			-53.791 dBm	3	N	1	f		2.49000000 GHz			-54.483 dBm	4	N	1	f		2.49906250 GHz			-51.047 dBm	
MKR	MODE	TRC	SQL	∞	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f		2.46887500 GHz			0.940 dBm																																							
2	N	1	f		2.48350000 GHz			-53.791 dBm																																							
3	N	1	f		2.49000000 GHz			-54.483 dBm																																							
4	N	1	f		2.49906250 GHz			-51.047 dBm																																							
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>∞</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.40201 GHz</td> <td></td> <td></td> <td>0.629 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.40000 GHz</td> <td></td> <td></td> <td>-52.042 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.39900 GHz</td> <td></td> <td></td> <td>-55.379 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.37455 GHz</td> <td></td> <td></td> <td>-51.475 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	∞	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.40201 GHz			0.629 dBm	2	N	1	f		2.40000 GHz			-52.042 dBm	3	N	1	f		2.39900 GHz			-55.379 dBm	4	N	1	f		2.37455 GHz			-51.475 dBm	
MKR	MODE	TRC	SQL	∞	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f		2.40201 GHz			0.629 dBm																																							
2	N	1	f		2.40000 GHz			-52.042 dBm																																							
3	N	1	f		2.39900 GHz			-55.379 dBm																																							
4	N	1	f		2.37455 GHz			-51.475 dBm																																							
<p>$\pi/4$DQPSK/LCH/ Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQL</th> <th>∞</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.409024 GHz</td> <td></td> <td></td> <td>0.752 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.40000 GHz</td> <td></td> <td></td> <td>-53.437 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.39000 GHz</td> <td></td> <td></td> <td>-53.653 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.386776 GHz</td> <td></td> <td></td> <td>-51.389 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SQL	∞	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.409024 GHz			0.752 dBm	2	N	1	f		2.40000 GHz			-53.437 dBm	3	N	1	f		2.39000 GHz			-53.653 dBm	4	N	1	f		2.386776 GHz			-51.389 dBm	
MKR	MODE	TRC	SQL	∞	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f		2.409024 GHz			0.752 dBm																																							
2	N	1	f		2.40000 GHz			-53.437 dBm																																							
3	N	1	f		2.39000 GHz			-53.653 dBm																																							
4	N	1	f		2.386776 GHz			-51.389 dBm																																							
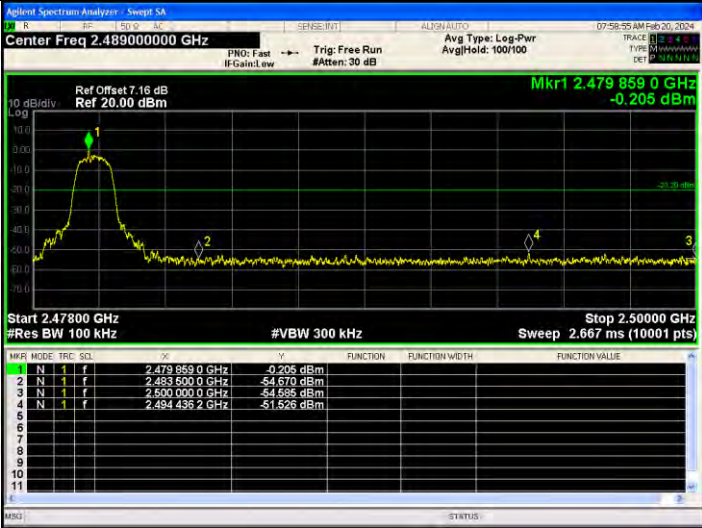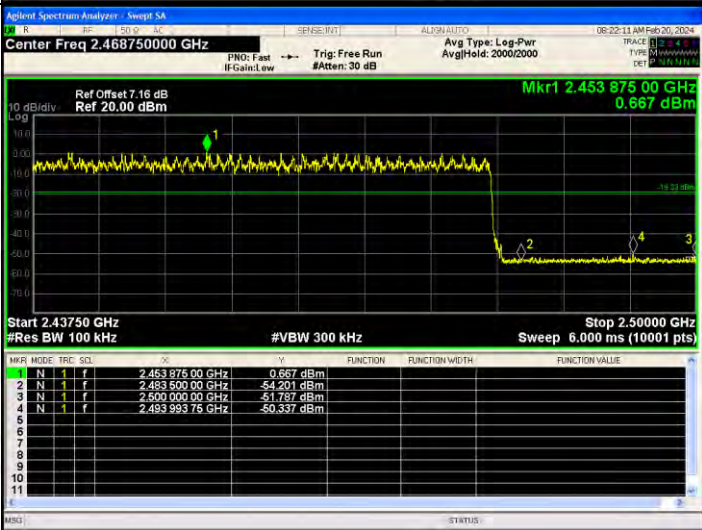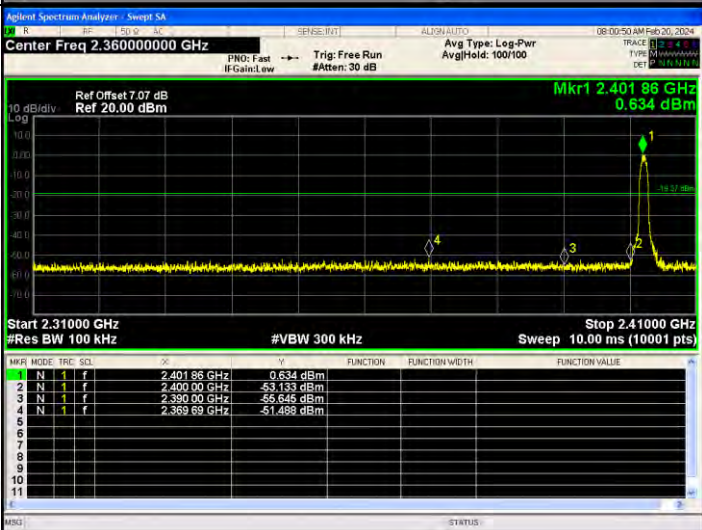
<p>$\pi/4$DQPSK/HCH/ No Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48900000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.479 859 0 GHz -0.205 dBm Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 859 0 GHz</td><td>-0.205 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 0 GHz</td><td>-54.670 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 0 GHz</td><td>-51.656 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.494 436 2 GHz</td><td>-51.526 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 859 0 GHz	-0.205 dBm				2	N	1	f	2.483 500 0 GHz	-54.670 dBm				3	N	1	f	2.500 000 0 GHz	-51.656 dBm				4	N	1	f	2.494 436 2 GHz	-51.526 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 859 0 GHz	-0.205 dBm																																									
2	N	1	f	2.483 500 0 GHz	-54.670 dBm																																									
3	N	1	f	2.500 000 0 GHz	-51.656 dBm																																									
4	N	1	f	2.494 436 2 GHz	-51.526 dBm																																									
<p>$\pi/4$DQPSK/HCH/ Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46875000 GHz Ref Offset 7.16 dB Ref 20.00 dBm Mkr1 2.463 875 00 GHz 0.667 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.463 875 00 GHz</td><td>0.667 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 00 GHz</td><td>-54.201 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 00 GHz</td><td>-51.787 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.493 993 75 GHz</td><td>-50.337 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.463 875 00 GHz	0.667 dBm				2	N	1	f	2.483 500 00 GHz	-54.201 dBm				3	N	1	f	2.500 000 00 GHz	-51.787 dBm				4	N	1	f	2.493 993 75 GHz	-50.337 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.463 875 00 GHz	0.667 dBm																																									
2	N	1	f	2.483 500 00 GHz	-54.201 dBm																																									
3	N	1	f	2.500 000 00 GHz	-51.787 dBm																																									
4	N	1	f	2.493 993 75 GHz	-50.337 dBm																																									
<p>8DPSK/LCH/No Hop</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.36000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.401 86 GHz 0.634 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 86 GHz</td><td>0.634 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 00 GHz</td><td>-53.133 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 00 GHz</td><td>-55.645 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.369 69 GHz</td><td>-51.498 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 86 GHz	0.634 dBm				2	N	1	f	2.400 00 GHz	-53.133 dBm				3	N	1	f	2.390 00 GHz	-55.645 dBm				4	N	1	f	2.369 69 GHz	-51.498 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 86 GHz	0.634 dBm																																									
2	N	1	f	2.400 00 GHz	-53.133 dBm																																									
3	N	1	f	2.390 00 GHz	-55.645 dBm																																									
4	N	1	f	2.369 69 GHz	-51.498 dBm																																									

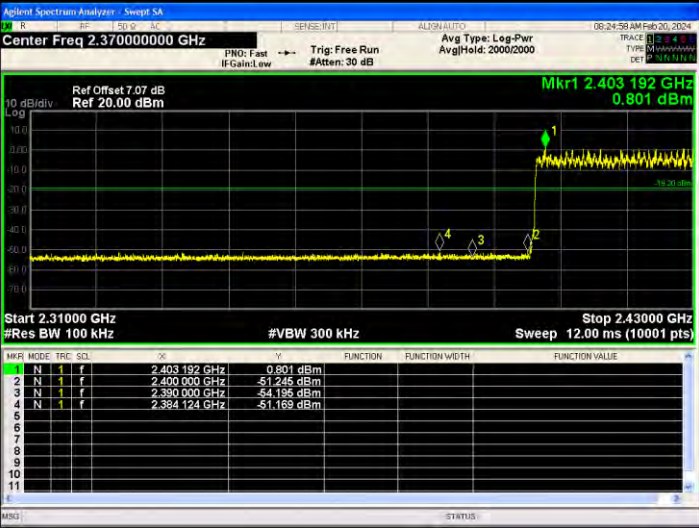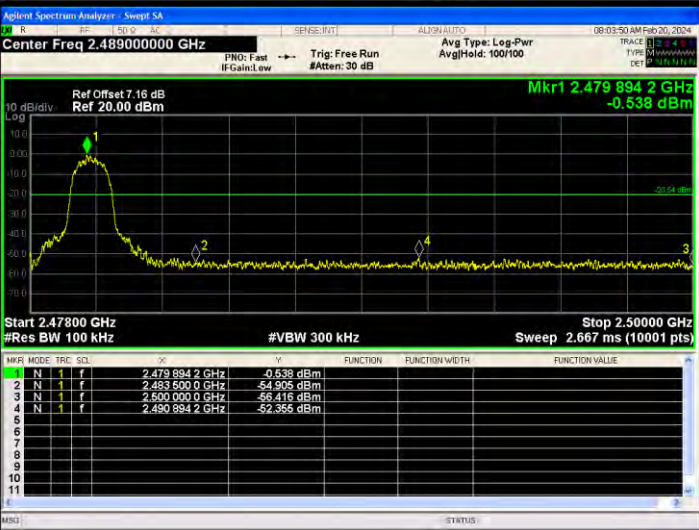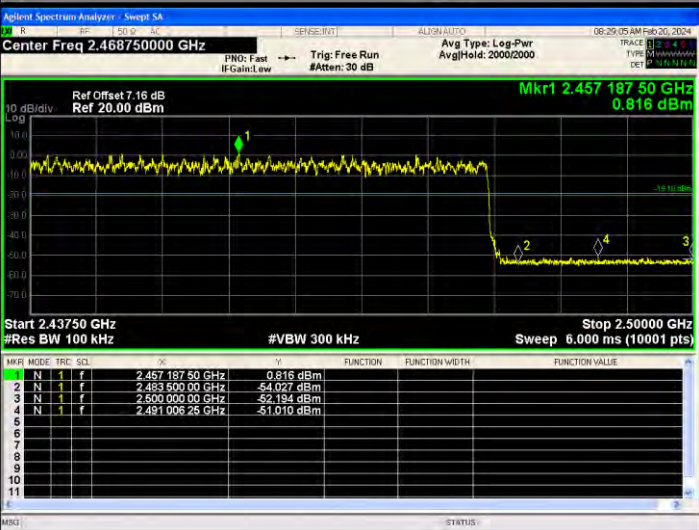
<p>8DPSK /LCH/Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>×</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.403192 GHz</td> <td></td> <td></td> <td>0.801 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.400000 GHz</td> <td></td> <td></td> <td>-51.245 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.390000 GHz</td> <td></td> <td></td> <td>-54.195 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.384124 GHz</td> <td></td> <td></td> <td>-51.169 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.403192 GHz			0.801 dBm	2	N	1	f		2.400000 GHz			-51.245 dBm	3	N	1	f		2.390000 GHz			-54.195 dBm	4	N	1	f		2.384124 GHz			-51.169 dBm
MKR	MODE	TRC	SOL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.403192 GHz			0.801 dBm																																						
2	N	1	f		2.400000 GHz			-51.245 dBm																																						
3	N	1	f		2.390000 GHz			-54.195 dBm																																						
4	N	1	f		2.384124 GHz			-51.169 dBm																																						
<p>8DPSK /HCH/No Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>×</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.479894 GHz</td> <td></td> <td></td> <td>-0.538 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.483500 GHz</td> <td></td> <td></td> <td>-54.905 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.500000 GHz</td> <td></td> <td></td> <td>-56.415 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.480884 GHz</td> <td></td> <td></td> <td>-52.355 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.479894 GHz			-0.538 dBm	2	N	1	f		2.483500 GHz			-54.905 dBm	3	N	1	f		2.500000 GHz			-56.415 dBm	4	N	1	f		2.480884 GHz			-52.355 dBm
MKR	MODE	TRC	SOL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.479894 GHz			-0.538 dBm																																						
2	N	1	f		2.483500 GHz			-54.905 dBm																																						
3	N	1	f		2.500000 GHz			-56.415 dBm																																						
4	N	1	f		2.480884 GHz			-52.355 dBm																																						
<p>8DPSK /HCH/Hop</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>×</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.4571875 GHz</td> <td></td> <td></td> <td>0.816 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.483500 GHz</td> <td></td> <td></td> <td>-54.027 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.500000 GHz</td> <td></td> <td></td> <td>-52.194 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>2.481008 GHz</td> <td></td> <td></td> <td>-51.010 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.4571875 GHz			0.816 dBm	2	N	1	f		2.483500 GHz			-54.027 dBm	3	N	1	f		2.500000 GHz			-52.194 dBm	4	N	1	f		2.481008 GHz			-51.010 dBm
MKR	MODE	TRC	SOL	×	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f		2.4571875 GHz			0.816 dBm																																						
2	N	1	f		2.483500 GHz			-54.027 dBm																																						
3	N	1	f		2.500000 GHz			-52.194 dBm																																						
4	N	1	f		2.481008 GHz			-51.010 dBm																																						

RF Conducted Spurious Emissions Graphs


GFSK/LCH

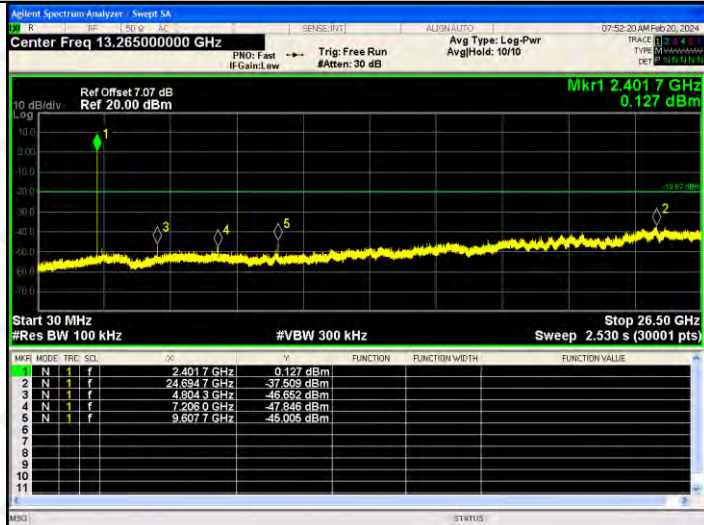



GFSK/MCH

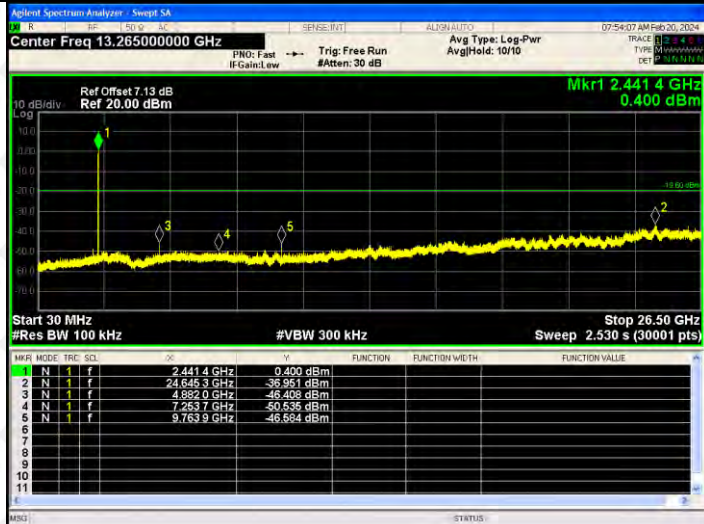

GFSK/HCH

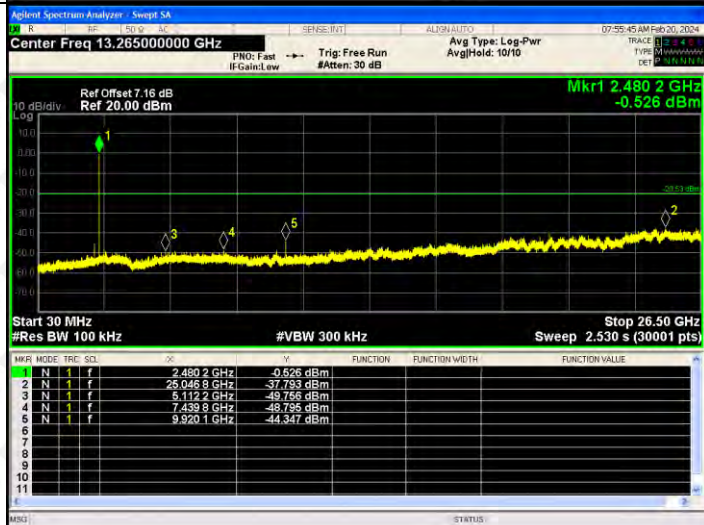

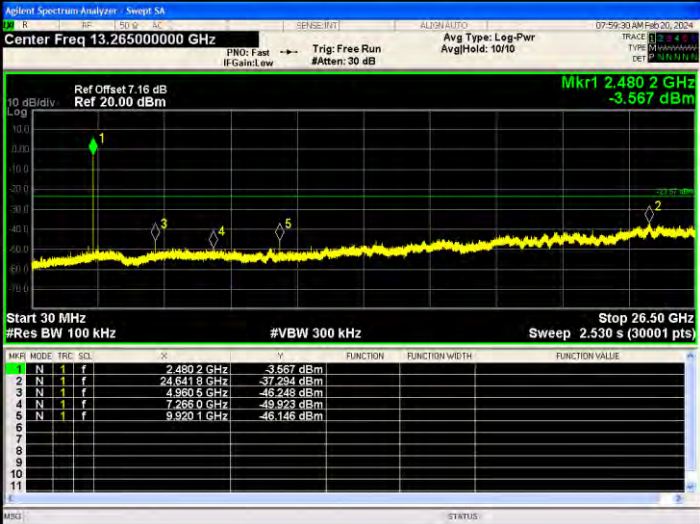
<p>$\pi/4$DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-2.310 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6109 GHz</td> <td>-37.446 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9243 GHz</td> <td>-45.325 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2050 GHz</td> <td>-48.887 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6077 GHz</td> <td>-44.815 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-2.310 dBm				2	N	1	f	24.6109 GHz	-37.446 dBm				3	N	1	f	4.9243 GHz	-45.325 dBm				4	N	1	f	7.2050 GHz	-48.887 dBm				5	N	1	f	9.6077 GHz	-44.815 dBm			
MkR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	-2.310 dBm																																																		
2	N	1	f	24.6109 GHz	-37.446 dBm																																																		
3	N	1	f	4.9243 GHz	-45.325 dBm																																																		
4	N	1	f	7.2050 GHz	-48.887 dBm																																																		
5	N	1	f	9.6077 GHz	-44.815 dBm																																																		
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>-1.617 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6409 GHz</td> <td>-37.646 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8990 GHz</td> <td>-47.251 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3234 GHz</td> <td>-47.083 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.7639 GHz</td> <td>-46.801 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-1.617 dBm				2	N	1	f	24.6409 GHz	-37.646 dBm				3	N	1	f	4.8990 GHz	-47.251 dBm				4	N	1	f	7.3234 GHz	-47.083 dBm				5	N	1	f	9.7639 GHz	-46.801 dBm			
MkR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	-1.617 dBm																																																		
2	N	1	f	24.6409 GHz	-37.646 dBm																																																		
3	N	1	f	4.8990 GHz	-47.251 dBm																																																		
4	N	1	f	7.3234 GHz	-47.083 dBm																																																		
5	N	1	f	9.7639 GHz	-46.801 dBm																																																		
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>MkR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-3.567 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6418 GHz</td> <td>-37.294 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9605 GHz</td> <td>-46.248 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4680 GHz</td> <td>-49.929 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9201 GHz</td> <td>-46.146 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MkR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-3.567 dBm				2	N	1	f	24.6418 GHz	-37.294 dBm				3	N	1	f	4.9605 GHz	-46.248 dBm				4	N	1	f	7.4680 GHz	-49.929 dBm				5	N	1	f	9.9201 GHz	-46.146 dBm			
MkR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-3.567 dBm																																																		
2	N	1	f	24.6418 GHz	-37.294 dBm																																																		
3	N	1	f	4.9605 GHz	-46.248 dBm																																																		
4	N	1	f	7.4680 GHz	-49.929 dBm																																																		
5	N	1	f	9.9201 GHz	-46.146 dBm																																																		
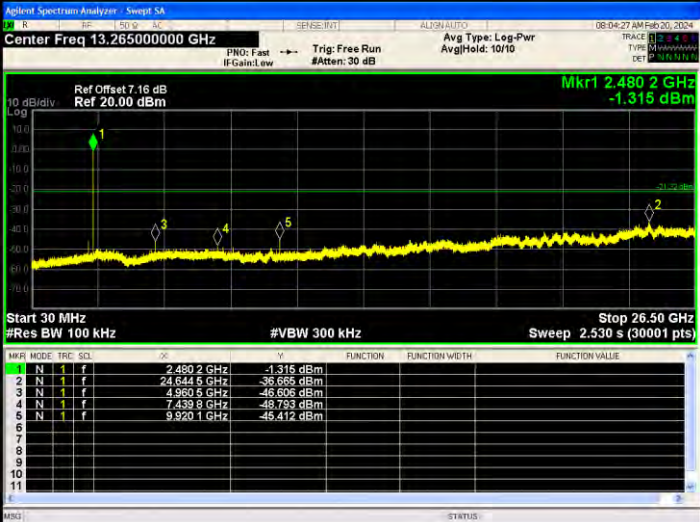
<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 7 GHz</td> <td>-3.384 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.151 8 GHz</td> <td>-37.650 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.924 3 GHz</td> <td>-45.070 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.205 0 GHz</td> <td>-48.414 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.607 7 GHz</td> <td>-45.606 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 7 GHz	-3.384 dBm				2	N	1	f	25.151 8 GHz	-37.650 dBm				3	N	1	f	4.924 3 GHz	-45.070 dBm				4	N	1	f	7.205 0 GHz	-48.414 dBm				5	N	1	f	9.607 7 GHz	-45.606 dBm			
MKR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.401 7 GHz	-3.384 dBm																																																		
2	N	1	f	25.151 8 GHz	-37.650 dBm																																																		
3	N	1	f	4.924 3 GHz	-45.070 dBm																																																		
4	N	1	f	7.205 0 GHz	-48.414 dBm																																																		
5	N	1	f	9.607 7 GHz	-45.606 dBm																																																		
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.441 4 GHz</td> <td>0.228 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.681 5 GHz</td> <td>-36.451 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.892 0 GHz</td> <td>-45.003 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.323 4 GHz</td> <td>-48.998 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.763 9 GHz</td> <td>-46.496 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 4 GHz	0.228 dBm				2	N	1	f	24.681 5 GHz	-36.451 dBm				3	N	1	f	4.892 0 GHz	-45.003 dBm				4	N	1	f	7.323 4 GHz	-48.998 dBm				5	N	1	f	9.763 9 GHz	-46.496 dBm			
MKR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.441 4 GHz	0.228 dBm																																																		
2	N	1	f	24.681 5 GHz	-36.451 dBm																																																		
3	N	1	f	4.892 0 GHz	-45.003 dBm																																																		
4	N	1	f	7.323 4 GHz	-48.998 dBm																																																		
5	N	1	f	9.763 9 GHz	-46.496 dBm																																																		
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 2 GHz</td> <td>-1.315 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.644 5 GHz</td> <td>-36.656 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.960 5 GHz</td> <td>-46.606 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.438 9 GHz</td> <td>-48.793 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.920 1 GHz</td> <td>-45.412 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	-1.315 dBm				2	N	1	f	24.644 5 GHz	-36.656 dBm				3	N	1	f	4.960 5 GHz	-46.606 dBm				4	N	1	f	7.438 9 GHz	-48.793 dBm				5	N	1	f	9.920 1 GHz	-45.412 dBm			
MKR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.480 2 GHz	-1.315 dBm																																																		
2	N	1	f	24.644 5 GHz	-36.656 dBm																																																		
3	N	1	f	4.960 5 GHz	-46.606 dBm																																																		
4	N	1	f	7.438 9 GHz	-48.793 dBm																																																		
5	N	1	f	9.920 1 GHz	-45.412 dBm																																																		

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

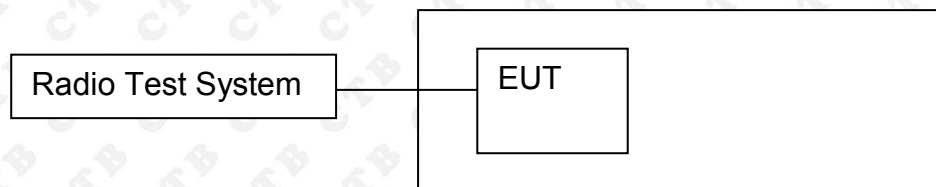

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.




9.3 Test procedure




1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

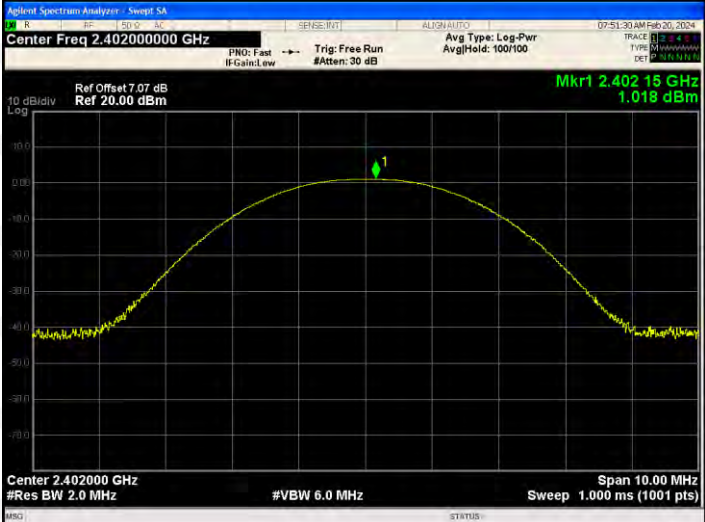Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	1.018	20.97	PASS
	MCH	0.812	20.97	PASS
	HCH	0.696	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	1.783	20.97	PASS
	MCH	1.531	20.97	PASS
	HCH	1.465	20.97	PASS
EDR mode (8DPSK)	LCH	2.107	20.97	PASS
	MCH	1.888	20.97	PASS
	HCH	1.715	20.97	PASS

Test Graph:


Graphs	
GFSK/LCH	
GFSK/MCH	
GFSK/HCH	

<p>$\pi/4$DQPSK/LCH</p>		
<p>$\pi/4$DQPSK/MCH</p>		
<p>$\pi/4$DQPSK/HCH</p>		

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.40200000 GHz Ref Offset: 7.07 dB, Ref: 20.00 dBm Mkr1 2.40197 GHz, 2.107 dBm Span 10.00 MHz, Res BW 2.0 MHz, #VBW 6.0 MHz, Sweep 1.000 ms (1001 pts)</p>
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.44100000 GHz Ref Offset: 7.13 dB, Ref: 20.00 dBm Mkr1 2.44102 GHz, 1.888 dBm Span 10.00 MHz, Res BW 2.0 MHz, #VBW 6.0 MHz, Sweep 1.000 ms (1001 pts)</p>
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq: 2.48000000 GHz Ref Offset: 7.18 dB, Ref: 20.00 dBm Mkr1 2.48002 GHz, 1.715 dBm Span 10.00 MHz, Res BW 2.0 MHz, #VBW 6.0 MHz, Sweep 1.000 ms (1001 pts)</p>

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

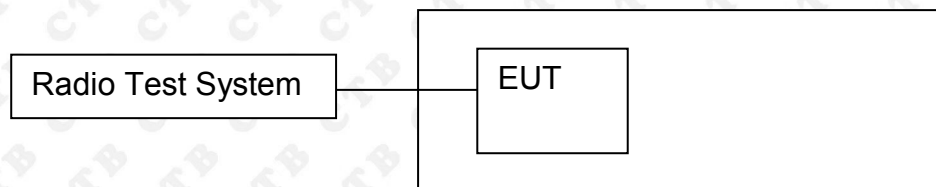

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.876	PASS
	Mid channel	0.874	PASS
	High channel	0.860	PASS
$\pi/4$ DQPSK	Low channel	1.275	PASS
	Mid channel	1.270	PASS
	High channel	1.276	PASS
8DPSK	Low channel	1.307	PASS
	Mid channel	1.299	PASS
	High channel	1.298	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:


<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Device: BTS</p> <p>Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.402452 GHz -21.413 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 812.74 kHz Total Power 7.64 dBm Transmit Freq Error 13.497 kHz OBW Power 99.00 % x dB Bandwidth 876.4 kHz x dB -20.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Device: BTS</p> <p>Ref Offset 7.13 dB Ref 27.13 dBm Mkr3 2.441449 GHz -21.913 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 843.42 kHz Total Power 6.70 dBm Transmit Freq Error 11.973 kHz OBW Power 99.00 % x dB Bandwidth 874.4 kHz x dB -20.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Att: 30 dB Avg/Hold: 100/100 Radio Device: BTS</p> <p>Ref Offset 7.16 dB Ref 27.16 dBm Mkr3 2.480443 GHz -22.346 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 844.15 kHz Total Power 6.80 dBm Transmit Freq Error 13.425 kHz OBW Power 99.00 % x dB Bandwidth 859.9 kHz x dB -20.00 dB</p>

<p>$\pi/4$-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.07 dB</p> <p>Ref: 27.07 dBm</p> <p>Mkr3: 2.402659 GHz</p> <p>-20.242 dBm</p> <p>Center: 2.402 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1825 MHz</p> <p>Total Power: 7.42 dBm</p> <p>Transmit Freq Error: 22.048 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.275 MHz</p> <p>x dB: -20.00 dB</p>
<p>$\pi/4$-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.13 dB</p> <p>Ref: 27.13 dBm</p> <p>Mkr3: 2.44166 GHz</p> <p>-19.962 dBm</p> <p>Center: 2.441 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1921 MHz</p> <p>Total Power: 6.89 dBm</p> <p>Transmit Freq Error: 25.039 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.270 MHz</p> <p>x dB: -20.00 dB</p>
<p>$\pi/4$-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.16 dB</p> <p>Ref: 27.16 dBm</p> <p>Mkr3: 2.480659 GHz</p> <p>-20.985 dBm</p> <p>Center: 2.48 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1815 MHz</p> <p>Total Power: 7.01 dBm</p> <p>Transmit Freq Error: 21.622 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.276 MHz</p> <p>x dB: -20.00 dB</p>

<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.07 dB</p> <p>Ref 27.07 dBm</p> <p>Mkr3 2.40268 GHz</p> <p>-22.453 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1840 MHz</p> <p>Total Power 6.84 dBm</p> <p>Transmit Freq Error 26.259 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.307 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.13 dB</p> <p>Ref 27.13 dBm</p> <p>Mkr3 2.441671 GHz</p> <p>-21.283 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1865 MHz</p> <p>Total Power 7.24 dBm</p> <p>Transmit Freq Error 21.499 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.299 MHz</p> <p>x dB -20.00 dB</p>
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 7.16 dB</p> <p>Ref 27.16 dBm</p> <p>Mkr3 2.48067 GHz</p> <p>-20.849 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1970 MHz</p> <p>Total Power 6.87 dBm</p> <p>Transmit Freq Error 20.469 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.298 MHz</p> <p>x dB -20.00 dB</p>

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

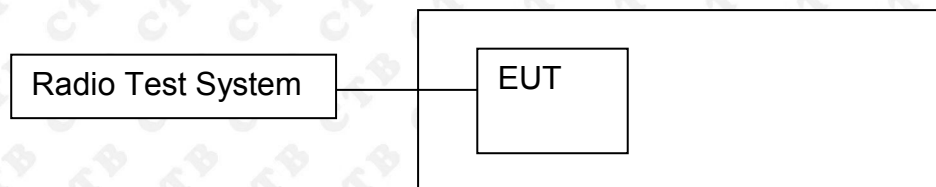

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.




11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.994	0.584	PASS
GFSK	MCH	0.996	0.583	PASS
GFSK	HCH	0.994	0.573	PASS
$\pi/4$ DQPSK	LCH	0.996	0.850	PASS
$\pi/4$ DQPSK	MCH	0.998	0.847	PASS
$\pi/4$ DQPSK	HCH	1.000	0.851	PASS
8DPSK	LCH	1.002	0.871	PASS
8DPSK	MCH	1.000	0.866	PASS
8DPSK	HCH	0.996	0.865	PASS

Test Graph


Graphs																												
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 994.000000 kHz</p> <p>Ref Offset 7.07 dB Ref 20.00 dBm</p> <p>ΔMkr1 994 kHz 0.112 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>994 kHz (Δ)</td> <td></td> <td></td> <td>0.112 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401860 GHz</td> <td></td> <td></td> <td>0.848 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(Δ)	994 kHz (Δ)			0.112 dB	2	F	1	f		2.401860 GHz			0.848 dBm
MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	AZ	1	f	(Δ)	994 kHz (Δ)			0.112 dB																				
2	F	1	f		2.401860 GHz			0.848 dBm																				
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 996.000000 kHz</p> <p>Ref Offset 7.13 dB Ref 20.00 dBm</p> <p>ΔMkr1 996 kHz 1.684 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>996 kHz (Δ)</td> <td></td> <td></td> <td>1.684 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440862 GHz</td> <td></td> <td></td> <td>-0.712 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(Δ)	996 kHz (Δ)			1.684 dB	2	F	1	f		2.440862 GHz			-0.712 dBm
MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	AZ	1	f	(Δ)	996 kHz (Δ)			1.684 dB																				
2	F	1	f		2.440862 GHz			-0.712 dBm																				
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 994.000000 kHz</p> <p>Ref Offset 7.16 dB Ref 20.00 dBm</p> <p>ΔMkr1 994 kHz 0.753 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>994 kHz (Δ)</td> <td></td> <td></td> <td>0.753 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478864 GHz</td> <td></td> <td></td> <td>0.261 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(Δ)	994 kHz (Δ)			0.753 dB	2	F	1	f		2.478864 GHz			0.261 dBm
MNR	MODE	TRF	SQL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	AZ	1	f	(Δ)	994 kHz (Δ)			0.753 dB																				
2	F	1	f		2.478864 GHz			0.261 dBm																				

<p>$\pi/4$DQPSK/LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>Δ</th> <th>F</th> <th>Δ</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td>-0.032 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 020 GHz</td> <td></td> <td>0.496 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	Δ	F	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	1.000 MHz	(Δ)	-0.032 dB				2	F	1	f		2.402 020 GHz		0.496 dBm				
MNR	MODE	TRC	SCN	Δ	F	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																									
1	Δ2	1	f	(Δ)	1.000 MHz	(Δ)	-0.032 dB																												
2	F	1	f		2.402 020 GHz		0.496 dBm																												
<p>$\pi/4$DQPSK/MCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>Δ</th> <th>F</th> <th>Δ</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>996 kHz</td> <td>(Δ)</td> <td>0.008 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 014 GHz</td> <td></td> <td>-0.123 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	Δ	F	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	996 kHz	(Δ)	0.008 dB				2	F	1	f		2.441 014 GHz		-0.123 dBm				
MNR	MODE	TRC	SCN	Δ	F	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																									
1	Δ2	1	f	(Δ)	996 kHz	(Δ)	0.008 dB																												
2	F	1	f		2.441 014 GHz		-0.123 dBm																												
<p>$\pi/4$DQPSK/HCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>Δ</th> <th>F</th> <th>Δ</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>998 kHz</td> <td>(Δ)</td> <td>0.202 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 020 GHz</td> <td></td> <td>-0.092 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	Δ	F	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	998 kHz	(Δ)	0.202 dB				2	F	1	f		2.479 020 GHz		-0.092 dBm				
MNR	MODE	TRC	SCN	Δ	F	Δ	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																									
1	Δ2	1	f	(Δ)	998 kHz	(Δ)	0.202 dB																												
2	F	1	f		2.479 020 GHz		-0.092 dBm																												
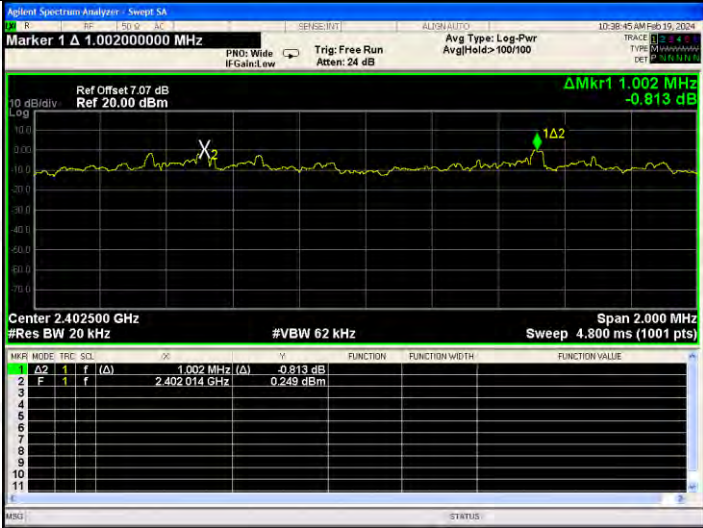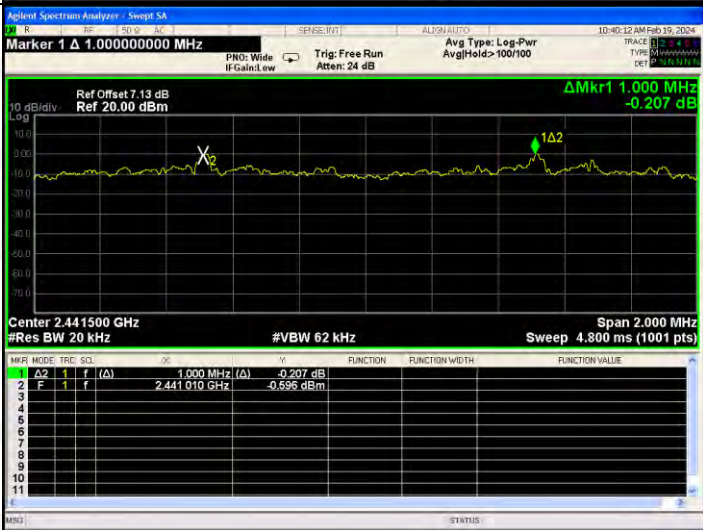
<p>8DPSK/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 7.07 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz -0.813 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td>-0.813 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402014 GHz</td> <td></td> <td></td> <td>-0.249 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ Z	1	f	(Δ)	1.002 MHz	(Δ)		-0.813 dB	2	F	1	f		2.402014 GHz			-0.249 dBm
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ Z	1	f	(Δ)	1.002 MHz	(Δ)		-0.813 dB																				
2	F	1	f		2.402014 GHz			-0.249 dBm																				
<p>8DPSK /MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset 7.13 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.000 MHz -0.207 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td>-0.207 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441010 GHz</td> <td></td> <td></td> <td>-0.696 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ Z	1	f	(Δ)	1.000 MHz	(Δ)		-0.207 dB	2	F	1	f		2.441010 GHz			-0.696 dBm
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ Z	1	f	(Δ)	1.000 MHz	(Δ)		-0.207 dB																				
2	F	1	f		2.441010 GHz			-0.696 dBm																				
<p>8DPSK /HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 996.000000 kHz</p> <p>Ref Offset 7.16 dB Ref 20.00 dBm</p> <p>ΔMkr1 996 kHz 0.865 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>996 kHz</td> <td>(Δ)</td> <td></td> <td>0.865 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479020 GHz</td> <td></td> <td></td> <td>-1.273 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ Z	1	f	(Δ)	996 kHz	(Δ)		0.865 dB	2	F	1	f		2.479020 GHz			-1.273 dBm
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ Z	1	f	(Δ)	996 kHz	(Δ)		0.865 dB																				
2	F	1	f		2.479020 GHz			-1.273 dBm																				

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

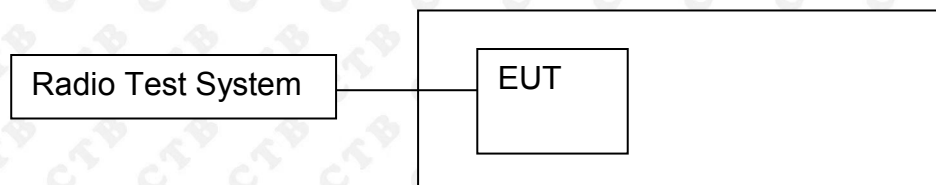

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Test Graph

Graphs


GFSK/Hop

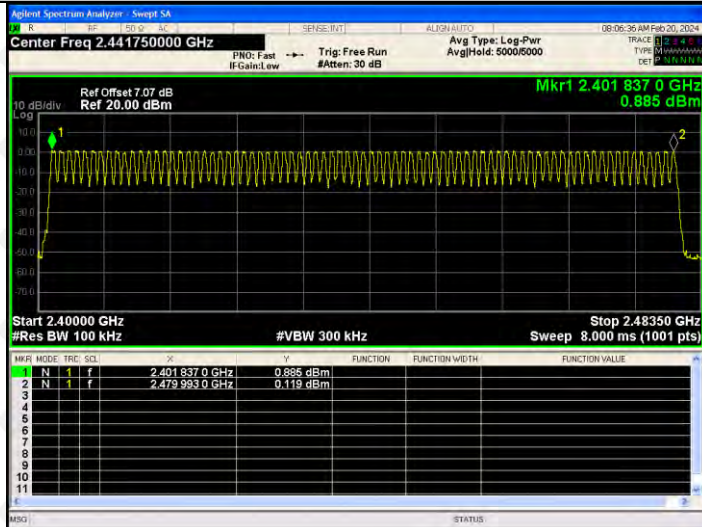

$\pi/4$ DQPSK/Hop

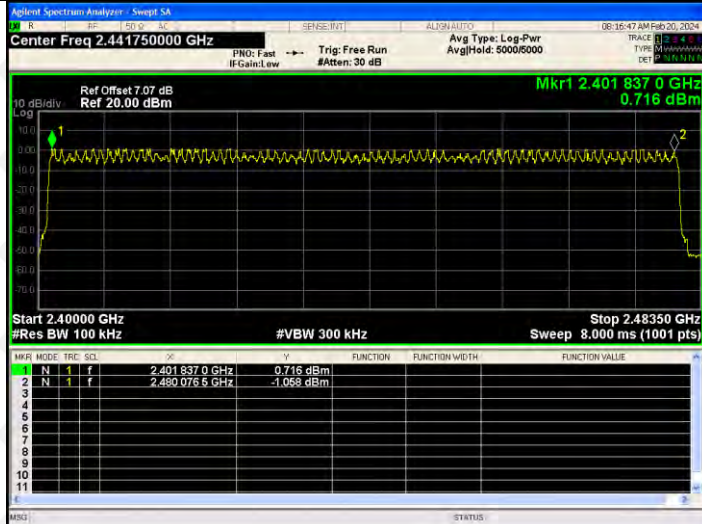


8DPSK/Hop

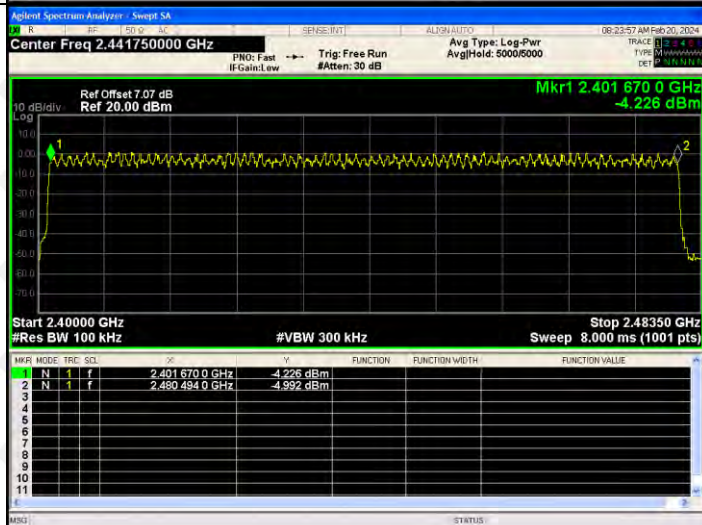

13. DWELL TIME

13.1 Block Diagram Of Test Setup

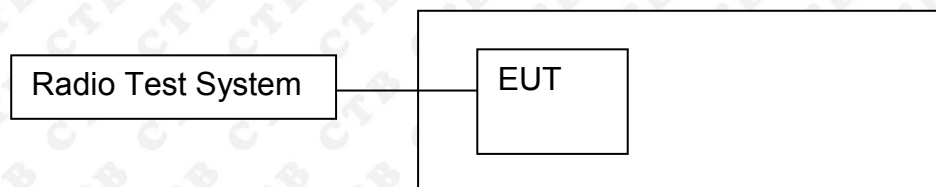

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.382	122.24	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.383	122.56	400	PASS
	DH3	LCH	1.644	263.04	400	PASS
	DH3	MCH	1.643	262.88	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.893	308.587	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5: $1600/79/6 * 0.4 * 79 * (\text{MkrDelta}) / 1000$


DH3: $1600/79/4 * 0.4 * 79 * (\text{MkrDelta}) / 1000$

DH1: $1600/79/2 * 0.4 * 79 * (\text{MkrDelta}) / 1000$


Remark: Mkr Delta is once pulse time.

Test Graph

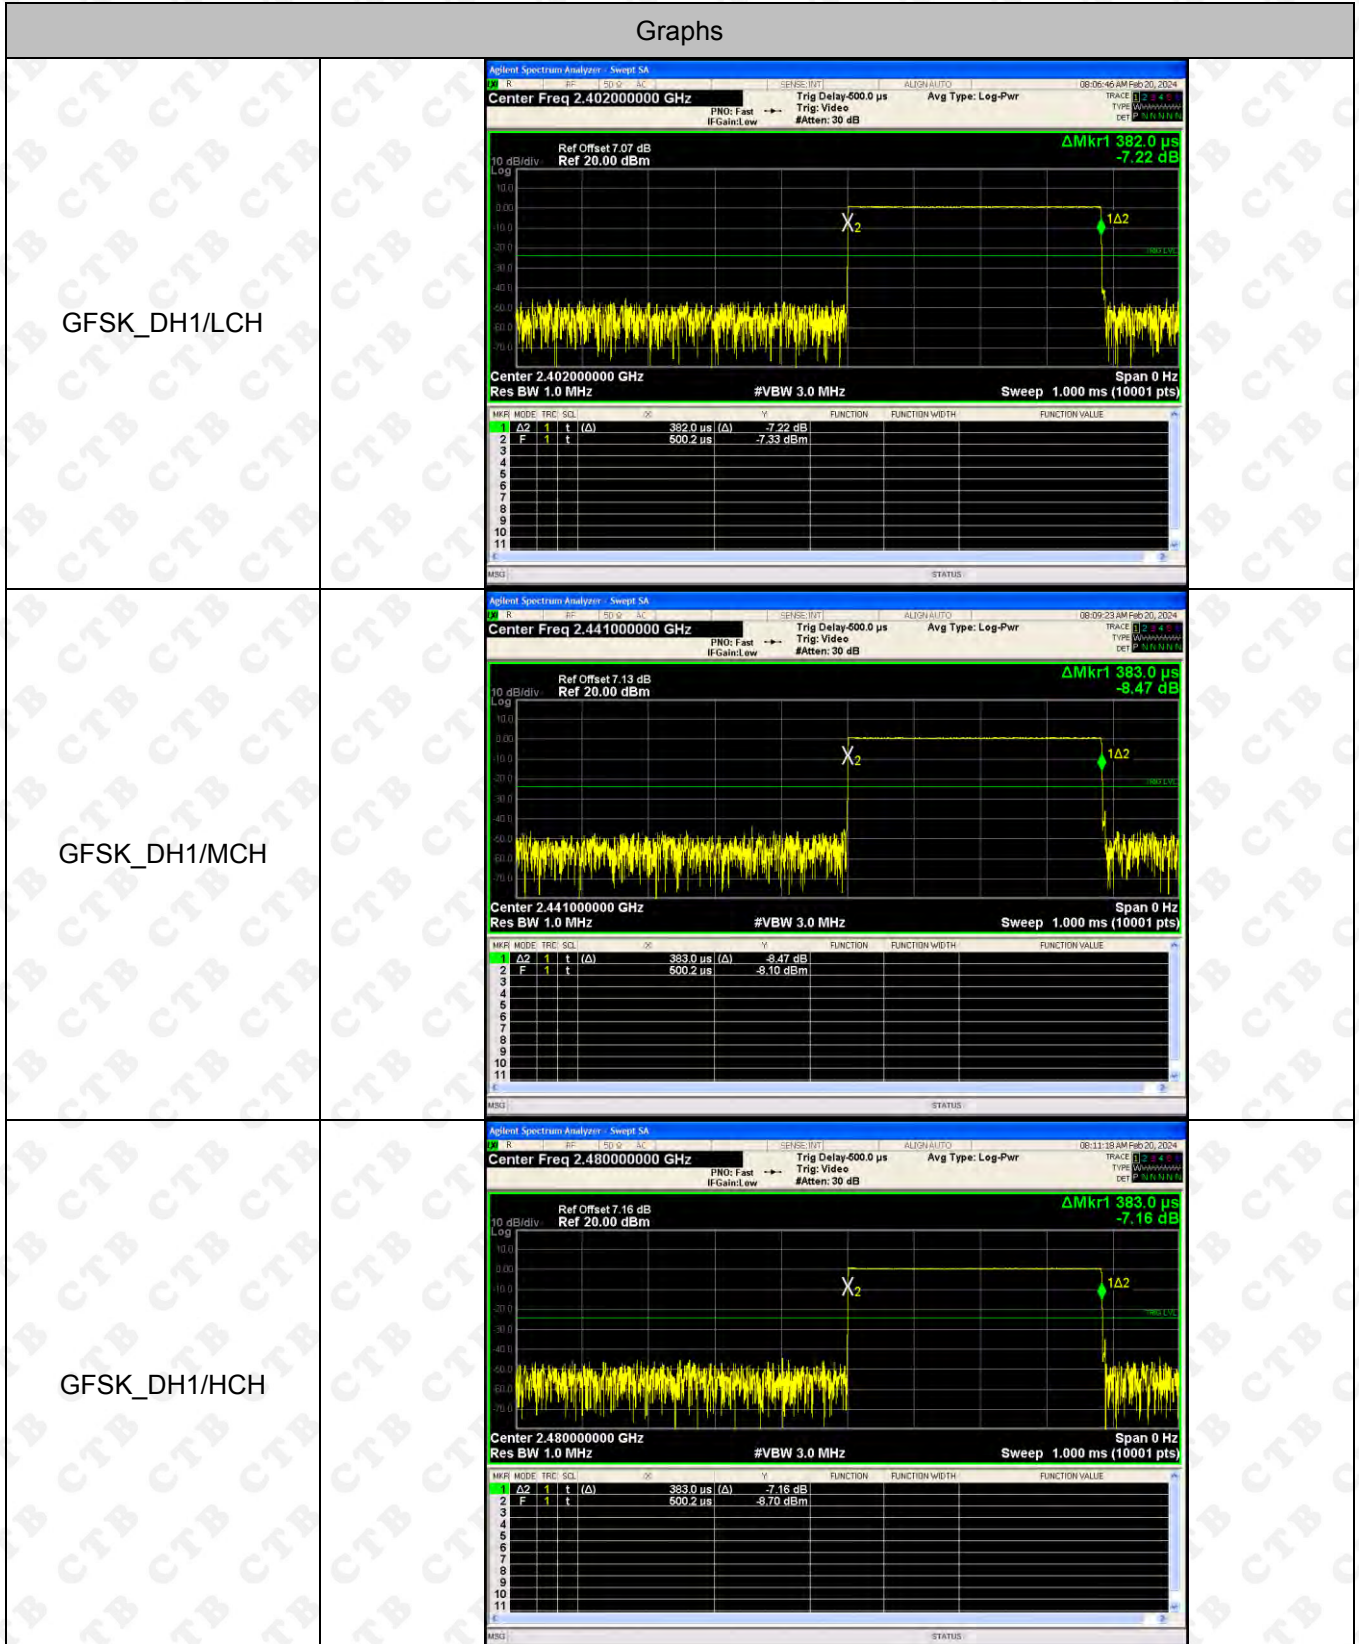

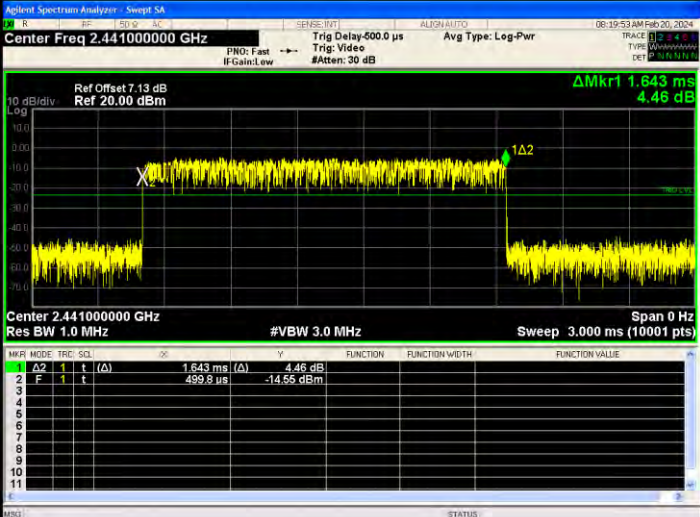
<p>GFSK_DH3/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.40200000 GHz</p> <p>Ref Offset 7.07 dB Ref 20.00 dBm</p> <p>Delta Mkr1 1.644 ms -5.06 dB</p> <p>Center 2.40200000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>Q</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>1.644 ms</td> <td>(Δ)</td> <td></td> <td>-5.06 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 us</td> <td></td> <td></td> <td>-5.88 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.644 ms	(Δ)		-5.06 dB	2	F	1	t		500.1 us			-5.88 dBm
MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	1.644 ms	(Δ)		-5.06 dB																				
2	F	1	t		500.1 us			-5.88 dBm																				
<p>GFSK_DH3/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.44100000 GHz</p> <p>Ref Offset 7.13 dB Ref 20.00 dBm</p> <p>Delta Mkr1 1.643 ms 4.46 dB</p> <p>Center 2.44100000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>Q</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>1.643 ms</td> <td>(Δ)</td> <td></td> <td>4.46 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.8 us</td> <td></td> <td></td> <td>-14.55 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.643 ms	(Δ)		4.46 dB	2	F	1	t		499.8 us			-14.55 dBm
MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	1.643 ms	(Δ)		4.46 dB																				
2	F	1	t		499.8 us			-14.55 dBm																				
<p>GFSK_DH3/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.48000000 GHz</p> <p>Ref Offset 7.16 dB Ref 20.00 dBm</p> <p>Delta Mkr1 1.644 ms -0.63 dB</p> <p>Center 2.48000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 3.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>Q</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(Δ)</td> <td>1.644 ms</td> <td>(Δ)</td> <td></td> <td>-0.63 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>500.1 us</td> <td></td> <td></td> <td>-8.20 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.644 ms	(Δ)		-0.63 dB	2	F	1	t		500.1 us			-8.20 dBm
MKR	MODE	TRC	SOL	Q	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	1.644 ms	(Δ)		-0.63 dB																				
2	F	1	t		500.1 us			-8.20 dBm																				


GFSK_DH5/LCH

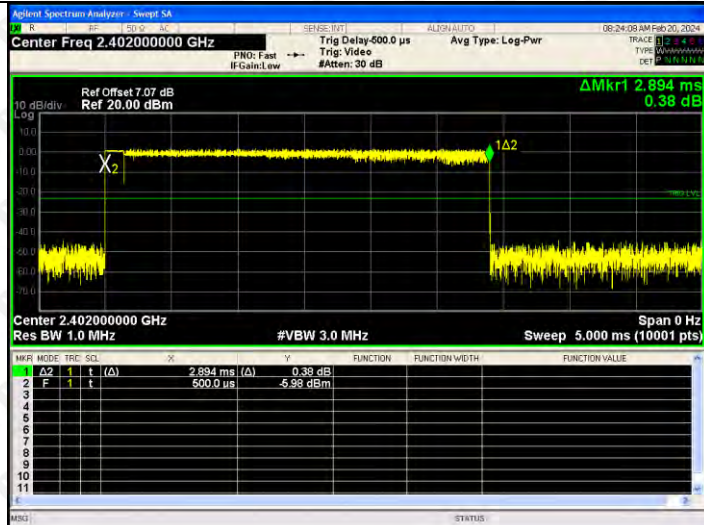

GFSK_DH5/MCH

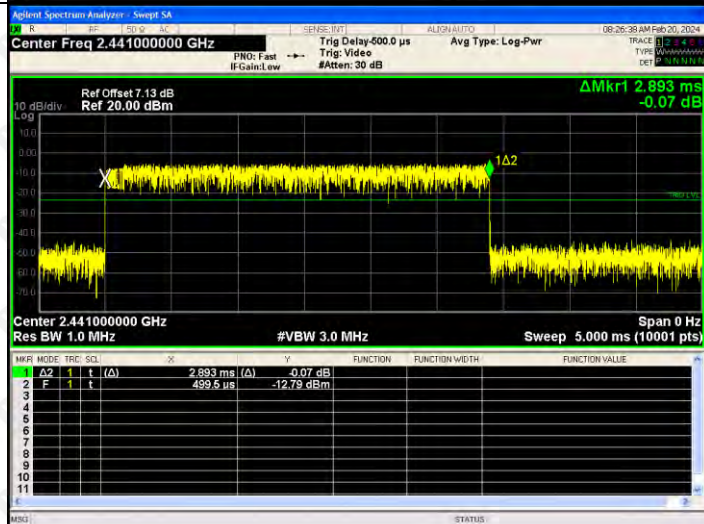

GFSK_DH5/HCH

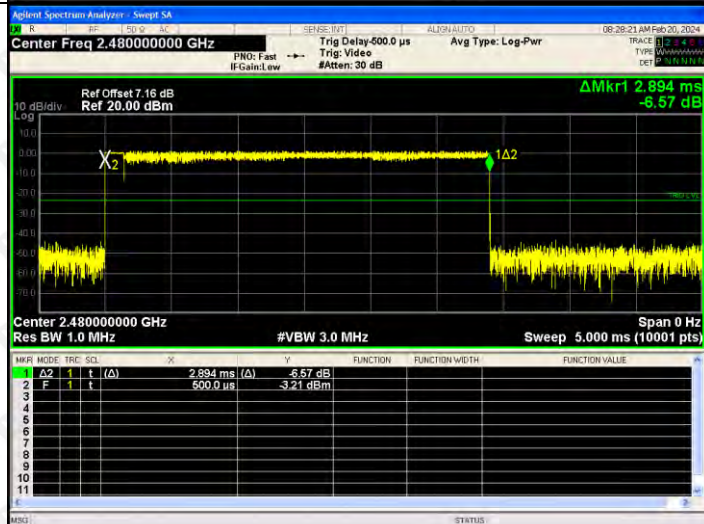

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

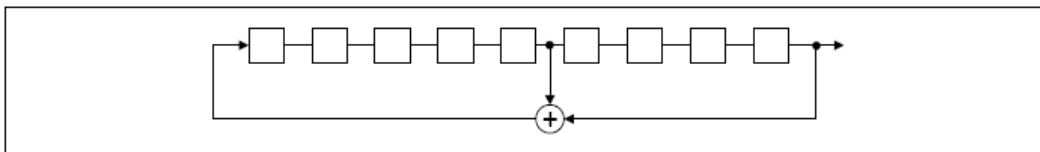

An example of Pseudorandom Frequency Hopping Sequence as follow:

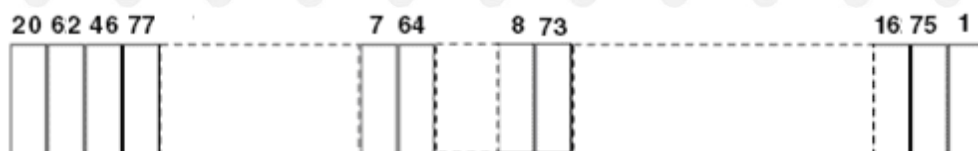

Each frequency used equally on the average by each transmitter.
The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is glue stick antenna. The best case gain of the antenna is 1.49dBi.

16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

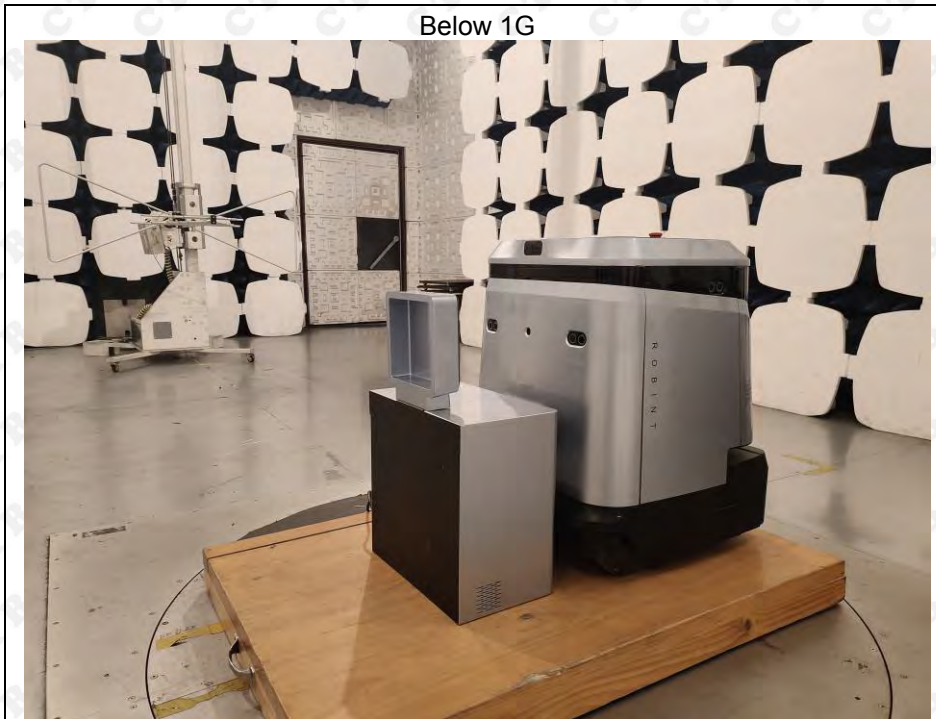

Above 1G



Conducted emissions



※※※※ END OF REPORT ※※※※