

## **Annex A. Maximum Target Conducted Power**

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

BT Tune-up Power (Full w/o Duty Cycle)			
Bluetooth			
Mode	Channel	Frequency	Max Tune-up
BDR / EDR	0	2402	12.5
	39	2441	12.5
	78	2480	12.5
LE 4.0 / LE 5.2	0	2402	7.5
	19	2440	7.5
	39	2480	7.5


BT Tune-up Power (Full w/ Duty Cycle)			
Bluetooth			
Mode	Channel	Frequency	Max Tune-up
BDR / EDR	0	2402	4.22
	39	2441	4.22
	78	2480	4.22
LE 4.0 / LE 5.2	0	2402	0.65
	19	2440	0.65
	39	2480	0.65

## Annex B. Considerations Related to Bluetooth for Setup and Testing

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

The Bluetooth call box has been used during SAR measurement and the EUT was set to **DH5** mode at the maximum output power. Its duty factor was calculated as below and the measured SAR for Bluetooth would be scaled to the 100% transmission duty factor to determine compliance.


The duty factor of Bluetooth signal are shown as below.

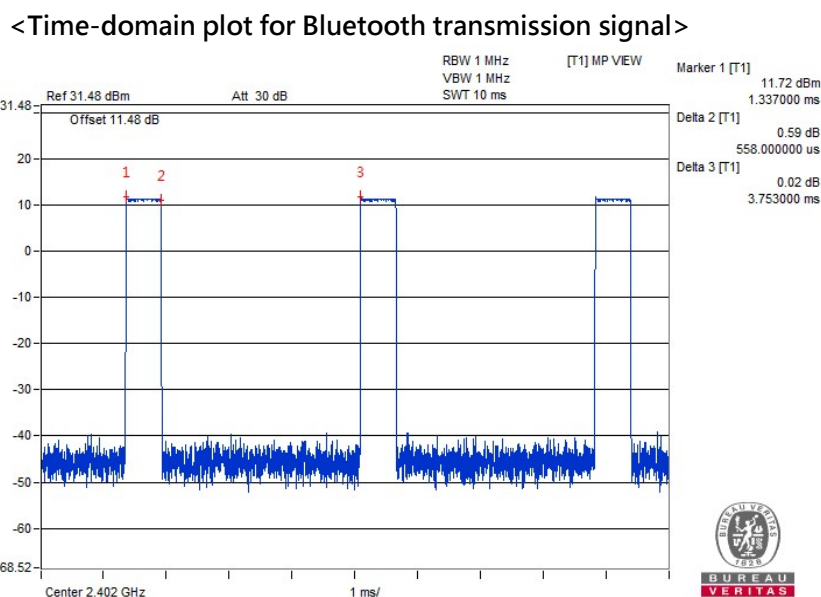

Time-domain plot for Bluetooth transmission signal

The duty factor of Bluetooth signal has been calculated as following.

$$\text{Duty Factor} = \text{Pulse Width} / \text{Total Period} = 0.558 / 3.753 = 14.87\%$$

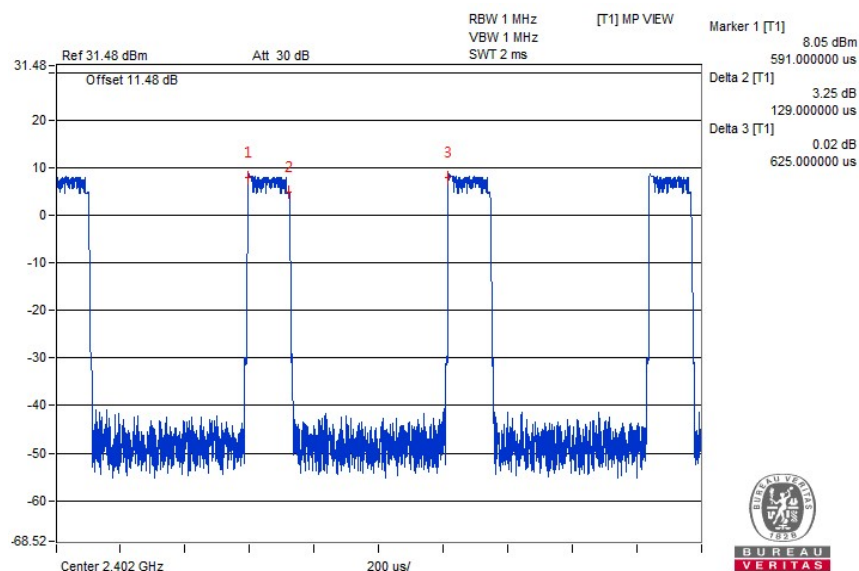

Time-domain plot for Bluetooth transmission signal

The duty factor of Bluetooth signal has been calculated as following.

$$\text{Duty Factor} = \text{Pulse Width} / \text{Total Period} = 129 / 625 = 20.64\%$$