

东莞市速波电子有限公司

Dongguan Speedwave Electronics Co., Ltd

地址：东莞市虎门镇大宁浦江路 61 号

Address: No. 61, Pujiang Road, Daning, Humen Town, Dongguan City

承 认 书

SPECIFICATION FOR APPROVAL

客 户 名 称

CUSTOMER NAME:

产 品 名 称

PRODUCT NAME: Wi-Fi Antenna

产 品 型 号

PRODUCT MODEL: MX2458N-113B-60LX


客 户 料 号

CUSTOMER P/N:

承认书项目表

NO.	内容 (Contents)	页数 (Number of Page)	页码 (Page Code)
1	承认书封面 (Spec Cover)	1	1
2	承认书项目表 (Spec Item)	1	2
3	工程成品图 (Drawing)	1	3
4	电性测试报告 (Test Reports)	1	4
5	S 参数测试 (S Parameter)	1	5
6	增益测试 (Gain Test)	2	6
7			
8			
9			
10	-	-	-
11	-	-	-
12	-	-	-

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

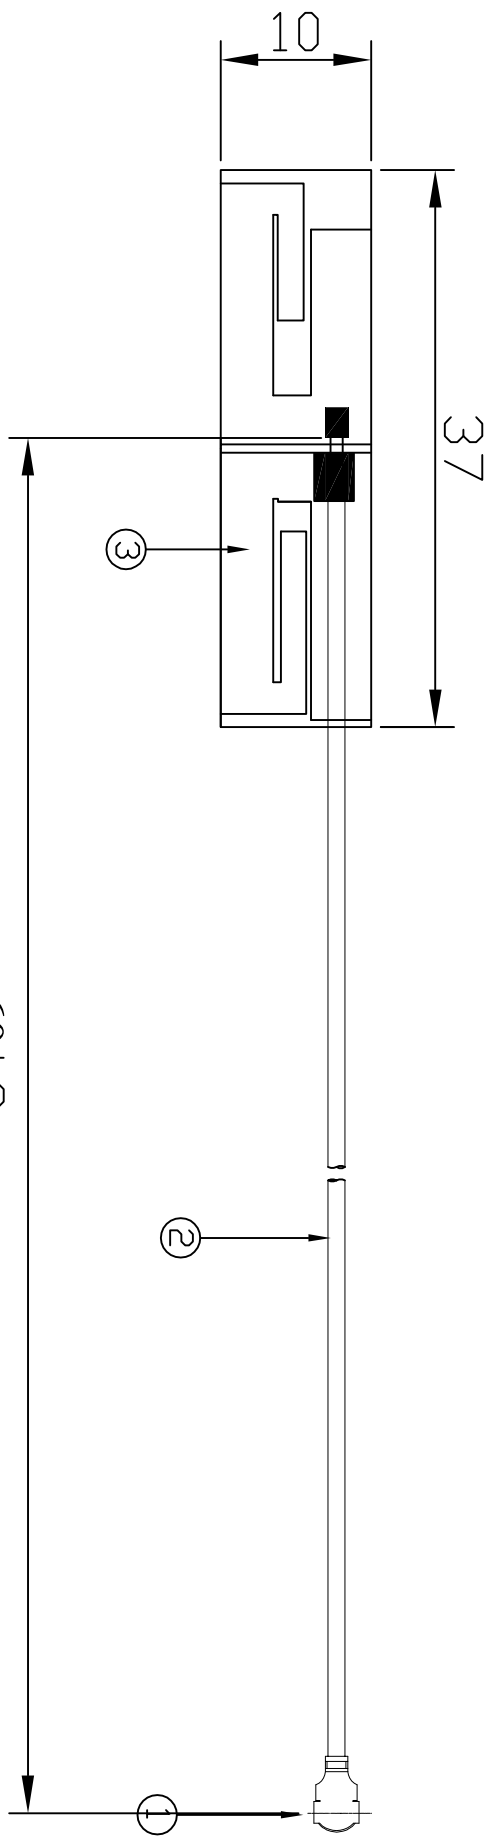

60±3mm


3	MX2458N-A01	FPC	FPC 37*10*0.1mm	1
2	R-CB-113B	Coaxial Cable	O.D. 1.13mm Black	1
1	Cl-113	Connector	Mini Connector	1
No.	Part Number	Name	Material	Q'ty

东莞市速波电子有限公司

TITLE: WIFI ANTENNA		DWG NAME:		Tolerance	
PART NO.: MX2458N-113B-60LX				XX ±0.20	
APPROVED BY	CHECKED BY	DESIGNED BY	UNITS: mm	X.XX ±0.10	
Jeff 2014-03-18	leon 2014-03-18	YD 2014-03-18	SCALE: 1/1	X° ±3°	
REVISION: A					

电性测试报告


Test Reports

Sample Photo	
	
A. Electrical Characteristics	
Frequency	2400 ~ 2500 MHz 4900 ~ 5900 MHz
S.W.R.	≤ 2.0 @ 2400 ~ 2500 MHz ≤ 2.0 @ 4900 ~ 5900 MHz
Antenna Gain	3.7 ± 0.5 dBi
Impedance	50 Ohm Nominal
Return Loss	-10 dB Max
Radiation	Omni-directional
Cable Loss	2 dB / m Max @ 5000 MHz
Polarization	Linear, Vertical
Admitted Power	1 W
Connector	IPEX
Physical Properties	
Antenna Material	FPC
Cable Type	O.D. 1.13mm // 60 mm
Operating Temp.	-10 ~ +60 °C
Storage Temp.	-10 ~ +70 °C


S 参数测试

S Parameter Test

Agilent E5071C

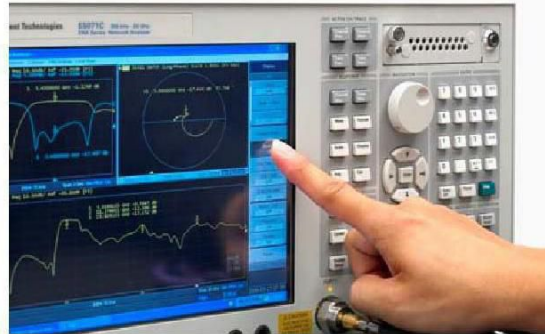

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

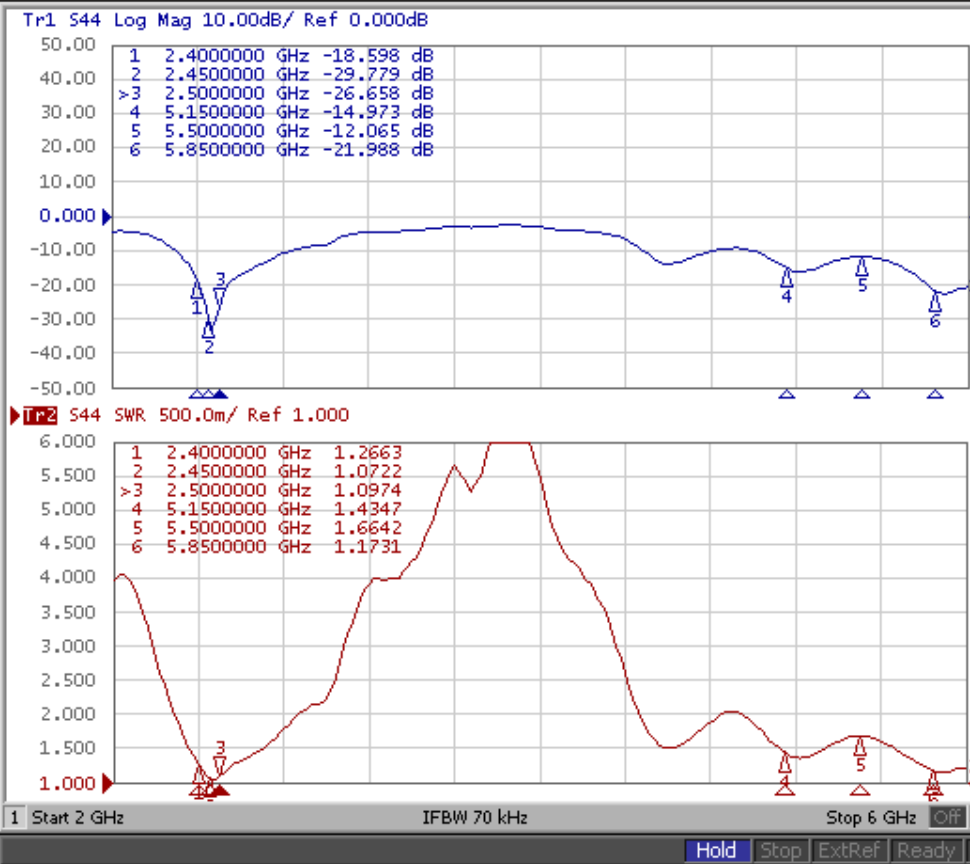

Trigger

Hold

Single

Continuous

Hold All Channels

Continuous Disp Channels

Trigger Source Internal

Trigger Event On Sweep


Trigger Scope All Channel

Restart



Hold Stop ExtRef Ready Svc 2013-08-06 10:07

增益测试

Gain Test

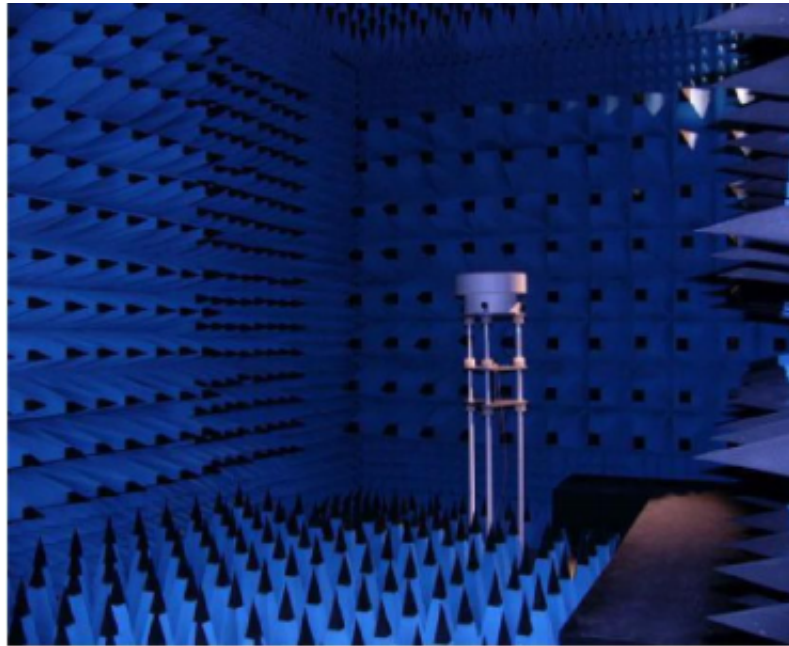

*Antenna
Radiation
Pattern
VS
Gain*

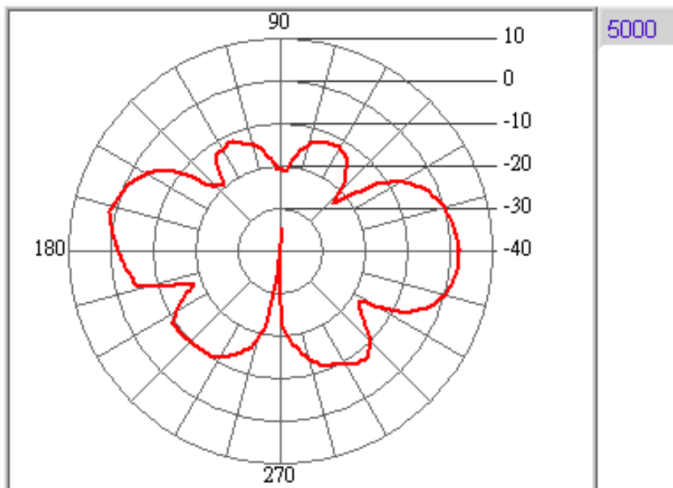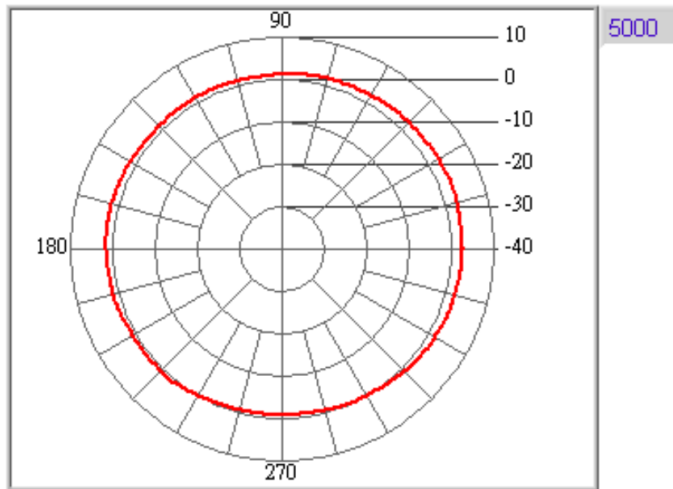

Frequency(MHz)	2400	2410	2420	2430	3440	2450	2460	2470	2480	2490	2500
Peak Gain(dBi)	3.82	3.85	3.88	3.87	3.91	3.97	3.95	3.92	3.93	3.87	3.89
Frequency(MHz)	4900	5000	5100	5200	5300	5400	5500	5600	5700	5800	5900
Peak Gain(dBi)	3.65	3.66	3.68	3.71	3.70	3.73	3.69	3.67	3.72	3.65	3.74