


蓝牙发射器/接收器/USB三合一 说明书

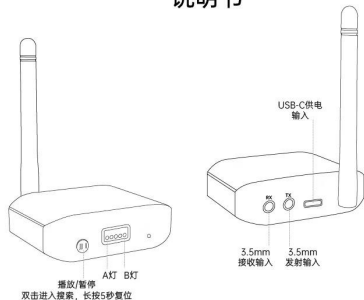


参数

蓝牙版本:	高通5.3
蓝牙协议:	A2DP HFP HSP
频率范围:	2.402GHz-2.480GHz
频率响应:	100Hz-20kHz
传输距离:	20米
连接设备数:	2
信噪比:	>90dB
发射接口:	USB/TX3.5mm接口
接收接口:	RX3.5mm接口
发射音频格式:	SBC/APTX/APTXLL/APTXHD/APTX Adaptive
接收音频格式:	SBC/AAC/APTX/aptx HD/aptx Adaptive
USB免驱支持系统:	WIN-ALL/Linux/苹果电脑/PS4-5/安卓


一：默认发射模式优先

1. USB供电TX指示灯亮起，设备会自动进入配对搜索状态，打开蓝牙耳机/音箱等蓝牙设备，进入配对模式，设备自动搜索连接成功，设备的A指示灯长亮，表示第一设备连接成功。注：开机灯慢闪是回连状态，连接新设备需要按一下按键进入快闪。
2. 在次双击按键，设备会在次发起配对搜索，进入第二台设备搜索，连接成功后设备的B指示灯亮起，表示第二设备连接成功。
3. TYPE-C数据线连接适配器供电，插入3.5mm音频线，设备会自动识别到3.5mm音频输入，设备工作指示灯常亮。
4. TYPE-C数据线连接PC识别到USB/Audio，设备工作指示灯慢闪，(表示USB声卡) USB/Audio设备：BLS-B55。



二：接收模式

1. USB供电产品插入RX音频线，设备会自动识别到3.5mm音频输出，RX指示灯亮起，设备会自动进入配对搜索状态，打开手机/平板/电脑等设备蓝牙搜索产品名称"BLS-B55"点击连接蓝牙，设备连接成功，设备的A指示灯亮起，表示第一设备连接成功。
2. 在次双击按键，设备会在次发起配对搜索，手机搜索连接成功，设备的B指示灯亮起，表示第二设备连接成功。
3. 设备工作指示灯，呼吸慢闪。(表示3.5mm音频输出)
4. 短按按键暂停/播放，长按5秒清空配对记录，响应的指示灯闪3次。



Bluetooth transmitter/receiver/ USB three in one manual




Parameters

Bluetooth version:	Qualcomm 5.3
Bluetooth protocol:	A2DP HFP HSP
Frequency range:	2.402GHz-2.480GHz
Frequency response:	100Hz-20kHz
Transmission distance:	20 meters
Number of connected devices:	2
Signal to noise ratio:	>90dB
Transmission interface:	USB/TX3.5mm interface
Receiving interface:	RX3.5mm interface
Transmit audio format:	SBC/APTX/APTXLL/APTXHD/APTX Adaptive
Received audio format:	SBC/AAC/APTX/aptx HD/aptx Adaptive
USB drive free support system:	WIN-ALL/Linux/Mac/PS4-5/Android


1: Default emission mode priority

1. When the USB powered TX indicator light is on, the device will automatically enter pairing search mode. Turn on Bluetooth devices such as Bluetooth headphones/speakers, and enter pairing mode. The device will automatically search for and connect successfully, and the device's A indicator light will remain on, indicating that the first device connection is successful. Note: The slow flashing of the power on light is in a connected state. To connect a new device, you need to press the button to enter the fast flashing mode.
2. Double click the button again, and the device will initiate a pairing search and enter the second device search. After the connection is successful, the device's B indicator light will light up, indicating that the second device connection is successful.
3. Connect the TYPE-C data cable to the adapter for power supply, insert a 3.5mm audio cable, and the device will automatically recognize the 3.5mm audio input. The device's working indicator light will remain on.
4. The TYPE-C data cable connects to the PC and recognizes USB/Audio. The device's working indicator light flashes slowly, indicating a USB sound card. USB/Audio device: BLS-B55.



2: Receiving mode

1. Insert the USB powered product into the RX audio cable, and the device will automatically recognize the 3.5mm audio output. The RX indicator light will light up, and the device will automatically enter the pairing search state. Open the Bluetooth search for the product name "BLS-B55" on devices such as mobile phones/tablets/computers, and click to connect to Bluetooth. The device connection is successful, and the A indicator light of the device will light up, indicating that the first device connection is successful.
2. Double click the button again, and the device will initiate a pairing search. The mobile search connection is successful, and the device's B indicator light lights up, indicating that the second device connection is successful.
3. Equipment working indicator light, slow breathing flashing. (represents 3.5mm audio output).
4. Short press the button to pause/play, long press for 5 seconds to clear the pairing record, and the corresponding instructions flash 3 times.



Warning Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.