

Radio Test Report

FCC ID: 2A2GJ-M2808**IC: 27498-M2808**

Report No. : TB-RF183072
Applicant : Heltec Automation Technology Co., Ltd
Equipment Under Test (EUT)
EUT Name : Heltec Indoor Hotspot
Model No. : HT-M2808
Series Model No. : HT-M2802
Brand Name : ----
Sample ID : 20210603-15-1#& 20210603-15-2#
Receipt Date : 2021-07-14
Test Date : 2021-07-15 to 2021-08-19
Issue Date : 2021-08-20
Standards : FCC Part 15 Subpart C 15.247
RSS-247 Issue 2 February 2017
RSS-Gen Issue 5 March 2019
Test Method : ANSI C63.10: 2013
KDB 558074 D01 15.247 Meas Guidance v05r02
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above.

Witness Engineer : Joy
Engineer Supervisor : IVAN SU
Engineer Manager : Ray Lai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	6
1.1 Client Information.....	6
1.2 General Description of EUT (Equipment Under Test)	6
1.3 Block Diagram Showing the Configuration of System Tested.....	7
1.4 Description of Support Units	7
1.6 Description of Test Software Setting	9
1.7 Measurement Uncertainty	9
1.8 Test Facility.....	10
2. TEST SUMMARY.....	11
3. TEST SOFTWARE.....	11
4. TEST EQUIPMENT.....	12
5. CONDUCTED EMISSION.....	13
5.1 Test Standard and Limit.....	13
5.2 Test Setup.....	13
5.3 Test Procedure.....	13
5.4 Deviation From Test Standard.....	14
5.5 EUT Operating Mode	14
5.6 Test Data.....	14
6. RADIATED AND CONDUCTED UNWANTED EMISSIONS.....	15
6.1 Test Standard and Limit.....	15
6.2 Test Setup.....	16
6.3 Test Procedure.....	17
6.4 Deviation From Test Standard.....	18
6.5 EUT Operating Mode	18
6.6 Test Data.....	18
7. EMISSIONS IN NONRESTRICTED FREQUENCY BANDS	19
7.1 Test Standard and Limit.....	19
7.2 Test Setup.....	19
7.3 Test Procedure.....	19
7.4 Deviation From Test Standard.....	20
7.5 EUT Operating Mode	20
7.6 Test Data.....	20
8. 99% OCCUPIED AND 20DB BANDWIDTH.....	21
8.1 Test Standard and Limit.....	21
8.2 Test Setup.....	21
8.3 Test Procedure.....	21
8.4 Deviation From Test Standard.....	22
8.5 EUT Operating Mode	22
8.6 Test Data.....	22

9.	PEAK OUTPUT POWER TEST.....	23
	9.1 Test Standard and Limit.....	23
	9.2 Test Setup.....	23
	9.3 Test Procedure.....	23
	9.4 Deviation From Test Standard.....	24
	9.5 EUT Operating Mode	24
	9.6 Test Data.....	24
10.	POWER SPECTRAL DENSITY.....	25
	10.1 Test Standard and Limit	25
	10.2 Test Setup.....	25
	10.3 Test Procedure.....	25
	10.4 Deviation From Test Standard.....	25
	10.5 Antenna Connected Construction	25
	10.6 Test Data.....	25
11.	CARRIER FREQUENCY SEPARATION	26
	11.1 Test Standard and Limit	26
	11.2 Test Setup.....	26
	11.3 Test Procedure.....	26
	11.4 Deviation From Test Standard.....	27
	11.5 Antenna Connected Construction	27
	11.6 Test Data.....	27
12.	TIME OF OCCUPANCY (DWELL TIME)	28
	12.1 Test Standard and Limit	28
	12.2 Test Setup.....	28
	12.3 Test Procedure.....	28
	12.4 Deviation From Test Standard.....	29
	12.5 Antenna Connected Construction	29
	12.6 Test Data.....	29
13.	NUMBER OF HOPPING FREQUENCIES	30
	13.1 Test Standard and Limit	30
	13.2 Test Setup.....	30
	13.3 Test Procedure.....	30
	13.4 Deviation From Test Standard.....	31
	13.5 Antenna Connected Construction	31
	13.6 Test Data.....	31
14.	HOPPING FUNCTION REQUIREMENTS	32
	14.1 Test Standard and Limit	32
	14.4 Deviation From Test Standard.....	32
	14.6 Test Data.....	32
15.	ANTENNA REQUIREMENT.....	33
	15.1 Test Standard and Limit	33
	15.2 Deviation From Test Standard.....	33
	15.3 Antenna Connected Construction	33

15.4 Test Data.....	33
ATTACHMENT A-- CONDUCTED EMISSION TEST DATA	34
ATTACHMENT B--UNWANTED EMISSIONS DATA	36
ATTACHMENT C—EMISSIONS IN NONRESTRICTED FREQUENCY DATA.....	57
ATTACHMENT D—99% OCCUPIED AND 20DB BANDWIDTH DATA.....	61
ATTACHMENT E—PEAK OUTPUT POWER DATA.....	65
ATTACHMENT F—POWER SPECTRAL DENSITY DATA.....	67
ATTACHMENT G—CARRIER FREQUENCY SEPARATION DATA.....	69
ATTACHMENT H—TIME OF OCCUPANCY(DWELL TIME) DATA.....	71
ATTACHMENT I—NUMBER OF HOPPING FREQUENCY.....	72

Revision History

Report No.	Version	Description	Issued Date
TB-RF183072	Rev.01	Initial issue of report	2021-08-20

1. General Information about EUT

1.1 Client Information

Applicant	:	Heltec Automation Technology Co., Ltd
Address	:	2-208, Block A, Yusha Building, 64 Hangtian Road, Longtan Industrial Park, Chenghua District, Chengdu, Sichuan, China
Manufacturer	:	Heltec Automation Technology Co., Ltd
Address	:	2-208, Block A, Yusha Building, 64 Hangtian Road, Longtan Industrial Park, Chenghua District, Chengdu, Sichuan, China

1.2 General Description of EUT (Equipment Under Test)


EUT Name	:	Heltec Indoor Hotspot	
HVIN/Models No.	:	HT-M2808, HT-M2802	
Model Different	:	All these models are identical in the same PCB, layout and electrical circuit, The only difference is model name.	
Product Description	:	Operation Frequency:	LoRa(125KHz): 903.9MHz-905.3MHz
		Number of Channel:	8 channels
		Antenna Gain:	Antenna 1: 0.5dBi External Antenna Antenna 2: 4dBi External Antenna Antenna 3: 2dBi External Antenna
		Bit Rate of Transmitter:	5.4kbps
Power Rating	:	Adapter: Input: 90-264V~, 50/60Hz, 1.5A Output: DC 12V3.0A	
Software Version	:	N/A	
Hardware Version	:	N/A	
Remark:			
(1) The antenna gain and adapter provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.			
(2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			
(3) Antenna information provided by the applicant. And the type of antenna please see the external photos.			

(4) Channel List:


Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	903.9	04	904.5	07	905.1
02	904.1	05	904.7	08	905.3
03	904.3	06	904.9		

1.3 Block Diagram Showing the Configuration of System Tested

Conducted Test

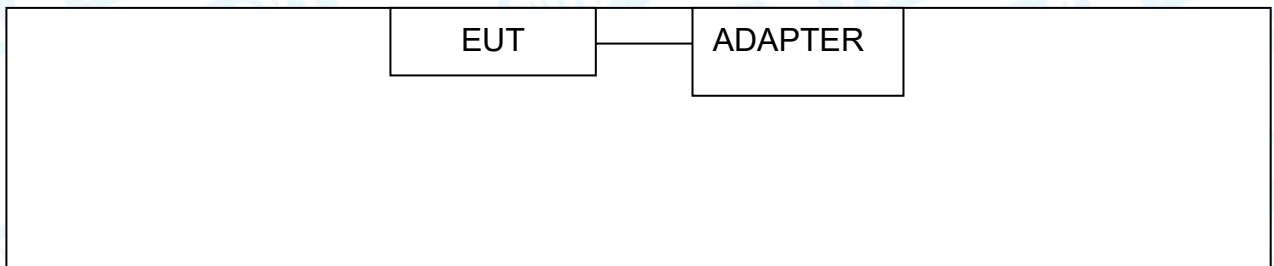

Radiated Test

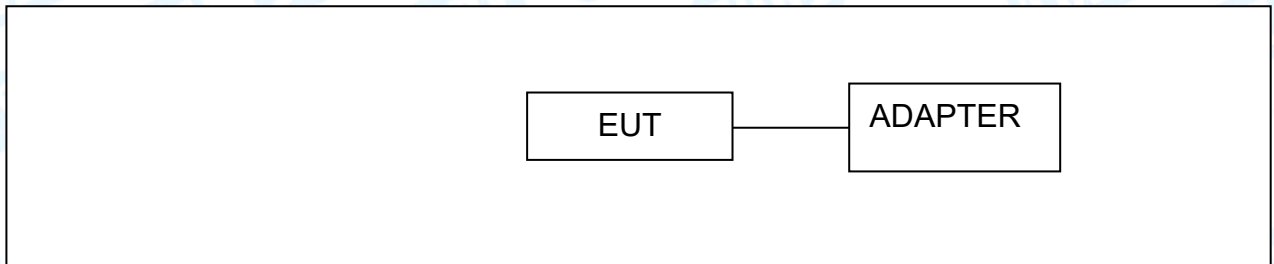

1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Used “√”
---	----	----	---	---
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	Yes	NO	1.0M	Accessory

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	TX Mode Channel 01
For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode Channel 01
Mode 2	TX Mode Channel 01/04/08
Mode 3	Hopping Mode

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.
According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels.
- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a Mobile unit; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF setting.

Test Software Version	Putty.exe		
Frequency	903.9MHz	904.5MHz	905.3MHz
LoRa	10	10	10

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F.,Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.

2. Test Summary

Standard Section		Test Item	Test Sample(s)	Judgment	Remark
FCC	IC				
FCC 15.207(a)	RSS-Gen 8.8	Conducted Emission	20210603-15-1#	PASS	N/A
FCC 15.209 & 15.247(d)	RSS-Gen 8.9 & RSS 247 5.5	Radiated Unwanted Emissions	20210603-15-1#	PASS	N/A
FCC 15.203	RSS-247 6.8	Antenna Requirement	20210603-15-2#	PASS	N/A
FCC 15.247(a)	RSS-Gen 6.7 RSS 247 5.1 (1)	99% Occupied Bandwidth & 20dB Bandwidth	20210603-15-2#	PASS	N/A
FCC 15.247(b)(1)	RSS 247 5.4 (2)	Peak Output Power	20210603-15-2#	PASS	N/A
FCC 15.247(f)	RSS-247 5.2(b)	Power Spectral Density	20210603-15-2#	PASS	N/A
FCC 15.247(a)(1)	RSS 247 5.3 (a)	Carrier frequency separation	20210603-15-2#	PASS	N/A
FCC 15.247(f)	RSS 247 5.1 (4)	Time of occupancy	20210603-15-2#	PASS	N/A
FCC 15.247(b)(1)	RSS 247 5.1 (4)	Number of Hopping Frequency	20210603-15-2#	PASS	N/A(2)
FCC 15.247(d)	RSS-Gen 8.10 RSS-247 5.5	Band Edge	20210603-15-2#	PASS	N/A
FCC 15.207(a)	RSS-247 5.5	Conducted Unwanted Emissions	20210603-15-2#	PASS	N/A
FCC 15.205	RSS-Gen 8.10	Emissions in Restricted Bands	20210603-15-2#	PASS	N/A
FCC 15.247(a)(1)	RSS 247	Hopping function Requirements	20210603-15-2#	PASS	N/A
/	/	On Time and Duty Cycle	20210603-15-2#	/	N/A

Note: N/A is an abbreviation for Not Applicable.

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRFtest	V2.0.0.0
RF Test System	JS1120	Tonscend	V2.6.88.0336

4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 02, 2021	Jul. 01, 2022
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 02, 2021	Jul. 01, 2022
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 02, 2021	Jul. 01, 2022
LISN	Rohde & Schwarz	ENV216	101131	Jul. 02, 2021	Jul. 01, 2022
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 02, 2021	Jul. 01, 2022
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 02, 2021	Jul. 01, 2022
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jul. 02, 2021	Jul. 01, 2022
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Mar.01, 2020	Feb. 28, 2022
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 06, 2021	Jul. 05, 2022
Pre-amplifier	Sonoma	310N	185903	Feb. 25, 2021	Feb. 24, 2022
Pre-amplifier	HP	8449B	3008A00849	Feb. 25, 2021	Feb. 24, 2022
Pre-amplifier	SKET	LNPA_1840G-50	SK201904032	Feb. 25, 2021	Feb. 24, 2022
Cable	HUBER+SUHNER	100	SUCOFLEX	Feb. 25, 2021	Feb. 24, 2022
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 02, 2021	Jul. 01, 2022
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jul. 02, 2021	Jul. 01, 2022
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 11, 2020	Sep. 10, 2021
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 11, 2020	Sep. 10, 2021
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 11, 2020	Sep. 10, 2021
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO26	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO29	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO31	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17I00015SNO33	Sep. 11, 2020	Sep. 10, 2021

5. Conducted Emission

5.1 Test Standard and Limit

5.1.1 Test Standard

RSS-Gen 8.8
FCC Part 15.207


5.1.2 Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.2 Test Setup

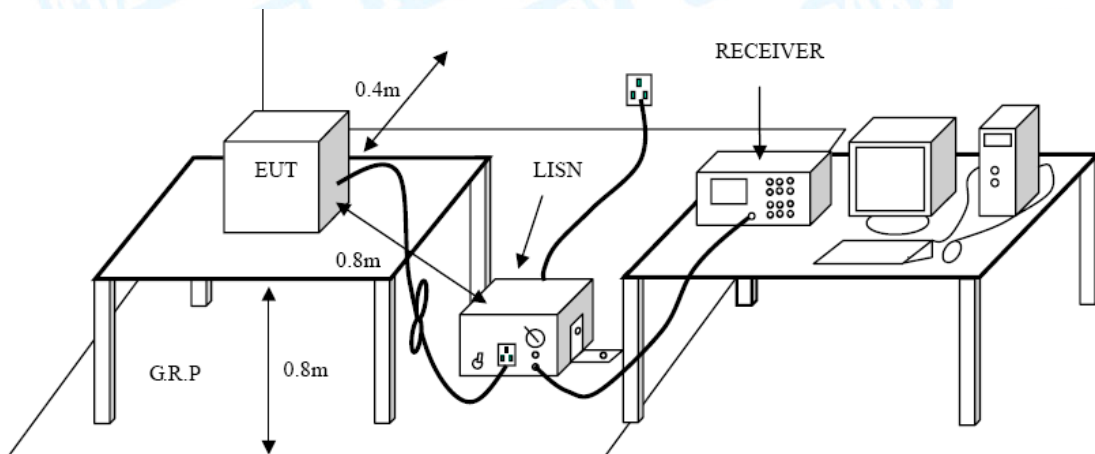

5.3 Test Procedure

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- The bandwidth of EMI test receiver is set at 9 kHz, and the test frequency band is from 0.15MHz to 30MHz.

5.4 Deviation From Test Standard

No deviation

5.5 EUT Operating Mode

Please refer to the description of test mode.

5.6 Test Data

Please refer to the Attachment A.

6. Radiated and Conducted Unwanted Emissions

6.1 Test Standard and Limit

6.1.1 Test Standard

RSS-Gen 8.9 & RSS 247 5.5
FCC Part 15.209 & FCC Part 15.247(d)

6.1.2 Test Limit

General field strength limits at frequencies Below 30MHz			
Frequency (MHz)	Field Strength ($\mu\text{A/m}$)*	Field Strength (microvolt/meter)**	Measurement Distance (meters)
0.009~0.490	6.37/F (F in kHz)	2400/F(KHz)	300
0.490~1.705	63.7/F (F in kHz)	24000/F(KHz)	30
1.705~30.0	0.08	30	30

Note: 1, The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.
2, *is for RSS Standard, **is for FCC Standard.

General field strength limits at frequencies above 30 MHz		
Frequency (MHz)	Field strength ($\mu\text{V/m}$ at 3 m)	Measurement Distance (meters)
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


General field strength limits at frequencies Above 1000MHz		
Frequency (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54

Note:
(1) The tighter limit applies at the band edges.
(2) Emission Level(dBuV/m)=20log Emission Level(uV/m)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

6.2 Test Setup


Radiated measurement

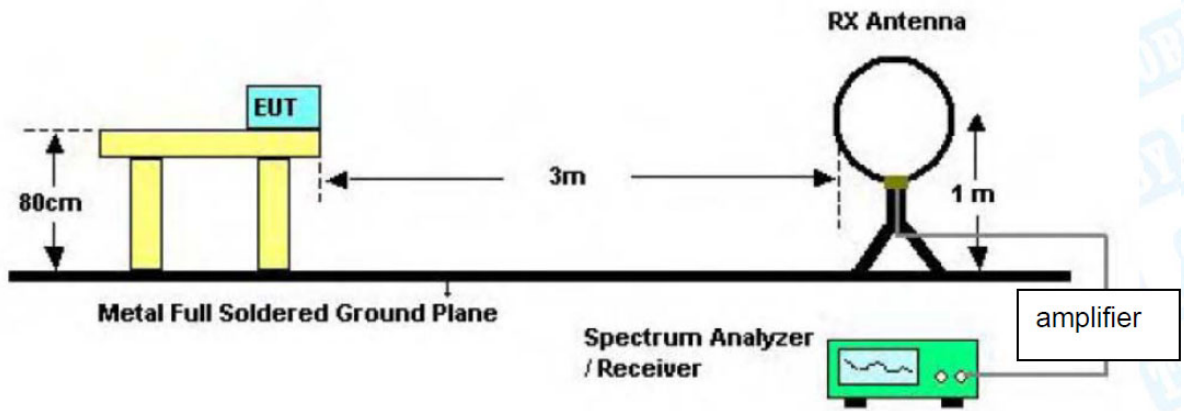

Below 30MHz Test Setup

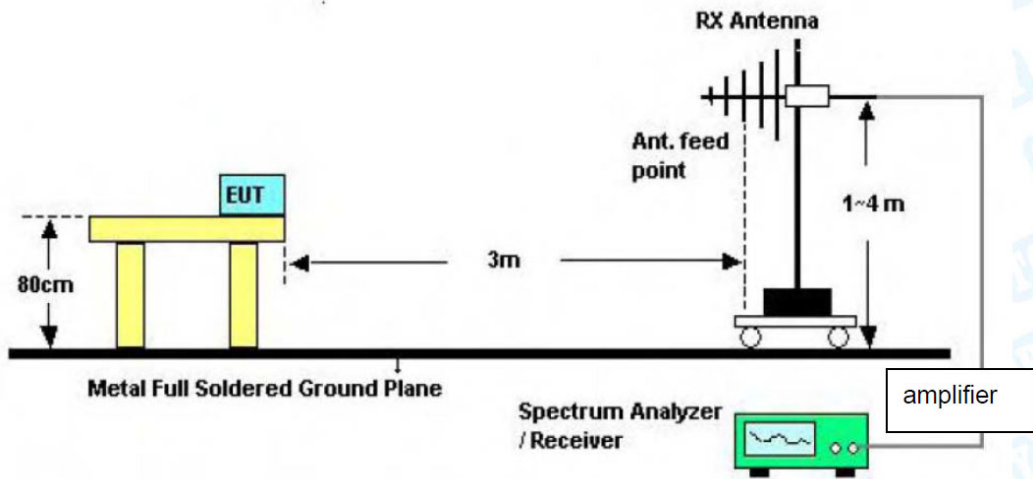


Below 1000MHz Test Setup

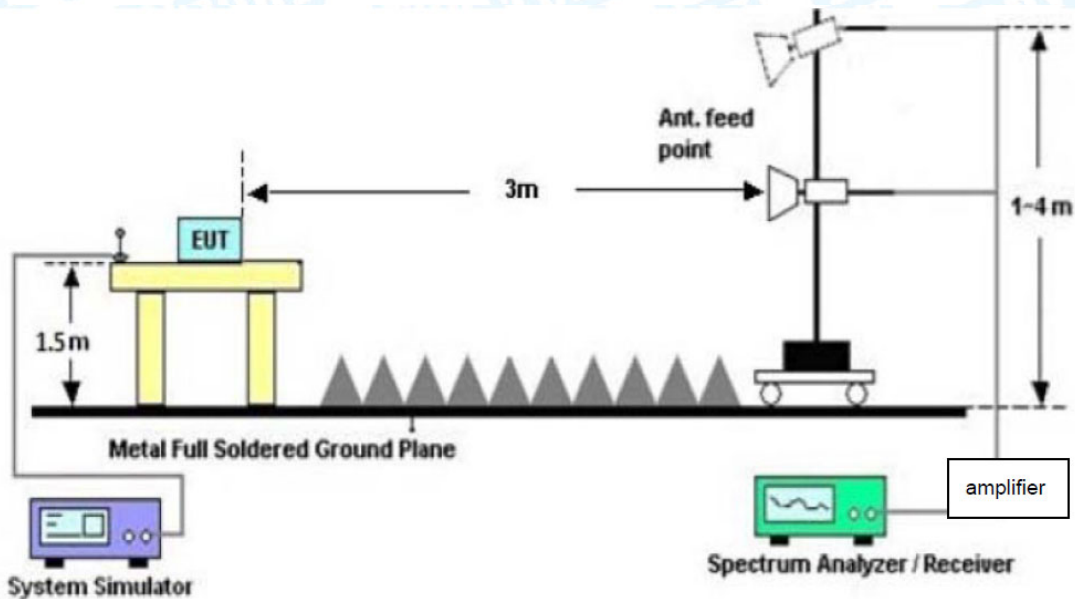

Above 1GHz Test Setup

Conducted measurement

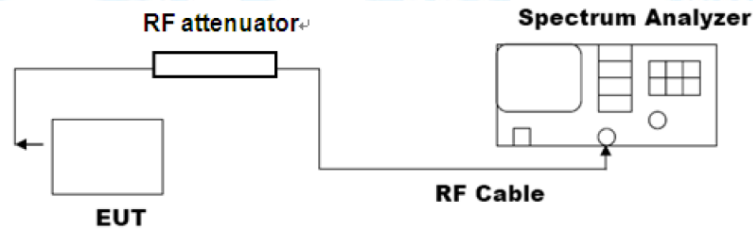

6.3 Test Procedure

---Radiated measurement

- The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Below 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- Testing frequency range 30MHz-1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection. Testing frequency range 9KHz-150Hz the measuring instrument use VBW=200Hz with Quasi-peak detection. Testing frequency range 9KHz-30MHz the measuring instrument use VBW=9kHz with Quasi-peak detection.
- Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- For the actual test configuration, please see the test setup photo.

--- Conducted measurement

● Reference level measurement

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

● Emission level measurement

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Mode

Please refer to the description of test mode.

6.6 Test Data

Please refer to the Attachment B.

7. Emissions in nonrestricted frequency bands

7.1 Test Standard and Limit

7.1.1 Test Standard


RSS-Gen 8.10 & RSS 247 5.5

FCC Part 15.205 & FCC Part 15.247(d)

7.1.2 Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.2 Test Setup

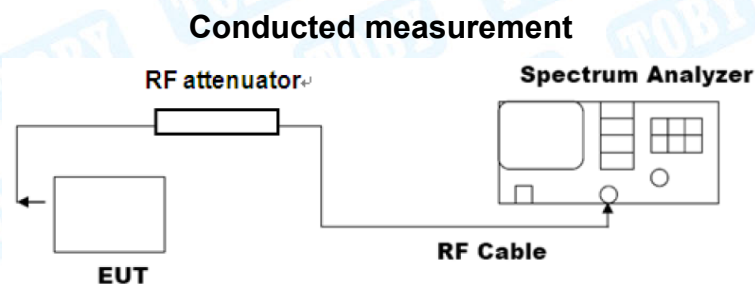

7.3 Test Procedure

Reference level measurement

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq [3 \cdot \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Emission level measurement

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW \geq [3*RBW].
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Mode

Please refer to the description of test mode.

7.6 Test Data

Please refer to the Attachment C.

8. 99% Occupied and 20dB Bandwidth

8.1 Test Standard and Limit


8.1.1 Test Standard

RSS-Gen 6.7 & RSS 247 5.1(a)
FCC Part 15.205 & FCC Part 15.247(a)

8.1.2 Test Limit

There are no limits for 20dB bandwidth and 99% occupied bandwidth.

8.2 Test Setup

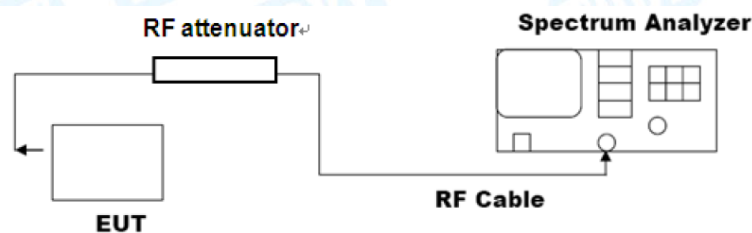

8.3 Test Procedure

- The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:
 - a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
 - b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
 - c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
 - d) Step a) through step c) might require iteration to adjust within the specified range.
 - e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
 - f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
 - g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

8.4 Deviation From Test Standard

No deviation

8.5 EUT Operating Mode

Please refer to the description of test mode.

8.6 Test Data

Please refer to the Attachment D.

9. Peak Output Power Test

9.1 Test Standard and Limit

9.1.1 Test Standard


RSS 247 5.4(2)

FCC Part 15.247(b)(1)

9.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	$P_{\max\text{-pk}} \leq 1 \text{ W}$ $N_{ch} \geq 50$ $f \geq \text{MAX} \{ 25 \text{ kHz}, \text{BW}_{20\text{dB}} \}$ $\text{BW}_{20\text{dB}} \leq 250\text{KHz}$ $t_{ch} \leq 0.4 \text{ s for } T = 20\text{s}$	902~928
	$P_{\max\text{-pk}} \leq 0.25\text{W}$ $25 \leq N_{ch} < 50$ $f \geq \text{MAX} \{ 25 \text{ kHz}, \text{BW}_{20\text{dB}} \}$ $250\text{KHz} < \text{BW}_{20\text{dB}} \leq 500\text{KHz}$ $t_{ch} \leq 0.4 \text{ s for } T = 10\text{s}$	
t_{ch} = average time of occupancy; T = period; N_{ch} = # hopping frequencies; BW = bandwidth; f = hopping channel carrier frequency separation		

9.2 Test Setup

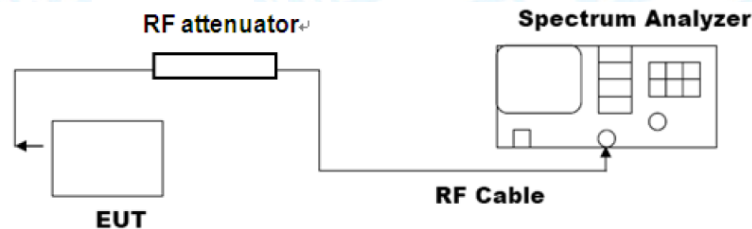

9.3 Test Procedure

- This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:
 - a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW ≥ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
 - b) Allow trace to stabilize.
 - c) Use the marker-to-peak function to set the marker to the peak of the emission.
 - d) The indicated level is the peak output power, after any corrections for external

attenuators and cables.

e) A plot of the test results and setup description shall be included in the test report.

NOTE-A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

9.4 Deviation From Test Standard

No deviation

9.5 EUT Operating Mode

Please refer to the description of test mode.

9.6 Test Data

Please refer to the Attachment E.

10. Power Spectral Density

10.1 Test Standard and Limit

10.1.1 Test Standard


RSS 247 5.2(b)

FCC Part 15.247(f)

10.1.2 Test Limit

Test Item	Limit
Power Spectral Density	8dBm(in any 3 kHz)

10.2 Test Setup

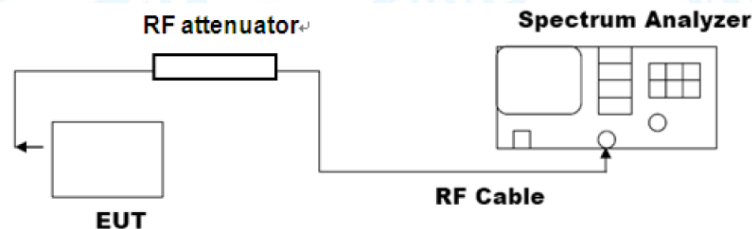

10.3 Test Procedure

- The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:
 - a) Set analyzer center frequency to DTS channel center frequency.
 - b) Set the span to 1.5 times the DTS bandwidth.
 - c) Set the RBW to $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
 - d) Set the VBW $\geq [3 * \text{RBW}]$.
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum amplitude level within the RBW.
 - j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

10.4 Deviation From Test Standard

No deviation

10.5 Antenna Connected Construction

Please refer to the description of test mode.

10.6 Test Data

Please refer to the Attachment F.

11. Carrier frequency separation

11.1 Test Standard and Limit

11.1.1 Test Standard


RSS 247 5.1(2)

FCC Part 15.247(a)(1)

11.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Carrier frequency separation	$P_{max-pk} \leq 1\text{ W}$ $N_{ch} \geq 50$ $f \geq \text{MAX} \{ 25\text{ kHz}, BW_{20dB} \}$ $BW_{20dB} \leq 250\text{KHz}$ $t_{ch} \leq 0.4\text{ s for } T = 20\text{s}$	902~928
	$P_{max-pk} \leq 0.25\text{W}$ $25 \leq N_{ch} < 50$ $f \geq \text{MAX} \{ 25\text{ kHz}, BW_{20dB} \}$ $250\text{KHz} < BW_{20dB} \leq 500\text{KHz}$ $t_{ch} \leq 0.4\text{ s for } T = 10\text{s}$	
t_{ch} = average time of occupancy; T = period; N_{ch} = # hopping frequencies; BW = bandwidth; f = hopping channel carrier frequency separation		

11.2 Test Setup

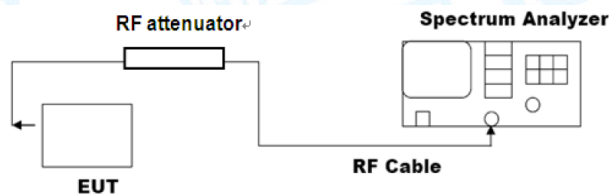

11.3 Test Procedure

● The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) \geq RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

11.4 Deviation From Test Standard

No deviation

11.5 Antenna Connected Construction

Please refer to the description of test mode.

11.6 Test Data

Please refer to the Attachment G.

12. Time of occupancy (dwell time)

12.1 Test Standard and Limit


12.1.1 Test Standard

RSS 247 5.3(1)
FCC Part 15.247(f)

12.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Time of occupancy (dwell time)	$P_{\max\text{-pk}} \leq 1 \text{ W}$ $N_{ch} \geq 50$ $f \geq \text{MAX} \{ 25 \text{ kHz}, \text{BW}_{20\text{dB}} \}$ $\text{BW}_{20\text{dB}} \leq 250\text{KHz}$ $t_{ch} \leq 0.4 \text{ s for } T = 20\text{s}$	902~928
	$P_{\max\text{-pk}} \leq 0.25\text{W}$ $25 \leq N_{ch} < 50$ $f \geq \text{MAX} \{ 25 \text{ kHz}, \text{BW}_{20\text{dB}} \}$ $250\text{KHz} < \text{BW}_{20\text{dB}} \leq 500\text{KHz}$ $t_{ch} \leq 0.4 \text{ s for } T = 10\text{s}$	
t_{ch} = average time of occupancy; T = period; N_{ch} = # hopping frequencies; BW = bandwidth; f = hopping channel carrier frequency separation		

12.2 Test Setup

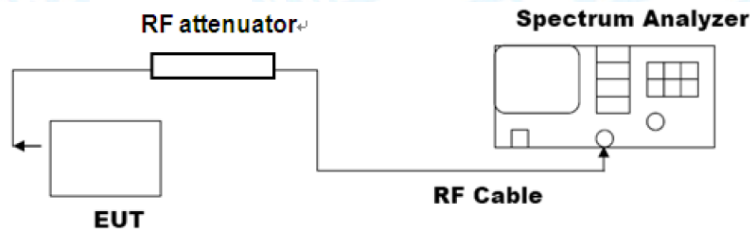

12.3 Test Procedure

- The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:
 - a) Span: Zero span, centered on a hopping channel.
 - b) RBW shall be \square channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
 - c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
 - d) Detector function: Peak.
 - e) Trace: Max hold.
 Use the marker-delta function to determine the transmit time per hop. If this value varies

with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) =
(number of hops on spectrum analyzer) × (period specified in the requirements / analyzer sweep time)

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.

12.4 Deviation From Test Standard

No deviation

12.5 Antenna Connected Construction

Please refer to the description of test mode.

12.6 Test Data

Please refer to the Attachment H.

13. Number of hopping frequencies

13.1 Test Standard and Limit


13.1.1 Test Standard

RSS 247 5.1(4)
FCC Part 15.247(b)(1)

13.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Carrier frequency separation	$P_{max-pk} \leq 1\text{ W}$ $N_{ch} \geq 50$ $f \geq \text{MAX} \{ 25\text{ kHz}, BW_{20dB} \}$ $BW_{20dB} \leq 250\text{KHz}$ $t_{ch} \leq 0.4\text{ s for } T = 20\text{s}$	902~928
	$P_{max-pk} \leq 0.25\text{W}$ $25 \leq N_{ch} < 50$ $f \geq \text{MAX} \{ 25\text{ kHz}, BW_{20dB} \}$ $250\text{KHz} < BW_{20dB} \leq 500\text{KHz}$ $t_{ch} \leq 0.4\text{ s for } T = 10\text{s}$	
t_{ch} = average time of occupancy; T = period; N_{ch} = # hopping frequencies; BW = bandwidth; f = hopping channel carrier frequency separation		
There is no minimum number of hopping channels associated with this type of hybrid system. While there is not a specific minimum limit, the hop sequence is required to appear as pseudorandom per Section 15.247(a)(1) (see Section 3 of this document).		

13.2 Test Setup

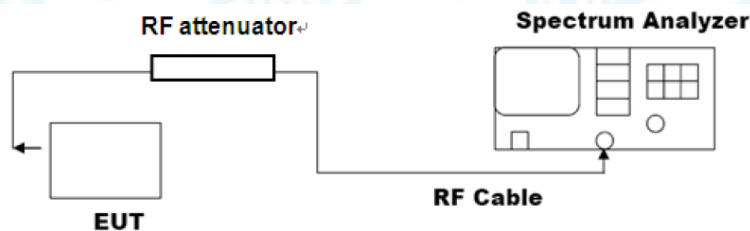

13.3 Test Procedure

- The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:
 - a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
 - b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
 - c) VBW \geq RBW.
 - d) Sweep: Auto.
 - e) Detector function: Peak.

- f) Trace: Max hold.
- g) Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.

Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

13.4 Deviation From Test Standard

No deviation

13.5 Antenna Connected Construction

Please refer to the description of test mode.

13.6 Test Data

Please refer to the Attachment I.

14. Hopping function Requirements

14.1 Test Standard and Limit

14.1.1 Test Standard

RSS 247

FCC Part 15.247(a)(1)

14.1.2 Test Limit

The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

14.4 Deviation From Test Standard

No deviation

14.6 Test Data

The transmitter follows the LoRa alliance protocol which complies with the pseudo-random hop sequence, equal use of each frequency, and receiver matching bandwidth and synchronization requirements.

15. Antenna Requirement

15.1 Test Standard and Limit

15.1.1 Test Standard

RSS 247 6.8

FCC Part 15.203

15.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.2 Deviation From Test Standard

No deviation

15.3 Antenna Connected Construction

The gains of the antenna used for transmitting is (Ant1: 0.4dBi; Ant1: 4dBi; Ant1: 2dBi), and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.


15.4 Test Data

The EUT antenna is a external antenna. It complies with the standard requirement.

Antenna Type
<input type="checkbox"/> Permanent attached antenna
<input checked="" type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna

Attachment A-- Conducted Emission Test Data

Temperature:	24.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Terminal:	Line		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

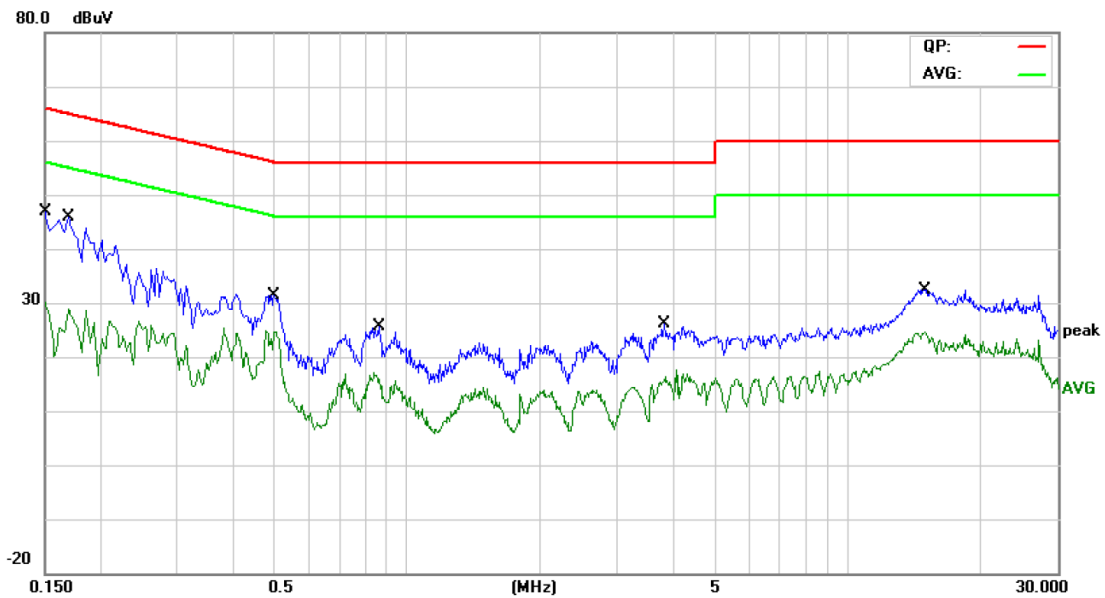


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	34.04	9.70	43.74	65.99	-22.25	QP
2		0.1500	19.07	9.70	28.77	55.99	-27.22	AVG
3		0.1700	31.47	9.70	41.17	64.96	-23.79	QP
4		0.1700	17.16	9.70	26.86	54.96	-28.10	AVG
5		0.4980	18.93	9.70	28.63	56.03	-27.40	QP
6		0.4980	13.33	9.70	23.03	46.03	-23.00	AVG
7		0.8620	11.07	9.75	20.82	56.00	-35.18	QP
8		0.8620	5.28	9.75	15.03	46.00	-30.97	AVG
9		3.8300	10.78	9.90	20.68	56.00	-35.32	QP
10		3.8300	5.05	9.90	14.95	46.00	-31.05	AVG
11		15.0460	18.68	10.00	28.68	60.00	-31.32	QP
12		15.0460	13.44	10.00	23.44	50.00	-26.56	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)

Temperature:	24.6°C	Relative Humidity:	42%
Test Voltage:	AC 120V/60Hz		
Terminal:	Neutral		
Test Mode:	Mode 1		
Remark:	Only worse case is reported.		

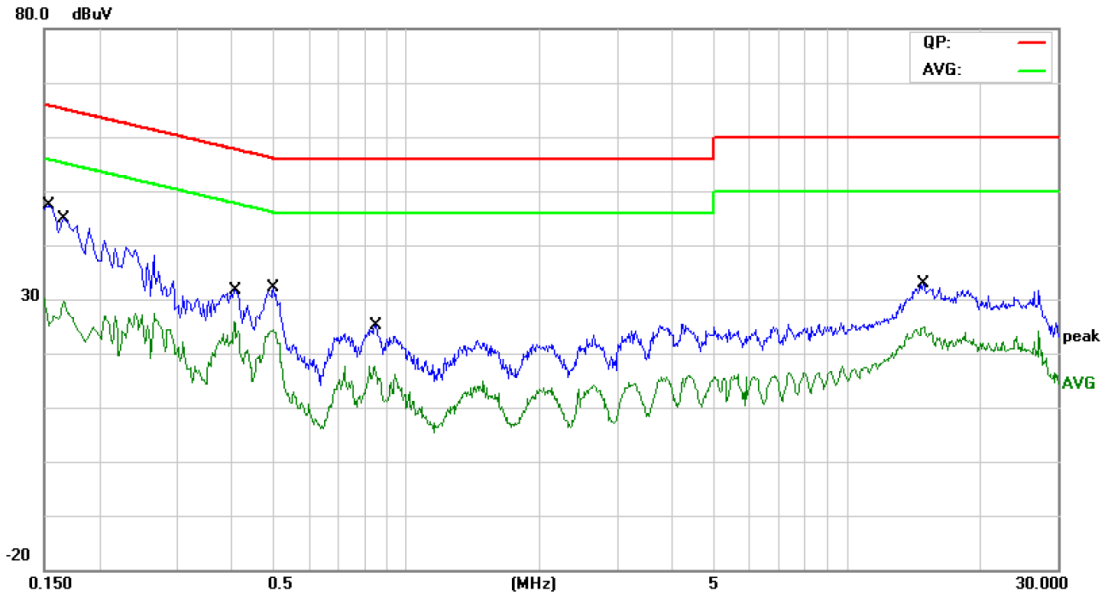

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	31.19	9.70	40.89	65.78	-24.89	QP
2		0.1539	15.42	9.70	25.12	55.78	-30.66	AVG
3		0.1676	31.23	9.70	40.93	65.07	-24.14	QP
4		0.1676	16.78	9.70	26.48	55.07	-28.59	AVG
5		0.4100	19.02	9.70	28.72	57.65	-28.93	QP
6		0.4100	13.43	9.70	23.13	47.65	-24.52	AVG
7		0.4980	19.00	9.70	28.70	56.03	-27.33	QP
8	*	0.4980	13.31	9.70	23.01	46.03	-23.02	AVG
9		0.8500	12.03	9.75	21.78	56.00	-34.22	QP
10		0.8500	6.41	9.75	16.16	46.00	-29.84	AVG
11		14.8500	19.30	9.99	29.29	60.00	-30.71	QP
12		14.8500	14.17	9.99	24.16	50.00	-25.84	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)

Attachment B--Unwanted Emissions Data

---Radiated Unwanted Emissions


9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB Below the permissible value has no need to be reported.

30MHz~1GHz

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (903.9MHz-Antenna 1)		
Remark:	Only worse case is reported.		

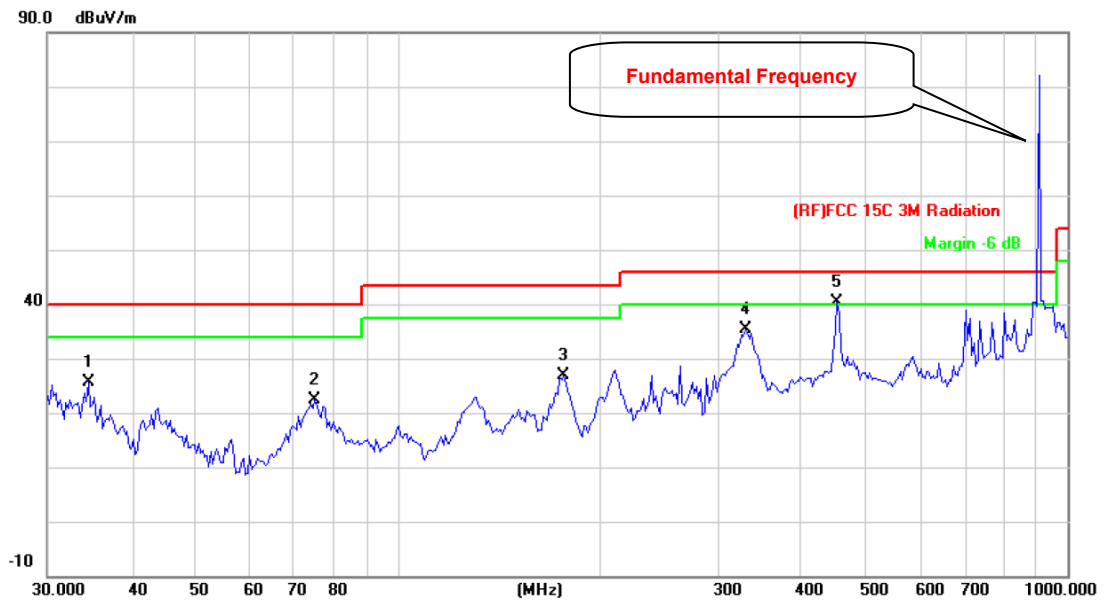


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		34.5173	42.50	-16.77	25.73	40.00	-14.27	peak
2		75.1822	45.46	-23.15	22.31	40.00	-17.69	peak
3		176.8878	47.25	-20.41	26.84	43.50	-16.66	peak
4		330.1949	50.68	-15.31	35.37	46.00	-10.63	peak
5	*	452.7197	52.44	-12.00	40.44	46.00	-5.56	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (903.9MHz-Antenna 1)		
Remark:	Only worse case is reported.		

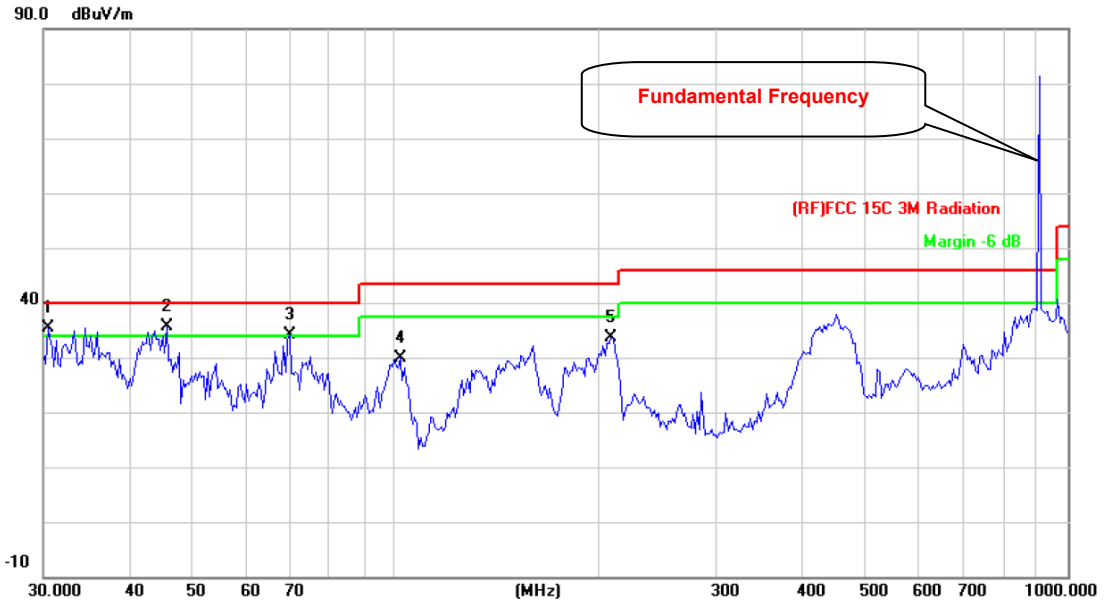


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	!	30.4238	49.16	-13.72	35.44	40.00	-4.56	peak
2	*	45.6948	57.70	-22.14	35.56	40.00	-4.44	peak
3	!	69.6005	57.91	-23.73	34.18	40.00	-5.82	peak
4		101.6443	52.23	-22.30	29.93	43.50	-13.57	peak
5		209.3129	53.23	-19.59	33.64	43.50	-9.86	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (904.5MHz-Antenna 1)		
Remark:	Only worse case is reported.		

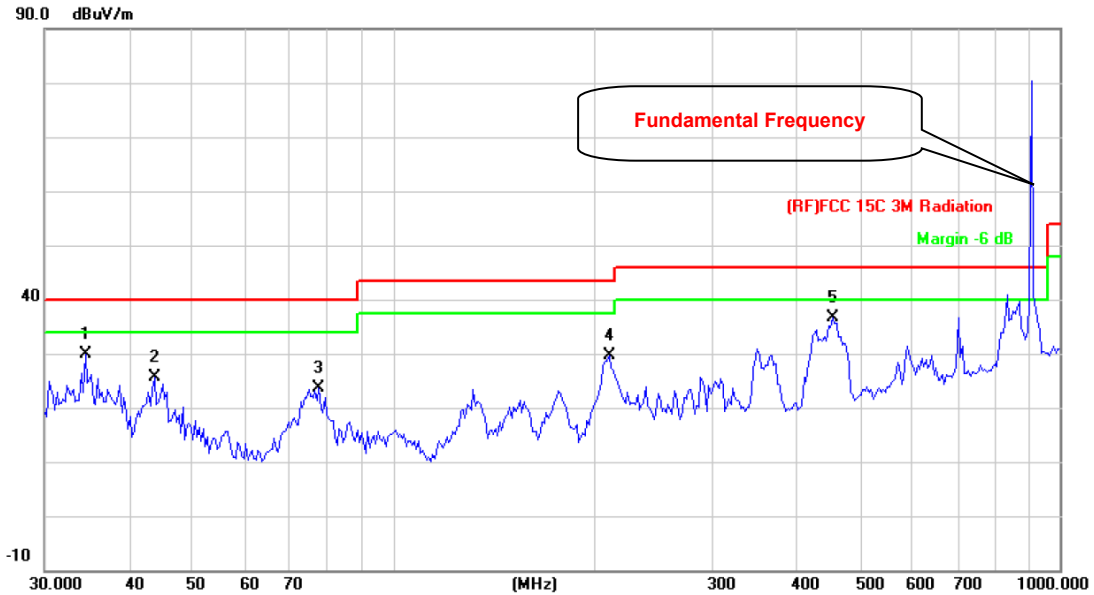


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		34.5173	46.60	-16.77	29.83	40.00	-10.17	peak
2		43.8119	46.86	-21.33	25.53	40.00	-14.47	peak
3		77.3212	46.48	-22.94	23.54	40.00	-16.46	peak
4		210.7860	49.18	-19.49	29.69	43.50	-13.81	peak
5	*	455.9058	48.47	-11.92	36.55	46.00	-9.45	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (904.5MHz-Antenna 1)		
Remark:	Only worse case is reported.		

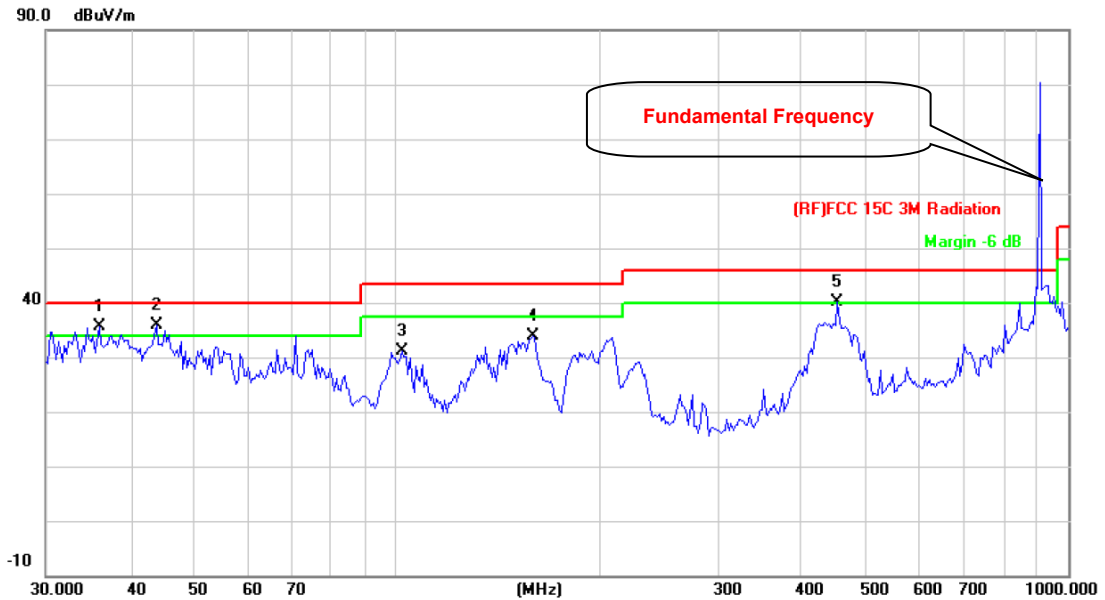


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	!	36.0007	53.25	-17.60	35.65	40.00	-4.35	peak
2	*	43.8119	57.33	-21.33	36.00	40.00	-4.00	peak
3		101.6443	53.44	-22.30	31.14	43.50	-12.36	peak
4		159.2251	55.05	-21.06	33.99	43.50	-9.51	peak
5	!	452.7197	52.13	-12.00	40.13	46.00	-5.87	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (905.3MHz-Antenna 1)		
Remark:	Only worse case is reported.		

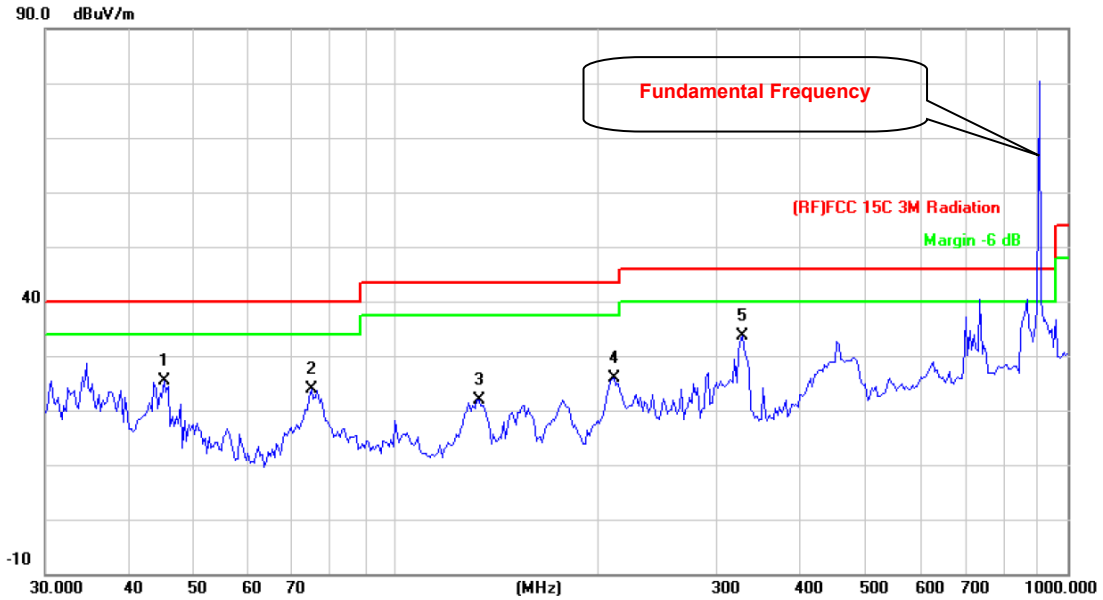


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		45.0583	47.18	-21.92	25.26	40.00	-14.74	peak
2		74.6569	47.12	-23.22	23.90	40.00	-16.10	peak
3		132.6850	44.53	-22.59	21.94	43.50	-21.56	peak
4		210.7860	45.33	-19.49	25.84	43.50	-17.66	peak
5	*	327.8873	49.02	-15.40	33.62	46.00	-12.38	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (905.3MHz-Antenna 1)		
Remark:	Only worse case is reported.		

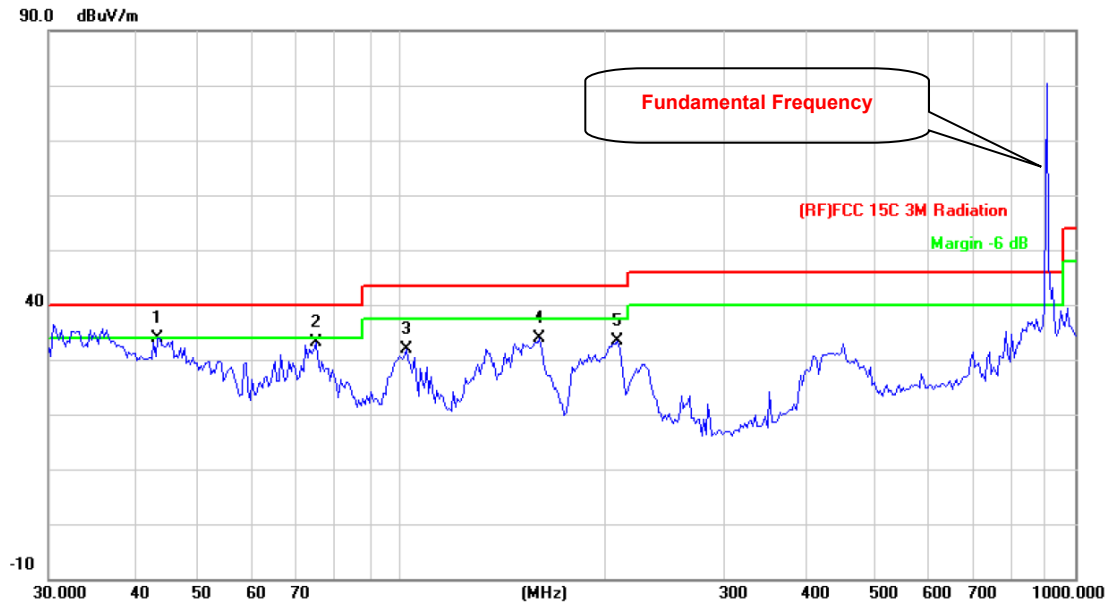


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	43.5057	55.13	-21.18	33.95	40.00	-6.05	peak
2		74.6569	56.40	-23.22	33.18	40.00	-6.82	peak
3		101.6443	54.30	-22.30	32.00	43.50	-11.50	peak
4		160.3456	54.84	-21.00	33.84	43.50	-9.66	peak
5		209.3129	53.03	-19.59	33.44	43.50	-10.06	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (903.9MHz-Antenna 2)		
Remark:	Only worse case is reported.		

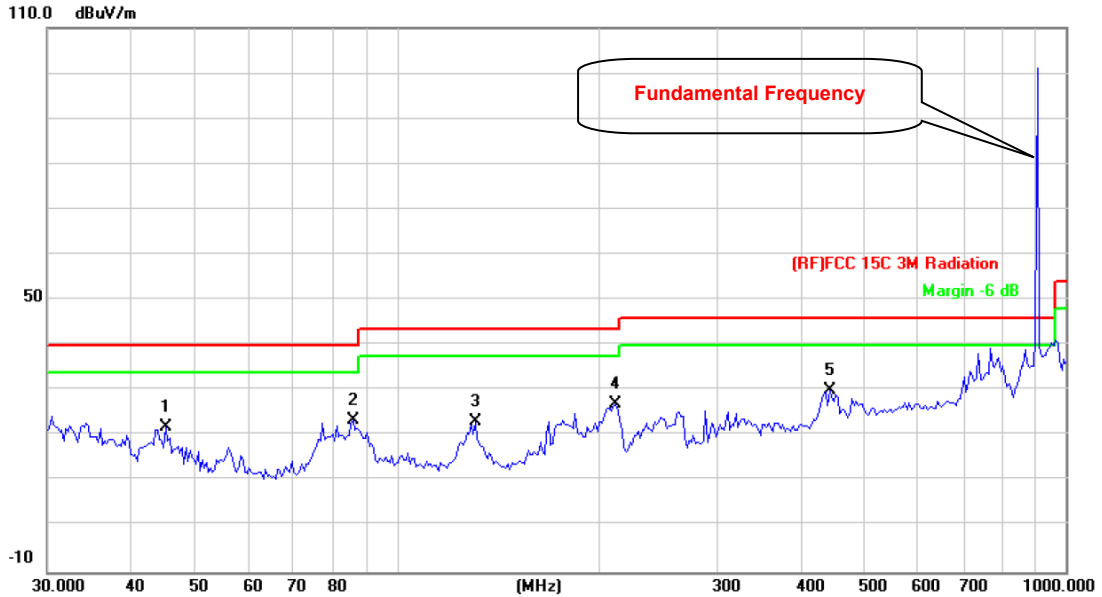


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		45.0583	43.84	-21.92	21.92	40.00	-18.08	peak
2		85.8984	45.91	-22.34	23.57	40.00	-16.43	peak
3		130.8369	45.62	-22.58	23.04	43.50	-20.46	peak
4		212.2695	46.36	-19.41	26.95	43.50	-16.55	peak
5	*	443.2943	42.24	-12.13	30.11	46.00	-15.89	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (903.9MHz-Antenna 2)		
Remark:	Only worse case is reported.		

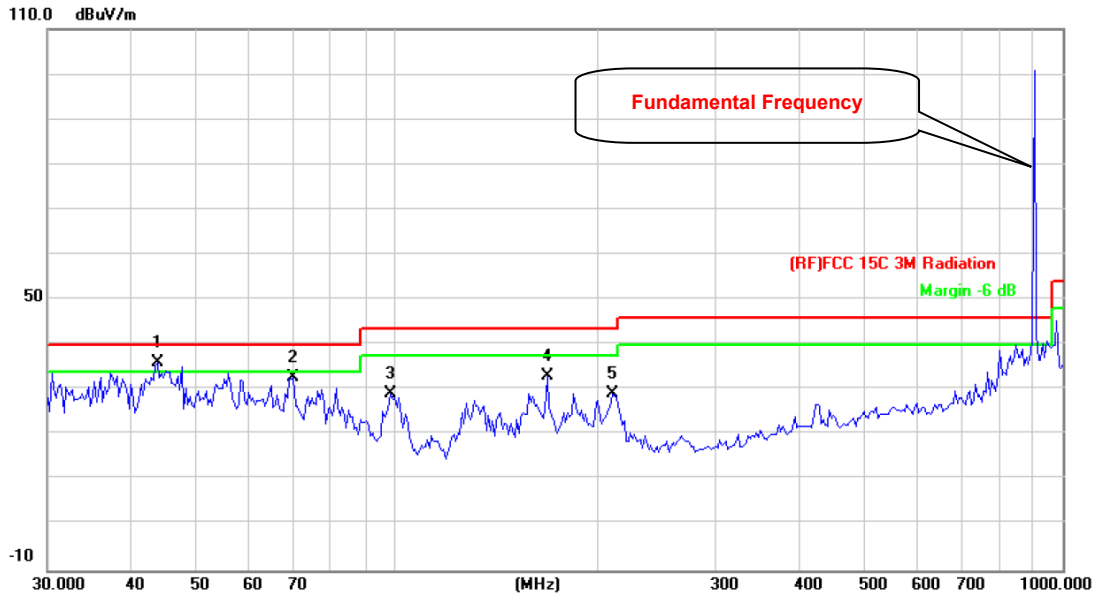


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	43.8119	57.35	-21.33	36.02	40.00	-3.98	peak
2		70.0903	56.30	-23.69	32.61	40.00	-7.39	peak
3		98.1419	51.47	-22.21	29.26	43.50	-14.24	peak
4		168.4138	53.78	-20.72	33.06	43.50	-10.44	peak
5		210.7860	48.65	-19.49	29.16	43.50	-14.34	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (904.5MHz-Antenna 2)		
Remark:	Only worse case is reported.		

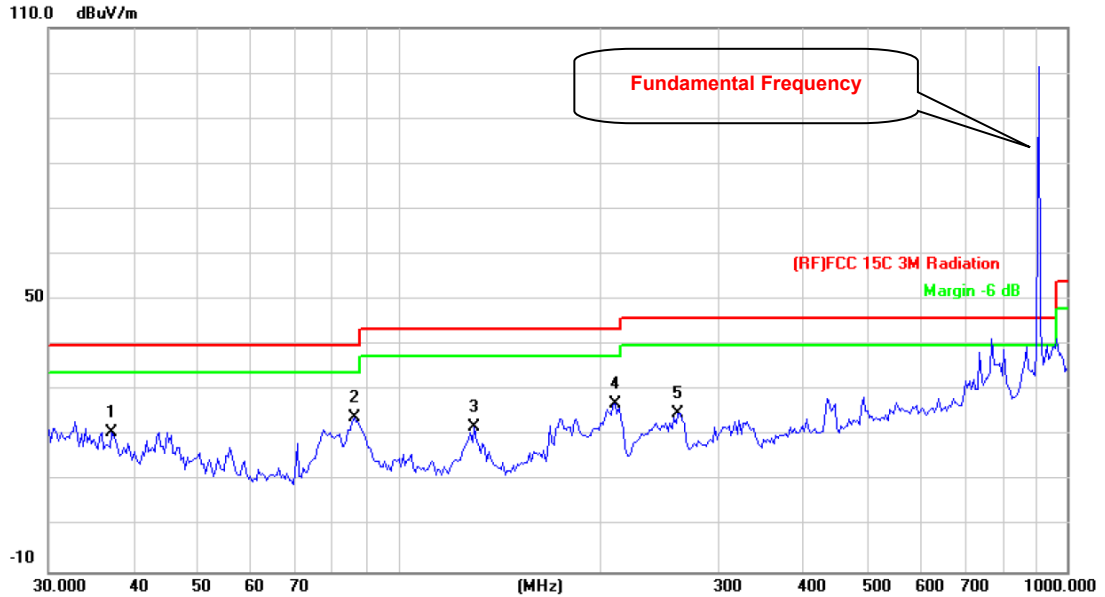


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		37.2855	39.05	-18.20	20.85	40.00	-19.15	peak
2	*	85.8984	46.45	-22.34	24.11	40.00	-15.89	peak
3		129.9226	44.42	-22.57	21.85	43.50	-21.65	peak
4		210.7860	46.48	-19.49	26.99	43.50	-16.51	peak
5		261.9753	42.15	-17.06	25.09	46.00	-20.91	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (904.5MHz-Antenna 2)		
Remark:	Only worse case is reported.		

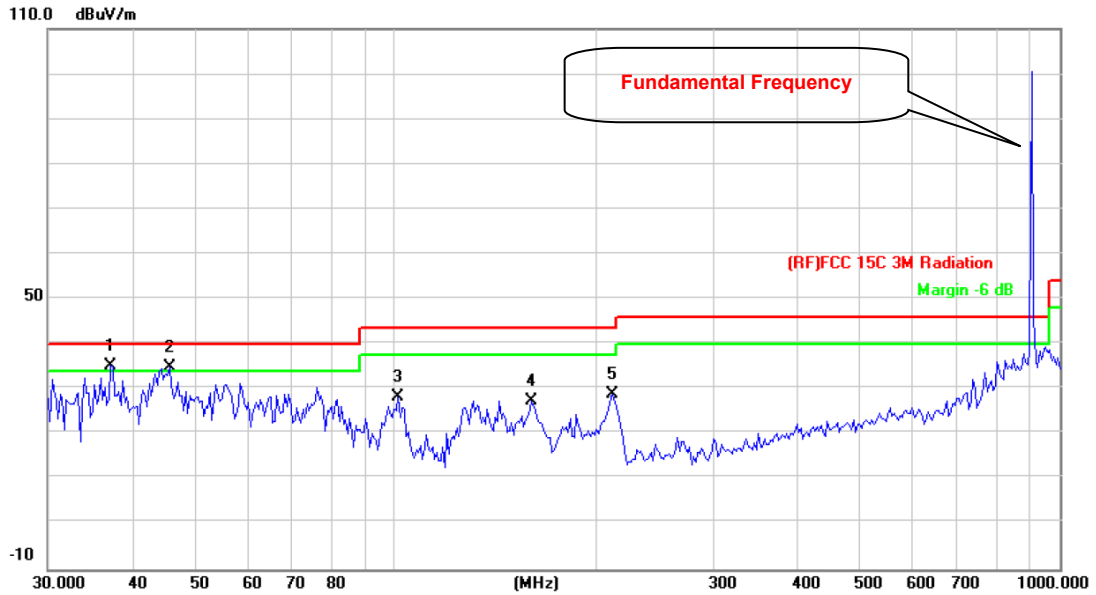


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	37.2855	53.35	-18.20	35.15	40.00	-4.85	peak
2	!	45.6948	57.14	-22.14	35.00	40.00	-5.00	peak
3		100.9339	50.52	-22.28	28.24	43.50	-15.26	peak
4		160.3456	48.44	-21.00	27.44	43.50	-16.06	peak
5		212.2695	48.41	-19.41	29.00	43.50	-14.50	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (905.3MHz-Antenna 2)		
Remark:	Only worse case is reported.		

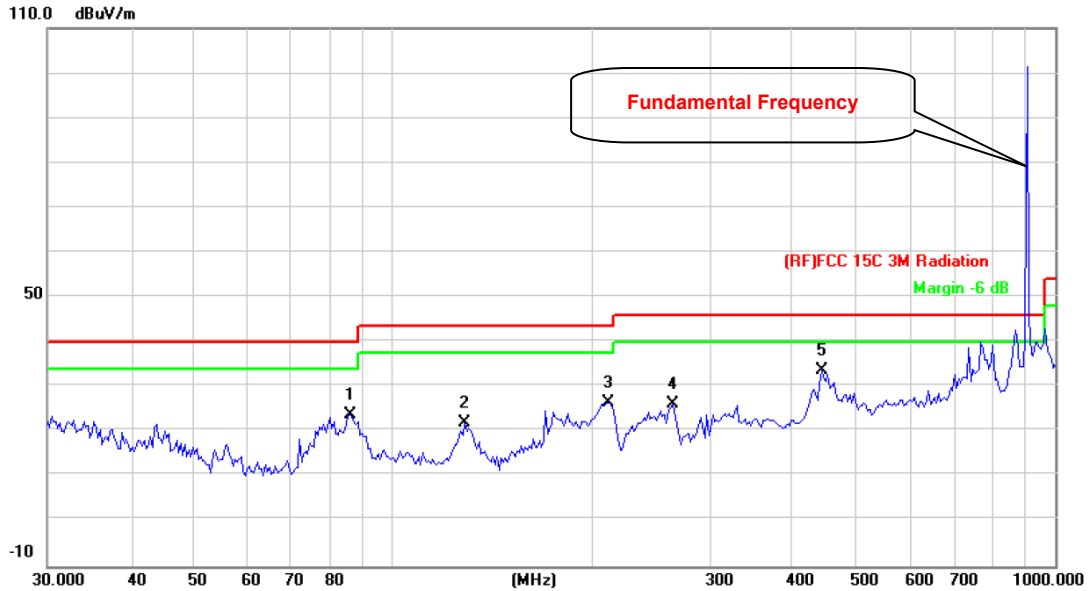


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		85.8983	45.98	-22.34	23.64	40.00	-16.36	peak
2		128.1129	44.60	-22.55	22.05	43.50	-21.45	peak
3		210.7860	45.94	-19.49	26.45	43.50	-17.05	peak
4		263.8190	43.18	-17.02	26.16	46.00	-19.84	peak
5	*	443.2943	45.71	-12.13	33.58	46.00	-12.42	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (905.3MHz-Antenna 2)		
Remark:	Only worse case is reported.		

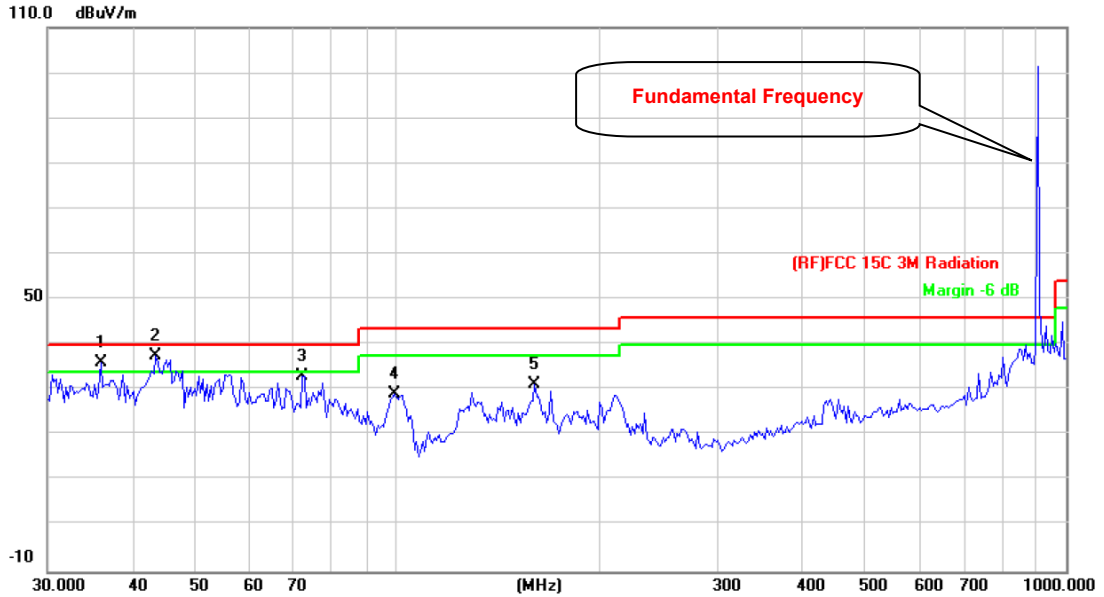


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	!	36.0007	53.70	-17.60	36.10	40.00	-3.90	peak
2	*	43.5057	58.70	-21.18	37.52	40.00	-2.48	peak
3		72.0843	56.51	-23.48	33.03	40.00	-6.97	peak
4		98.8326	51.48	-22.23	29.25	43.50	-14.25	peak
5		160.3456	52.20	-21.00	31.20	43.50	-12.30	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (903.9MHz-Antenna 3)		
Remark:	Only worse case is reported.		

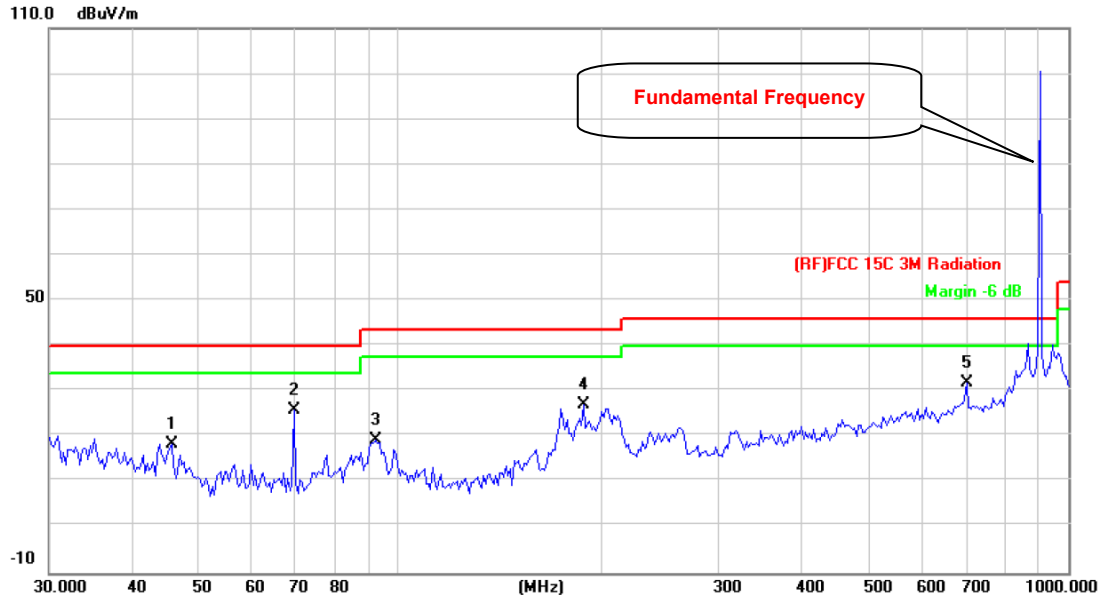


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		45.6948	40.58	-22.14	18.44	40.00	-21.56	peak
2	*	69.6005	49.67	-23.73	25.94	40.00	-14.06	peak
3		92.1388	41.43	-22.14	19.29	43.50	-24.21	peak
4		188.4125	46.95	-20.02	26.93	43.50	-16.57	peak
5		704.2261	38.49	-6.74	31.75	46.00	-14.25	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (903.9MHz-Antenna 3)		
Remark:	Only worse case is reported.		

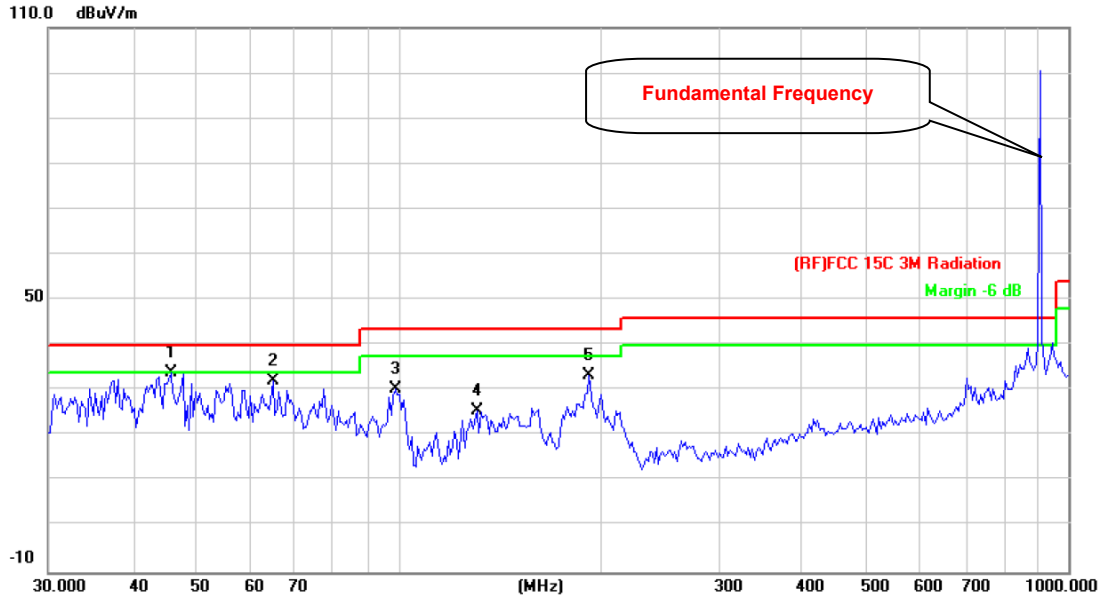


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	45.6948	55.98	-22.14	33.84	40.00	-6.16	peak
2		64.8865	56.20	-24.17	32.03	40.00	-7.97	peak
3		98.8326	52.59	-22.23	30.36	43.50	-13.14	peak
4		130.8369	48.04	-22.58	25.46	43.50	-18.04	peak
5		192.4186	53.19	-19.99	33.20	43.50	-10.30	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (904.5MHz-Antenna 3)		
Remark:	Only worse case is reported.		

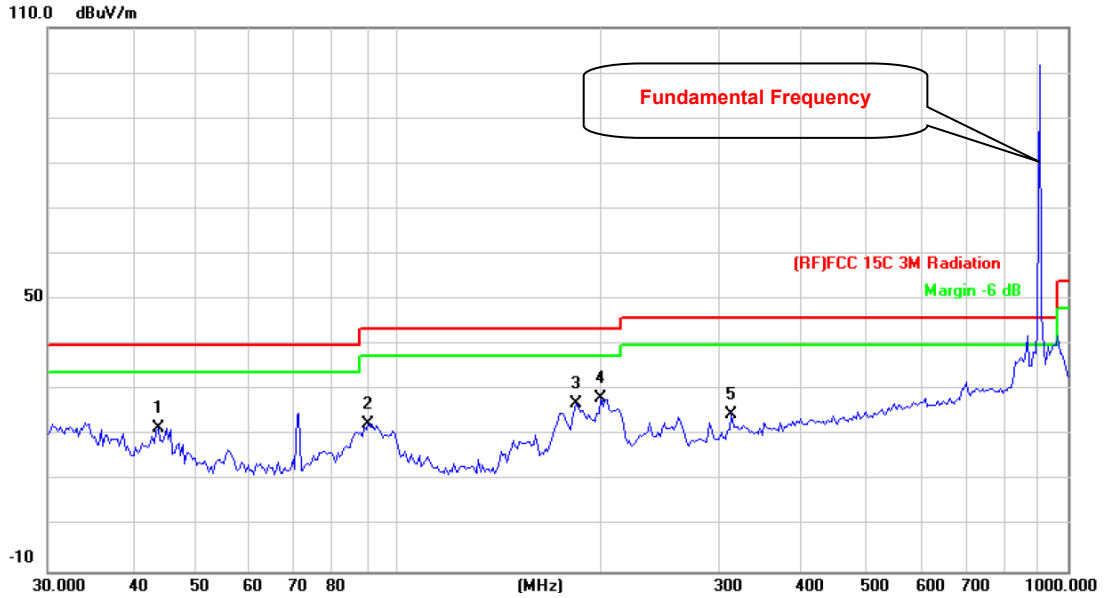


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		43.8119	43.04	-21.33	21.71	40.00	-18.29	peak
2		90.2205	44.55	-22.11	22.44	43.50	-21.06	peak
3		184.4898	47.28	-20.16	27.12	43.50	-16.38	peak
4	*	200.6881	48.39	-20.06	28.33	43.50	-15.17	peak
5		314.3765	40.45	-15.83	24.62	46.00	-21.38	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (904.5MHz-Antenna 3)		
Remark:	Only worse case is reported.		

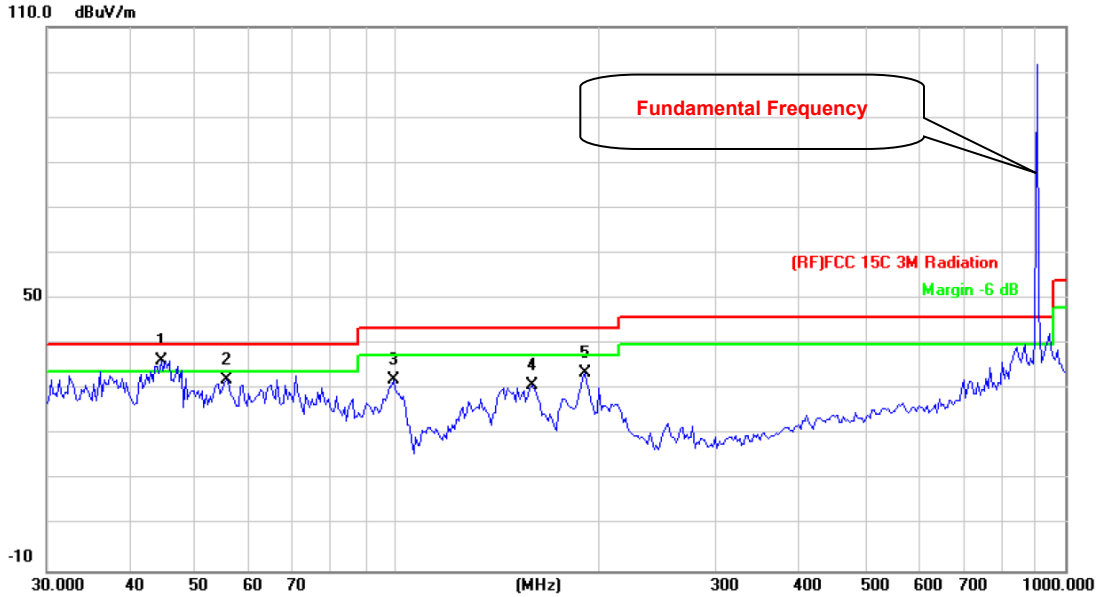


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	44.4308	58.11	-21.64	36.47	40.00	-3.53	peak
2		55.6094	56.44	-24.14	32.30	40.00	-7.70	peak
3		98.8326	54.29	-22.23	32.06	43.50	-11.44	peak
4		159.2251	51.97	-21.06	30.91	43.50	-12.59	peak
5		191.0738	53.74	-19.96	33.78	43.50	-9.72	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	Mode 2 (905.3MHz-Antenna 3)		
Remark:	Only worse case is reported.		

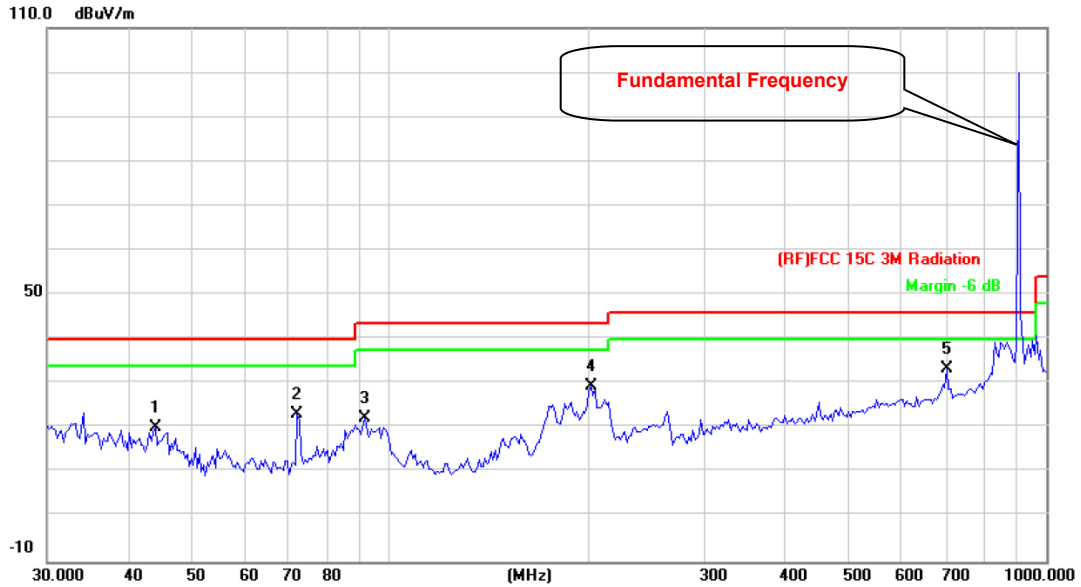


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		43.8119	41.58	-21.33	20.25	40.00	-19.75	peak
2		72.0843	46.59	-23.48	23.11	40.00	-16.89	peak
3		91.4949	44.50	-22.13	22.37	43.50	-21.13	peak
4		202.1005	49.39	-19.98	29.41	43.50	-14.09	peak
5	*	704.2261	40.19	-6.74	33.45	46.00	-12.55	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.9°C	Relative Humidity:	44%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	Mode 2 (905.3MHz-Antenna 3)		
Remark:	Only worse case is reported.		

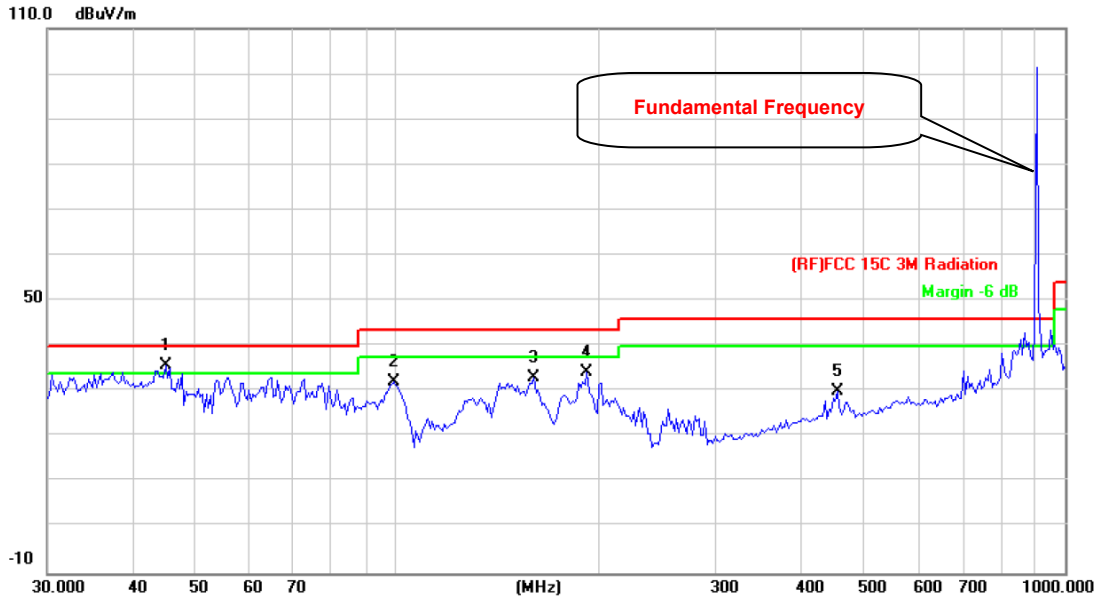

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	45.0583	57.73	-21.92	35.81	40.00	-4.19	peak
2		98.8326	54.28	-22.23	32.05	43.50	-11.45	peak
3		160.3456	54.13	-21.00	33.13	43.50	-10.37	peak
4		192.4186	54.34	-19.99	34.35	43.50	-9.15	peak
5		455.9058	42.08	-11.92	30.16	46.00	-15.84	peak

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Above 1GHz(only show the worst case Mid CH antenna 2)

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX 905.3MHz-Antenna 2		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		1808.812	52.85	-2.22	50.63	74.00	-23.37	peak
2	*	1808.968	37.87	-2.21	35.66	54.00	-18.34	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-10GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.

Temperature:	23.2°C	Relative Humidity:	41%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX 905.3MHz-Antenna 2		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	1808.546	53.58	-2.22	51.36	74.00	-22.64	peak
2		1809.044	33.46	-2.21	31.25	74.00	-42.75	peak

Remark:


1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)
4. The tests evaluated1-10GHz,The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.

---Conduction Unwanted Emissions


Tx. Spurious NVNT LoRa 903.9MHz Ant1 Ref

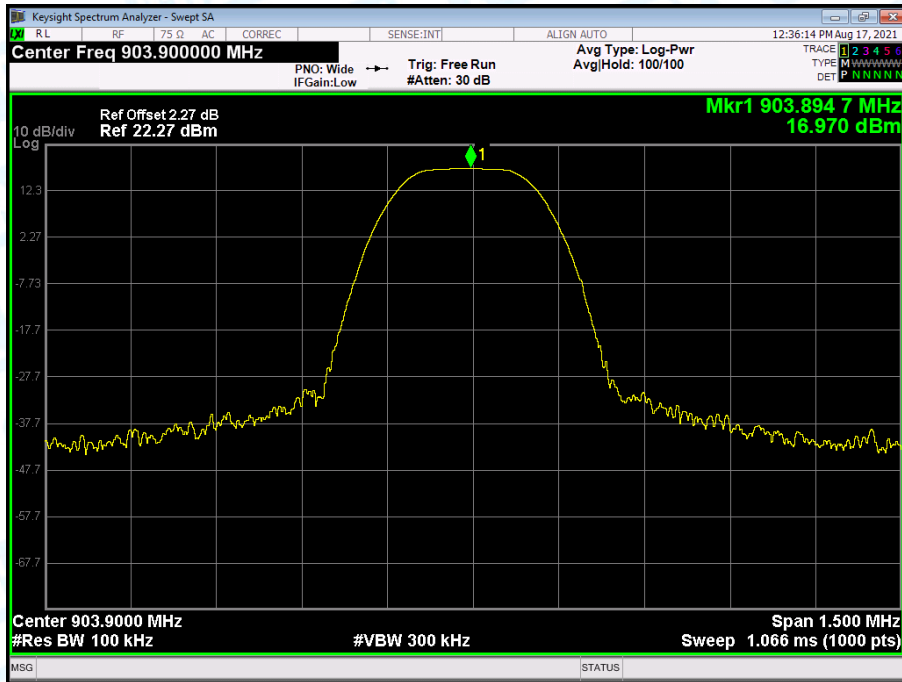


Tx. Spurious NVNT LoRa 903.9MHz Ant1 Emission

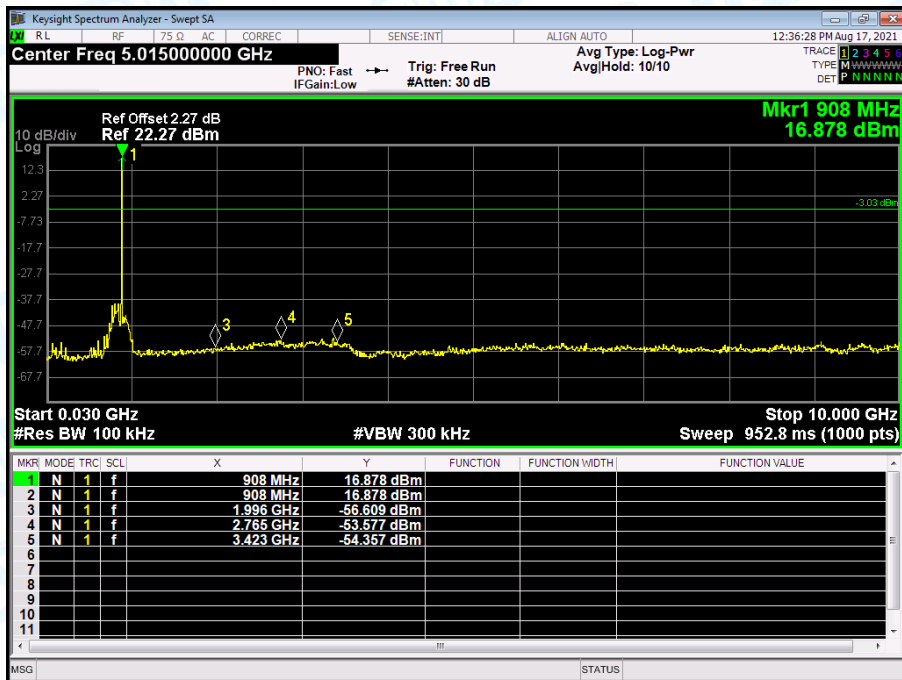

Tx. Spurious NVNT LoRa 905.3MHz Ant1 Ref

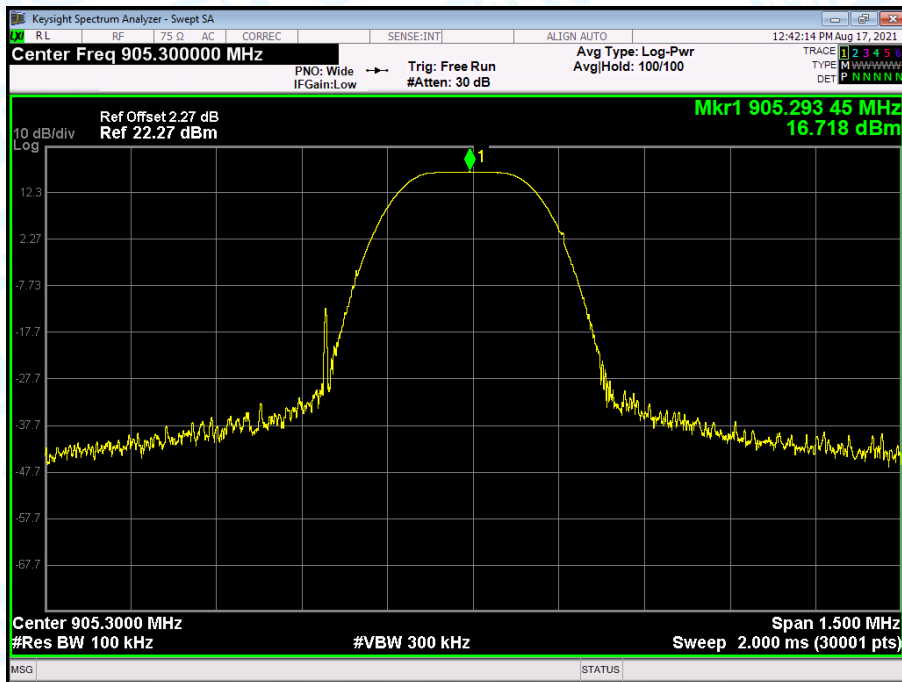


Tx. Spurious NVNT LoRa 905.3MHz Ant1 Emission

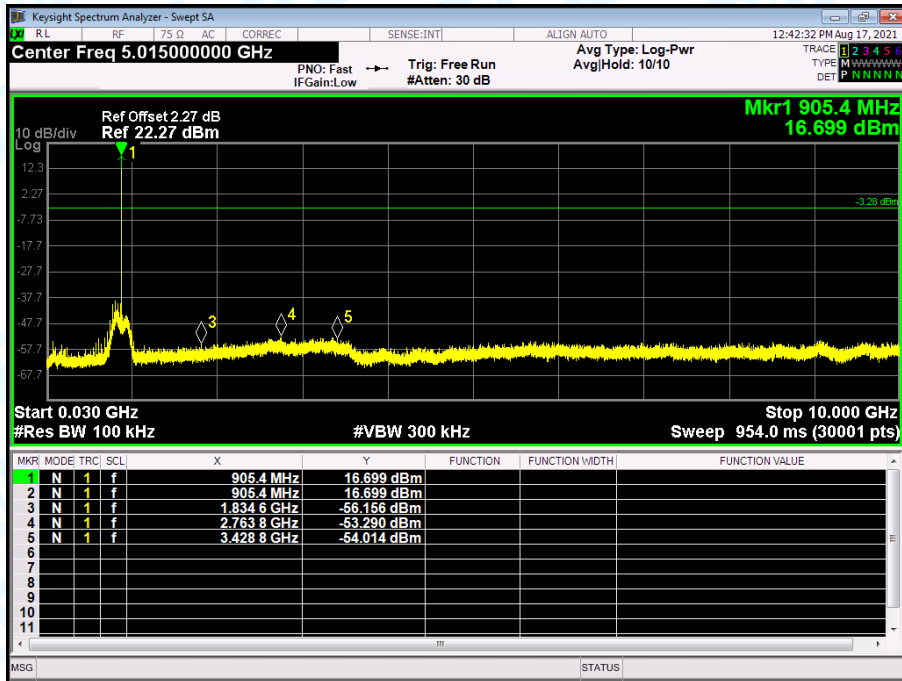


Attachment C—Emissions In Nonrestricted Frequency Data


Band Edge NVNT LoRa 903.9MHz Ant1 Ref

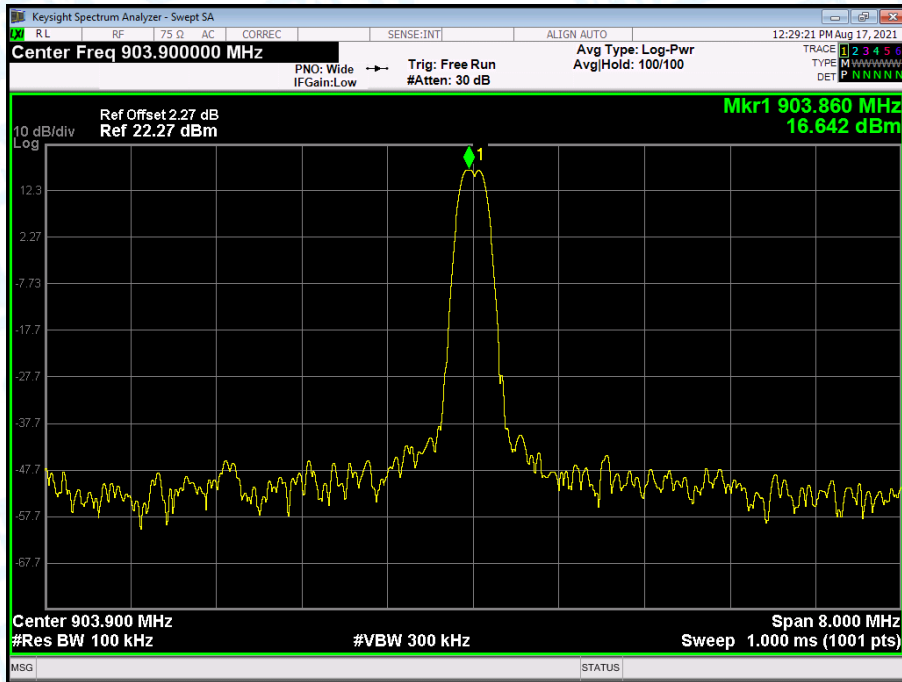


Band Edge NVNT LoRa 903.9MHz Ant1 Emission

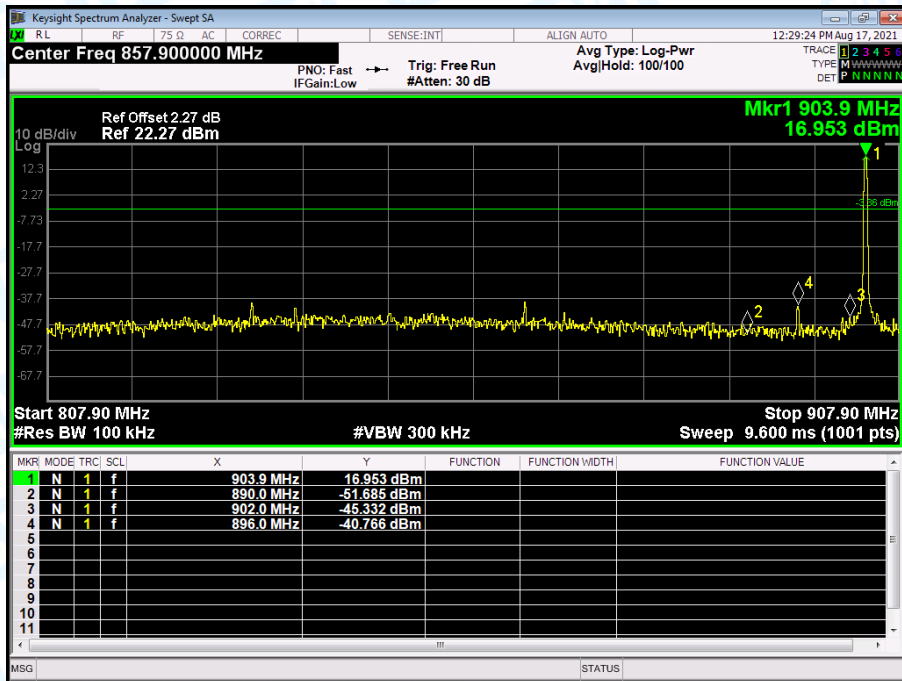


Band Edge NVNT LoRa 905.3MHz Ant1 Ref

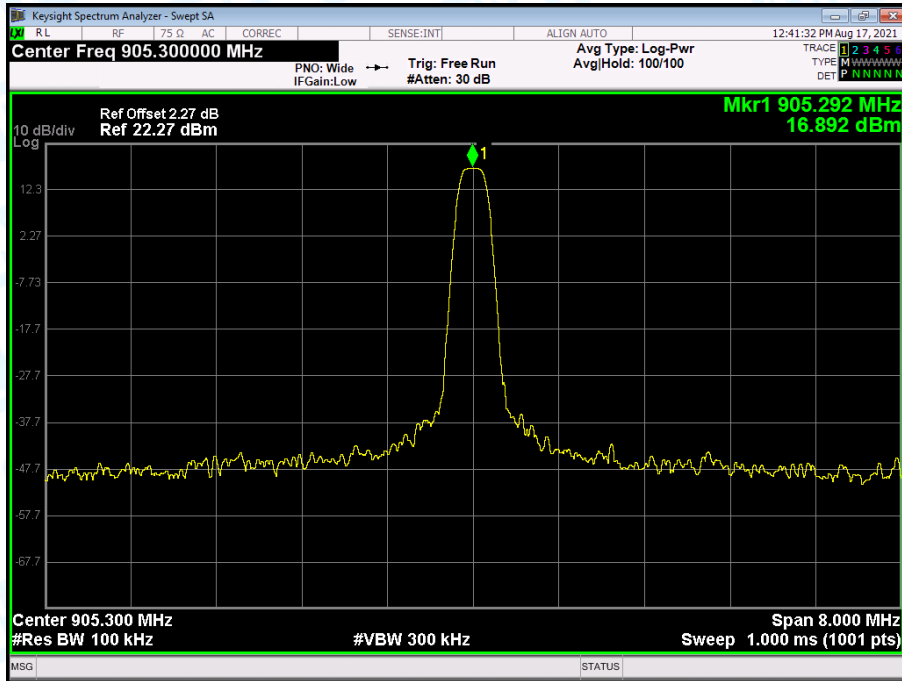


Band Edge NVNT LoRa 905.3MHz Ant1 Emission

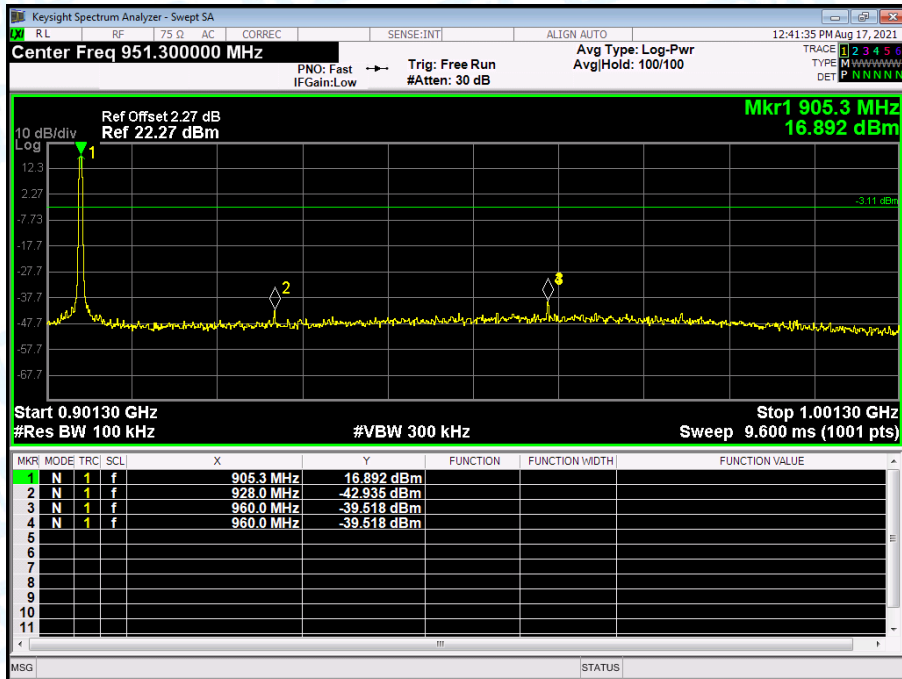


Band Edge(Hopping) NVNT LoRa 903.9MHz Ant1 Ref

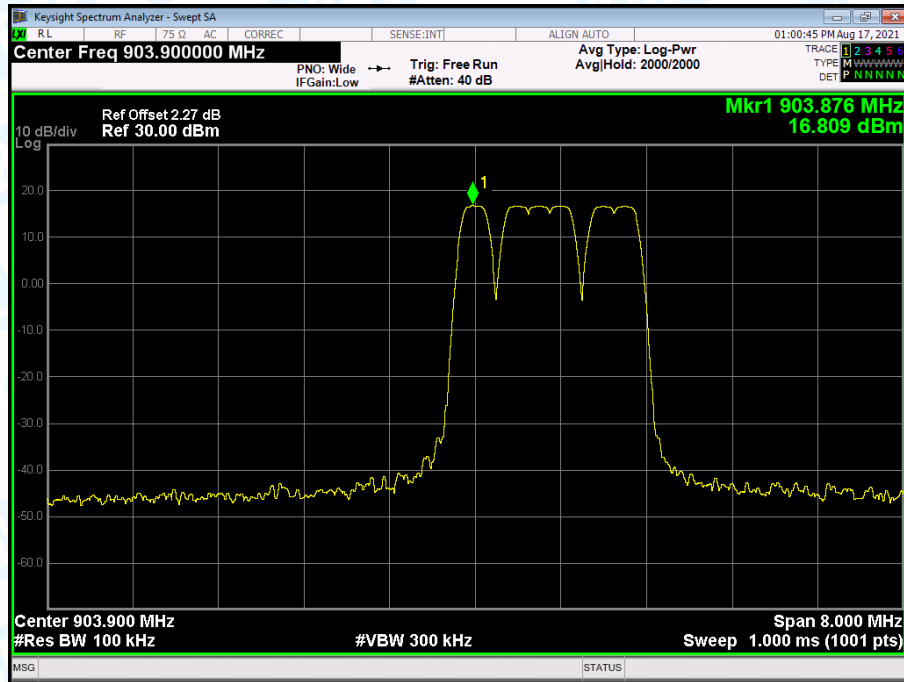


Band Edge(Hopping) NVNT LoRa 903.9MHz Ant1 Hopping Emission

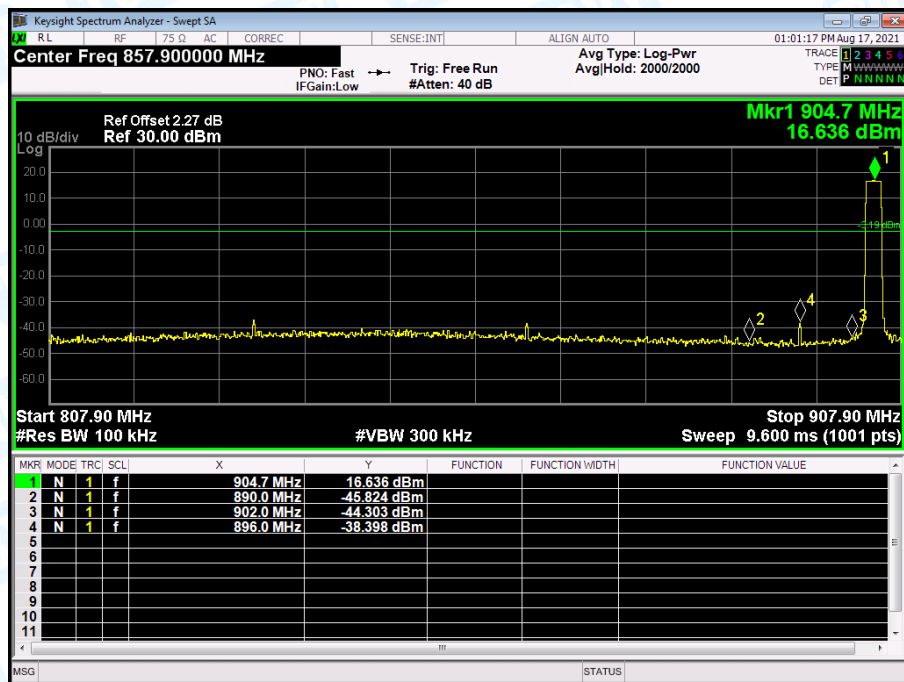

Band Edge(Hopping) NVNT LoRa 905.3MHz Ant1 Ref

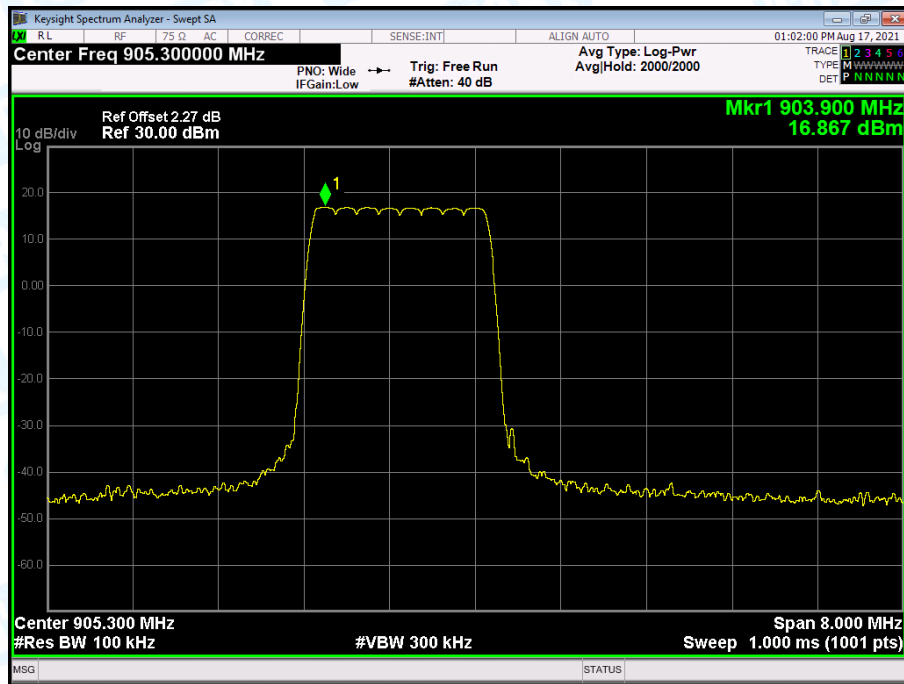


Band Edge(Hopping) NVNT LoRa 905.3MHz Ant1 Hopping Emission

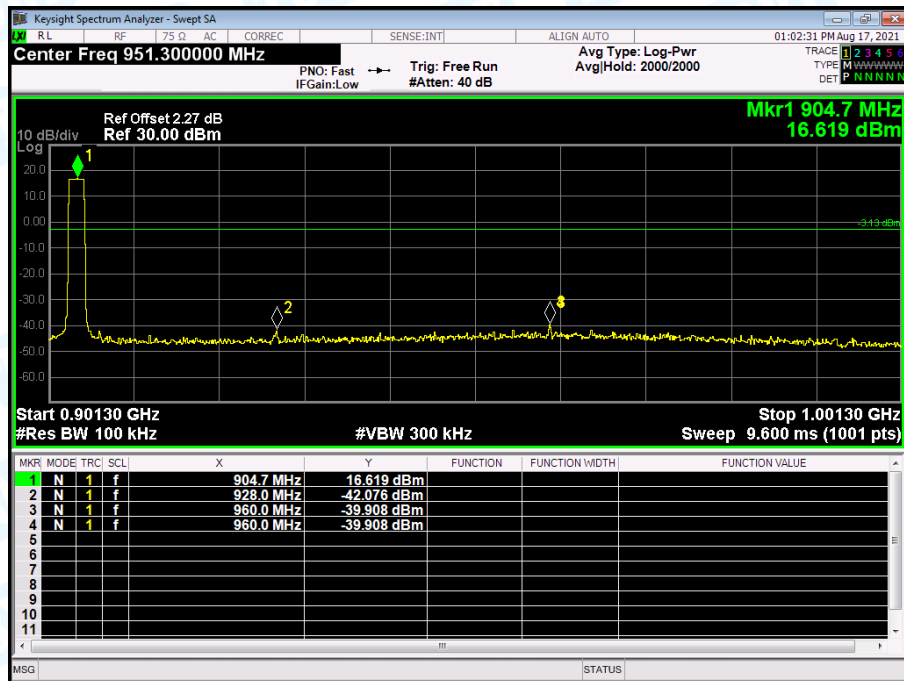


Attachment D—99% Occupied and 20dB Bandwidth Data

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode		
Channel frequency (MHz)	20dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)	Limit (kHz)
903.9	196.8	131.20	/
904.5	208.3	138.67	
905.3	198.8	132.53	


903.9MHz

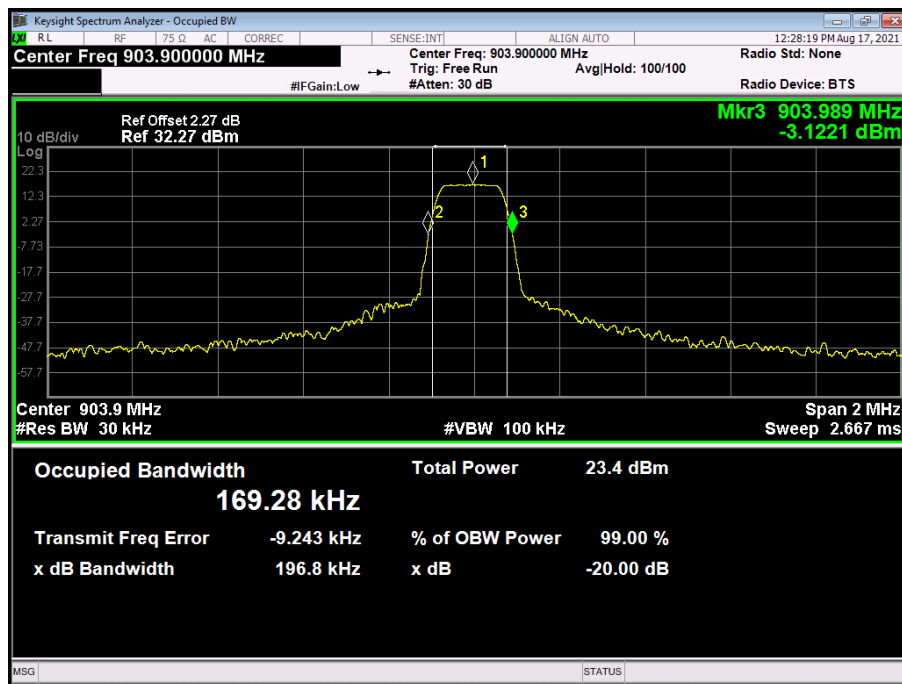

904.5MHz

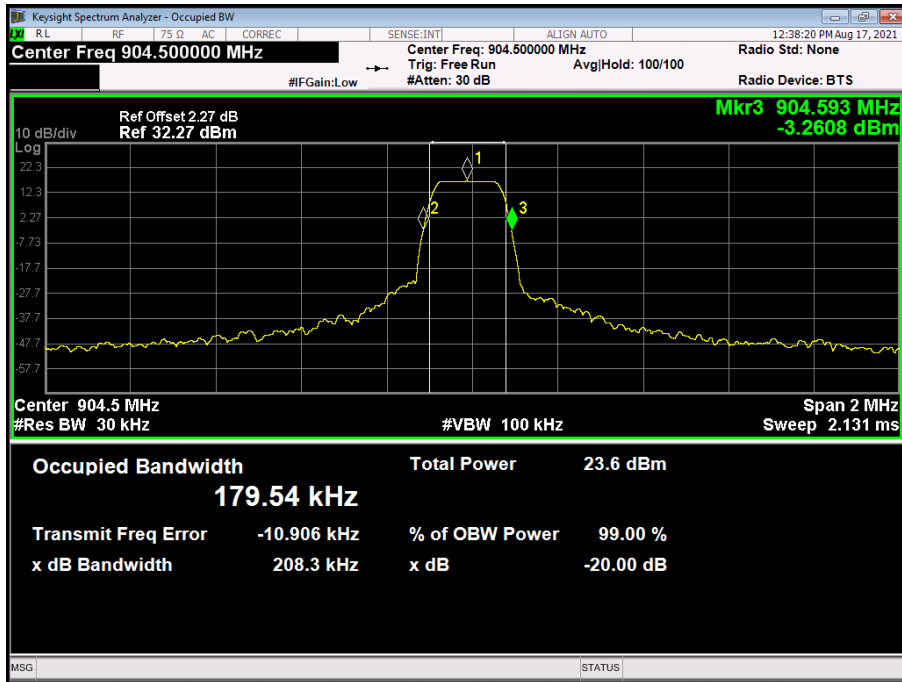

905.3MHz

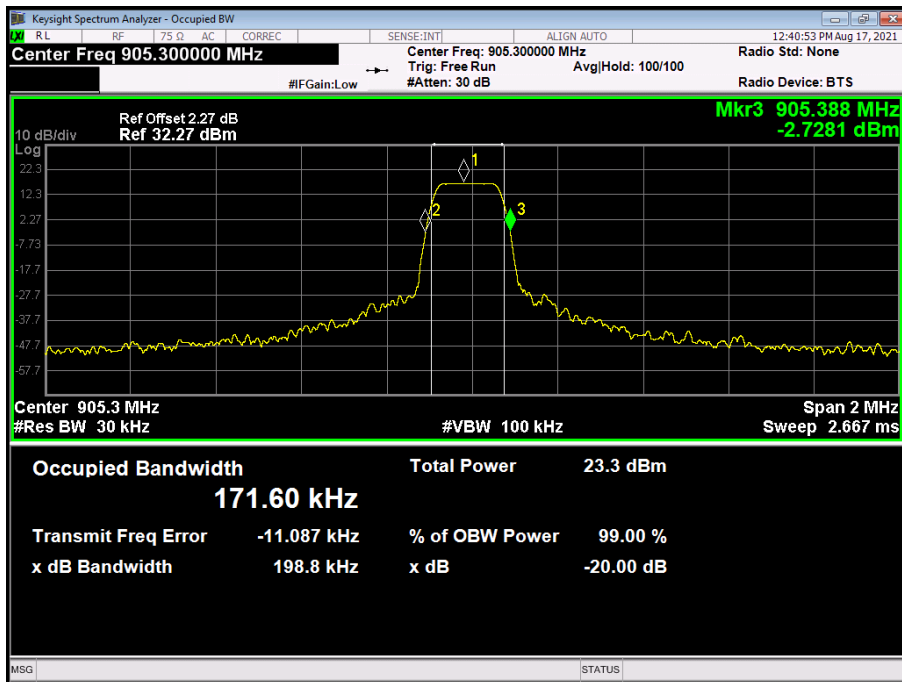


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode		
Channel frequency (MHz)	99% Bandwidth (kHz)		Limit (kHz)
903.9	127.54		/
904.5	127.66		
905.3	127.23		


903.9MHz



904.5MHz

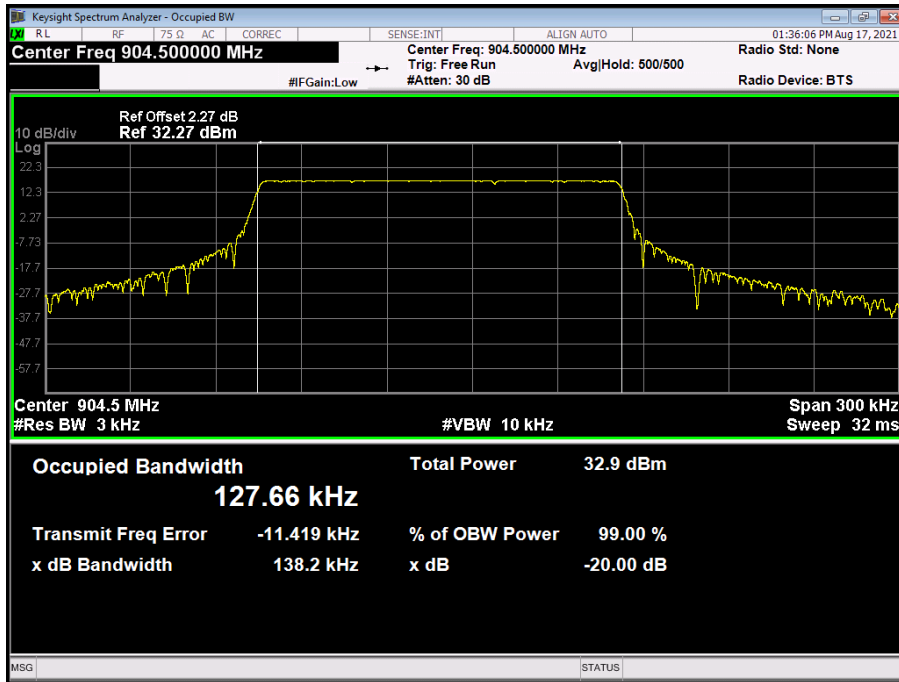


905.3MHz

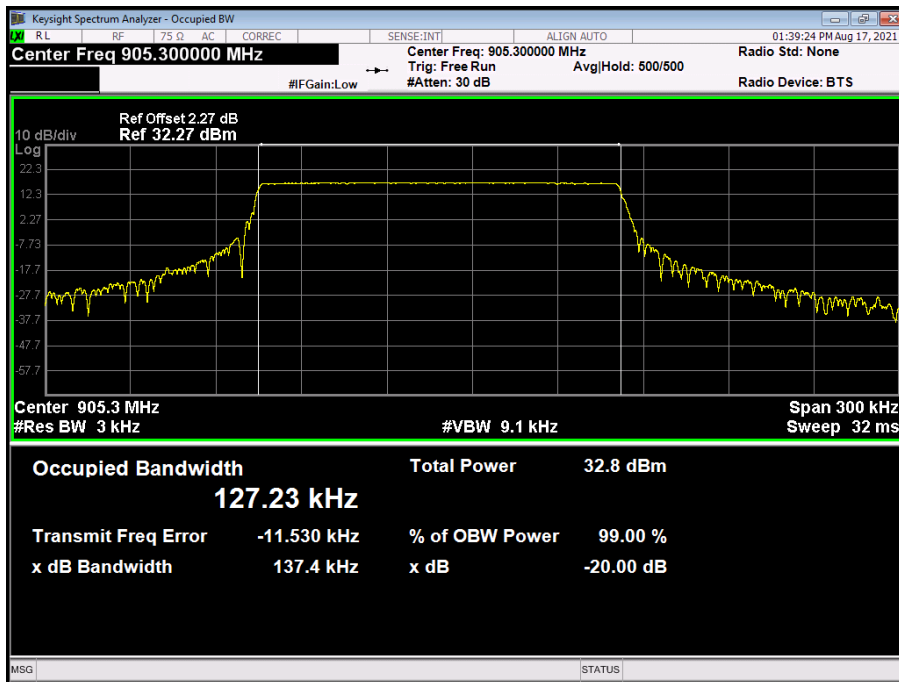


Attachment E—Peak Output Power Data

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
903.9	17.239	21	
904.5	17.336		
905.3	17.406		


903.9MHz

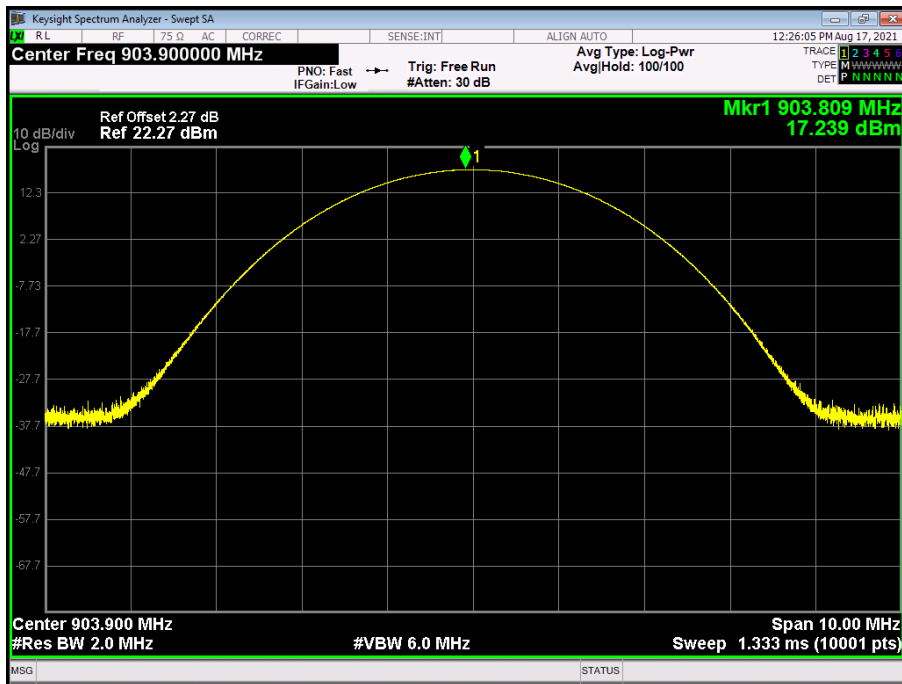

904.5MHz

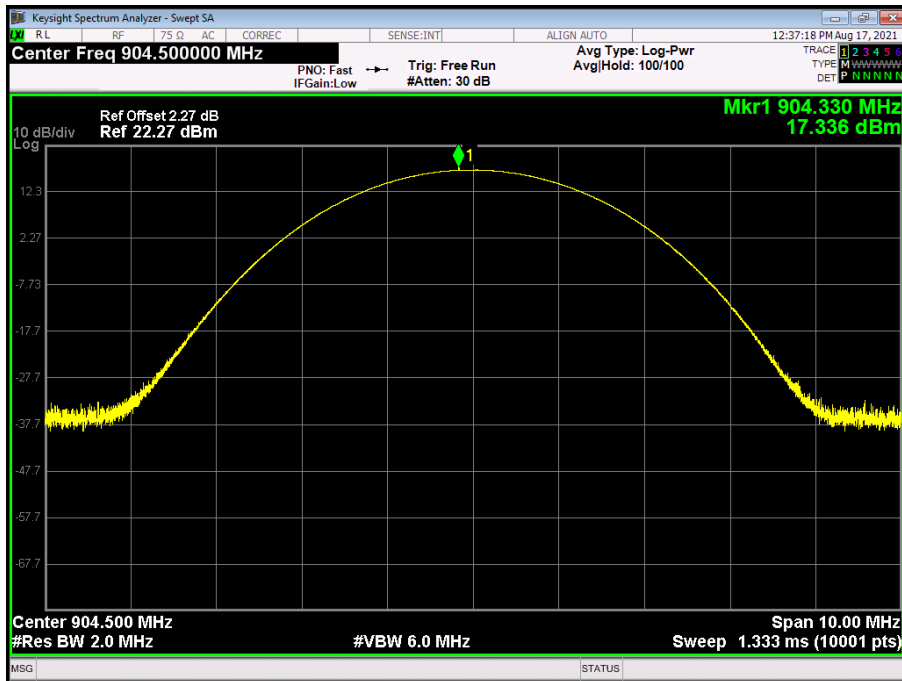


905.3MHz

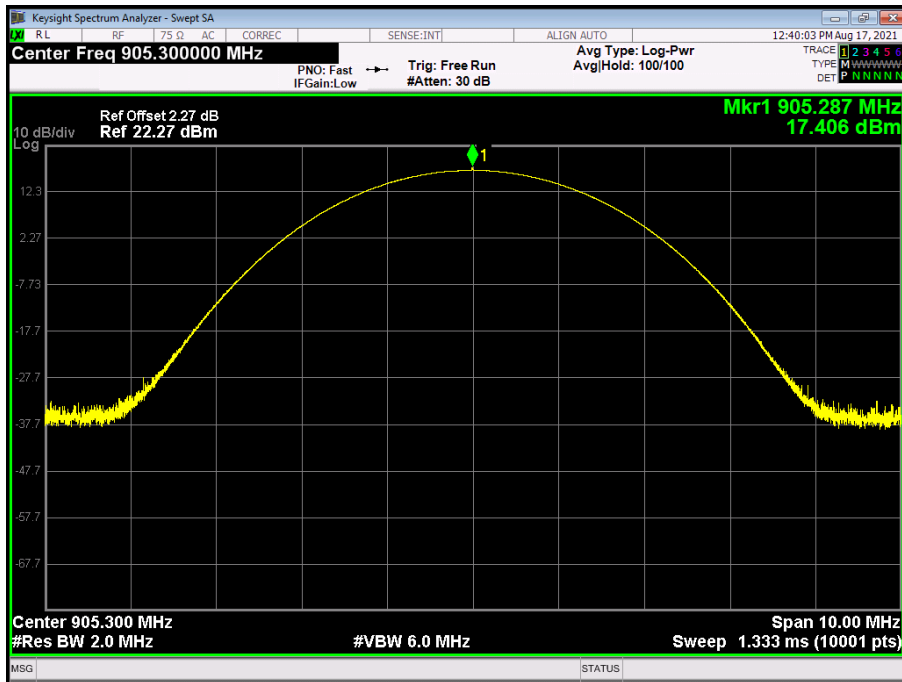


Attachment F—Power Spectral Density Data

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode		
Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
903.9	7.100	8	PASS
904.5	6.362		
905.3	6.875		


903.9MHz

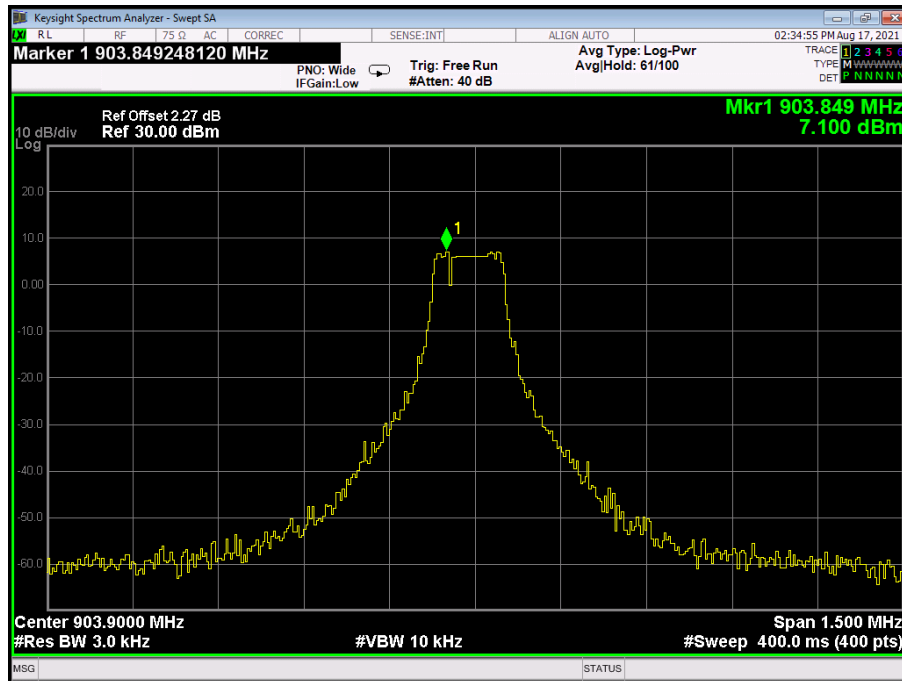

904.5MHz

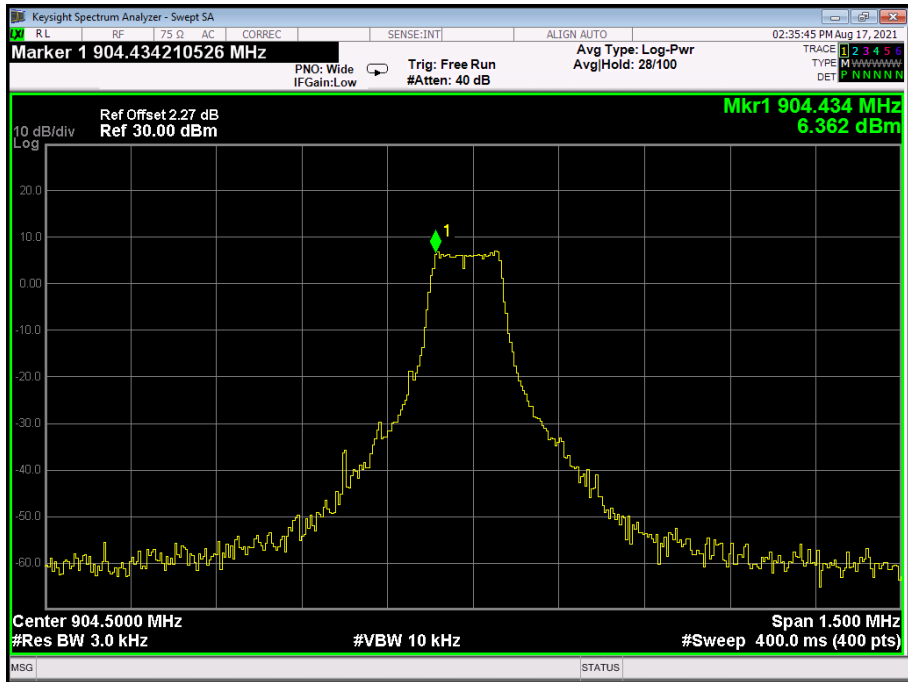


905.3MHz

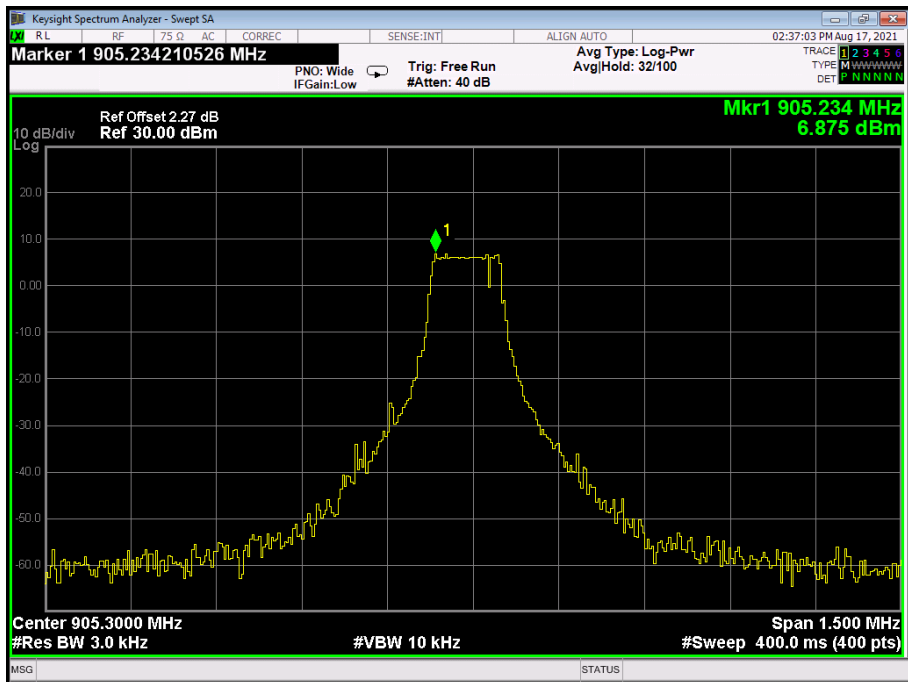

Attachment G—Carrier Frequency Separation Data

Temperature:	25°C	Relative Humidity:	55%																																																																																																												
Test Voltage:	AC 120V/60Hz																																																																																																														
Test Mode:	Hopping Mode																																																																																																														
Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit (kHz)																																																																																																													
903.9	201.5	131.20																																																																																																													
904.5	200.5	138.67																																																																																																													
905.3	200.5	132.53																																																																																																													
Hopping Mode																																																																																																															
903.9 MHz																																																																																																															
<p>Keysight Spectrum Analyzer - Swept SA Marker 1 Δ 201.500000 kHz Ref Offset 2.27 dB Ref 30.00 dBm ΔMkr1 201.5 kHz -0.143 dB Center 904.0000 MHz #Res BW 30 kHz #VBW 100 kHz Span 500.0 kHz Sweep 1.000 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC1</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>201.5 kHz</td> <td>(Δ)</td> <td></td> <td>-0.143 dB</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td></td> <td>903.8815 MHz</td> <td></td> <td></td> <td>16.694 dBm</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>				MKR	MODE	TRC1	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	f	(Δ)	201.5 kHz	(Δ)		-0.143 dB	2	N	1	f		903.8815 MHz			16.694 dBm	3									4									5									6									7									8									9									10									11								
MKR	MODE	TRC1	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																							
1	Δ2	1	f	(Δ)	201.5 kHz	(Δ)		-0.143 dB																																																																																																							
2	N	1	f		903.8815 MHz			16.694 dBm																																																																																																							
3																																																																																																															
4																																																																																																															
5																																																																																																															
6																																																																																																															
7																																																																																																															
8																																																																																																															
9																																																																																																															
10																																																																																																															
11																																																																																																															

Hopping Mode
904.5MHz

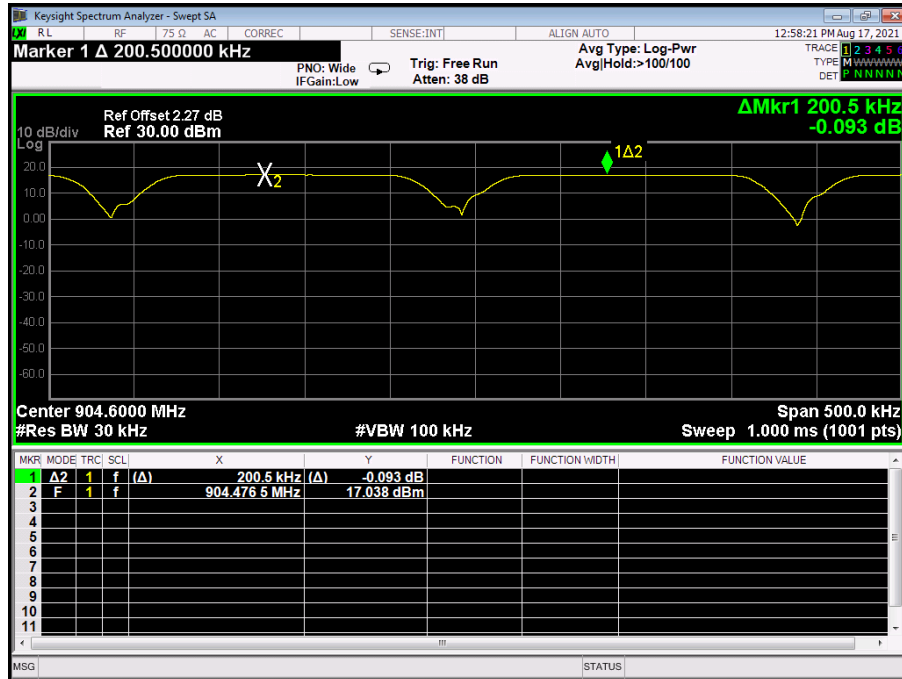


Hopping Mode
905.3MHz




Attachment H—Time of Occupancy(Dwell Time) Data

Test Mode	Number of Channel	Observation Period (0.4s* Number of Channel)(s)	Max. Duration of Each Bust (s)	Number of Burst Repetition During Observation Period	Average Time of Occupancy on any Channel	Limit (s)
Hopping Mode	8	3.2	0.05214	2	0.10428	0.4

Burst Duration

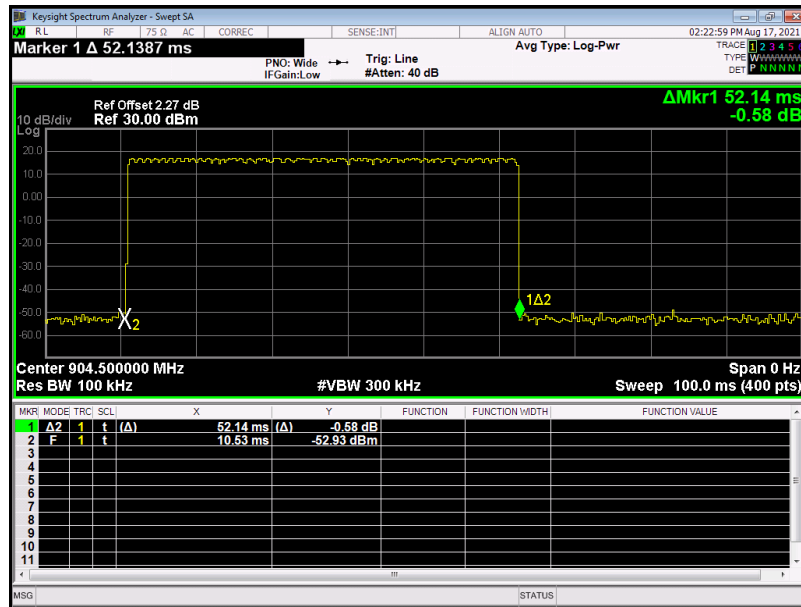


Burst Repetition During Observation Period Duration

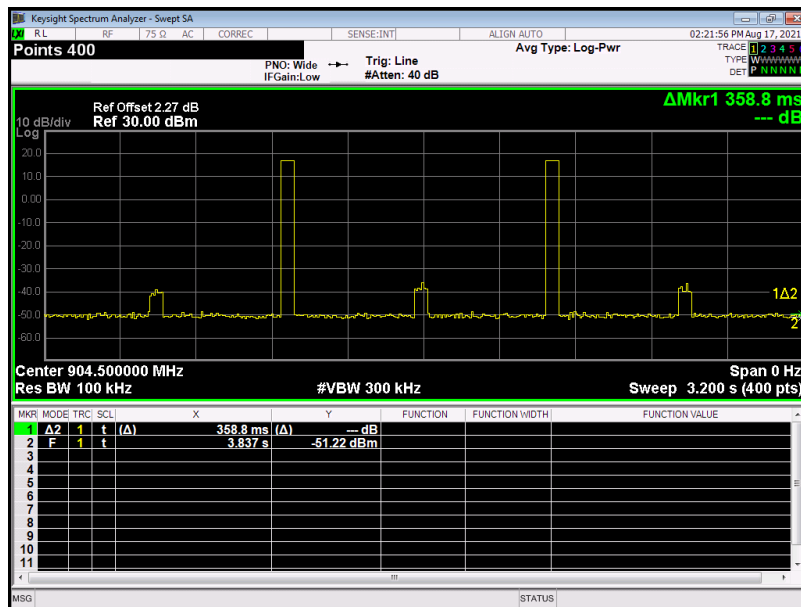

Attachment I—Number of Hopping Frequency

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	Hopping Mode		
Frequency Range	Test Mode	Quantity of Hopping Channel	Limit
902MHz~928MHz	LoRa	8	/

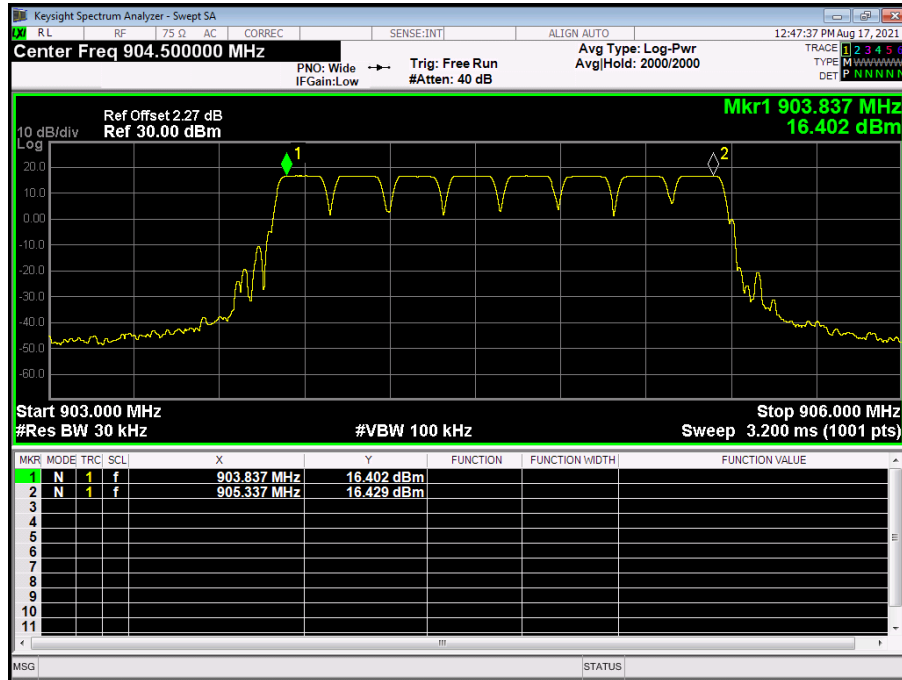

Note: The EUT is hybrid system and there is no minimum number of hopping channels associated with this type of hybrid system.

-----END OF REPORT-----