


# TEST REPORT

Product Name: OBDII Diagnostic interface  
FCC ID: 2A49X-VGATEICAR  
Trademark: Vgate,VLinker  
Model Number: Vgate iCar Pro WiFi, Vgate iCar2 WiFi,Vgate iCar3 WiFi  
Prepared For: Shenzhen CheBoTong Technology co., Ltd  
Address: 5C, 5th Floor, Building 2, Peninsula Chengbang Garden Phase II, Jinshiji Road, Dongjiaotou, Shekou Street, Nanshan District, Shenzhen China  
Manufacturer: Shenzhen CheBoTong Technology co., Ltd  
Address: 5C, 5th Floor, Building 2, Peninsula Chengbang Garden Phase II, Jinshiji Road, Dongjiaotou, Shekou Street, Nanshan District, Shenzhen China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China  
Sample Received Date: Feb. 26, 2022  
Sample tested Date: Feb. 26, 2022 to Mar. 04, 2022  
Issue Date: Mar. 04, 2022  
Report No.: CTB220302020RFX  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. This report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION</b> .....	4
<b>2. TEST SUMMARY</b> .....	5
<b>3. MEASUREMENT UNCERTAINTY</b> .....	6
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	8
4.3 Support Equipment .....	8
4.4 Channel List .....	8
4.5 Test Mode .....	9
4.6 Test Environment .....	9
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	10
5.1 Test Facility .....	10
5.2 Test Instrument Used .....	10
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	13
6.1 Block Diagram Of Test Setup .....	13
6.2 Limit .....	13
6.3 Test procedure .....	13
6.4 Test Result .....	15
<b>7. RADIATED SPURIOUS EMISSION</b> .....	17
7.1 Block Diagram Of Test Setup .....	17
7.2 Limit .....	17
7.3 Test procedure .....	18
7.4 Test Result .....	19
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	41
8.1 Block Diagram Of Test Setup .....	41
8.2 Limit .....	41
8.3 Test procedure .....	41
8.4 Test Result .....	42
<b>9. CONDUCTED OUTPUT POWER</b> .....	50
9.1 Block Diagram Of Test Setup .....	50
9.2 Limit .....	50
9.3 Test procedure .....	50
9.4 Test Result .....	51
<b>10. 6DB OCCUPIED BANDWIDTH</b> .....	52
10.1 Block Diagram Of Test Setup .....	52
10.2 Limit .....	52
10.3 Test procedure .....	52
10.4 Test Result .....	53
<b>11. POWER SPECTRAL DENSITY</b> .....	58
11.1 Block Diagram Of Test Setup .....	58
11.2 Limit .....	58
11.3 Test procedure .....	58

11.4 Test Result ..... 59

**12. ANTENNA REQUIREMENT ..... 64**

**13. EUT PHOTOGRAPHS ..... 65**

**14. EUT TEST SETUP PHOTOGRAPHS ..... 66**

*(Note: N/A means not applicable)*

## 1. VERSION

Report No.	Issue Date	Description	Approved
CTB220302020RFX	Mar. 04, 2022	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	N/A
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$
Conducted Emission (150KHz-30MHz)	3.2 dB

## 4. PRODUCT INFORMATION AND TEST SETUP

### 4.1 Product Information

Model(s):	Vgate iCar Pro WiFi, Vgate iCar2 WiFi, Vgate iCar3 WiFi
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: Vgate iCar Pro WiFi
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 7.35dBm
Type of Modulation:	WiFi: DSSS, OFDM, CCK
Antenna installation:	WiFi: PCB Antenna
Antenna Gain:	WiFi (2.4G) : 1.0dBi
Ratings:	DC 5V

### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer’s requirements and conditions for the intended use.

### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		



#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: Duty cycle > 98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

#### 4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):	5V
Normal Temperature(°C)	25
Low Temperature(°C)	0
High Temperature(°C)	50

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05


	software					
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.05
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-30 0 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.05
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

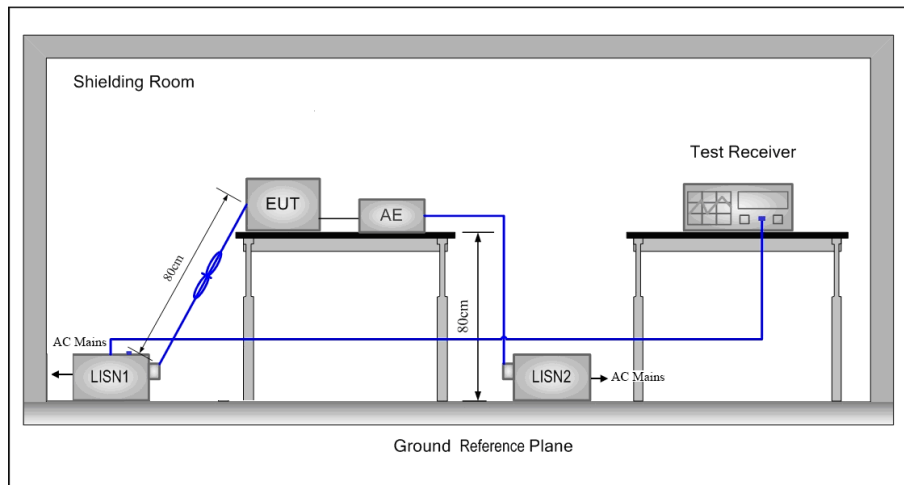

### 6.2 Limit

**Table 4 - AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed

0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

## 6.4 Test Result

L:

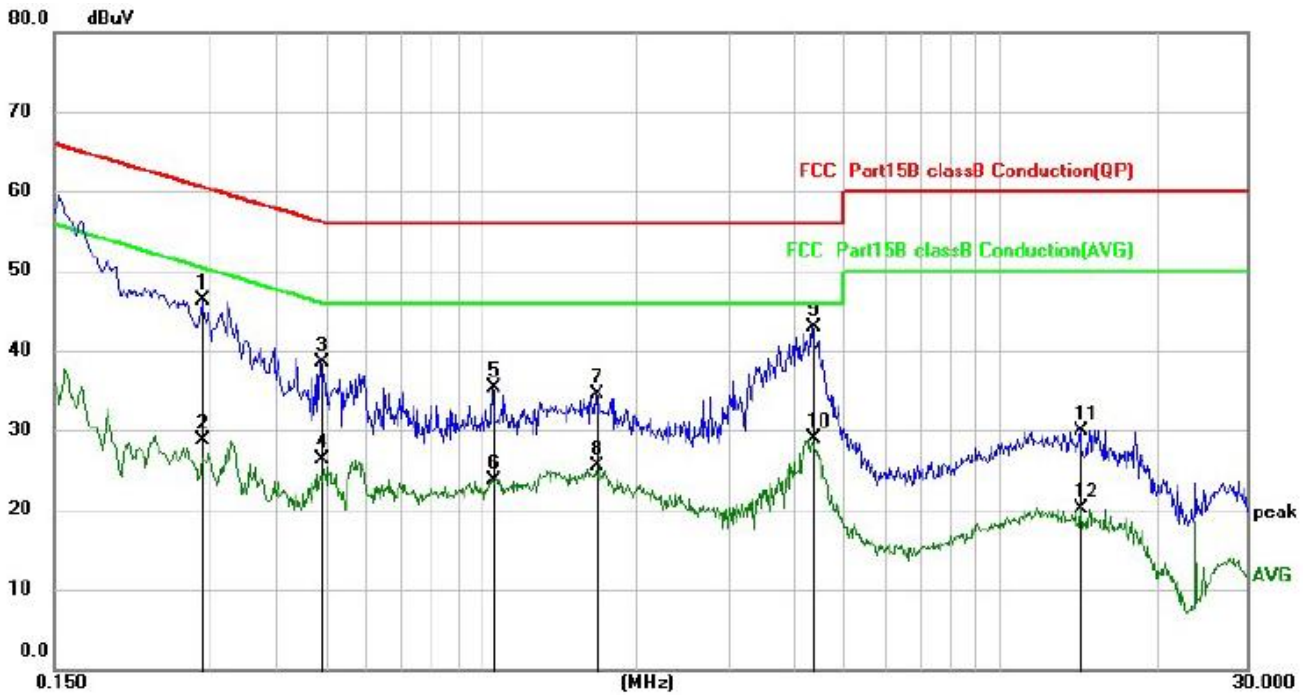


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.2900	35.63	10.64	46.27	60.52	-14.25	QP
2		0.2900	18.07	10.64	28.71	50.52	-21.81	AVG
3		0.4900	28.06	10.53	38.59	56.17	-17.58	QP
4		0.4900	15.71	10.53	26.24	46.17	-19.93	AVG
5		1.0500	24.73	10.62	35.35	56.00	-20.65	QP
6		1.0500	13.16	10.62	23.78	46.00	-22.22	AVG
7		1.6660	23.87	10.62	34.49	56.00	-21.51	QP
8		1.6660	14.79	10.62	25.41	46.00	-20.59	AVG
9	*	4.3500	32.29	10.65	42.94	56.00	-13.06	QP
10		4.3500	18.24	10.65	28.89	46.00	-17.11	AVG
11		14.3580	19.08	10.89	29.97	60.00	-30.03	QP
12		14.3580	9.26	10.89	20.15	50.00	-29.85	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

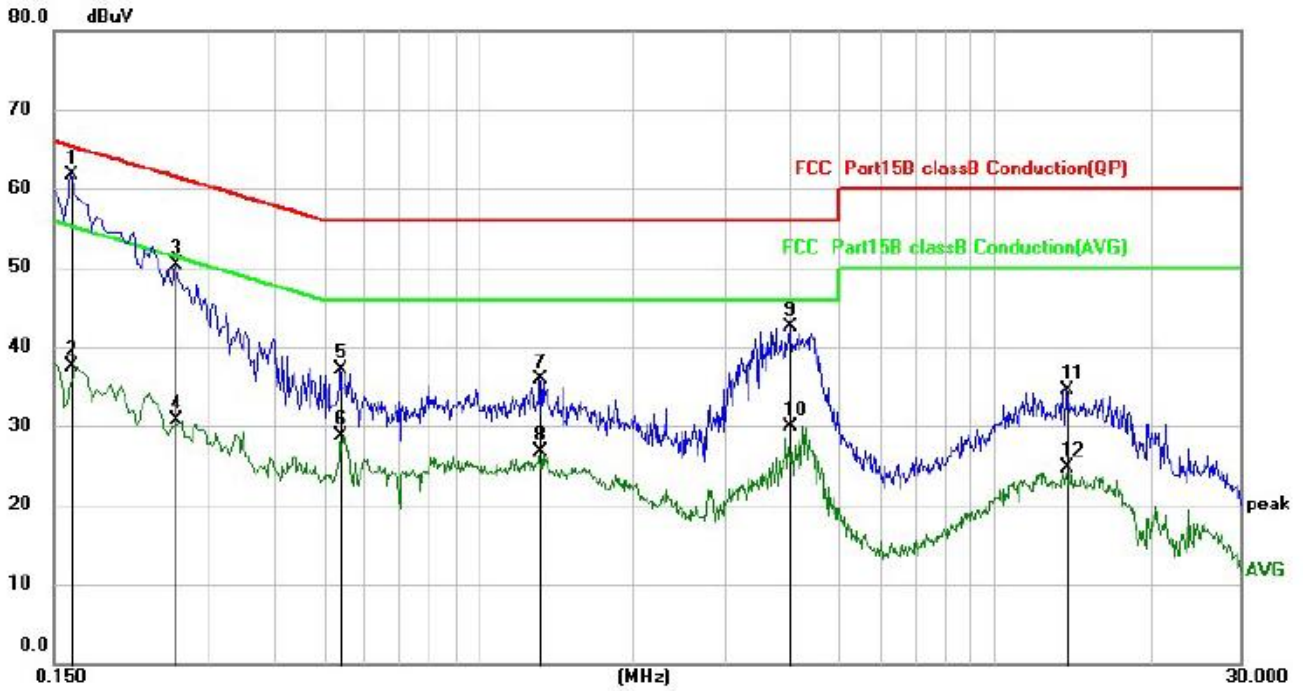

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1620	50.93	10.71	61.64	65.36	-3.72	QP
2		0.1620	26.87	10.71	37.58	55.36	-17.78	AVG
3		0.2580	39.62	10.66	50.28	61.50	-11.22	QP
4		0.2580	20.12	10.66	30.78	51.50	-20.72	AVG
5		0.5380	26.58	10.53	37.11	56.00	-18.89	QP
6		0.5380	18.16	10.53	28.69	46.00	-17.31	AVG
7		1.3099	25.28	10.62	35.90	56.00	-20.10	QP
8		1.3099	16.02	10.62	26.64	46.00	-19.36	AVG
9		4.0140	31.83	10.64	42.47	56.00	-13.53	QP
10		4.0140	19.35	10.64	29.99	46.00	-16.01	AVG
11		13.7780	23.60	10.88	34.48	60.00	-25.52	QP
12		13.7780	13.81	10.88	24.69	50.00	-25.31	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit



## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

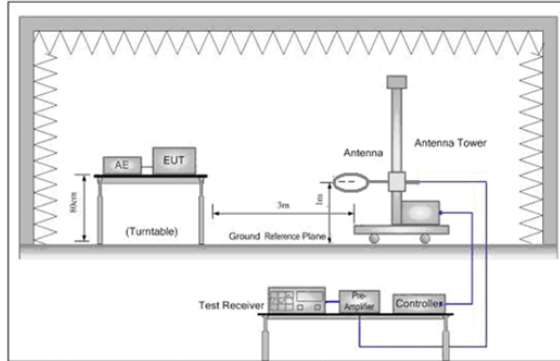


Figure 1. Below 30MHz

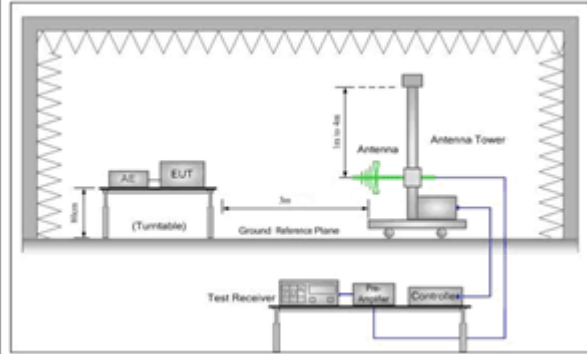


Figure 2. 30MHz to 1GHz

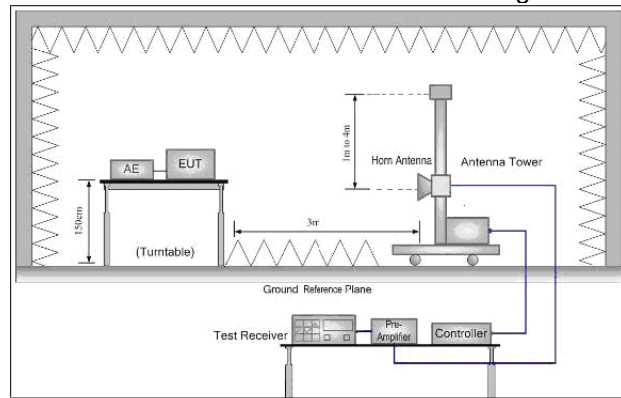


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.


Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

## 7.4 Test Result


Below 1GHz Test Results:  
Antenna polarity: H

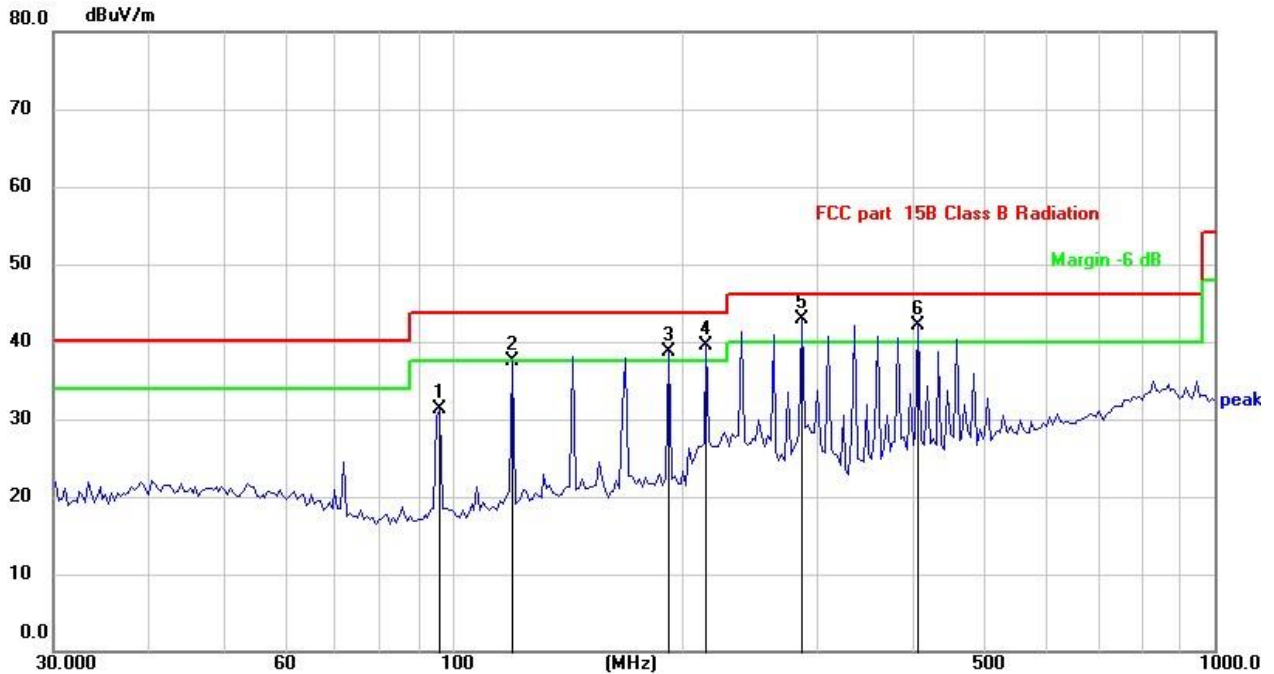

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		96.2672	40.44	-9.05	31.39	43.50	-12.11	QP
2		119.8555	44.40	-6.91	37.49	43.50	-6.01	QP
3	!	192.4183	46.74	-8.13	38.61	43.50	-4.89	QP
4	!	215.6454	46.55	-7.03	39.52	43.50	-3.98	QP
5	*	287.9904	48.28	-5.33	42.95	46.00	-3.05	QP
6	!	408.9458	43.67	-1.47	42.20	46.00	-3.80	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

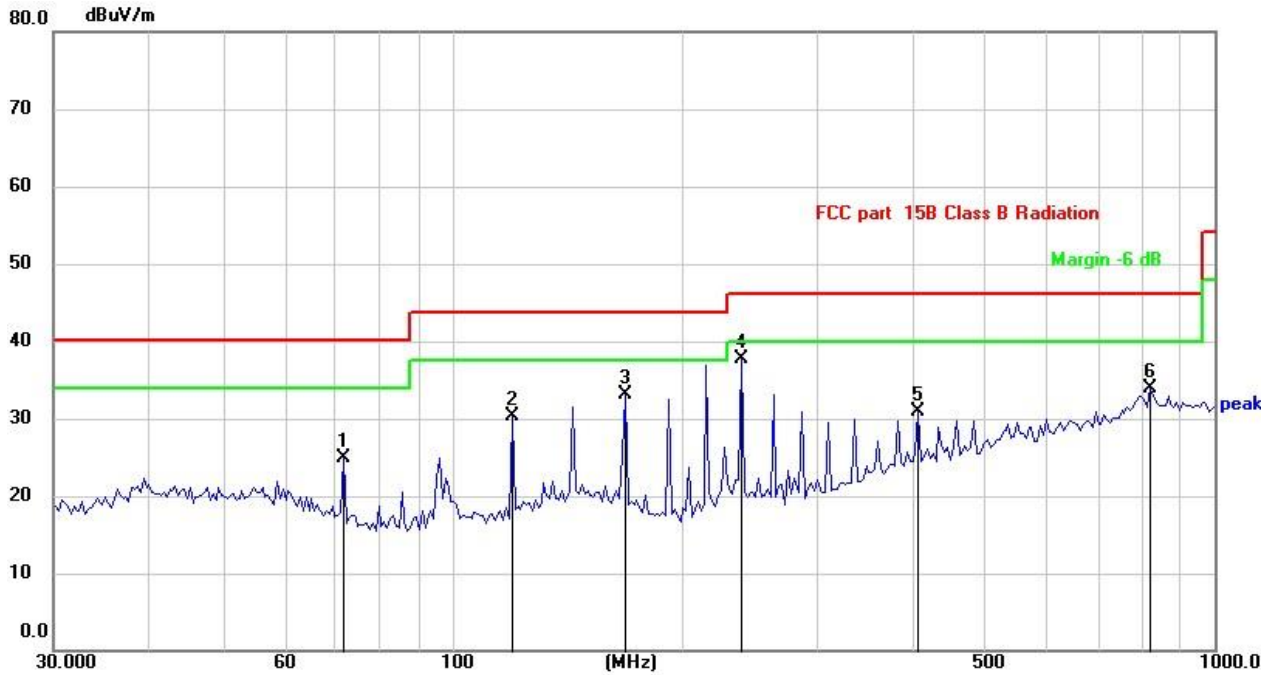

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		72.0841	33.17	-8.31	24.86	40.00	-15.14	QP
2		119.8555	37.15	-6.91	30.24	43.50	-13.26	QP
3		168.7093	39.28	-6.08	33.20	43.50	-10.30	QP
4	*	239.5669	43.57	-5.80	37.77	46.00	-8.23	QP
5		408.9458	32.40	-1.47	30.93	46.00	-15.07	QP
6		824.5968	27.87	6.07	33.94	46.00	-12.06	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.83	-3.64	62.19	74	-11.81	peak
4824	50.87	-3.64	47.23	54	-6.77	AVG
7236	57.03	-0.95	56.08	74	-17.92	peak
7236	45.69	-0.95	44.74	54	-9.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.83	-3.64	61.19	74	-12.81	peak
4824	49.38	-3.64	45.74	54	-8.26	AVG
7236	58.74	-0.95	57.79	74	-16.21	peak
7236	45.76	-0.95	44.81	54	-9.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.14	-3.51	61.63	74	-12.37	peak
4874	50.27	-3.51	46.76	54	-7.24	AVG
7311	59.54	-0.82	58.72	74	-15.28	peak
7311	44.99	-0.82	44.17	54	-9.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.27	-3.51	60.76	74	-13.24	peak
4874	49.19	-3.51	45.68	54	-8.32	AVG
7311	57.79	-0.82	56.97	74	-17.03	peak
7311	45.10	-0.82	44.28	54	-9.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.49	-3.43	59.06	74	-14.94	peak
4924	46.39	-3.43	42.96	54	-11.04	AVG
7386	57.29	-0.75	56.54	74	-17.46	peak
7386	44.81	-0.75	44.06	54	-9.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.44	-3.43	60.01	74	-13.99	peak
4924	46.77	-3.43	43.34	54	-10.66	AVG
7386	58.78	-0.75	58.03	74	-15.97	peak
7386	42.25	-0.75	41.50	54	-12.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) &lt;93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) &lt;54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	63.30	-3.64	59.66	74	-14.34	peak
4824	47.93	-3.64	44.29	54	-9.71	AVG
7236	59.14	-0.95	58.19	74	-15.81	peak
7236	46.30	-0.95	45.35	54	-8.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	62.06	-3.64	58.42	74	-15.58	peak
4824	46.85	-3.64	43.21	54	-10.79	AVG
7236	59.24	-0.95	58.29	74	-15.71	peak
7236	44.82	-0.95	43.87	54	-10.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	62.92	-3.51	59.41	74	-14.59	peak
4874	49.67	-3.51	46.16	54	-7.84	AVG
7311	59.99	-0.82	59.17	74	-14.83	peak
7311	44.21	-0.82	43.39	54	-10.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4874	64.32	-3.51	60.81	74	-13.19	peak
4874	46.93	-3.51	43.42	54	-10.58	AVG
7311	57.02	-0.82	56.20	74	-17.80	peak
7311	41.55	-0.82	40.73	54	-13.27	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.88	-3.43	59.45	74	-14.55	peak
4924	49.64	-3.43	46.21	54	-7.79	AVG
7386	57.01	-0.75	56.26	74	-17.74	peak
7386	41.36	-0.75	40.61	54	-13.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.66	-3.43	60.23	74	-13.77	peak
4924	48.22	-3.43	44.79	54	-9.21	AVG
7386	56.60	-0.75	55.85	74	-18.15	peak
7386	42.19	-0.75	41.44	54	-12.56	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4824	65.27	-3.64	61.63	74	-12.37	peak
4824	46.44	-3.64	42.80	54	-11.20	AVG
7236	59.57	-0.95	58.62	74	-15.38	peak
7236	44.71	-0.95	43.76	54	-10.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4824	65.00	-3.64	61.36	74	-12.64	peak
4824	51.62	-3.64	47.98	54	-6.02	AVG
7236	61.13	-0.95	60.18	74	-13.82	peak
7236	46.91	-0.95	45.96	54	-8.04	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4874.00	64.42	-3.51	60.91	74.00	-13.09	peak
4874.00	50.11	-3.51	46.60	54.00	-7.40	AVG
7311.00	57.11	-0.82	56.29	74.00	-17.71	peak
7311.00	44.70	-0.82	43.88	54.00	-10.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4874.00	64.00	-3.51	60.49	74.00	-13.51	peak
4874.00	47.48	-3.51	43.97	54.00	-10.03	AVG
7311.00	57.14	-0.82	56.32	74.00	-17.68	peak
7311.00	44.28	-0.82	43.46	54.00	-10.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.54	-3.43	59.11	74	-14.89	peak
4924	46.99	-3.43	43.56	54	-10.44	AVG
7386	56.86	-0.75	56.11	74	-17.89	peak
7386	43.81	-0.75	43.06	54	-10.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.03	-3.43	60.60	74	-13.40	peak
4924	47.25	-3.43	43.82	54	-10.18	AVG
7386	56.20	-0.75	55.45	74	-18.55	peak
7386	42.32	-0.75	41.57	54	-12.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4844	65.63	-3.63	62.00	74	-12.00	peak
4844	48.87	-3.63	45.66	54	-8.34	AVG
7266	58.71	-0.94	57.77	74	-16.23	peak
7266	45.88	-0.94	44.94	54	-9.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4844	64.00	-3.63	60.37	74	-13.63	peak
4844	49.35	-3.63	45.72	54	-8.28	AVG
7266	58.64	-0.94	57.70	74	-16.30	peak
7266	44.28	-0.94	43.34	54	-10.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.29	-3.51	60.78	74	-13.22	peak
4874	48.90	-3.51	45.39	54	-8.61	AVG
7311	58.92	-0.82	58.10	74	-15.90	peak
7311	46.31	-0.82	45.49	54	-8.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.27	-3.51	58.76	74	-15.24	peak
4874	46.47	-3.51	42.96	54	-11.04	AVG
7311	56.69	-0.82	55.87	74	-18.13	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	63.30	-3.43	59.87	74	-14.13	peak
4904	47.12	-3.43	43.69	54	-10.31	AVG
7356	57.40	-0.75	56.65	74	-17.35	peak
7356	41.93	-0.75	41.18	54	-12.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.08	-3.43	60.65	74	-13.35	peak
4904	45.74	-3.43	42.31	54	-11.69	AVG
7356	57.78	-0.75	57.03	74	-16.97	peak
7356	44.23	-0.75	43.48	54	-10.52	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5)Have tested in three orientations for radiated emissions, Only The worst record is in this report



**Restricted bands around fundamental frequency (Radiated)**

Operation Mode:  
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2390	57.73	-5.81	51.92	74	-22.08	peak
2390	/	-5.81	/	54	/	AVG
2399	65.04	-5.84	59.20	74	-14.80	peak
2399	48.10	-5.84	42.26	54	-11.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2390	56.09	-5.81	50.28	74	-23.72	peak
2390	/	-5.81	/	54	/	AVG
2399	62.82	-5.84	56.98	74	-17.02	peak
2399	47.56	-5.84	41.72	54	-12.28	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.82	-5.65	51.17	74	-22.83	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.41	-5.65	50.76	74	-23.24	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	59.21	-5.81	53.40	74	-20.60	peak
2390	/	-5.81	/	54	/	AVG
2399	63.35	-5.84	57.51	74	-16.49	peak
2399	47.61	-5.84	41.77	54	-12.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	57.25	-5.81	51.44	74	-22.56	peak
2390	/	-5.81	/	54	/	AVG
2399	62.96	-5.84	57.12	74	-16.88	peak
2399	46.83	-5.84	40.99	54	-13.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	56.30	-5.65	50.65	74	-23.35	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	57.92	-5.65	52.27	74	-21.73	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	56.49	-5.81	50.68	74	-23.32	peak
2390	/	-5.81	/	54	/	AVG
2399	63.67	-5.84	57.83	74	-16.17	peak
2399	48.43	-5.84	42.59	54	-11.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2390	57.05	-5.81	51.24	74	-22.76	peak
2390	/	-5.81	/	54	/	AVG
2399	60.56	-5.84	54.72	74	-19.28	peak
2399	47.59	-5.84	41.75	54	-12.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Operation Mode: 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.43	-5.65	51.78	74	-22.22	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.53	-5.65	50.88	74	-23.12	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.54	-5.81	52.73	74	-21.27	peak
2390	/	-5.81	/	54	/	AVG
2399	62.33	-5.84	56.49	74	-17.51	peak
2399	47.37	-5.84	41.53	54	-12.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.95	-5.81	53.14	74	-20.86	peak
2390	/	-5.81	/	54	/	AVG
2399	62.09	-5.84	56.25	74	-17.75	peak
2399	45.40	-5.84	39.56	54	-14.44	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Operation Mode: 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	57.75	-5.65	52.10	74	-21.90	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
2483.5	55.73	-5.65	50.08	74	-23.92	peak
2483.5	/	-5.65	/	54	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

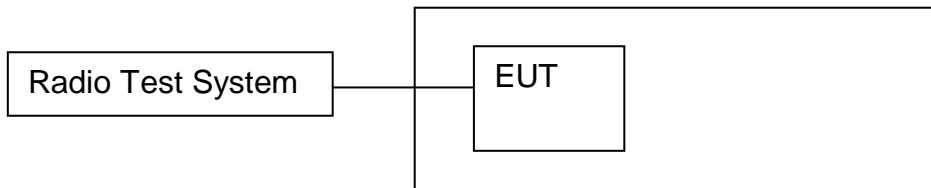

### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
Below 30MHz:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold  
Above 30MHz:  
RBW = 100KHz, VBW = 300KHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 8.4 Test Result




## BAND EDGE Graphs




802.11g/LCH

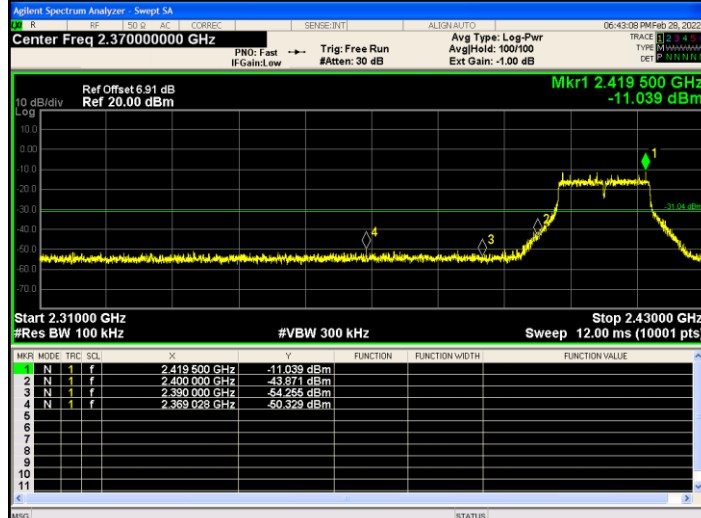


802.11g/HCH

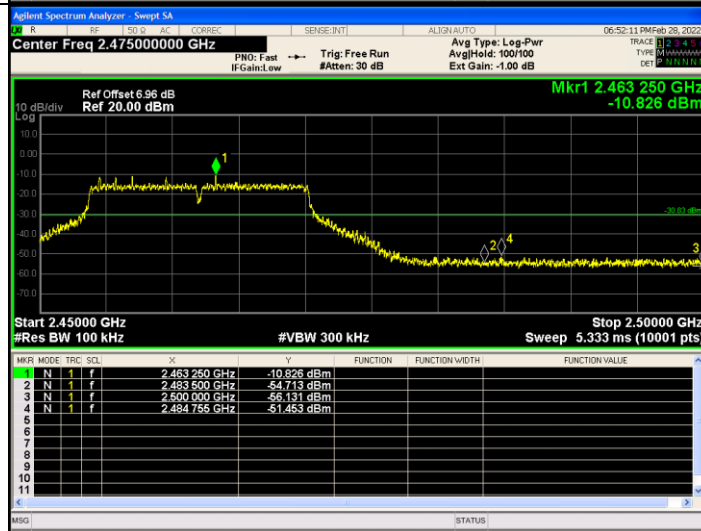




## BAND EDGE Graphs
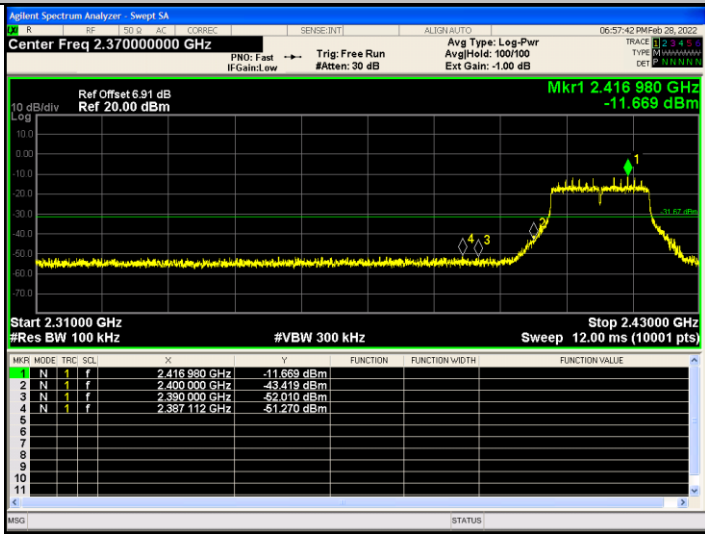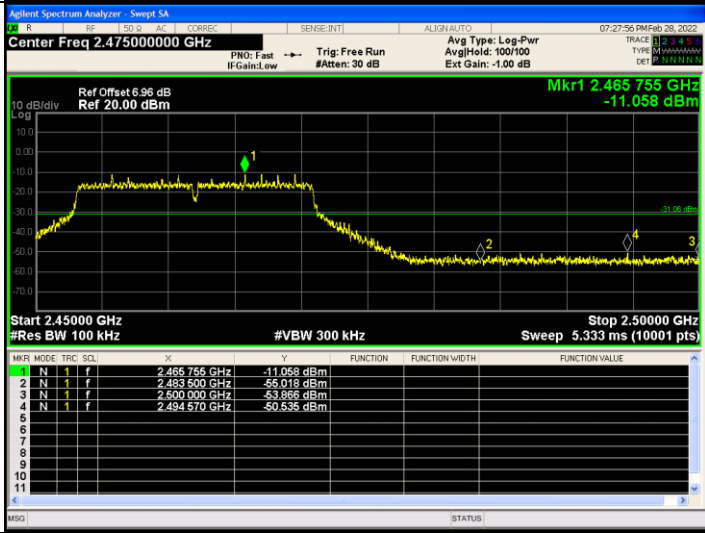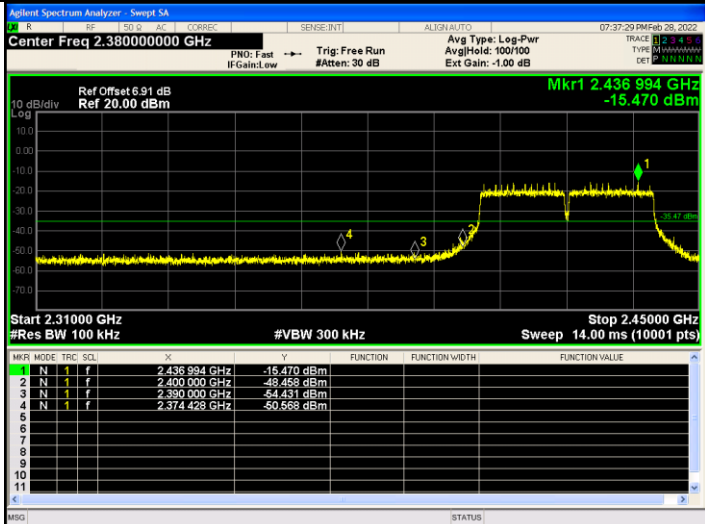
<p>802.11n(HT20)/L CH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.37000000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.416 980 GHz -11.669 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.416 980 GHz</td> <td>-11.669 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-43.419 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-52.010 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.387 112 GHz</td> <td>-51.270 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.416 980 GHz	-11.669 dBm				2	N	1	f	2.400 000 GHz	-43.419 dBm				3	N	1	f	2.390 000 GHz	-52.010 dBm				4	N	1	f	2.387 112 GHz	-51.270 dBm			
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.416 980 GHz	-11.669 dBm																																									
2	N	1	f	2.400 000 GHz	-43.419 dBm																																									
3	N	1	f	2.390 000 GHz	-52.010 dBm																																									
4	N	1	f	2.387 112 GHz	-51.270 dBm																																									
<p>802.11n(HT20)/H CH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.47500000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.465 755 GHz -11.058 dBm Start 2.45000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 5.333 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.465 755 GHz</td> <td>-11.058 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 GHz</td> <td>-55.018 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 GHz</td> <td>-53.266 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.494 570 GHz</td> <td>-50.536 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.465 755 GHz	-11.058 dBm				2	N	1	f	2.483 500 GHz	-55.018 dBm				3	N	1	f	2.500 000 GHz	-53.266 dBm				4	N	1	f	2.494 570 GHz	-50.536 dBm			
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.465 755 GHz	-11.058 dBm																																									
2	N	1	f	2.483 500 GHz	-55.018 dBm																																									
3	N	1	f	2.500 000 GHz	-53.266 dBm																																									
4	N	1	f	2.494 570 GHz	-50.536 dBm																																									
<p>802.11n(HT40)/L CH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.38000000 GHz Ref Offset 6.91 dB Ref 20.00 dBm Mkr1 2.436 994 GHz -15.470 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.45000 GHz Sweep 14.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SQ</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.436 994 GHz</td> <td>-15.470 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-48.458 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-54.431 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.374 428 GHz</td> <td>-50.569 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.436 994 GHz	-15.470 dBm				2	N	1	f	2.400 000 GHz	-48.458 dBm				3	N	1	f	2.390 000 GHz	-54.431 dBm				4	N	1	f	2.374 428 GHz	-50.569 dBm			
MKR	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.436 994 GHz	-15.470 dBm																																									
2	N	1	f	2.400 000 GHz	-48.458 dBm																																									
3	N	1	f	2.390 000 GHz	-54.431 dBm																																									
4	N	1	f	2.374 428 GHz	-50.569 dBm																																									




802.11n(HT40)/H  
CH

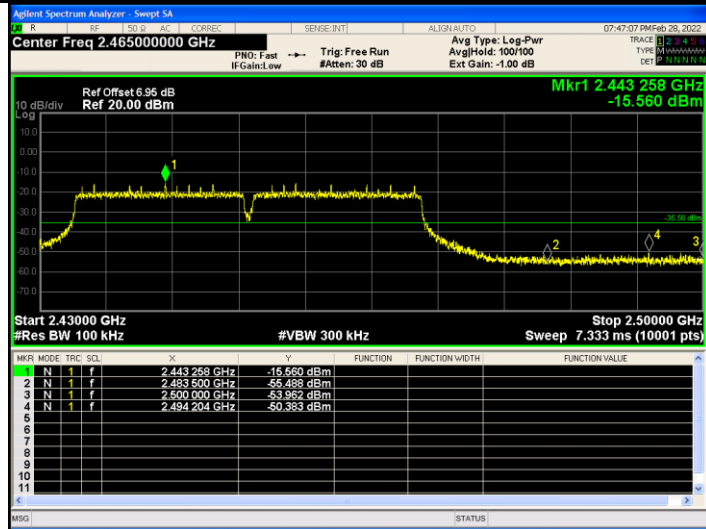

## RF Conducted Spurious Emissions Graphs

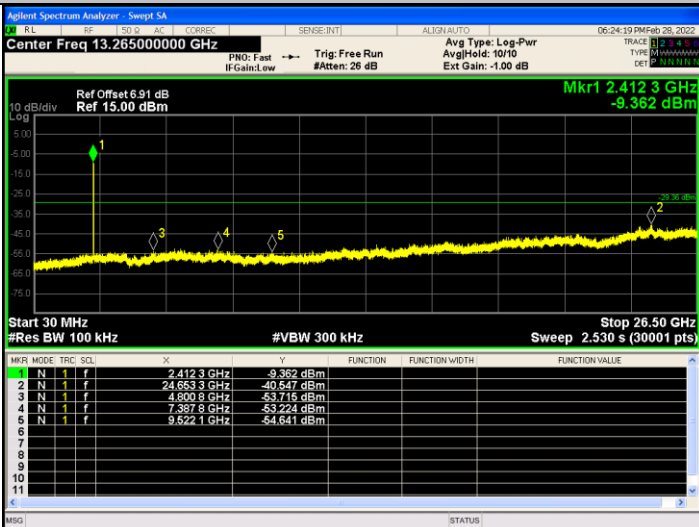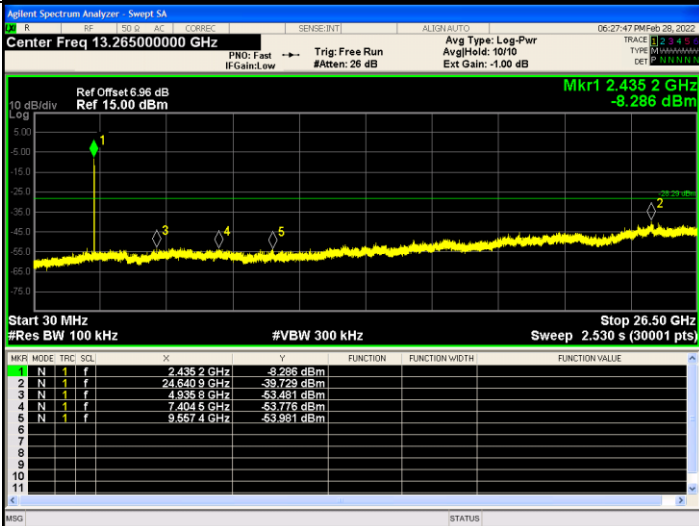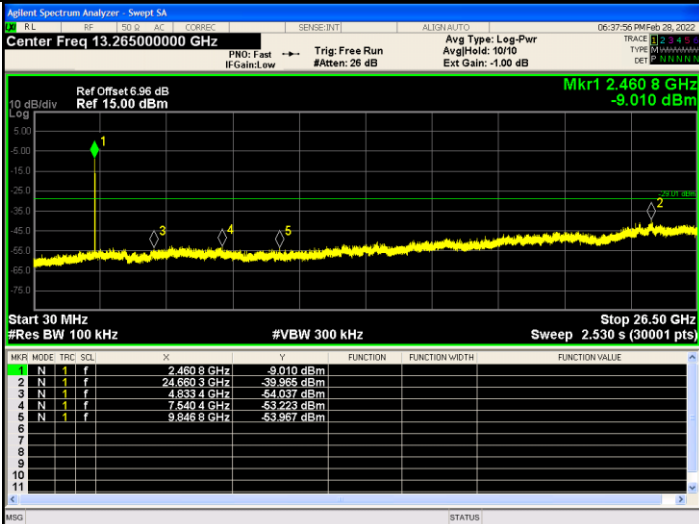
<p>802.11b /LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 6.91 dB Ref 15.00 dBm Mkr1 2.412 3 GHz -9.362 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.412 3 GHz</td> <td>-9.362 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.653 3 GHz</td> <td>-40.547 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.800 8 GHz</td> <td>-53.715 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.387 8 GHz</td> <td>-53.224 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.622 1 GHz</td> <td>-54.641 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.412 3 GHz	-9.362 dBm				2	N	1	f	24.653 3 GHz	-40.547 dBm				3	N	1	f	4.800 8 GHz	-53.715 dBm				4	N	1	f	7.387 8 GHz	-53.224 dBm				5	N	1	f	9.622 1 GHz	-54.641 dBm				
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.412 3 GHz	-9.362 dBm																																																			
2	N	1	f	24.653 3 GHz	-40.547 dBm																																																			
3	N	1	f	4.800 8 GHz	-53.715 dBm																																																			
4	N	1	f	7.387 8 GHz	-53.224 dBm																																																			
5	N	1	f	9.622 1 GHz	-54.641 dBm																																																			
<p>802.11b /MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 6.96 dB Ref 15.00 dBm Mkr1 2.435 2 GHz -9.286 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.435 2 GHz</td> <td>-9.286 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.640 9 GHz</td> <td>-39.729 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.838 8 GHz</td> <td>-53.451 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.404 5 GHz</td> <td>-53.776 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.657 4 GHz</td> <td>-53.981 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.435 2 GHz	-9.286 dBm				2	N	1	f	24.640 9 GHz	-39.729 dBm				3	N	1	f	4.838 8 GHz	-53.451 dBm				4	N	1	f	7.404 5 GHz	-53.776 dBm				5	N	1	f	9.657 4 GHz	-53.981 dBm				
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.435 2 GHz	-9.286 dBm																																																			
2	N	1	f	24.640 9 GHz	-39.729 dBm																																																			
3	N	1	f	4.838 8 GHz	-53.451 dBm																																																			
4	N	1	f	7.404 5 GHz	-53.776 dBm																																																			
5	N	1	f	9.657 4 GHz	-53.981 dBm																																																			
<p>802.11b /HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 6.96 dB Ref 15.00 dBm Mkr1 2.460 8 GHz -9.010 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.460 8 GHz</td> <td>-9.010 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.660 3 GHz</td> <td>-39.965 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.833 4 GHz</td> <td>-54.037 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.540 4 GHz</td> <td>-53.223 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.848 8 GHz</td> <td>-53.967 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.460 8 GHz	-9.010 dBm				2	N	1	f	24.660 3 GHz	-39.965 dBm				3	N	1	f	4.833 4 GHz	-54.037 dBm				4	N	1	f	7.540 4 GHz	-53.223 dBm				5	N	1	f	9.848 8 GHz	-53.967 dBm				
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.460 8 GHz	-9.010 dBm																																																			
2	N	1	f	24.660 3 GHz	-39.965 dBm																																																			
3	N	1	f	4.833 4 GHz	-54.037 dBm																																																			
4	N	1	f	7.540 4 GHz	-53.223 dBm																																																			
5	N	1	f	9.848 8 GHz	-53.967 dBm																																																			

## RF Conducted Spurious Emissions Graphs

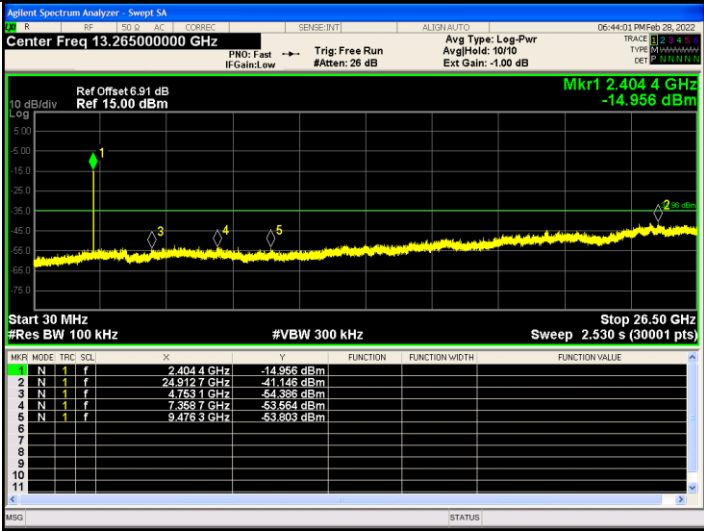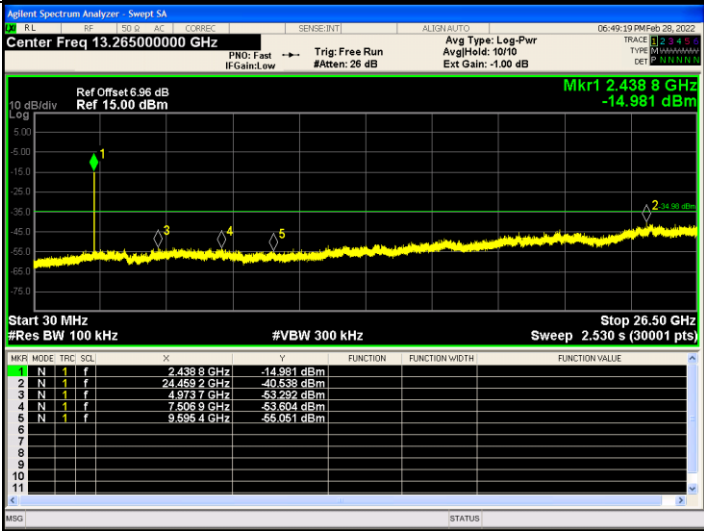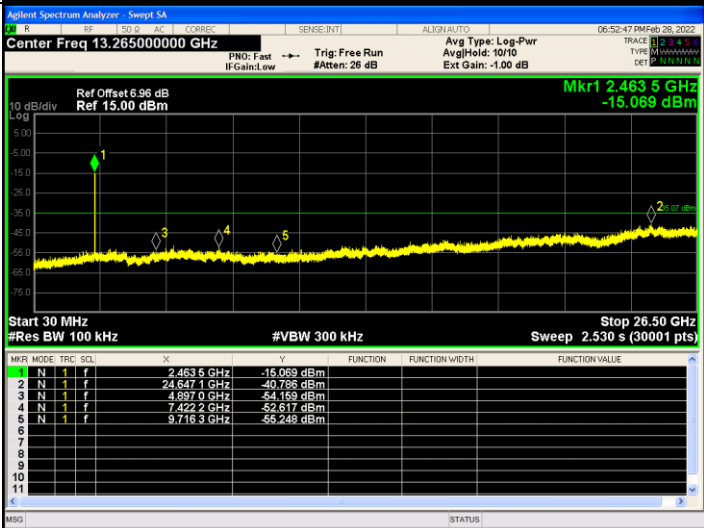
<p>802.11g /LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 6.91 dB Ref 15.00 dBm Mkr1 2.404 4 GHz -14.956 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.404 4 GHz</td><td>-14.956 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.912 7 GHz</td><td>-41.146 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.763 1 GHz</td><td>-54.396 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.368 7 GHz</td><td>-53.564 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.476 3 GHz</td><td>-53.803 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.404 4 GHz	-14.956 dBm				2	N	1	f	24.912 7 GHz	-41.146 dBm				3	N	1	f	4.763 1 GHz	-54.396 dBm				4	N	1	f	7.368 7 GHz	-53.564 dBm				5	N	1	f	9.476 3 GHz	-53.803 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.404 4 GHz	-14.956 dBm																																																		
2	N	1	f	24.912 7 GHz	-41.146 dBm																																																		
3	N	1	f	4.763 1 GHz	-54.396 dBm																																																		
4	N	1	f	7.368 7 GHz	-53.564 dBm																																																		
5	N	1	f	9.476 3 GHz	-53.803 dBm																																																		
<p>802.11g /MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 6.96 dB Ref 15.00 dBm Mkr1 2.438 8 GHz -14.981 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.438 8 GHz</td><td>-14.981 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.469 2 GHz</td><td>-40.638 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.973 7 GHz</td><td>-53.292 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.808 9 GHz</td><td>-53.604 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.696 4 GHz</td><td>-56.051 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.438 8 GHz	-14.981 dBm				2	N	1	f	24.469 2 GHz	-40.638 dBm				3	N	1	f	4.973 7 GHz	-53.292 dBm				4	N	1	f	7.808 9 GHz	-53.604 dBm				5	N	1	f	9.696 4 GHz	-56.051 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.438 8 GHz	-14.981 dBm																																																		
2	N	1	f	24.469 2 GHz	-40.638 dBm																																																		
3	N	1	f	4.973 7 GHz	-53.292 dBm																																																		
4	N	1	f	7.808 9 GHz	-53.604 dBm																																																		
5	N	1	f	9.696 4 GHz	-56.051 dBm																																																		
<p>802.11g /HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.265000000 GHz Ref Offset 6.96 dB Ref 15.00 dBm Mkr1 2.463 5 GHz -15.069 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.463 5 GHz</td><td>-15.069 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.647 1 GHz</td><td>-40.796 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.897 0 GHz</td><td>-54.159 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.422 2 GHz</td><td>-54.617 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.716 3 GHz</td><td>-56.248 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.463 5 GHz	-15.069 dBm				2	N	1	f	24.647 1 GHz	-40.796 dBm				3	N	1	f	4.897 0 GHz	-54.159 dBm				4	N	1	f	7.422 2 GHz	-54.617 dBm				5	N	1	f	9.716 3 GHz	-56.248 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.463 5 GHz	-15.069 dBm																																																		
2	N	1	f	24.647 1 GHz	-40.796 dBm																																																		
3	N	1	f	4.897 0 GHz	-54.159 dBm																																																		
4	N	1	f	7.422 2 GHz	-54.617 dBm																																																		
5	N	1	f	9.716 3 GHz	-56.248 dBm																																																		

## RF Conducted Spurious Emissions Graphs


802.11n  
(HT20)/  
LCH

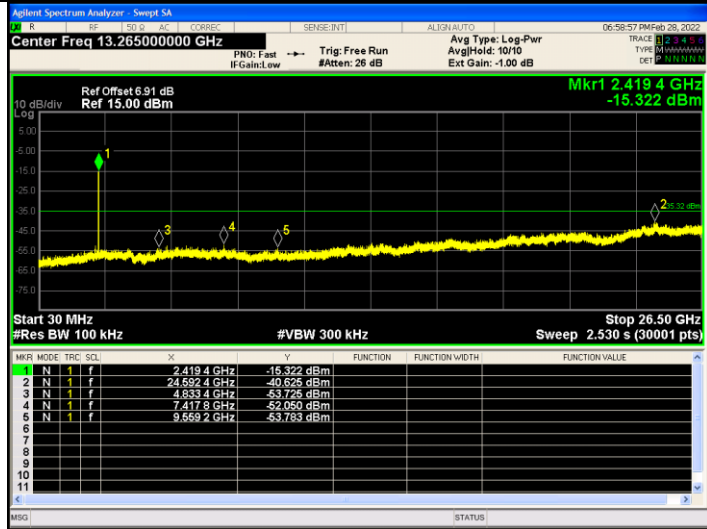




802.11  
n(HT20)  
/MCH

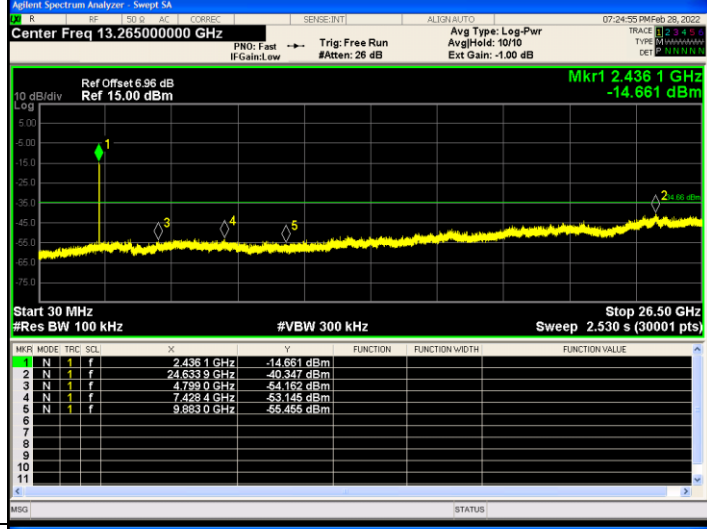

802.11  
n(HT20)  
/HCH

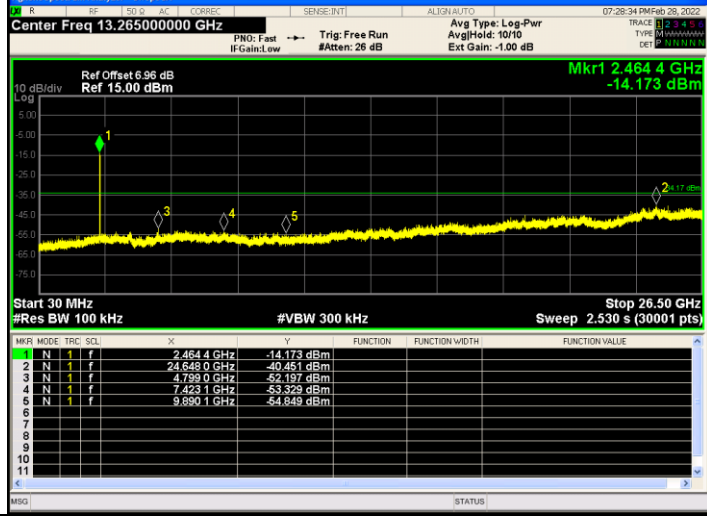

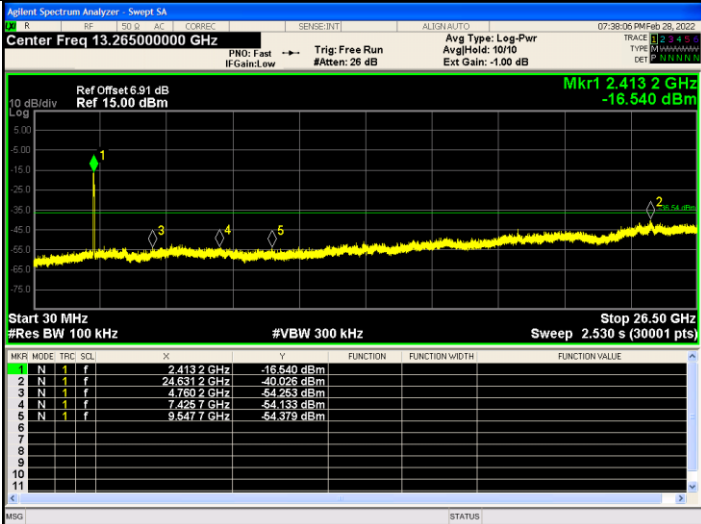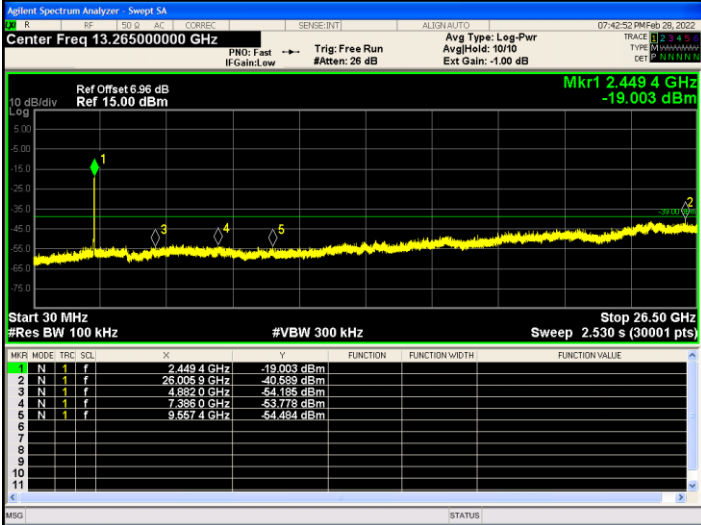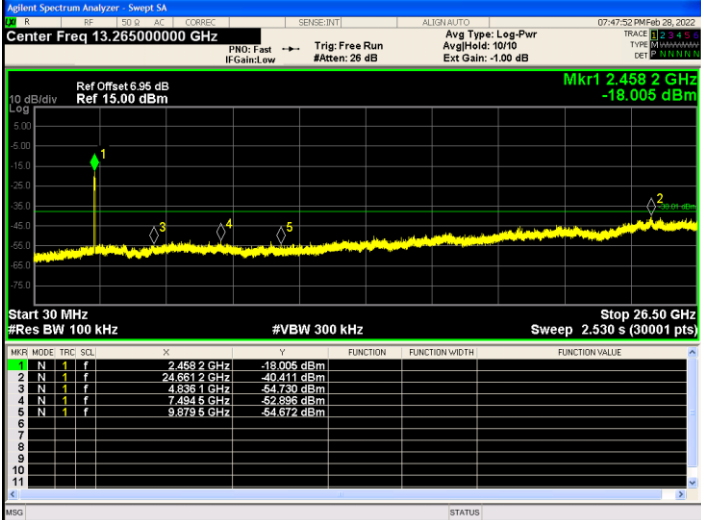

<p>802.11n (HT40)/ LCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4132 GHz</td> <td>-16.540 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6312 GHz</td> <td>-40.026 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7692 GHz</td> <td>-54.283 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4257 GHz</td> <td>-54.133 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6477 GHz</td> <td>-54.379 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4132 GHz	-16.540 dBm				2	N	1	f	24.6312 GHz	-40.026 dBm				3	N	1	f	4.7692 GHz	-54.283 dBm				4	N	1	f	7.4257 GHz	-54.133 dBm				5	N	1	f	9.6477 GHz	-54.379 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4132 GHz	-16.540 dBm																																																			
2	N	1	f	24.6312 GHz	-40.026 dBm																																																			
3	N	1	f	4.7692 GHz	-54.283 dBm																																																			
4	N	1	f	7.4257 GHz	-54.133 dBm																																																			
5	N	1	f	9.6477 GHz	-54.379 dBm																																																			
<p>802.11 n(HT40) /MCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4494 GHz</td> <td>-19.003 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.0059 GHz</td> <td>-40.589 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8820 GHz</td> <td>-54.155 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.8800 GHz</td> <td>-53.773 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6574 GHz</td> <td>-54.484 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4494 GHz	-19.003 dBm				2	N	1	f	26.0059 GHz	-40.589 dBm				3	N	1	f	4.8820 GHz	-54.155 dBm				4	N	1	f	7.8800 GHz	-53.773 dBm				5	N	1	f	9.6574 GHz	-54.484 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4494 GHz	-19.003 dBm																																																			
2	N	1	f	26.0059 GHz	-40.589 dBm																																																			
3	N	1	f	4.8820 GHz	-54.155 dBm																																																			
4	N	1	f	7.8800 GHz	-53.773 dBm																																																			
5	N	1	f	9.6574 GHz	-54.484 dBm																																																			
<p>802.11 n(HT40) /HCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4582 GHz</td> <td>-18.005 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6612 GHz</td> <td>-40.411 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8361 GHz</td> <td>-54.750 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4845 GHz</td> <td>-53.886 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.8795 GHz</td> <td>-54.672 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4582 GHz	-18.005 dBm				2	N	1	f	24.6612 GHz	-40.411 dBm				3	N	1	f	4.8361 GHz	-54.750 dBm				4	N	1	f	7.4845 GHz	-53.886 dBm				5	N	1	f	9.8795 GHz	-54.672 dBm				
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4582 GHz	-18.005 dBm																																																			
2	N	1	f	24.6612 GHz	-40.411 dBm																																																			
3	N	1	f	4.8361 GHz	-54.750 dBm																																																			
4	N	1	f	7.4845 GHz	-53.886 dBm																																																			
5	N	1	f	9.8795 GHz	-54.672 dBm																																																			

## 9. COUDUCTED OUTPUT POWER

### 9.1 Block Diagram Of Test Setup



### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 9.3 Test procedure


1. The EUT was directly connected to the Power meter

### 9.4 Test Result

Mode	Channel.	Peak Output Power [dBm]	Limit[dBm]	Verdict
802.11b	LCH	7.30	30	PASS
	MCH	7.22	30	PASS
	HCH	7.35	30	PASS
802.11g	LCH	6.58	30	PASS
	MCH	6.58	30	PASS
	HCH	6.81	30	PASS
802.11n(HT20)	LCH	6.07	30	PASS
	MCH	6.54	30	PASS
	HCH	6.82	30	PASS
802.11n(HT40)	LCH	5.61	30	PASS
	MCH	5.22	30	PASS
	HCH	5.28	30	PASS

## 10. 6DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

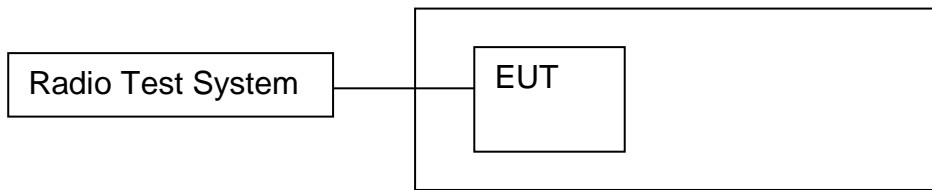

### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

### 10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

## 10.4 Test Result

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.659	500	PASS
	MCH	9.45	500	PASS
	HCH	11.021	500	PASS
802.11g	LCH	16.332	500	PASS
	MCH	16.338	500	PASS
	HCH	16.356	500	PASS
802.11n(HT20)	LCH	17.584	500	PASS
	MCH	17.574	500	PASS
	HCH	17.59	500	PASS
802.11n(HT40)	LCH	36.357	500	PASS
	MCH	36.392	500	PASS
	HCH	36.083	500	PASS

Test Graph:

Graphs													
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz      Center Freq: 2.412000000 GHz      Radio Std: None</p> <p>Trig: Free Run      #Atten: 30 dB      AvgHld: 100/100      Ext Gain: -1.00 dB      Radio Device: BTS</p> <p>Ref Offset: 6.91 dB      Ref 26.91 dBm      Mkr3 2.417376 GHz      -15.333 dBm</p> <p>Center 2.412 GHz      Span 30 MHz</p> <p>#Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.55 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;"><b>14.748 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	9.55 dBm	<b>14.748 MHz</b>			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	9.55 dBm											
<b>14.748 MHz</b>													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz      Center Freq: 2.437000000 GHz      Radio Std: None</p> <p>Trig: Free Run      #Atten: 30 dB      AvgHld: 100/100      Ext Gain: -1.00 dB      Radio Device: BTS</p> <p>Ref Offset: 6.96 dB      Ref 26.96 dBm      Mkr3 2.441685 GHz      -14.116 dBm</p> <p>Center 2.437 GHz      Span 30 MHz</p> <p>#Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.66 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;"><b>14.645 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	9.66 dBm	<b>14.645 MHz</b>			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	9.66 dBm											
<b>14.645 MHz</b>													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz      Center Freq: 2.462000000 GHz      Radio Std: None</p> <p>Trig: Free Run      #Atten: 30 dB      AvgHld: 100/100      Ext Gain: -1.00 dB      Radio Device: BTS</p> <p>Ref Offset: 6.96 dB      Ref 26.96 dBm      Mkr3 2.467507 GHz      -14.676 dBm</p> <p>Center 2.462 GHz      Span 30 MHz</p> <p>#Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>9.31 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;"><b>14.716 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	9.31 dBm	<b>14.716 MHz</b>			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	9.31 dBm											
<b>14.716 MHz</b>													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW          Center Freq: 2.41200000 GHz          #IF Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Ext Gain: -1.00 dB Radio Device: BTS          Ref Offset: 6.91 dB Ref: 26.91 dBm          Mkr3 2.420177 GHz -17.729 dBm          Center: 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms  <b>Occupied Bandwidth 16.601 MHz</b>          Total Power 5.87 dBm          Transmit Freq Error 11.384 kHz OBW Power 99.00 %          x dB Bandwidth 16.33 MHz x dB -6.00 dB</p>	
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW          Center Freq: 2.43700000 GHz          #IF Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Ext Gain: -1.00 dB Radio Device: BTS          Ref Offset: 6.96 dB Ref: 26.96 dBm          Mkr3 2.445165 GHz -16.737 dBm          Center: 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms  <b>Occupied Bandwidth 16.584 MHz</b>          Total Power 5.86 dBm          Transmit Freq Error -3.468 kHz OBW Power 99.00 %          x dB Bandwidth 16.34 MHz x dB -6.00 dB</p>	
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW          Center Freq: 2.46200000 GHz          #IF Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Ext Gain: -1.00 dB Radio Device: BTS          Ref Offset: 6.96 dB Ref: 26.96 dBm          Mkr3 2.470186 GHz -17.164 dBm          Center: 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms  <b>Occupied Bandwidth 16.559 MHz</b>          Total Power 6.21 dBm          Transmit Freq Error 8.465 kHz OBW Power 99.00 %          x dB Bandwidth 16.36 MHz x dB -6.00 dB</p>	


<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset: 6.91 dB Ref: 26.91 dBm</p> <p>Mkr3 2.420802 GHz -17.681 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.48 dBm</td> </tr> <tr> <td colspan="3">17.740 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>17.58 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	5.48 dBm	17.740 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			17.58 MHz	
Occupied Bandwidth	Total Power	5.48 dBm															
17.740 MHz																	
Transmit Freq Error	OBW Power	99.00 %															
x dB Bandwidth	x dB	-6.00 dB															
		17.58 MHz															
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3 2.445783 GHz -17.645 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>5.98 dBm</td> </tr> <tr> <td colspan="3">17.750 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>17.57 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	5.98 dBm	17.750 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			17.57 MHz	
Occupied Bandwidth	Total Power	5.98 dBm															
17.750 MHz																	
Transmit Freq Error	OBW Power	99.00 %															
x dB Bandwidth	x dB	-6.00 dB															
		17.57 MHz															
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3 2.470804 GHz -16.885 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>6.12 dBm</td> </tr> <tr> <td colspan="3">17.753 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>17.59 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	6.12 dBm	17.753 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			17.59 MHz	
Occupied Bandwidth	Total Power	6.12 dBm															
17.753 MHz																	
Transmit Freq Error	OBW Power	99.00 %															
x dB Bandwidth	x dB	-6.00 dB															
		17.59 MHz															



<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.228 MHz Total Power 5.17 dBm Transmit Freq Error 6.804 kHz OBW Power 99.00 % x dB Bandwidth 36.36 MHz x dB -6.00 dB Mkr3 2.440185 GHz -21.685 dBm</p>	
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.236 MHz Total Power 4.66 dBm Transmit Freq Error -2.449 kHz OBW Power 99.00 % x dB Bandwidth 36.39 MHz x dB -6.00 dB Mkr3 2.455194 GHz -21.826 dBm</p>	
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.209 MHz Total Power 4.86 dBm Transmit Freq Error -11.469 kHz OBW Power 99.00 % x dB Bandwidth 36.08 MHz x dB -6.00 dB Mkr3 2.47003 GHz -22.611 dBm</p>	

## 11. POWER SPECTRAL DENSITY

### 11.1 Block Diagram Of Test Setup

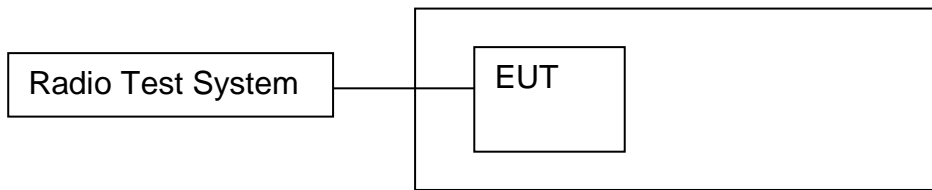

### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


### 11.3 Test procedure




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 11.4 Test Result




Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-21.601	8	PASS
	MCH	-21.792	8	PASS
	HCH	-21.941	8	PASS
802.11g	LCH	-26.186	8	PASS
	MCH	-25.964	8	PASS
	HCH	-25.286	8	PASS
802.11n(H T20)	LCH	-24.668	8	PASS
	MCH	-25.684	8	PASS
	HCH	-33.881	8	PASS
802.11n(H T40)	LCH	-29.396	8	PASS
	MCH	-29.247	8	PASS
	HCH	-30.203	8	PASS

## Test Graph

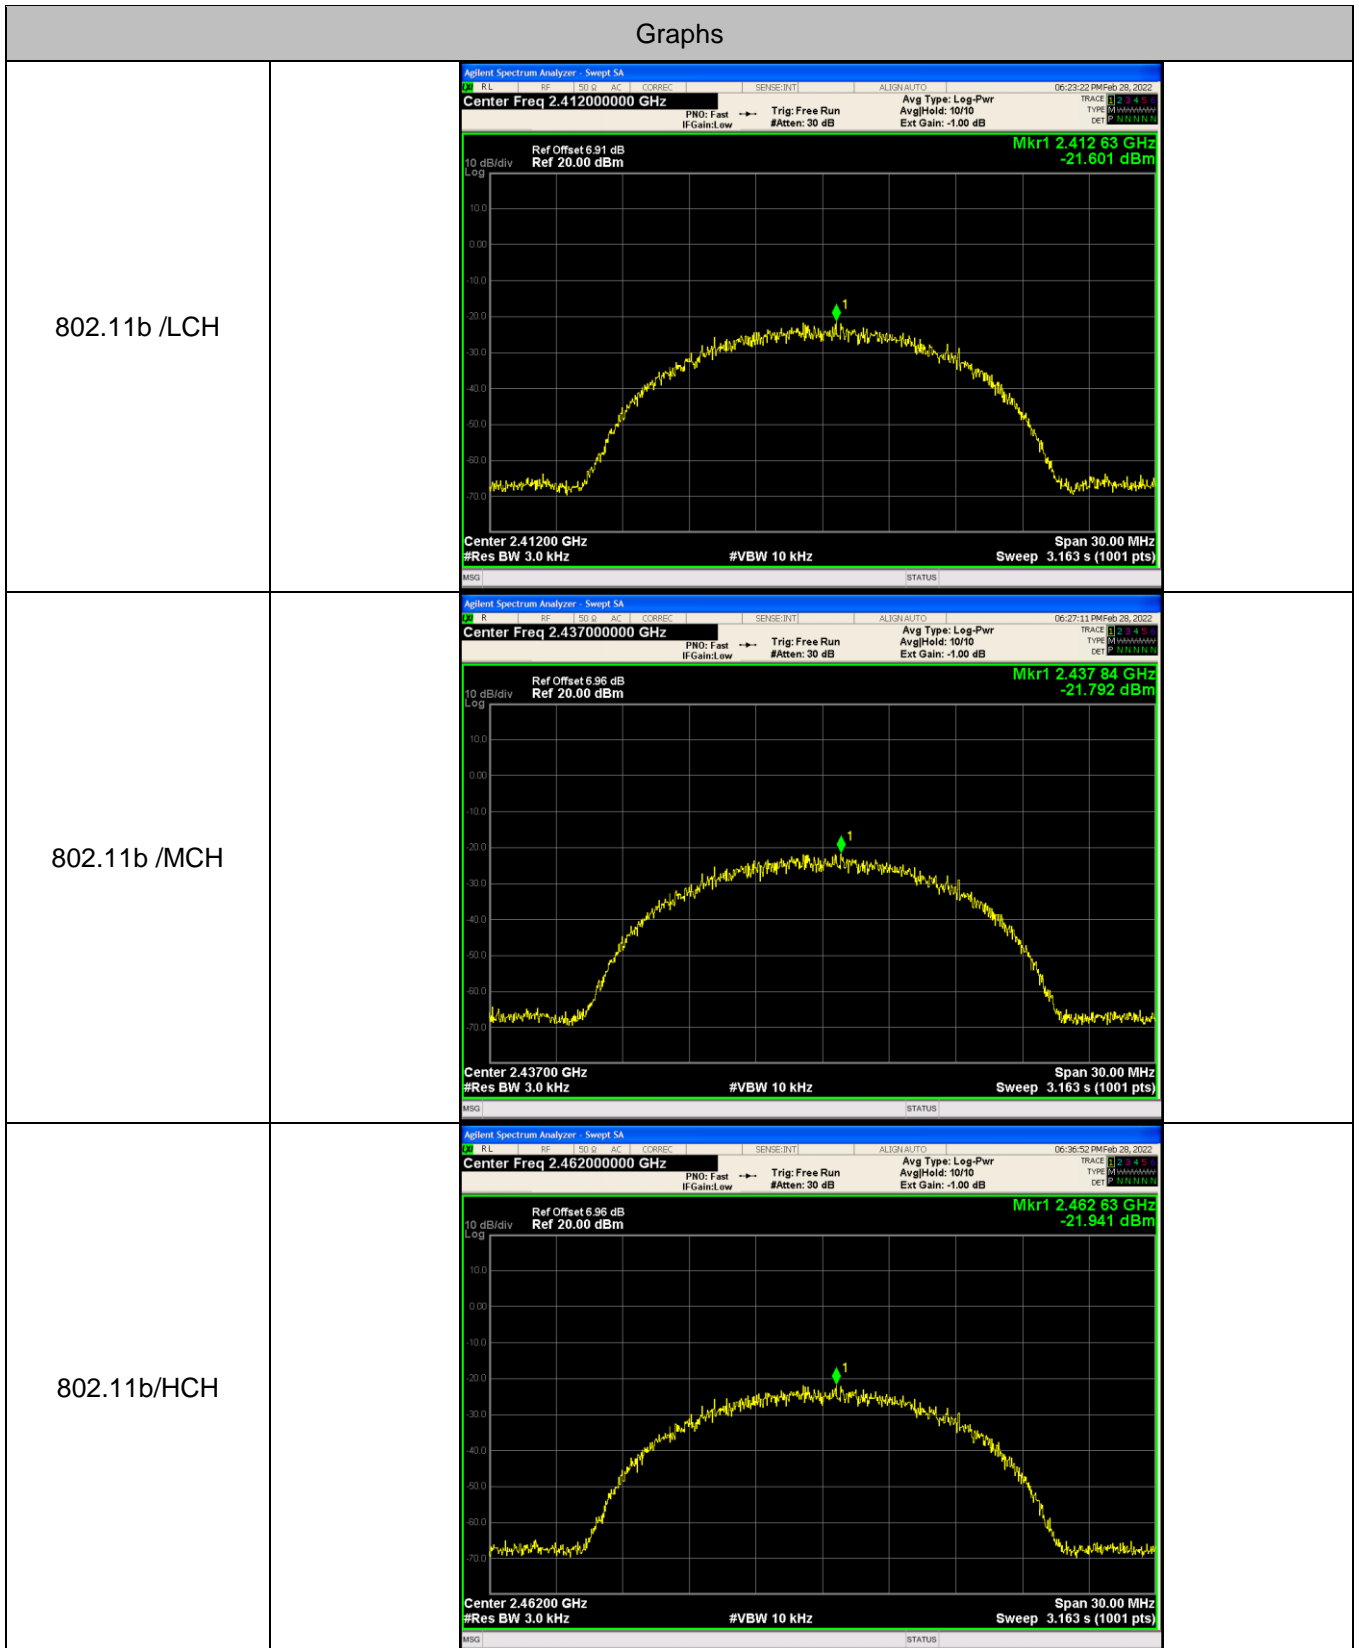
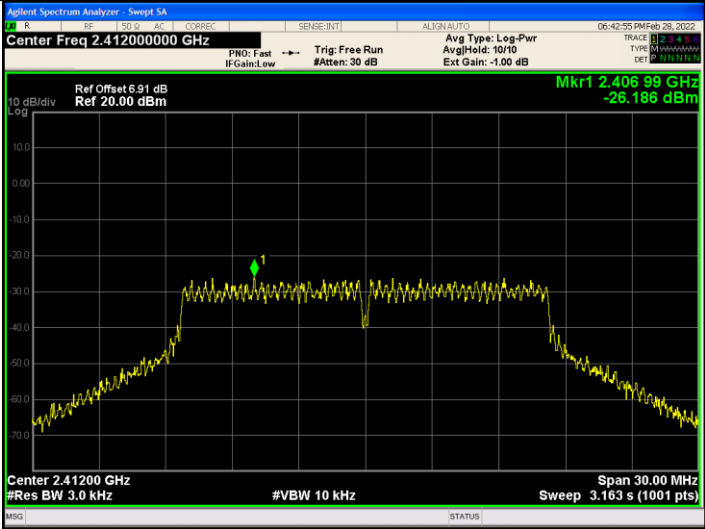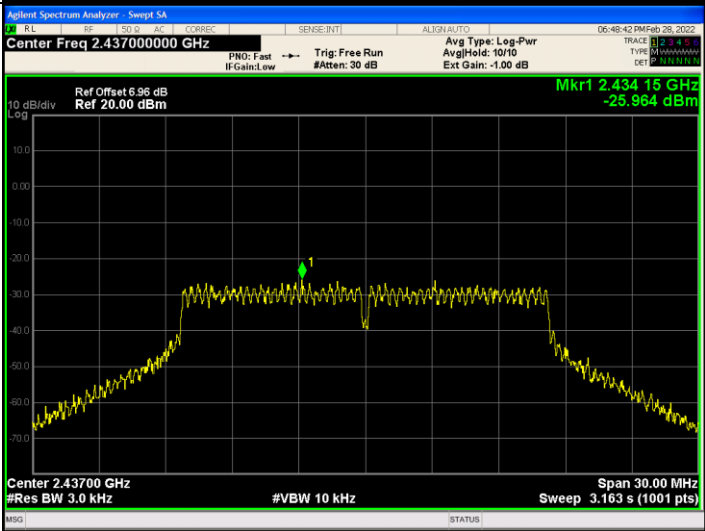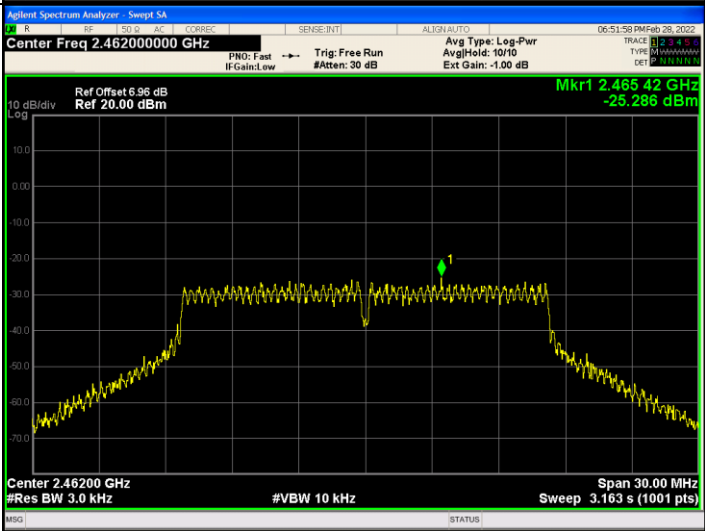
<p>802.11g/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.412000000 GHz          Ref Offset 6.91 dB          Ref 20.00 dBm          Mkr1 2.40699 GHz          -26.186 dBm          Span 30.00 MHz          #Res BW 3.0 kHz #VBW 10 kHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.437000000 GHz          Ref Offset 6.96 dB          Ref 20.00 dBm          Mkr1 2.43415 GHz          -25.964 dBm          Span 30.00 MHz          #Res BW 3.0 kHz #VBW 10 kHz          Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA          Center Freq 2.462000000 GHz          Ref Offset 6.96 dB          Ref 20.00 dBm          Mkr1 2.46542 GHz          -25.286 dBm          Span 30.00 MHz          #Res BW 3.0 kHz #VBW 10 kHz          Sweep 3.163 s (1001 pts)</p>

<p>802.11n(HT20)/LC H</p>		
<p>802.11n(HT20)/MC H</p>		
<p>802.11n(HT20)/HC H</p>		
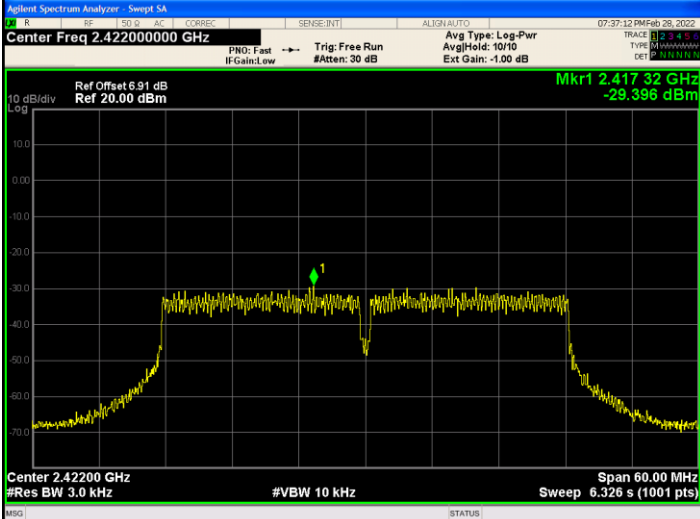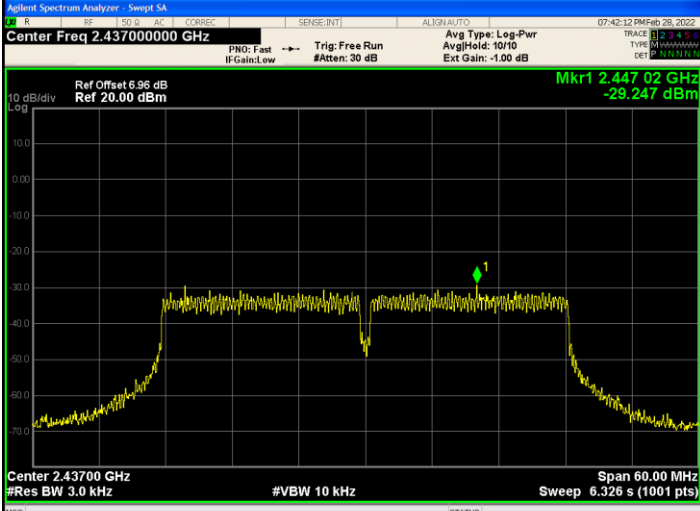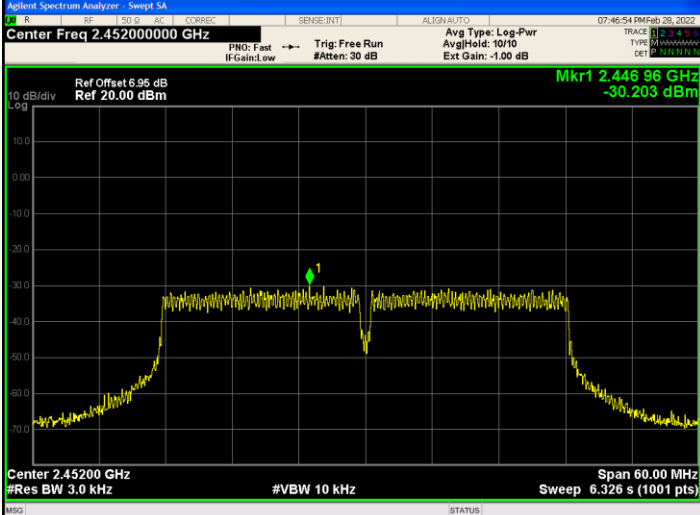
<p>802.11n(HT40)/LC H</p>		
<p>802.11n(HT40)/MC H</p>		
<p>802.11n(HT40)/HC H</p>		

## 12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### **EUT Antenna:**

The antenna is PCB Antenna and no consideration of replacement. The best case gain of the antenna is 1.0dBi.




### 13. EUT PHOTOGRAPHS

EUT Photo 1


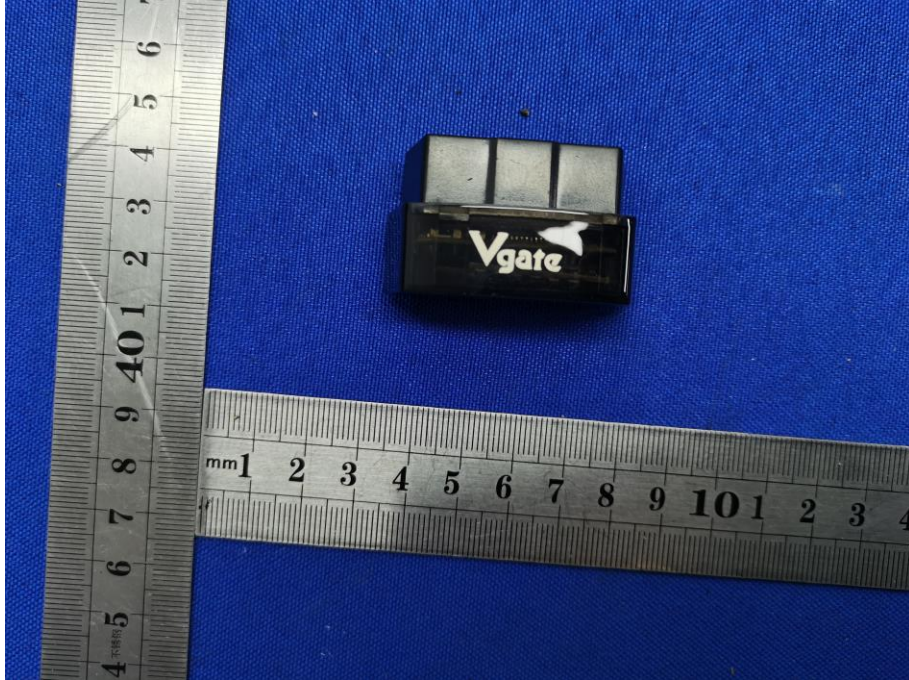


EUT Photo 2

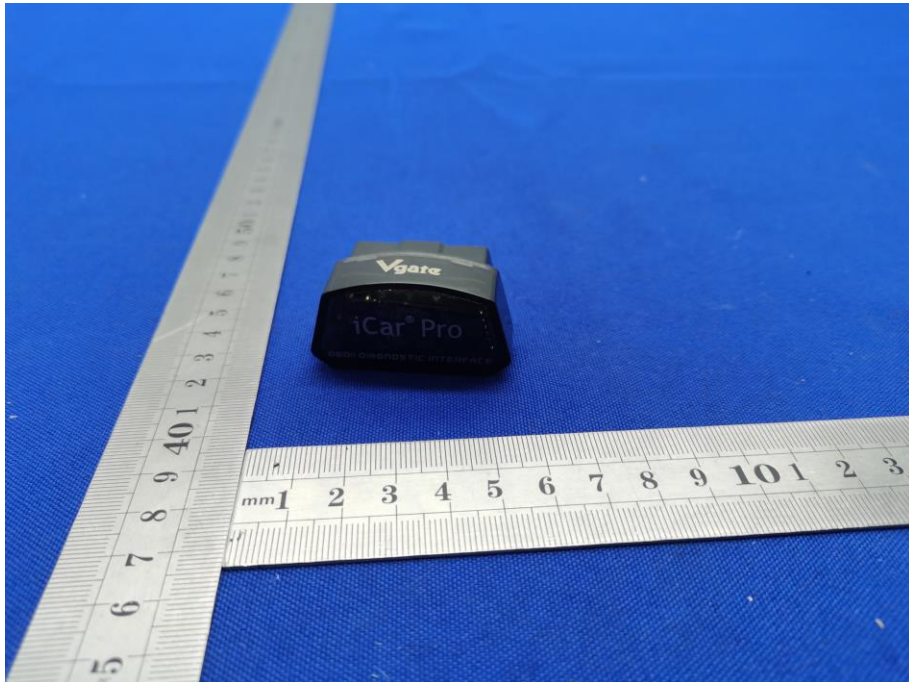

## 14. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emission

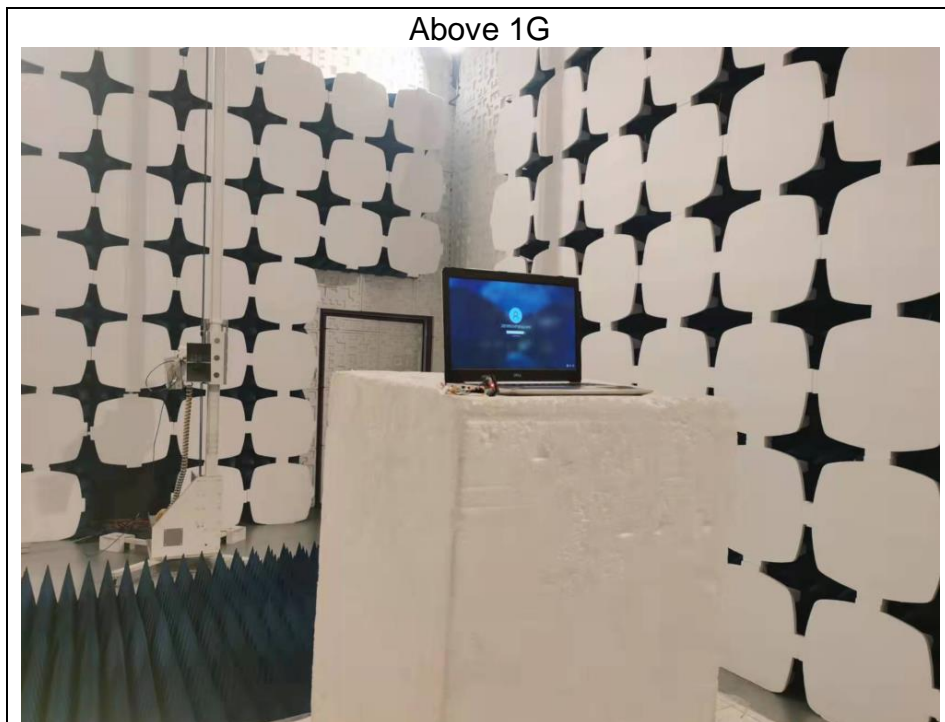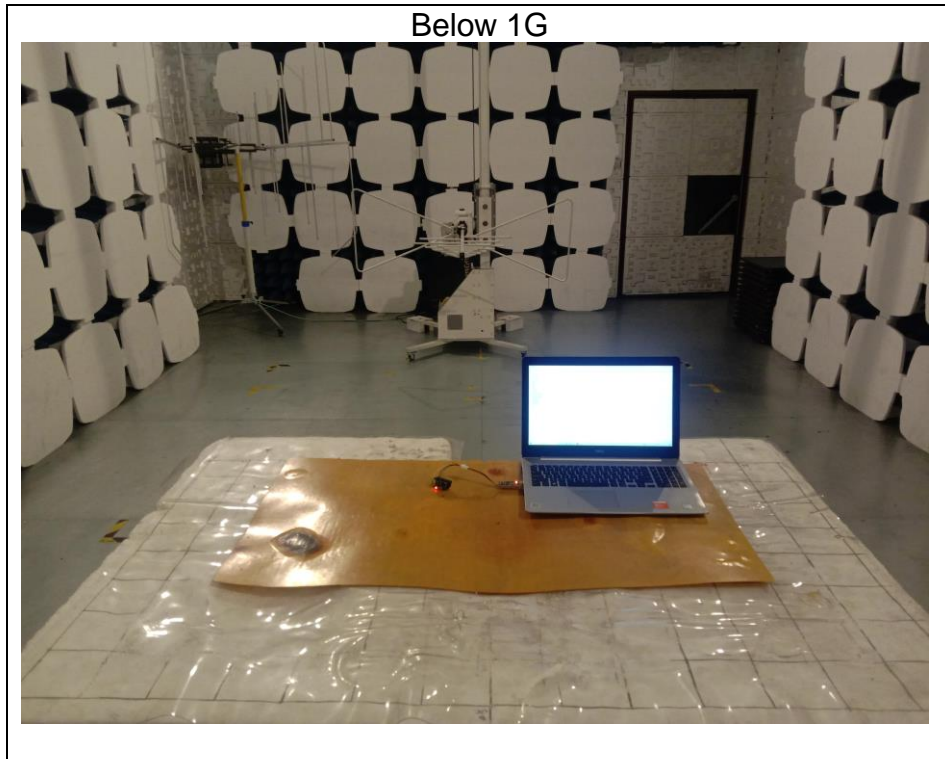

## Conducted emissions



\*\*\*\*\* END OF REPORT \*\*\*\*\*