



FCC RF Test Report

APPLICANT : Amazon.com Services LLC
EQUIPMENT : Wireless Tablet
MODEL NAME : TG425K
FCC ID : 2A4DH-4258
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Feb. 13, 2023 ~ Mar. 07, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION.....5

 1.1 Applicant5

 1.2 Product Feature of Equipment Under Test.....5

 1.3 Product Specification of Equipment Under Test.....5

 1.4 Modification of EUT6

 1.5 Testing Location6

 1.6 Test Software.....6

 1.7 Applicable Standards.....6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....7

 2.1 Carrier Frequency Channel7

 2.2 Test Mode.....8

 2.3 Connection Diagram of Test System.....9

 2.4 Support Unit used in test configuration and system10

 2.5 EUT Operation Test Setup10

 2.6 Measurement Results Explanation Example.....10

3 TEST RESULT11

 3.1 6dB and 99% Bandwidth Measurement11

 3.2 Output Power Measurement.....12

 3.3 Power Spectral Density Measurement15

 3.4 Conducted Band Edges and Spurious Emission Measurement16

 3.5 Radiated Band Edges and Spurious Emission Measurement17

 3.6 AC Conducted Emission Measurement.....21

 3.7 Antenna Requirements.....23

4 LIST OF MEASURING EQUIPMENT.....24

5 UNCERTAINTY OF EVALUATION.....25

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR2N0304-01B	Rev. 01	Initial issue of report	Apr. 06, 2023
FR2N0304-01B	Rev. 02	1. Update Section 4 List of Measuring Equipment 2. Revise RSE test mode number in Appendix C.	May 16, 2023
FR2N0304-01B	Rev. 03	Update Section 2.2 AC Conducted Emission test mode on Page 8	Sep. 07, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass
3.1	-	99% Bandwidth	-	Report only
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass
3.6	15.207	AC Conducted Emission	15.207(a)	Pass
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Amazon.com Services LLC
410 Terry Avenue N, Seattle, WA 98109-5210, United States

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Tablet
Model Name	TG425K
FCC ID	2A4DH-4258
SN	Conducted: PCC33E00304700M1 Conduction: GCC2HD003052001R Radiation: GCC2HD003052001W

Remark: There are three type of EUT, the differences between them are summary below:

	Sample1	Sample2	Sample3
Configuration	-	-	-
EMMC	64GB	64GB	64GB
DDR	4GB	4GB	3GB
Battery	ATL	SCUD	SCUD

According to the difference, for RF report, we chose sample 1 to perform full test.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	<Ant 1> BLE 1 Mbps:-2.89 dBm (0.0005 W) BLE 2 Mbps: -3.04 dBm (0.0005 W) <Ant 2> BLE 1 Mbps:-2.52 dBm (0.0006 W) BLE 2 Mbps: -2.59 dBm (0.0006 W)
99% Occupied Bandwidth	<Ant 1> BLE 1 Mbps: 1.043MHz BLE 2 Mbps: 2.070MHz <Ant 2> BLE 1 Mbps: 1.039MHz BLE 2 Mbps: 2.070MHz
Antenna Type / Gain	Ant 1: PIFA Antenna type with gain 1.5 dBi Ant 2: PIFA Antenna type with gain 2.5 dBi
Type of Modulation	Bluetooth LE : GFSK

Remark: Bluetooth LE supports SISO mode only.



1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH08-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH08-KS	AUDIX	E3	6.2009-8-24
2.	CO01-KS	R&S	EMC32	10.60.20

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
Radiated TCs	As Appendix C
AC Conducted Emission	Mode 1: Bluetooth Link + USB Cable(Charging From Adapter (PS57CP)(US)) + Earphone
Remark: For Radiated Test Cases, The tests were performance with Adapter, Earphone and USB Cable.	

2.3 Connection Diagram of Test System

< Radiated Emission >

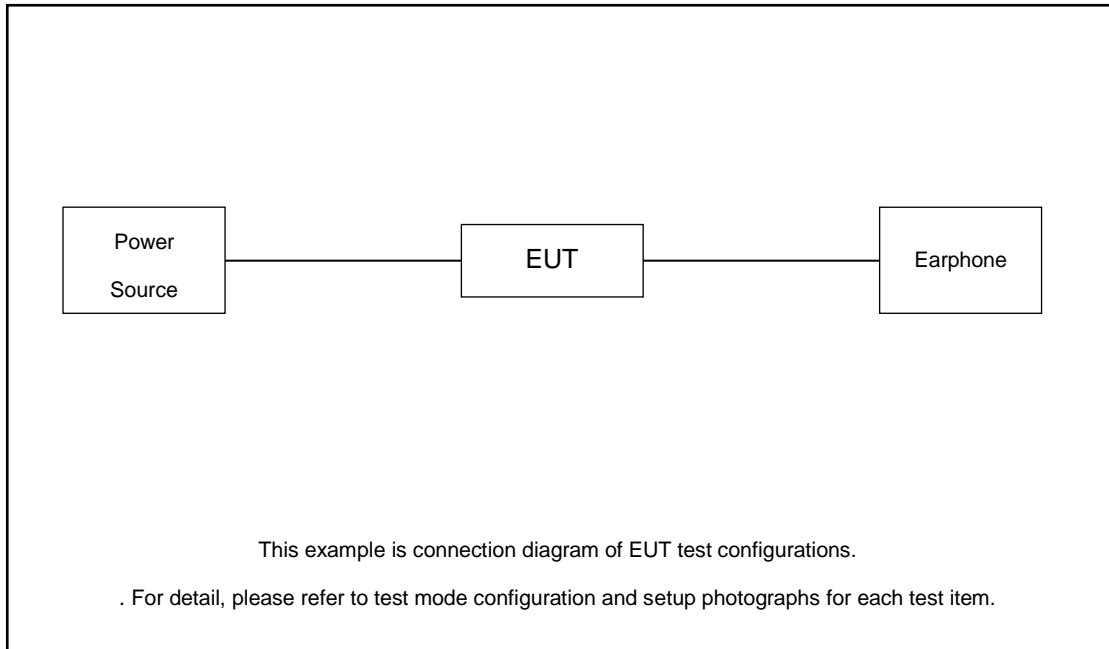

< AC Conducted Emission >

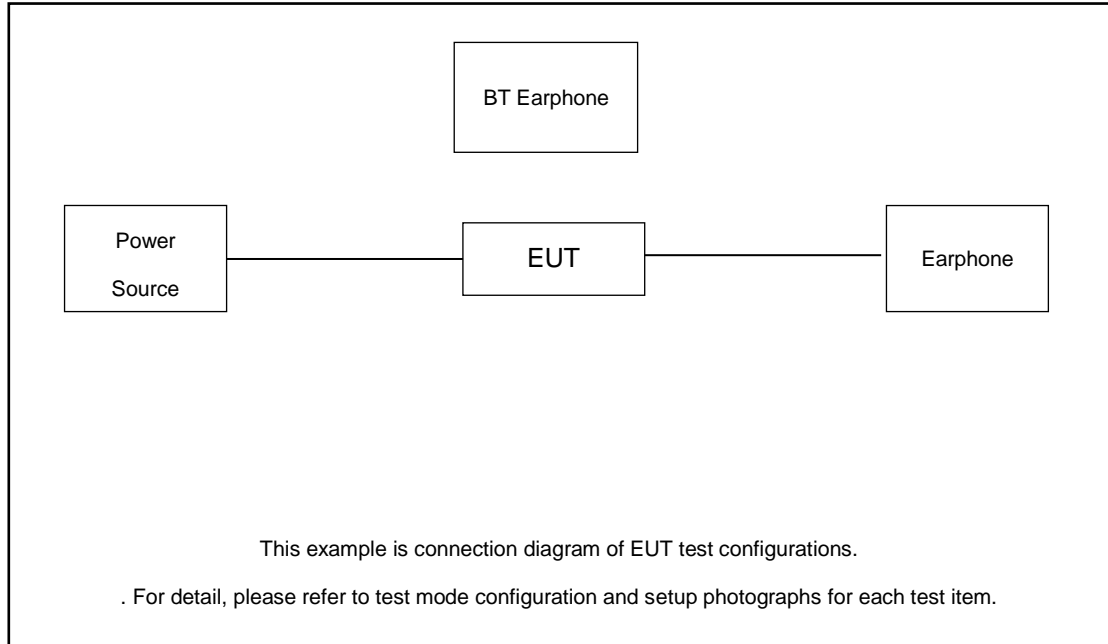



2.4 Support Unit used in test configuration and system

Item	Equipment	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	LBH308	N/A	N/A	N/A
2.	BT Base Station	CBT	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	P121	N/A	Unshielded,1.2m	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the Bluetooth Earphone under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor which are included in RF test system.

.

$$\text{Offset}(dB) = 12.89 \text{ (dB)}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

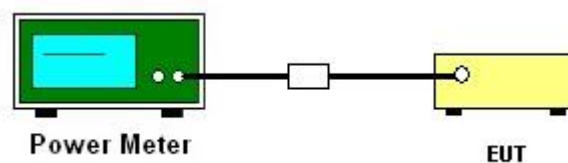



3.2.5 Test Result of Peak Output Power

Ant 1:

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-2.89	30.00	1.50	-1.39	36.00	Pass
BLE	1Mbps	1	19	2440	-3.08	30.00	1.50	-1.58	36.00	Pass
BLE	1Mbps	1	39	2480	-3.27	30.00	1.50	-1.77	36.00	Pass

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	-3.04	30.00	1.50	-1.54	36.00	Pass
BLE	2Mbps	1	19	2440	-3.10	30.00	1.50	-1.60	36.00	Pass
BLE	2Mbps	1	39	2480	-3.35	30.00	1.50	-1.85	36.00	Pass

Ant 2:

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	-2.52	30.00	2.50	-0.02	36.00	Pass
BLE	1Mbps	1	19	2440	-2.90	30.00	2.50	-0.40	36.00	Pass
BLE	1Mbps	1	39	2480	-2.71	30.00	2.50	-0.21	36.00	Pass

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	-2.59	30.00	2.50	-0.09	36.00	Pass
BLE	2Mbps	1	19	2440	-2.88	30.00	2.50	-0.38	36.00	Pass
BLE	2Mbps	1	39	2480	-2.70	30.00	2.50	-0.20	36.00	Pass



3.2.6 Test Result of Average Output Power (Reporting Only)

Ant 1:

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	0.74	-3.45
BLE	1Mbps	1	19	2440	0.74	-3.43
BLE	1Mbps	1	39	2480	0.74	-3.56

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	2.46	-3.06
BLE	2Mbps	1	19	2440	2.46	-3.32
BLE	2Mbps	1	39	2480	2.46	-3.36

Ant 2:

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	0.71	-2.96
BLE	1Mbps	1	19	2440	0.71	-3.17
BLE	1Mbps	1	39	2480	0.71	-3.11

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	2Mbps	1	0	2402	2.49	-2.63
BLE	2Mbps	1	19	2440	2.49	-2.90
BLE	2Mbps	1	39	2480	2.49	-2.77

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

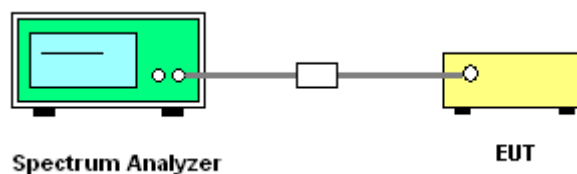

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

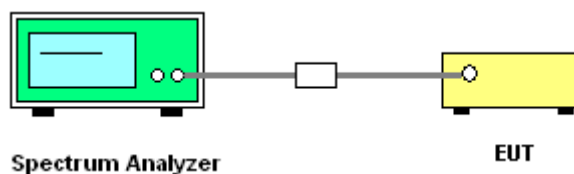

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

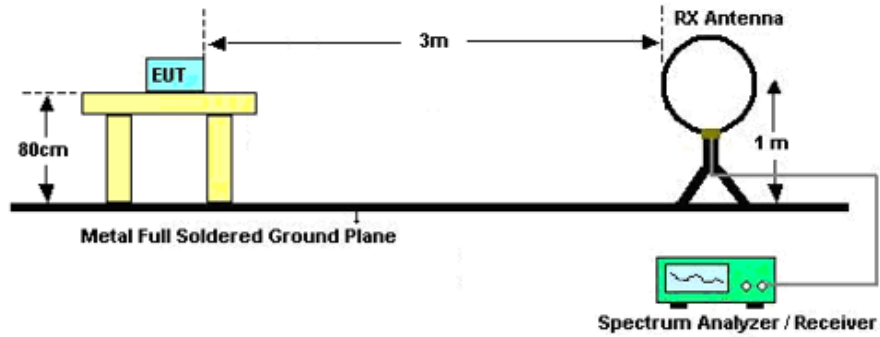

For radiated emissions from 30MHz to 1GHz

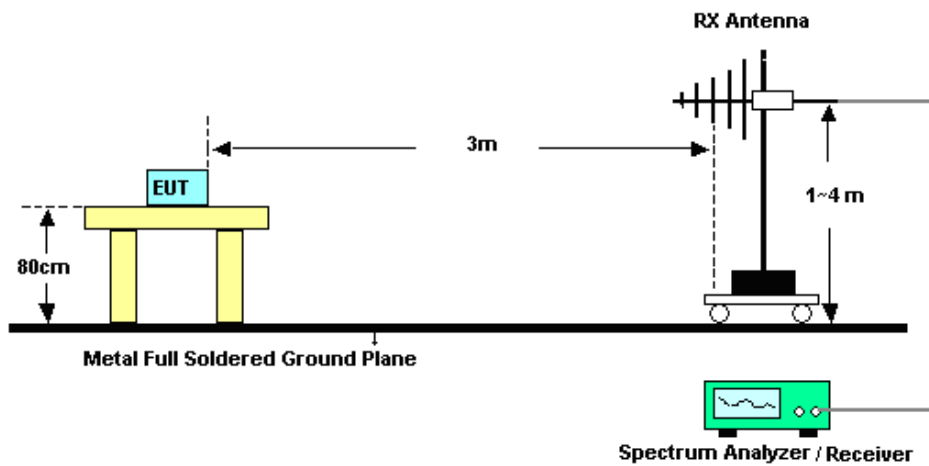

For radiated emissions above 1GHz

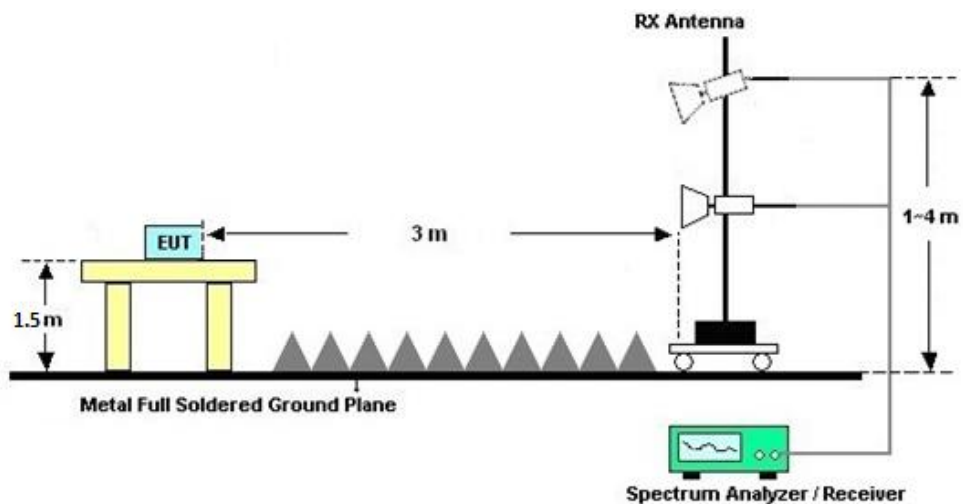



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

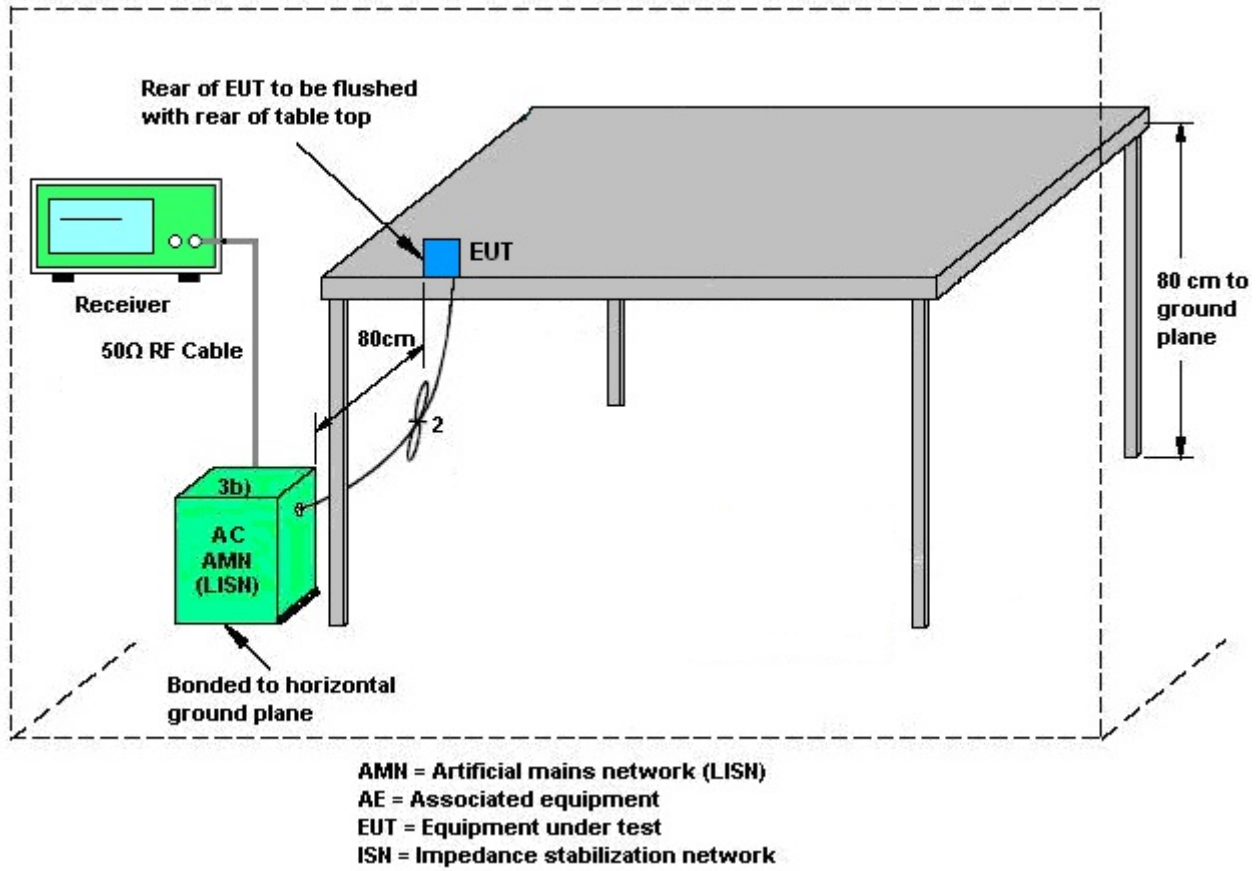

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Feb. 13, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Feb. 13, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Feb. 13, 2023	Jan. 04, 2024	Conducted (TH01-KS)
RF Test System	Tonscend	TS1120-3	N/A	N/A	NCR	Feb. 13, 2023	NCR	Conducted (TH01-KS)
automation control unit	Tonscend	JS0806-2	21H8060473	N/A	NCR	Feb. 13, 2023	NCR	Conducted (TH01-KS)
power control unit	Tonscend	JS0806-4ADC	21J8060495	N/A	NCR	Feb. 13, 2023	NCR	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max 30dBm	Jul. 11, 2022	Mar. 02, 2023	Jul. 10, 2023	Radiation (03CH08-KS)
Spectrum Analyzer	R&S	FSV40	101932	10kHz~40GHz;Max 30dBm	Oct. 12, 2022	Mar. 02, 2023	Oct. 11, 2023	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Mar. 02, 2023	Oct. 15, 2023	Radiation (03CH08-KS)
Bilog Antenna	TESEQ& VGT	CBL 61110	59915	30MHz-1GHz	Aug. 26, 2022	Mar. 02, 2023	Aug. 25, 2023	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 08, 2022	Mar. 02, 2023	Jul. 07, 2023	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz-18Ghz	Jan. 05, 2023	Mar. 02, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Mar. 02, 2023	Jan. 07, 2024	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	413741	9KHz-1GHz	Jan. 05, 2023	Mar. 02, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
Amplifier	EM	EM01G18GA	060834	1Ghz-18Ghz	Oct. 12, 2022	Mar. 02, 2023	Oct. 11, 2023	Radiation (03CH08-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2023	Mar. 02, 2023	Jan. 04, 2024	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Mar. 02, 2023	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Mar. 02, 2023	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Mar. 02, 2023	NCR	Radiation (03CH08-KS)
6db attenuator	TOJOIN	SMA(JK)	EMC01	2W/DC-18G	Jan. 10, 2023	Mar. 02, 2023	Jan. 09, 2024	Radiation (03CH08-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Mar. 07, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Mar. 07, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 13, 2022	Mar. 07, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Mar. 07, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results



Case No. : <u>FR2N0304-01B</u>
Ambient Condition: <u>25 °C, 45 %RH</u>
According Standard: <u>■Part15C</u>
Test Date: <u>2023.2.13</u> Test Engineer: <u>Jiang Jun</u>



DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.68	2401.65	2402.32	0.5	PASS
	Ant2	2402	0.67	2401.65	2402.32	0.5	PASS
	Ant1	2440	0.68	2439.65	2440.32	0.5	PASS
	Ant2	2440	0.67	2439.65	2440.32	0.5	PASS
	Ant1	2480	0.68	2479.65	2480.32	0.5	PASS
	Ant2	2480	0.67	2479.65	2480.32	0.5	PASS
BLE_2M	Ant1	2402	1.17	2401.41	2402.58	0.5	PASS
	Ant2	2402	1.18	2401.40	2402.58	0.5	PASS
	Ant1	2440	1.18	2439.40	2440.58	0.5	PASS
	Ant2	2440	1.18	2439.40	2440.58	0.5	PASS
	Ant1	2480	1.18	2479.40	2480.58	0.5	PASS
	Ant2	2480	1.18	2479.40	2480.58	0.5	PASS




Test Graphs

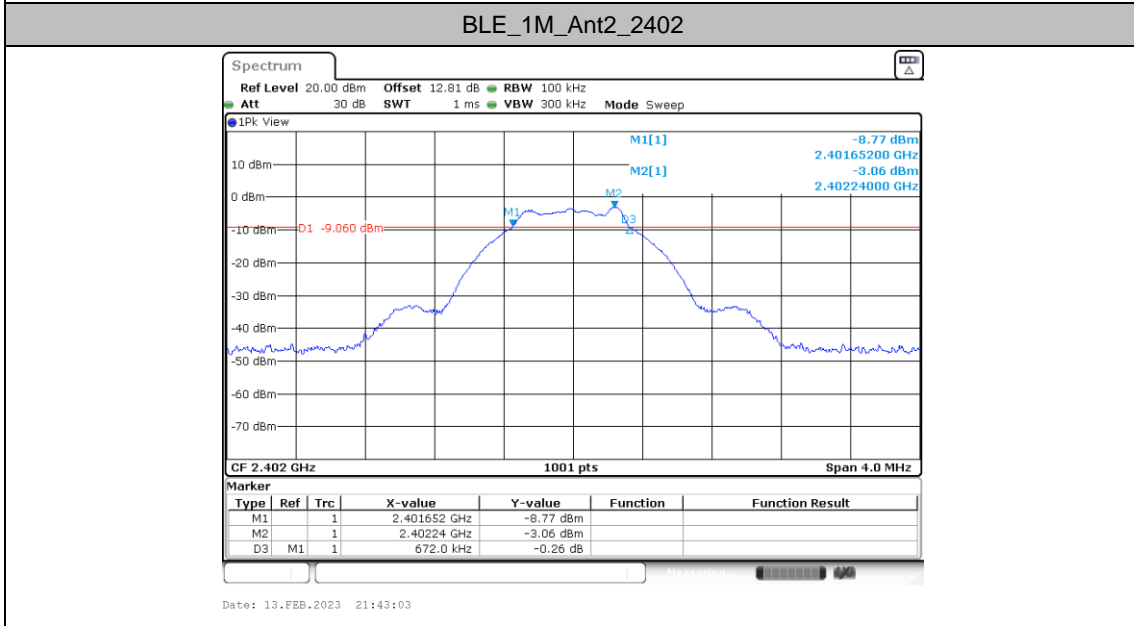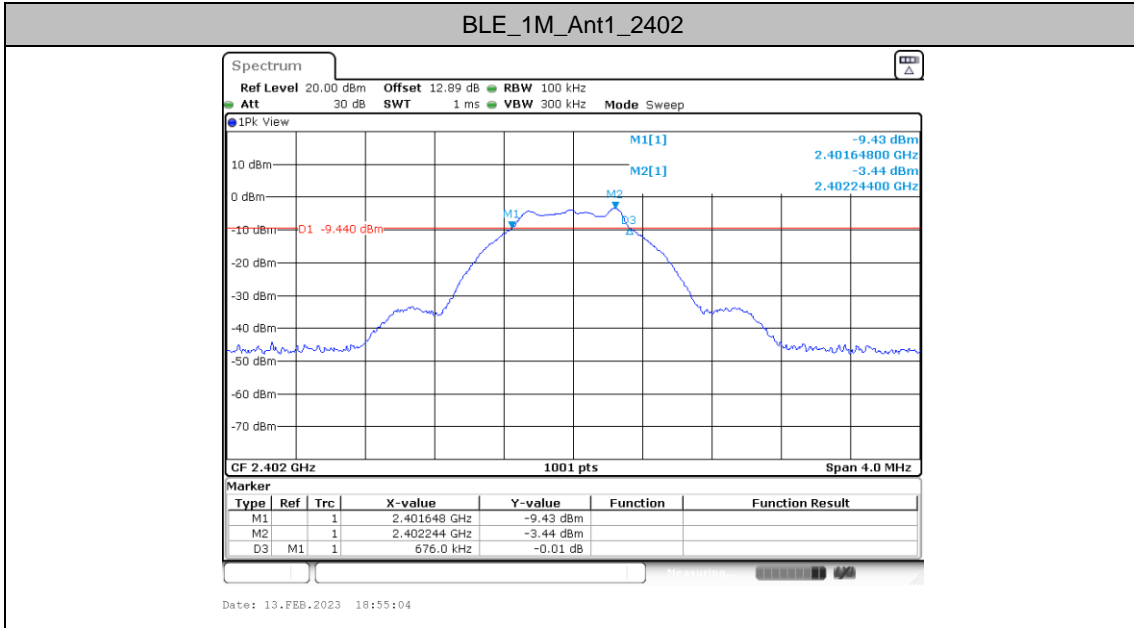




BLE_1M_Ant1_2440

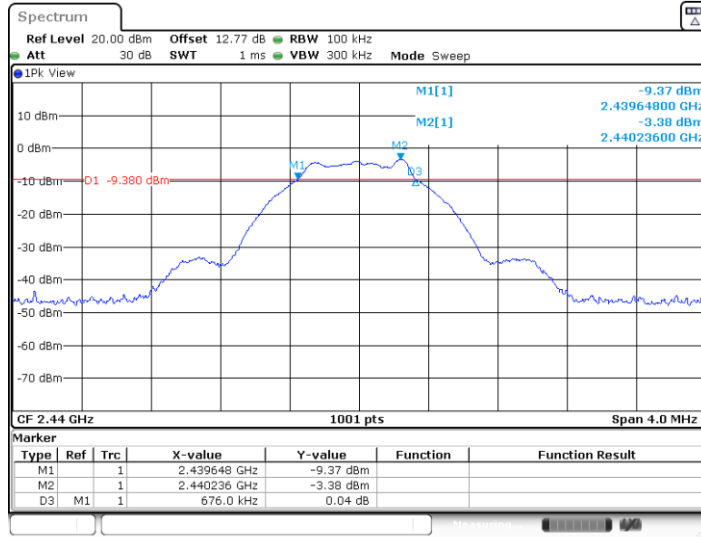


BLE_1M_Ant2_2440

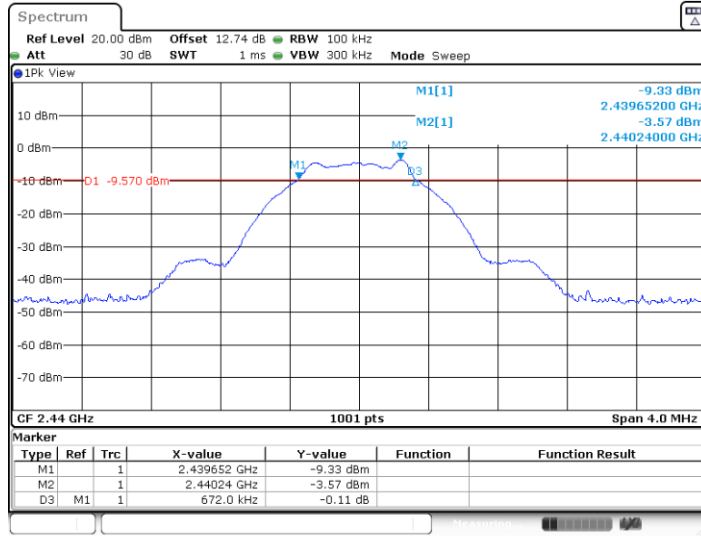




BLE_1M_Ant1_2480

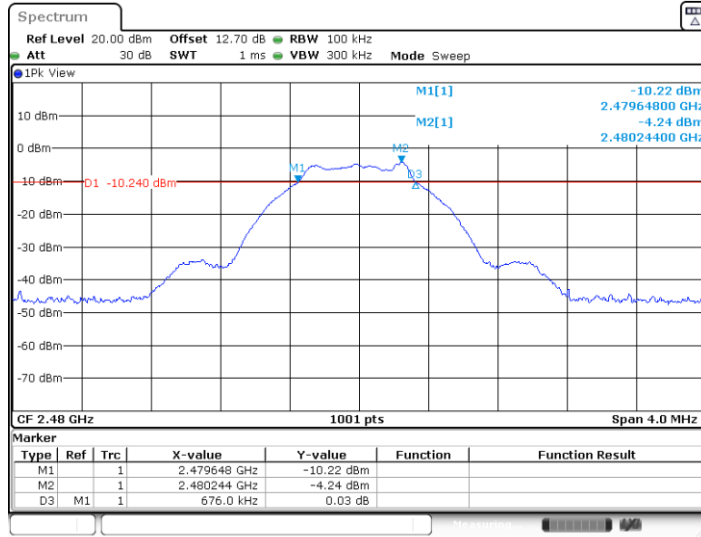


BLE_1M_Ant2_2480

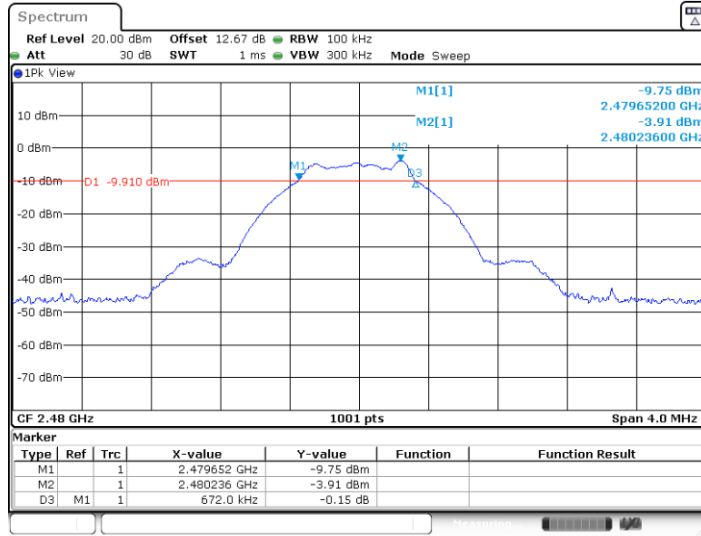




BLE_2M_Ant1_2402

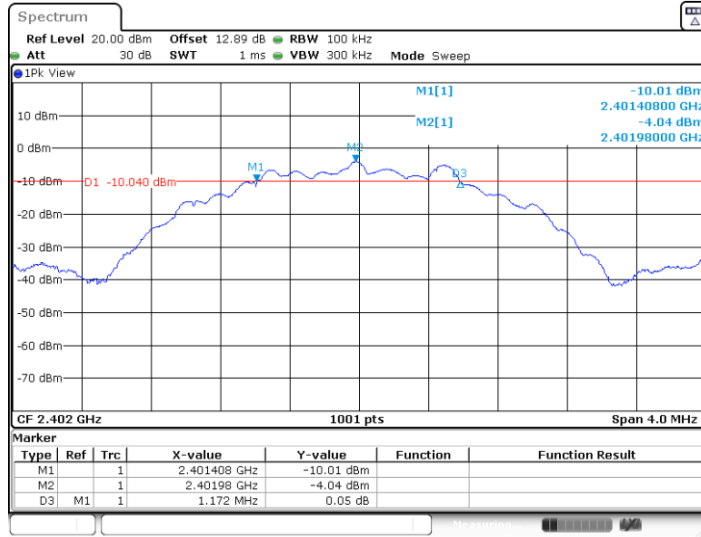


BLE_2M_Ant2_2402

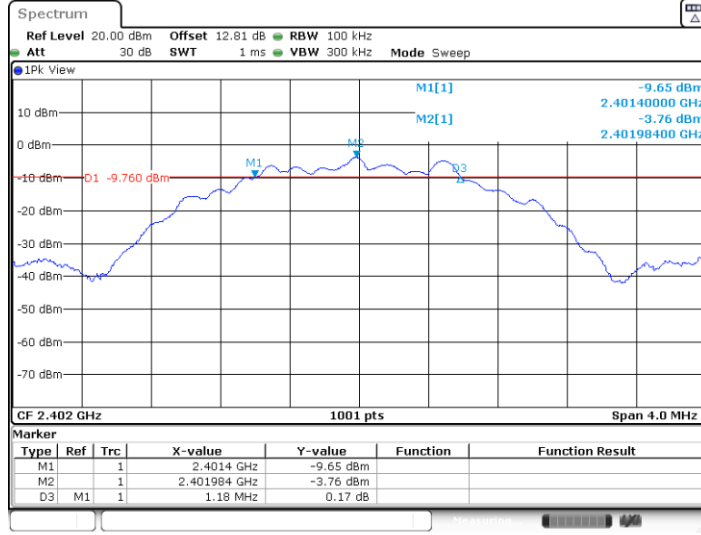




BLE_2M_Ant1_2440

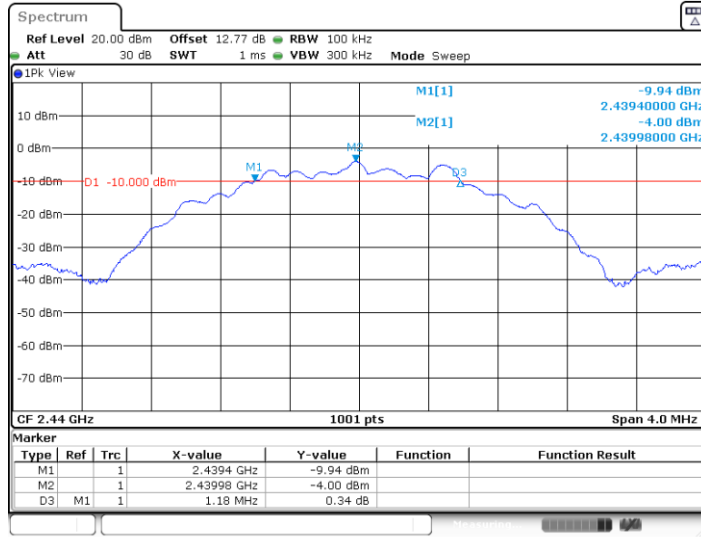

Date: 13.FEB.2023 19:03:32


BLE_2M_Ant2_2440

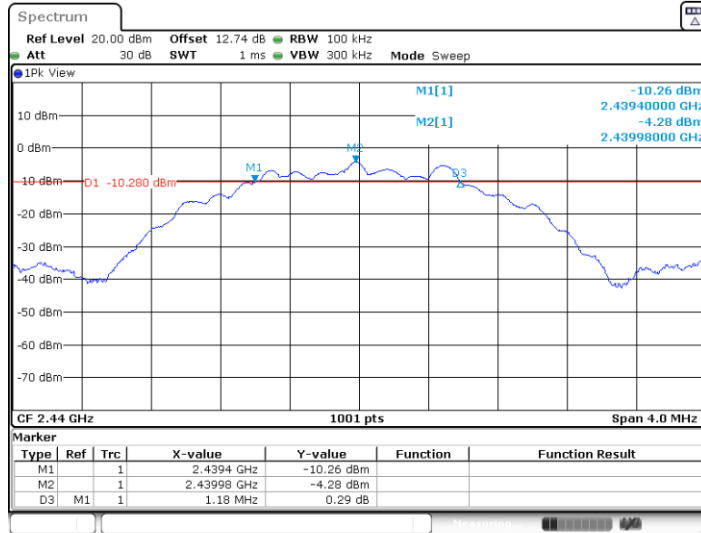

Date: 13.FEB.2023 21:51:18




BLE_2M_Ant1_2480

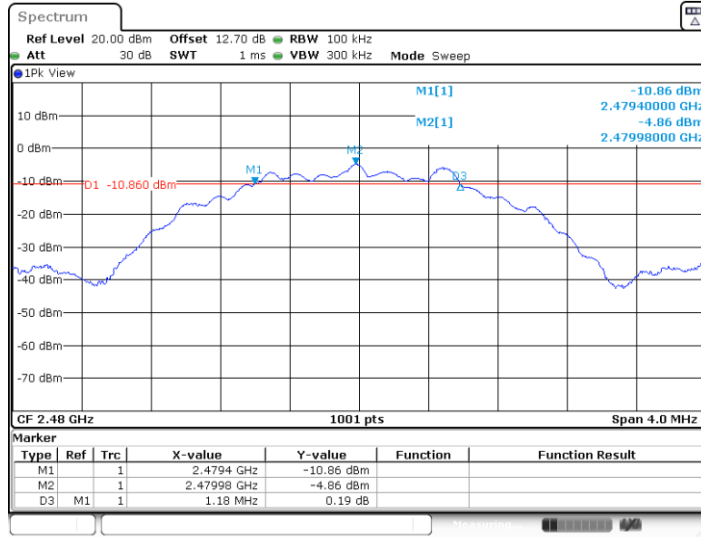

Date: 13.FEB.2023 19:05:09

BLE_2M_Ant2_2480

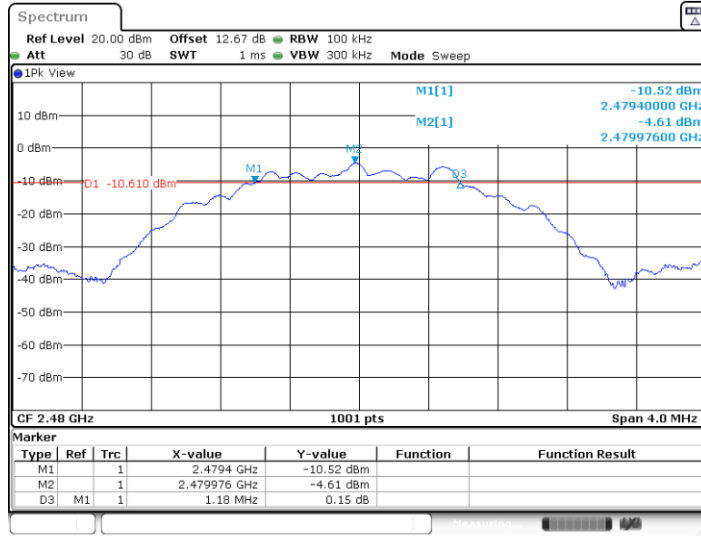

Date: 13.FEB.2023 21:53:01




Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.039	2401.4725	2402.5115	---	---
	Ant2	2402	1.039	2401.4725	2402.5115	---	---
	Ant1	2440	1.039	2439.4725	2440.5115	---	---
	Ant2	2440	1.039	2439.4725	2440.5115	---	---
	Ant1	2480	1.043	2479.4685	2480.5115	---	---
	Ant2	2480	1.039	2479.4725	2480.5115	---	---
BLE_2M	Ant1	2402	2.07	2400.9690	2403.0390	---	---
	Ant2	2402	2.066	2400.9690	2403.0350	---	---
	Ant1	2440	2.07	2438.9690	2441.0390	---	---
	Ant2	2440	2.07	2438.9690	2441.0390	---	---
	Ant1	2480	2.07	2478.9690	2481.0390	---	---
	Ant2	2480	2.07	2478.9690	2481.0390	---	---




Test Graphs

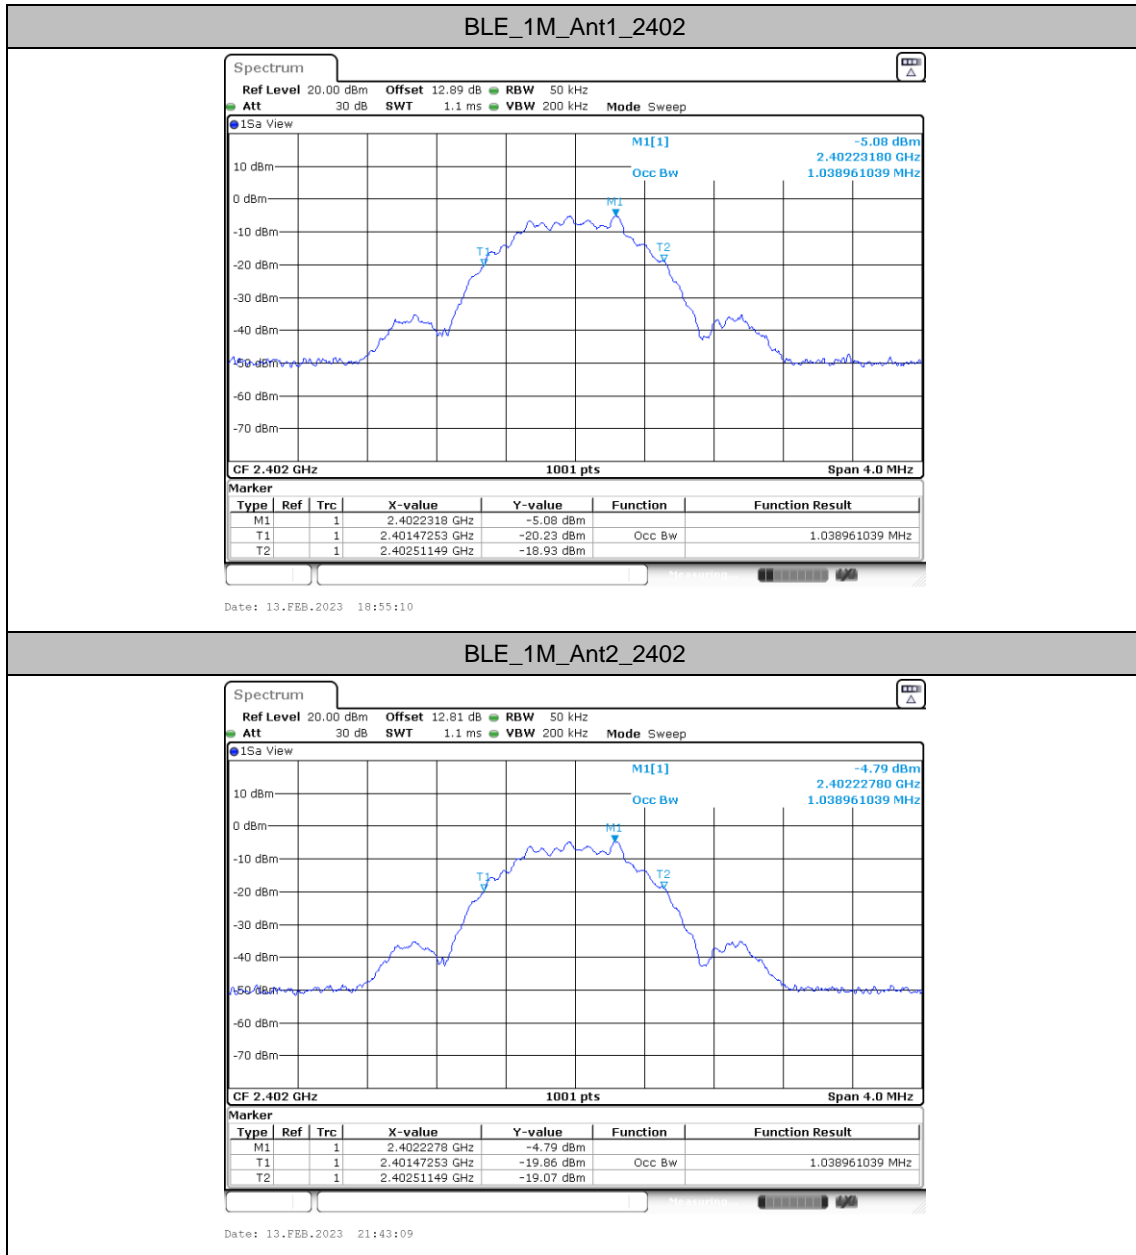




BLE_1M_Ant1_2440

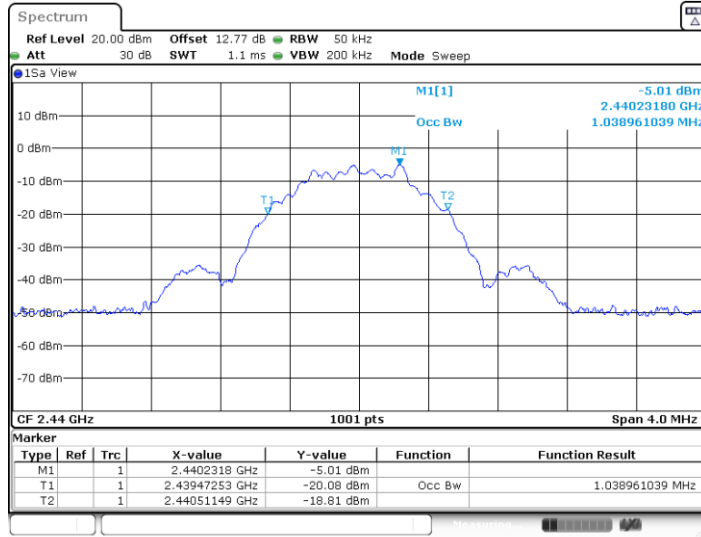

Date: 13.FEB.2023 18:57:24


BLE_1M_Ant2_2440

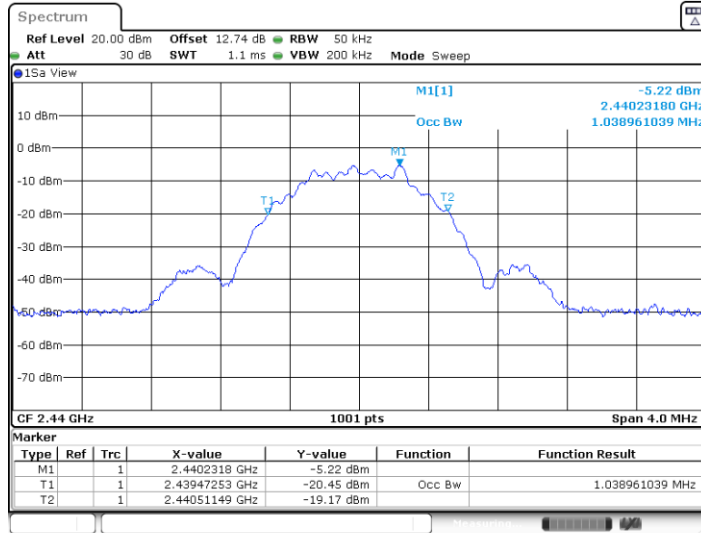

Date: 13.FEB.2023 21:45:16




BLE_1M_Ant1_2480

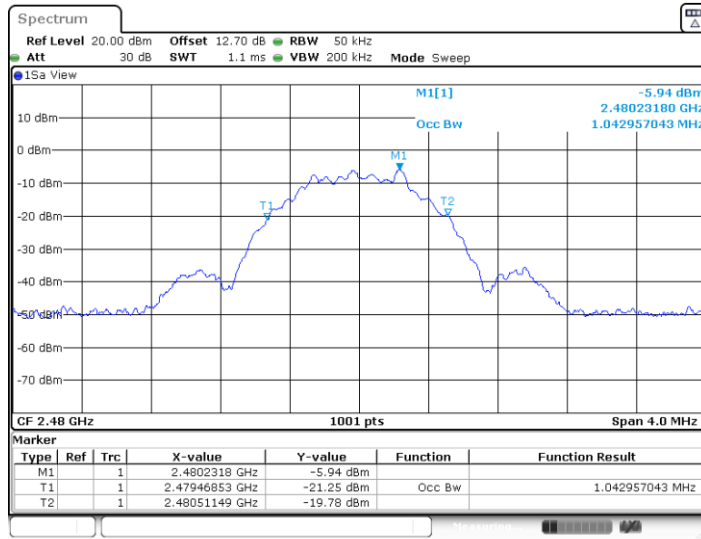

Date: 13.FEB.2023 18:58:59


BLE_1M_Ant2_2480

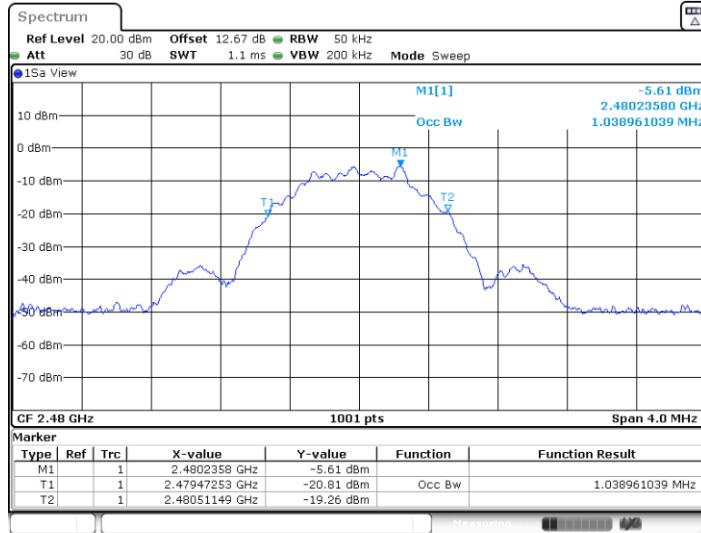

Date: 13.FEB.2023 21:46:56




BLE_2M_Ant1_2402

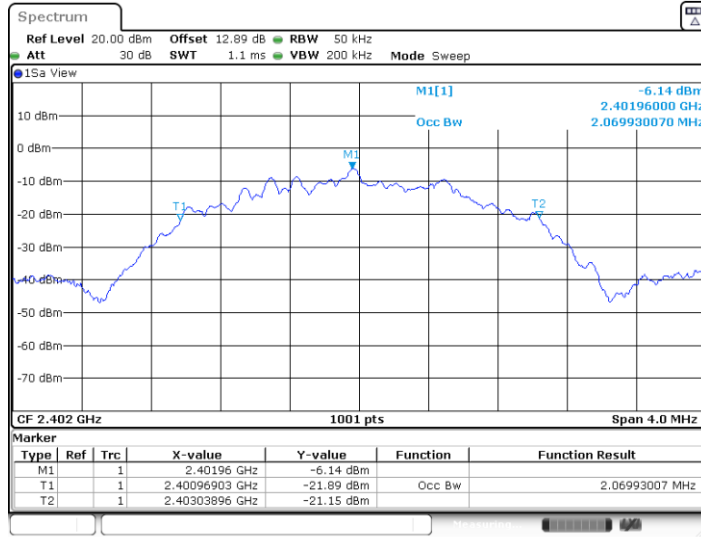

Date: 13.FEB.2023 19:01:18


BLE_2M_Ant2_2402

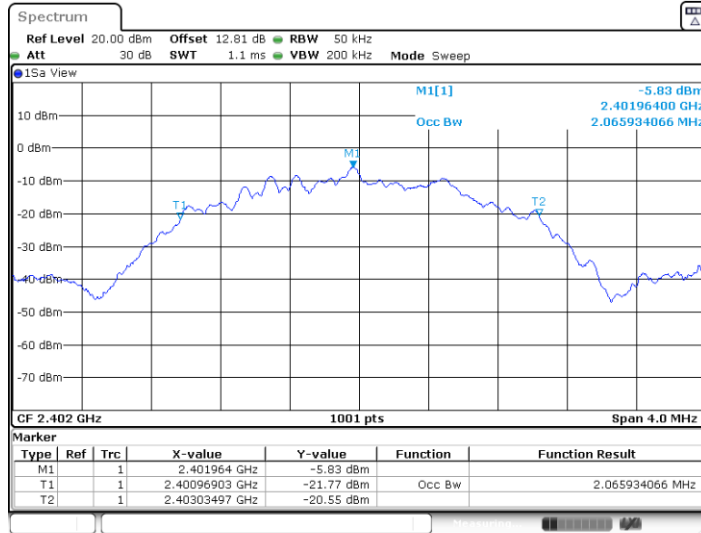

Date: 13.FEB.2023 21:49:04




BLE_2M_Ant1_2440

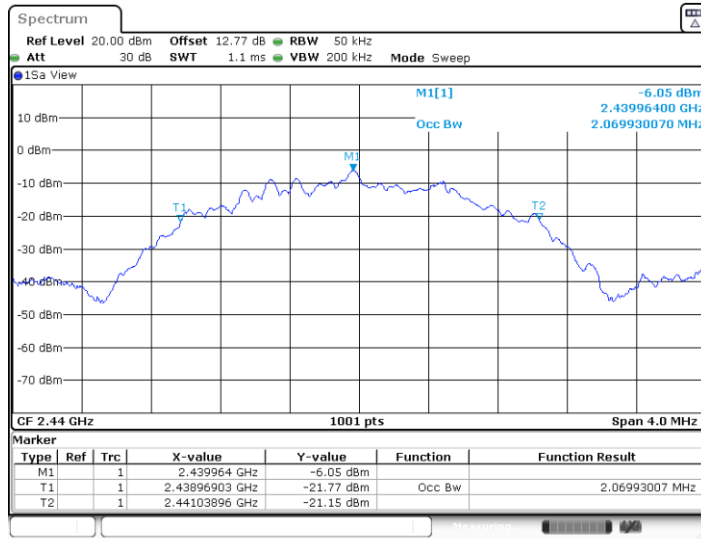

Date: 13.FEB.2023 19:03:44


BLE_2M_Ant2_2440

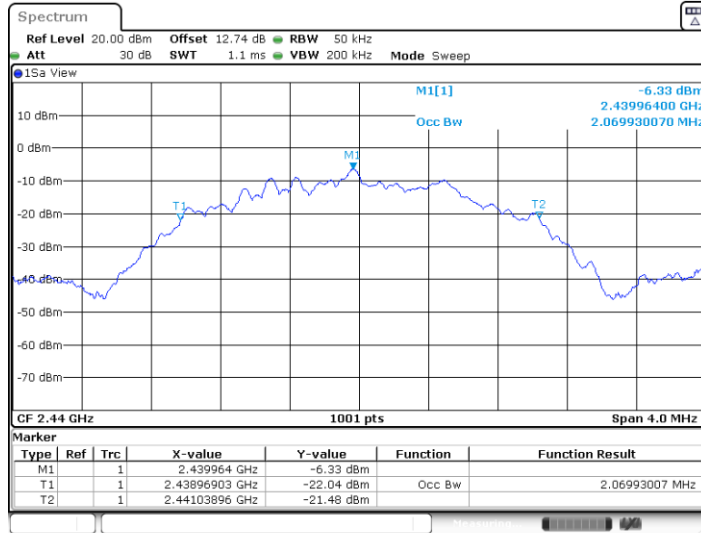

Date: 13.FEB.2023 21:51:33




BLE_2M_Ant1_2480

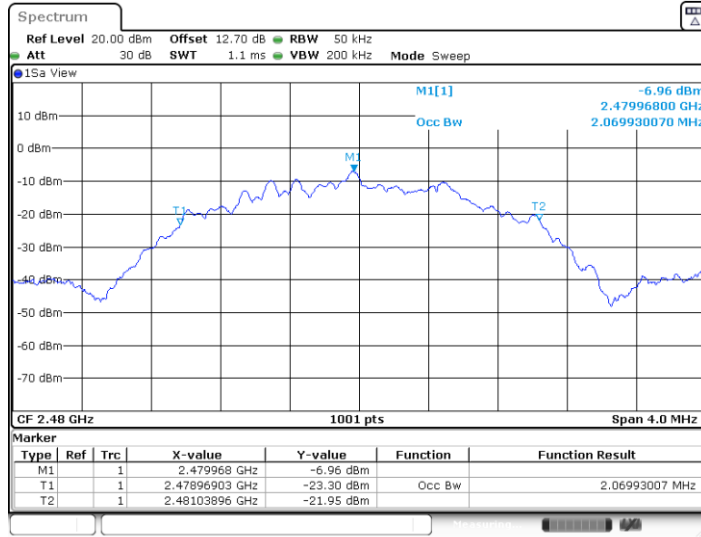

Date: 13.FEB.2023 19:05:21

BLE_2M_Ant2_2480

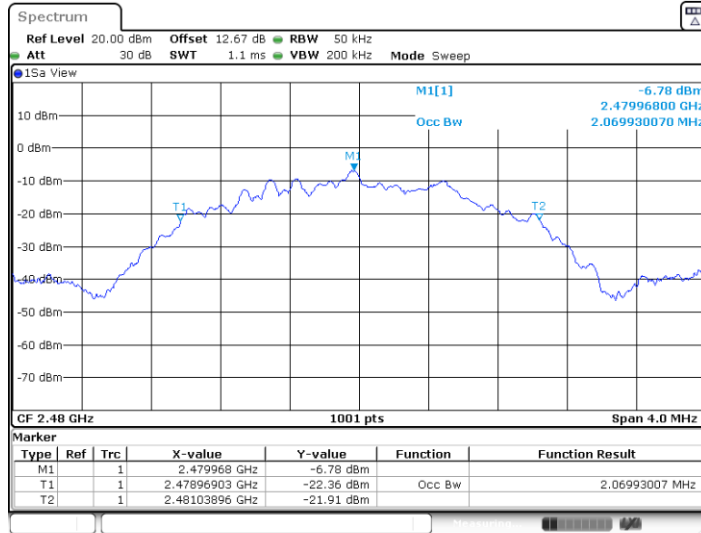

Date: 13.FEB.2023 21:53:13




Power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-19.23	≤8.00	PASS
	Ant2	2402	-18.81	≤8.00	PASS
	Ant1	2440	-19.14	≤8.00	PASS
	Ant2	2440	-19.34	≤8.00	PASS
	Ant1	2480	-20.01	≤8.00	PASS
	Ant2	2480	-19.7	≤8.00	PASS
BLE_2M	Ant1	2402	-21.34	≤8.00	PASS
	Ant2	2402	-21.05	≤8.00	PASS
	Ant1	2440	-21.21	≤8.00	PASS
	Ant2	2440	-21.55	≤8.00	PASS
	Ant1	2480	-22.15	≤8.00	PASS
	Ant2	2480	-21.92	≤8.00	PASS




Test Graphs

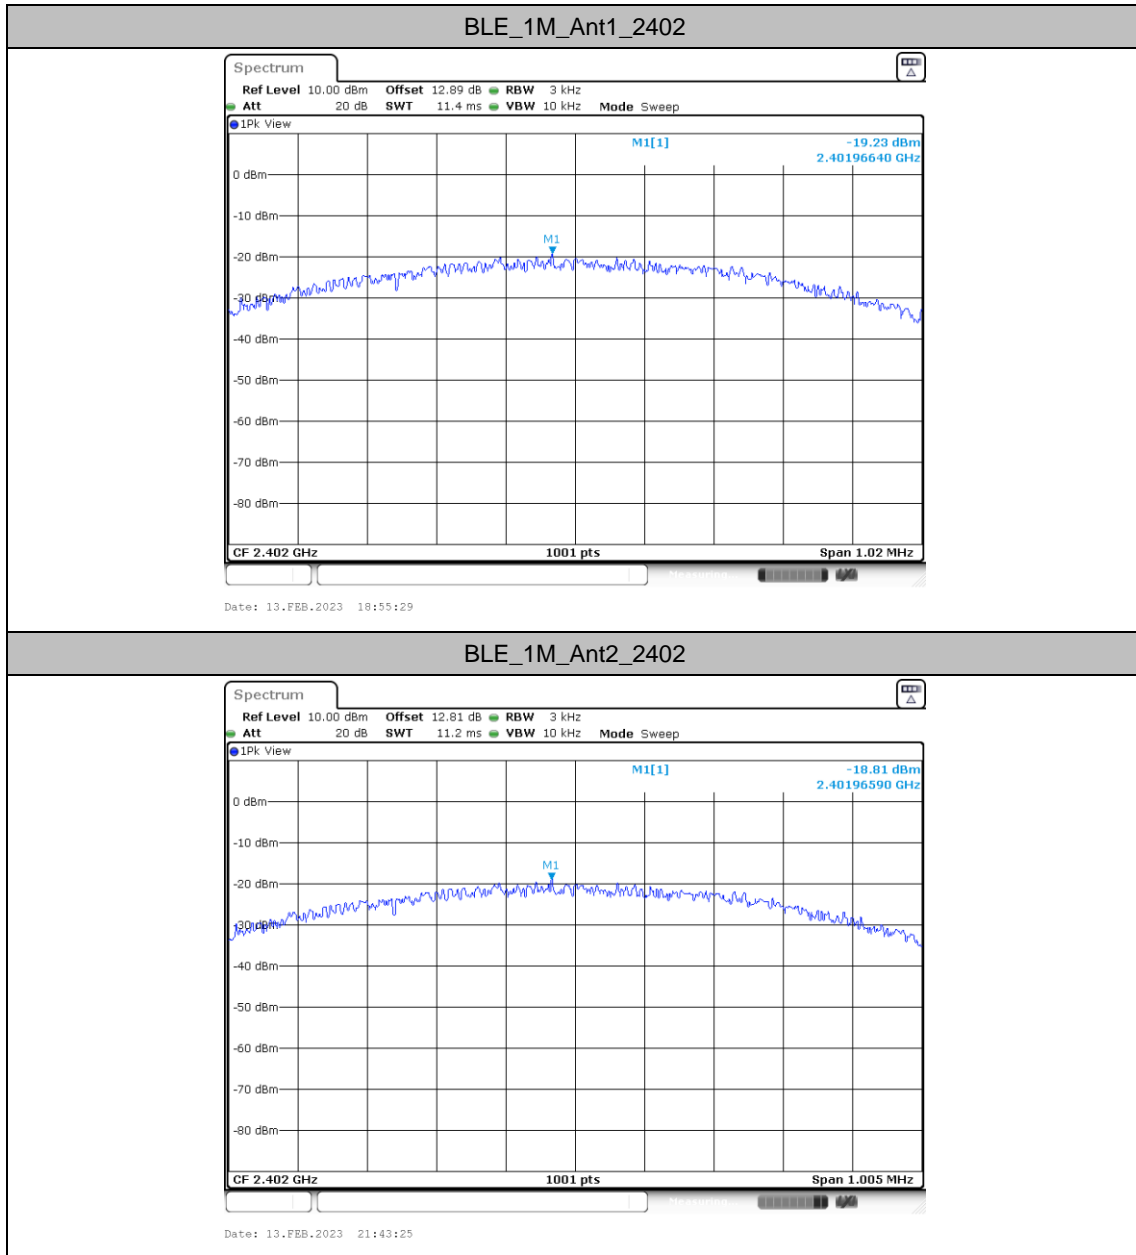




BLE_1M_Ant1_2440

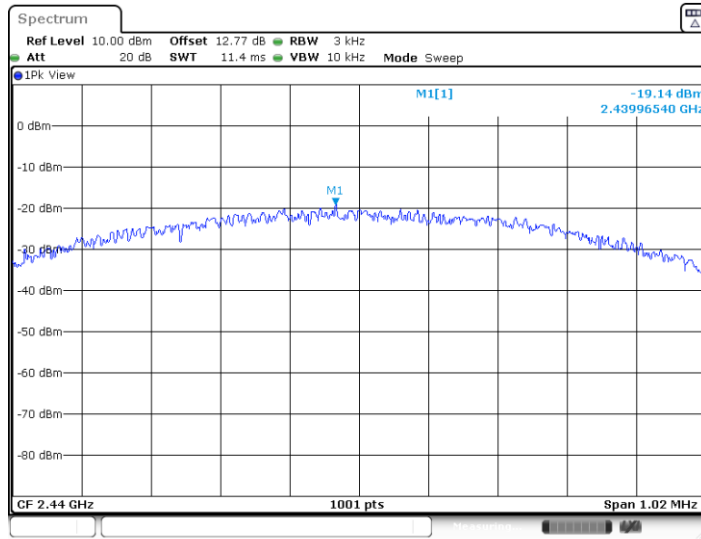

Date: 13.FEB.2023 18:57:44


BLE_1M_Ant2_2440

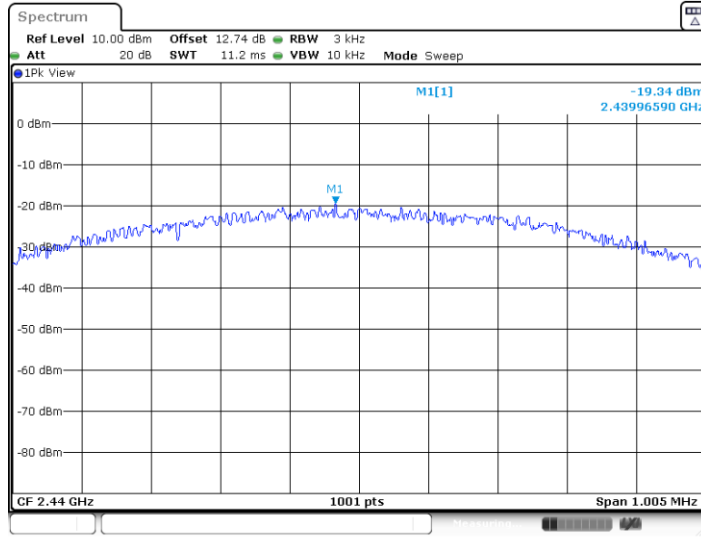

Date: 13.FEB.2023 21:45:33




BLE_1M_Ant1_2480


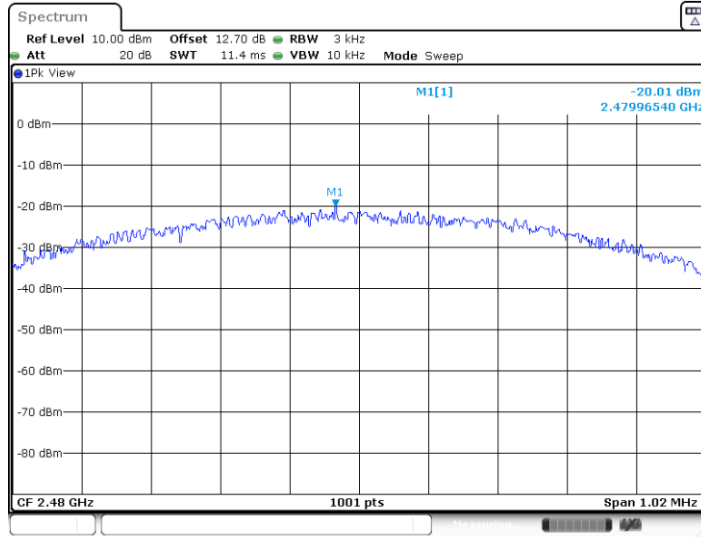


Date: 13.FEB.2023 18:59:19

BLE_1M_Ant2_2480

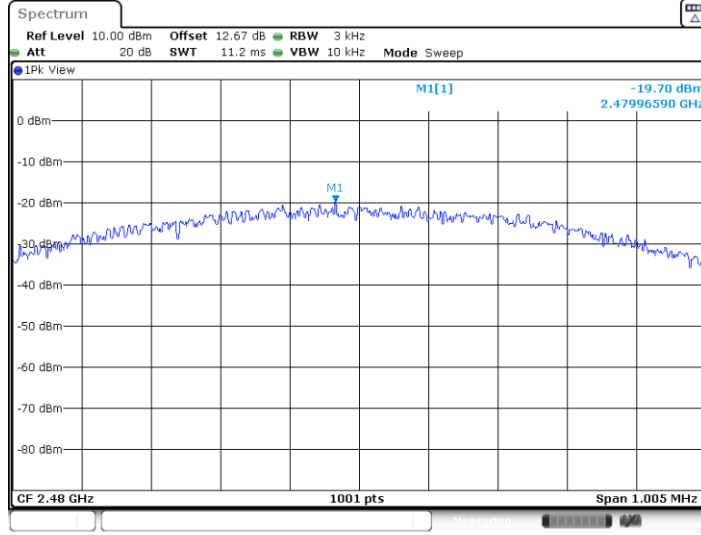


Date: 13.FEB.2023 21:47:16

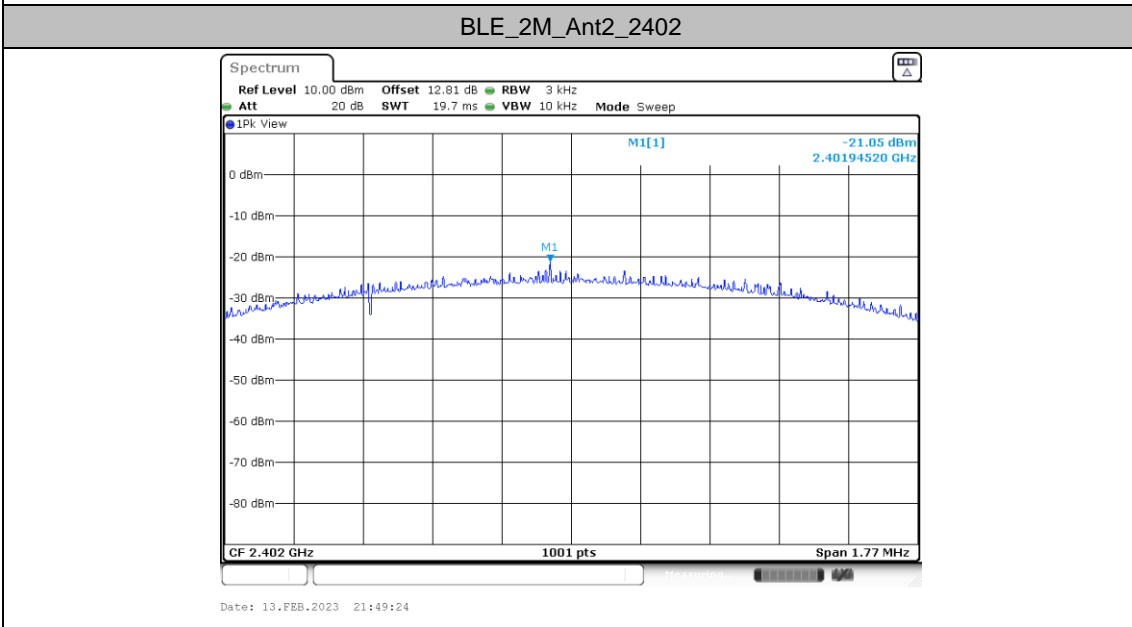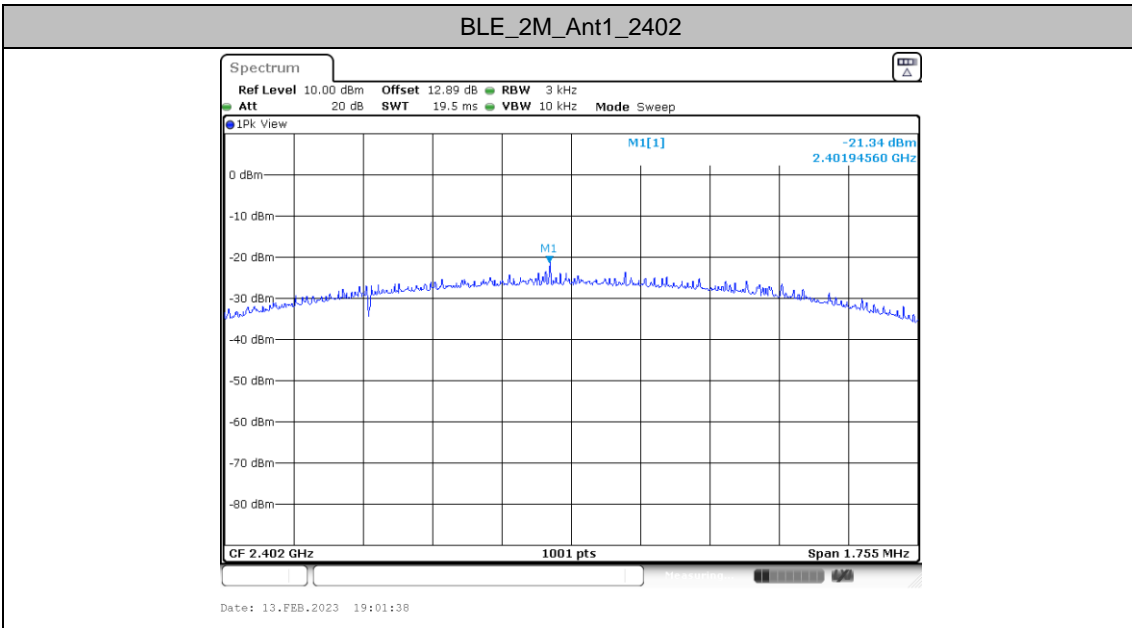




BLE_2M_Ant1_2440

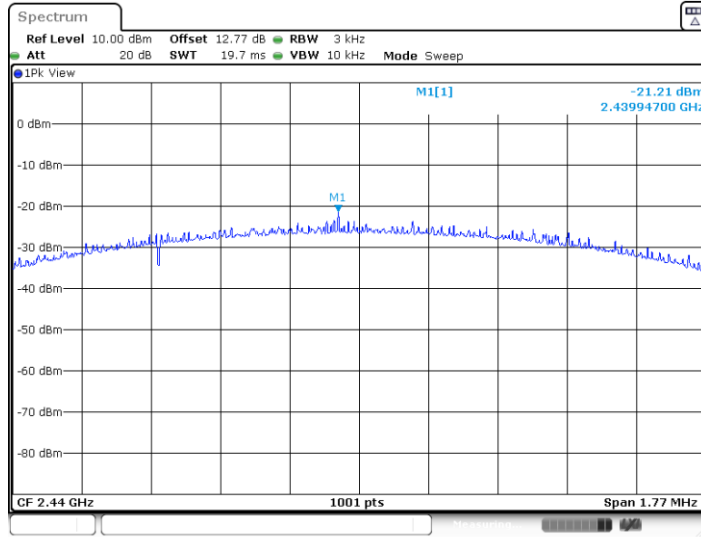

Date: 13.FEB.2023 19:04:01


BLE_2M_Ant2_2440

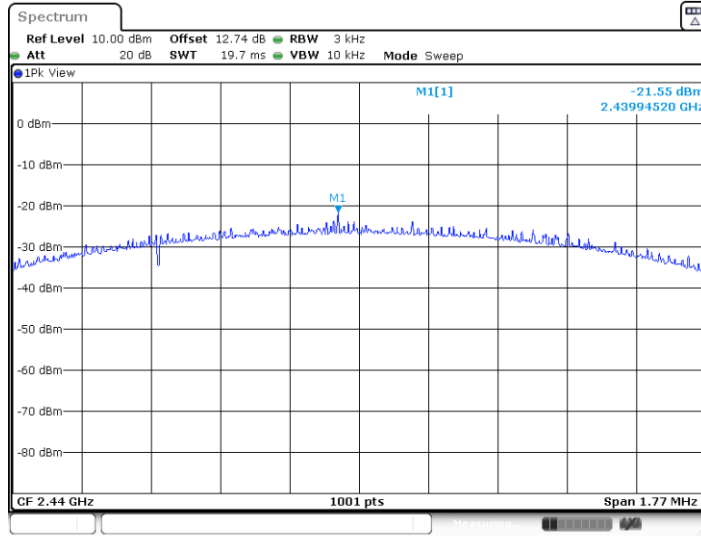

Date: 13.FEB.2023 21:51:53




BLE_2M_Ant1_2480

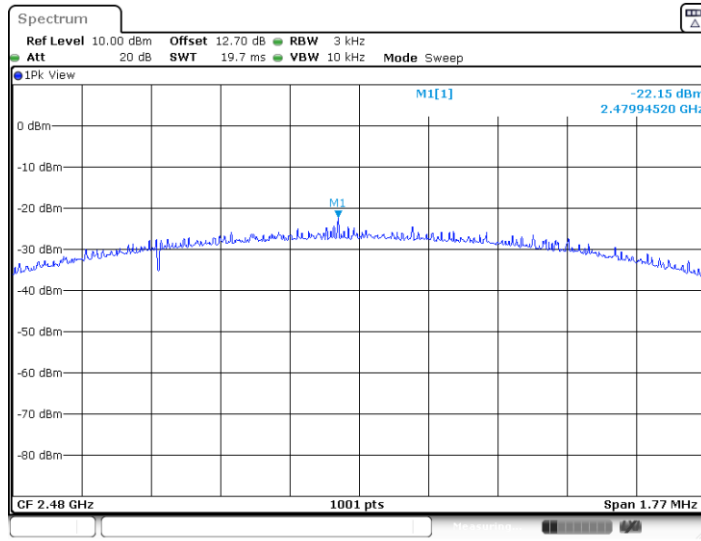

Date: 13.FEB.2023 19:05:41

BLE_2M_Ant2_2480

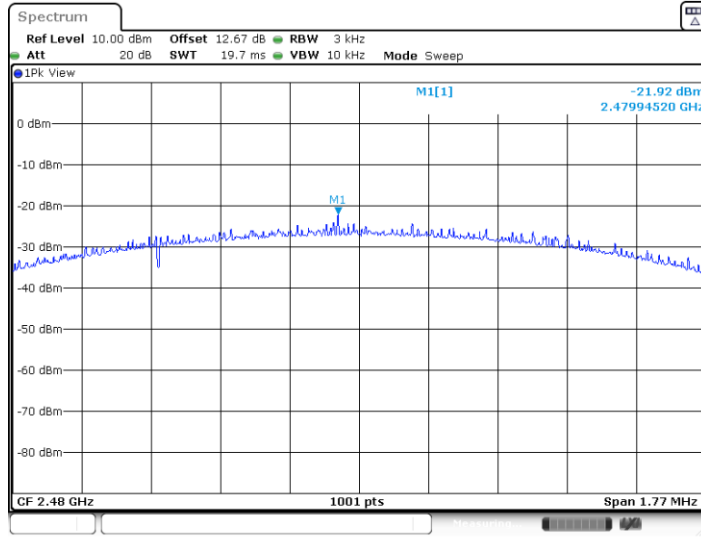

Date: 13.FEB.2023 21:53:32




Reference level measurement

Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_1M	Ant1	2402	2402.23	-3.41
	Ant2	2402	2402.23	-3.05
	Ant1	2440	2440.24	-3.38
	Ant2	2440	2440.24	-3.58
	Ant1	2480	2480.24	-4.22
	Ant2	2480	2480.24	-3.92
BLE_2M	Ant1	2402	2401.98	-4.04
	Ant2	2402	2401.98	-3.76
	Ant1	2440	2439.98	-3.99
	Ant2	2440	2439.98	-4.29
	Ant1	2480	2479.98	-4.89
	Ant2	2480	2479.98	-4.64




Test Graphs

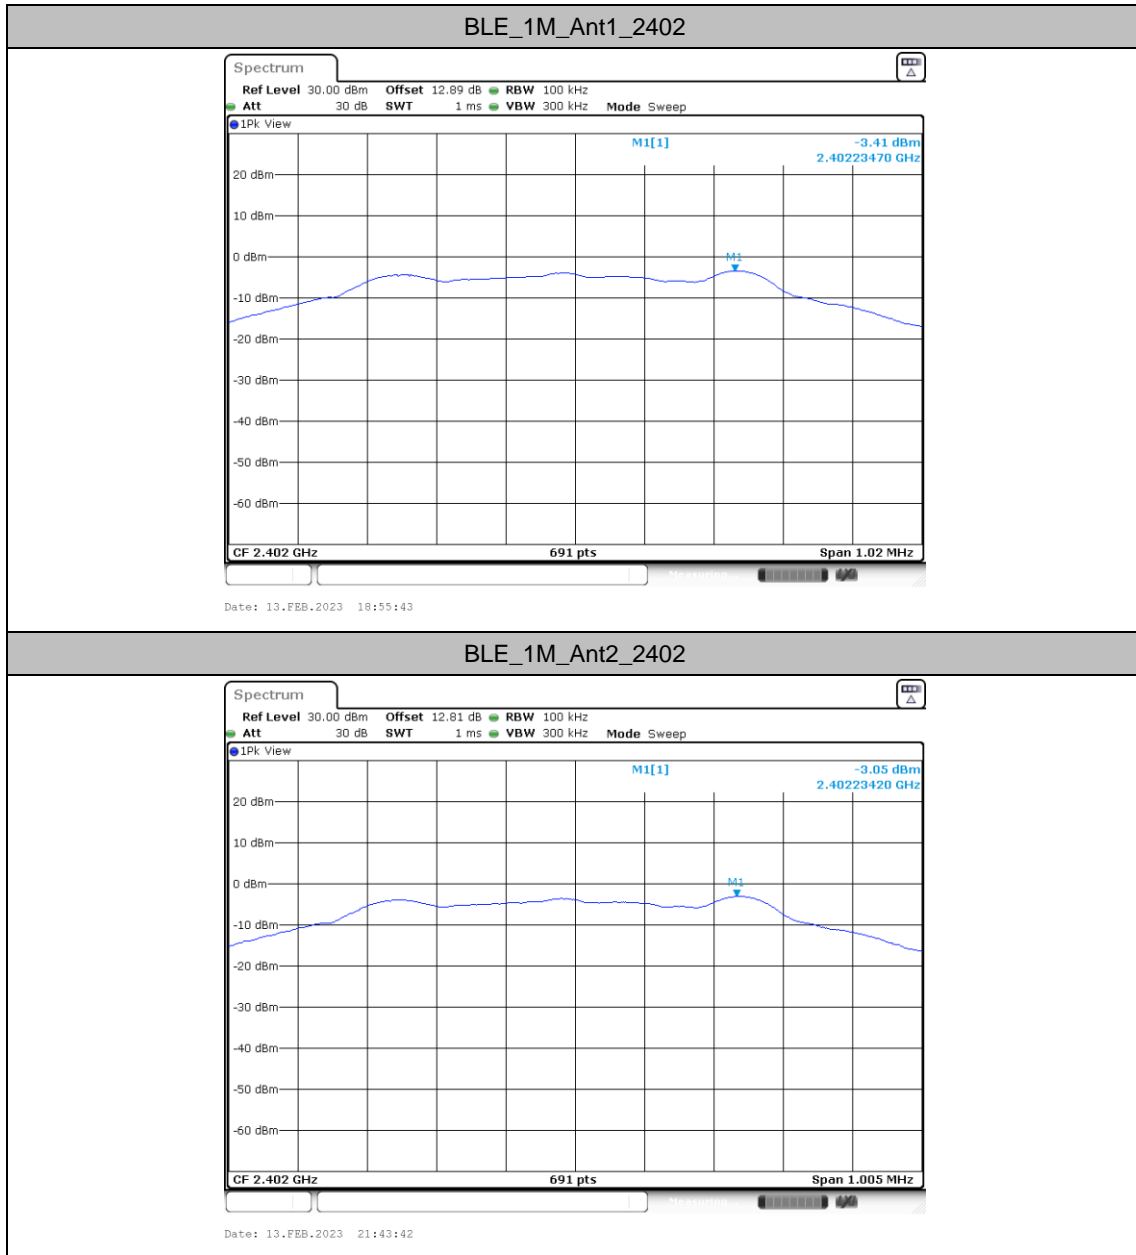




BLE_1M_Ant1_2440

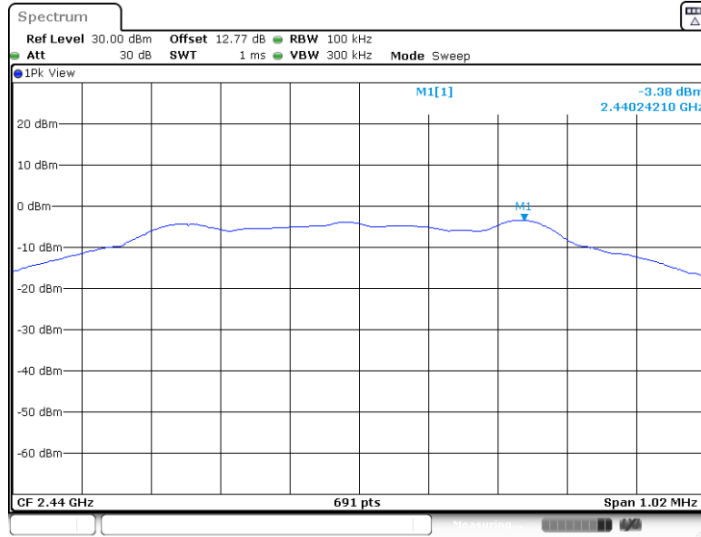

Date: 13.FEB.2023 18:57:57


BLE_1M_Ant2_2440

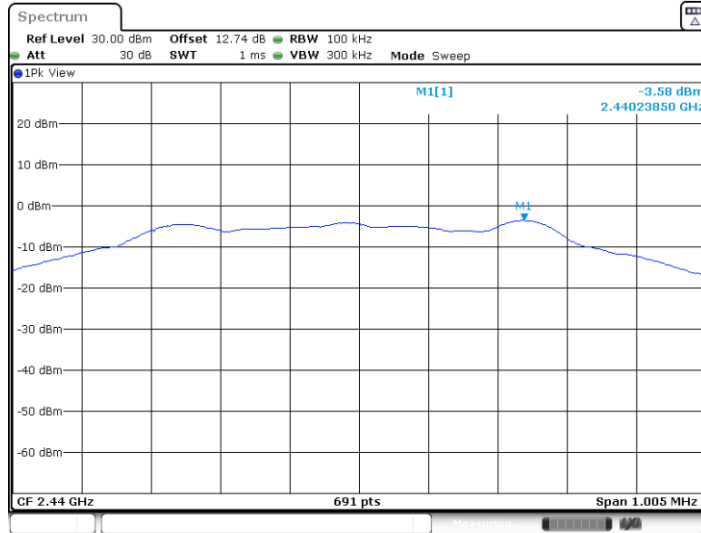

Date: 13.FEB.2023 21:45:49




BLE_1M_Ant1_2480

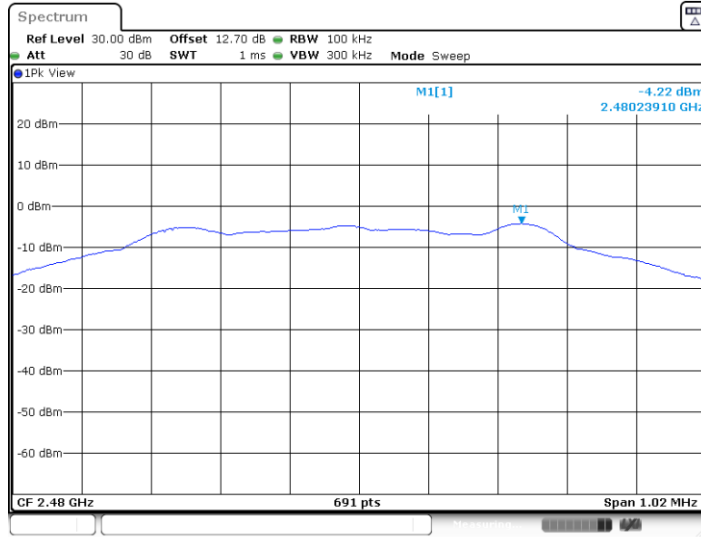

Date: 13.FEB.2023 18:59:35


BLE_1M_Ant2_2480

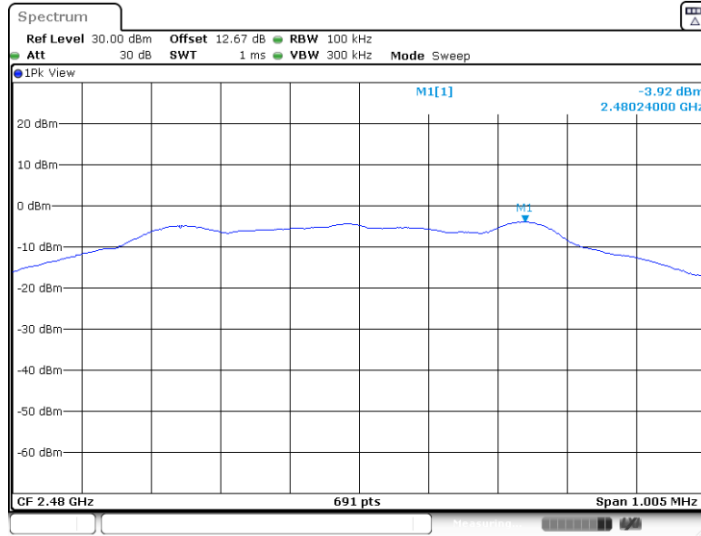

Date: 13.FEB.2023 21:47:33




BLE_2M_Ant1_2402

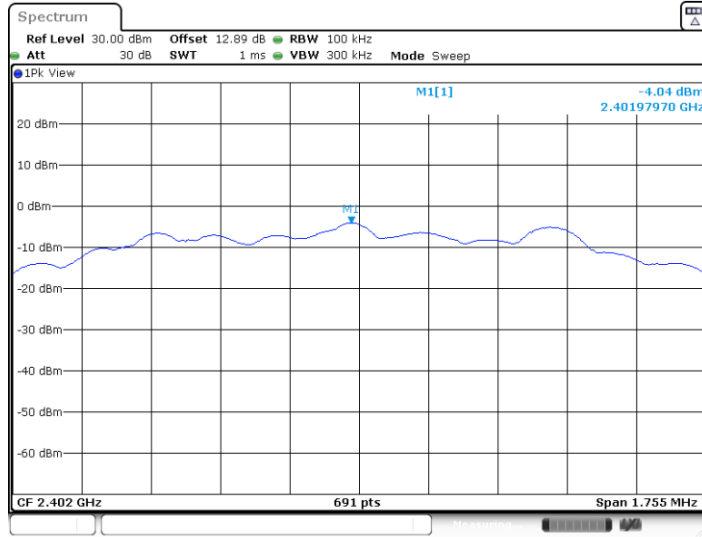

Date: 13.FEB.2023 19:01:54


BLE_2M_Ant2_2402

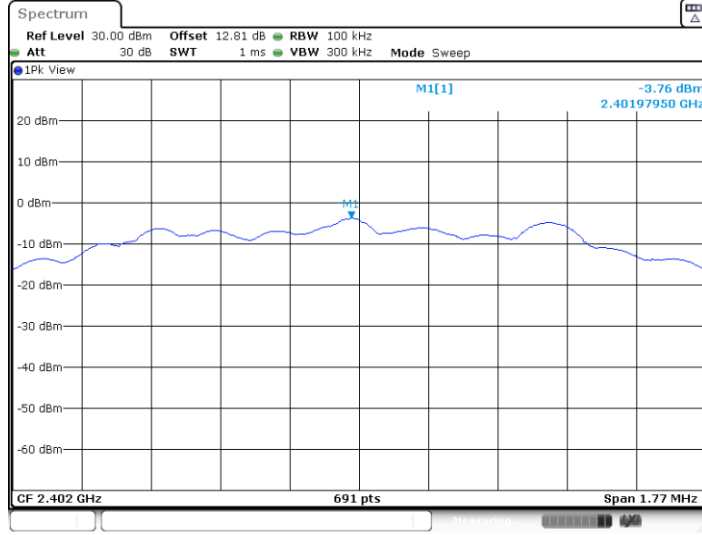

Date: 13.FEB.2023 21:49:40




BLE_2M_Ant1_2440

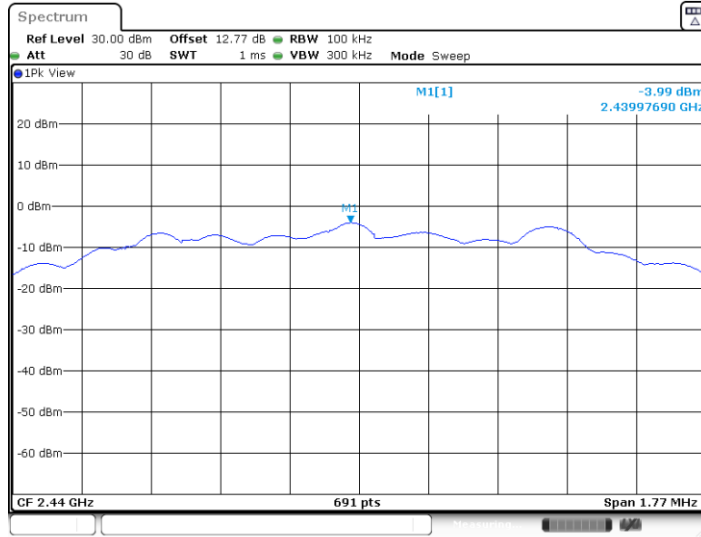

Date: 13.FEB.2023 19:04:17


BLE_2M_Ant2_2440

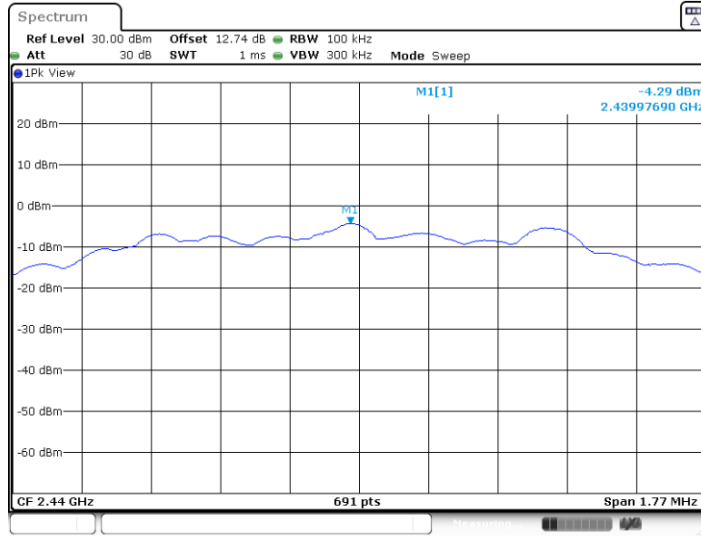

Date: 13.FEB.2023 21:52:06




BLE_2M_Ant1_2480

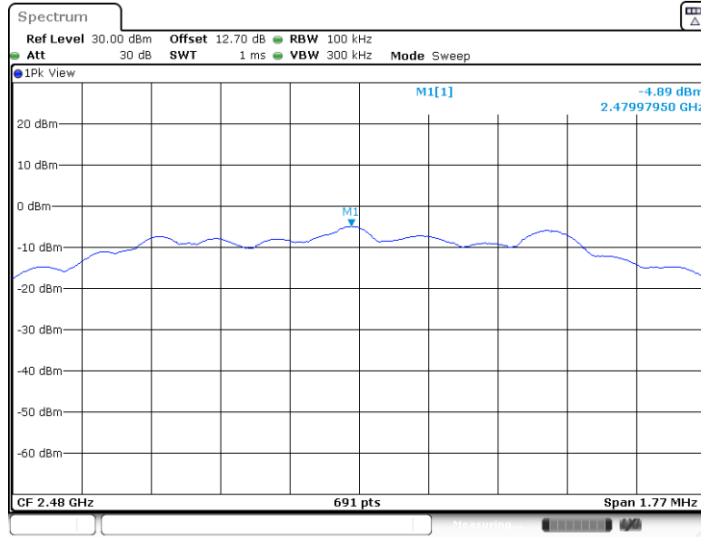

Date: 13.FEB.2023 19:05:54

BLE_2M_Ant2_2480

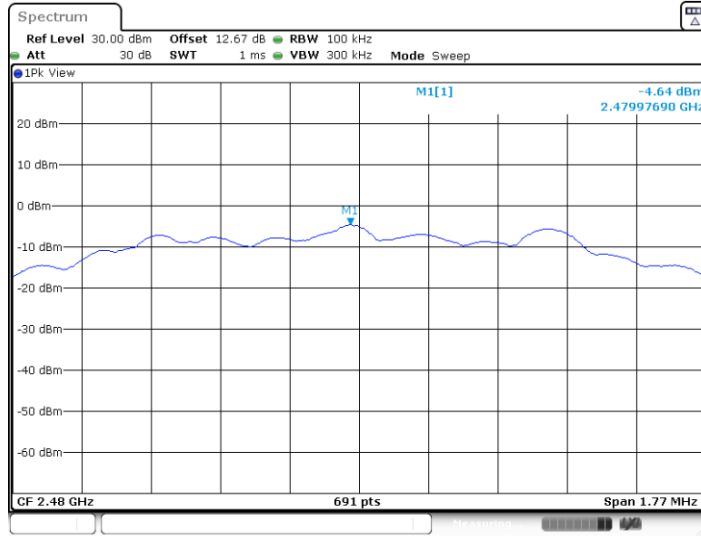

Date: 13.FEB.2023 21:53:46





Band edge measurements



Test Result



TestMode	Antenna	ChName	Freq(MHz)	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Ant1	Low	2402	-3.41	-43.32	≤-23.41	PASS
	Ant2	Low	2402	-3.05	-43.97	≤-23.05	PASS
	Ant1	High	2480	-4.22	-42.56	≤-24.22	PASS
	Ant2	High	2480	-3.92	-42.63	≤-23.92	PASS
BLE_2M	Ant1	Low	2402	-4.04	-34.21	≤-24.04	PASS
	Ant2	Low	2402	-3.76	-34.62	≤-23.76	PASS
	Ant1	High	2480	-4.89	-43.09	≤-24.89	PASS
	Ant2	High	2480	-4.64	-43.17	≤-24.64	PASS



Test Graphs

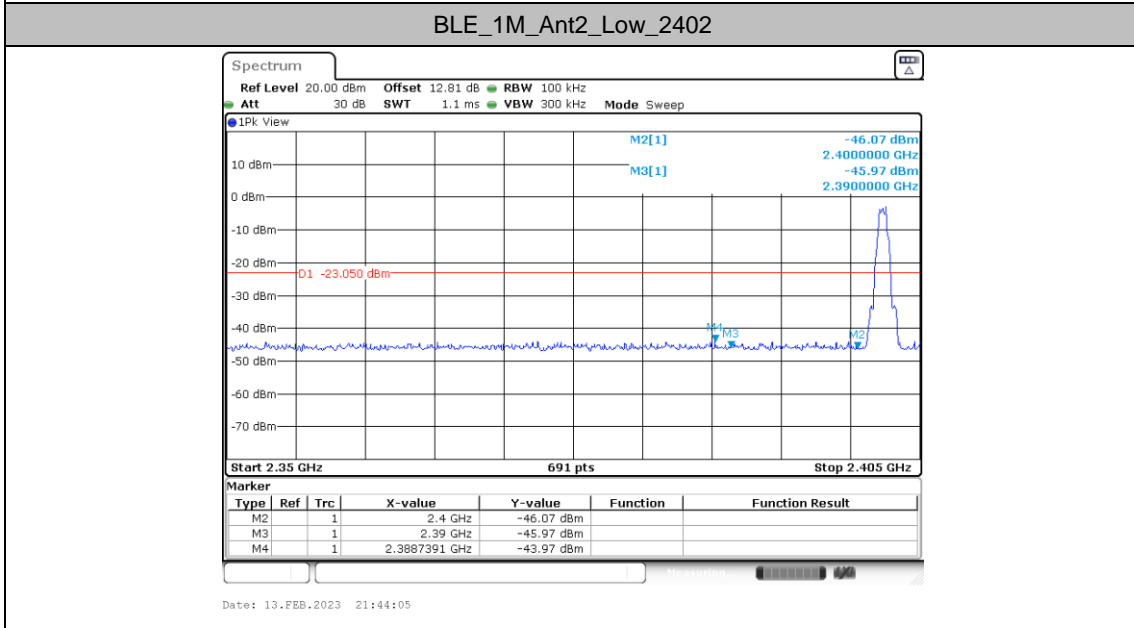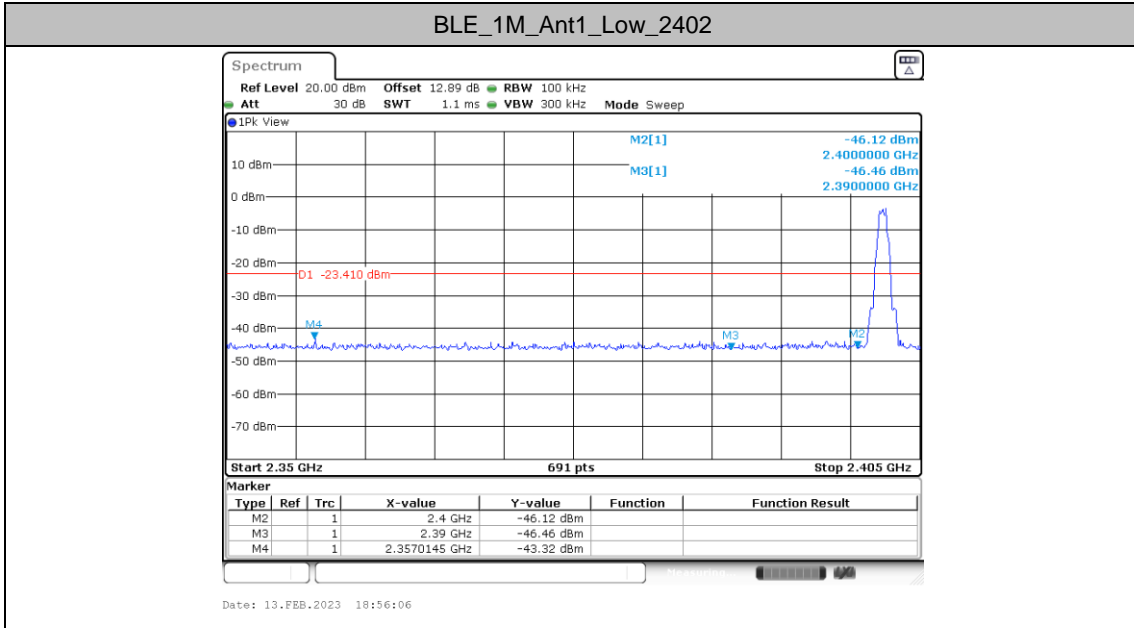


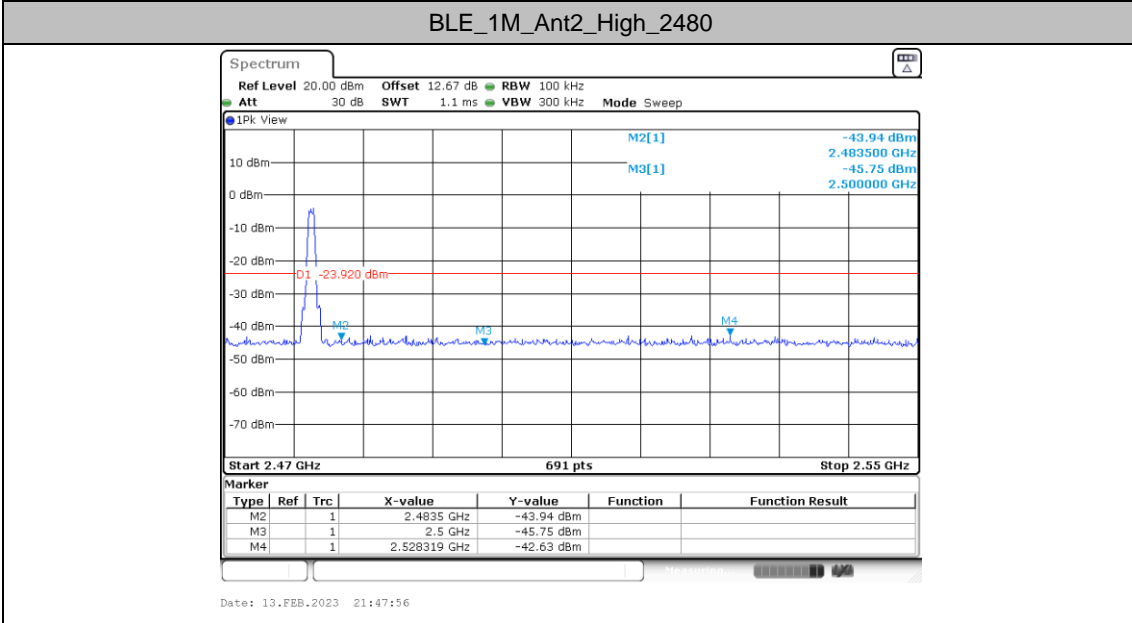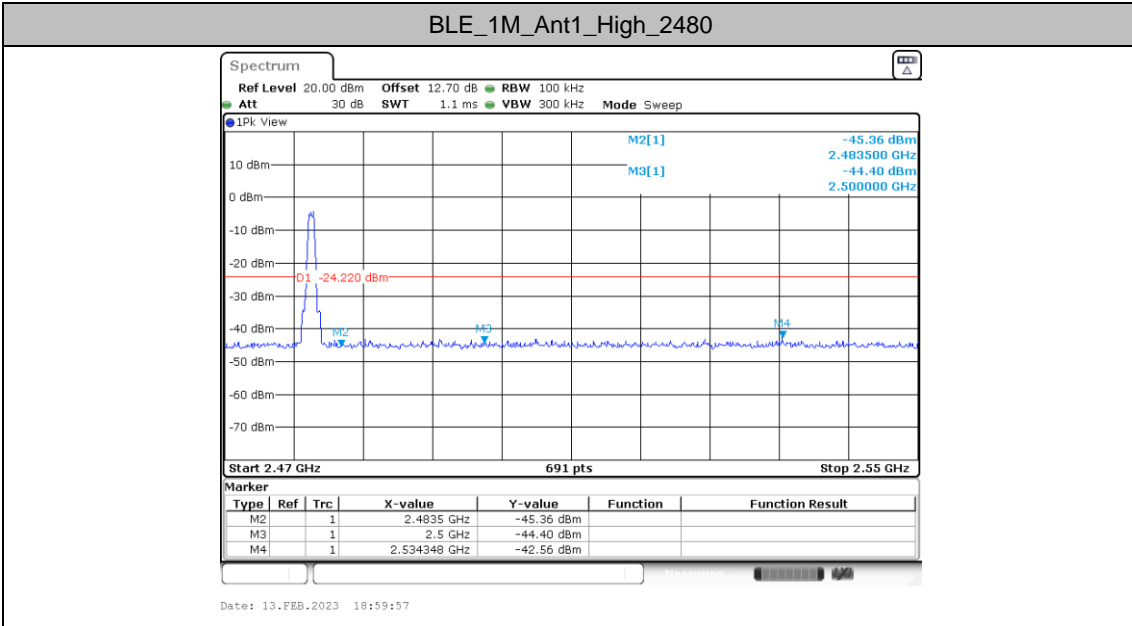

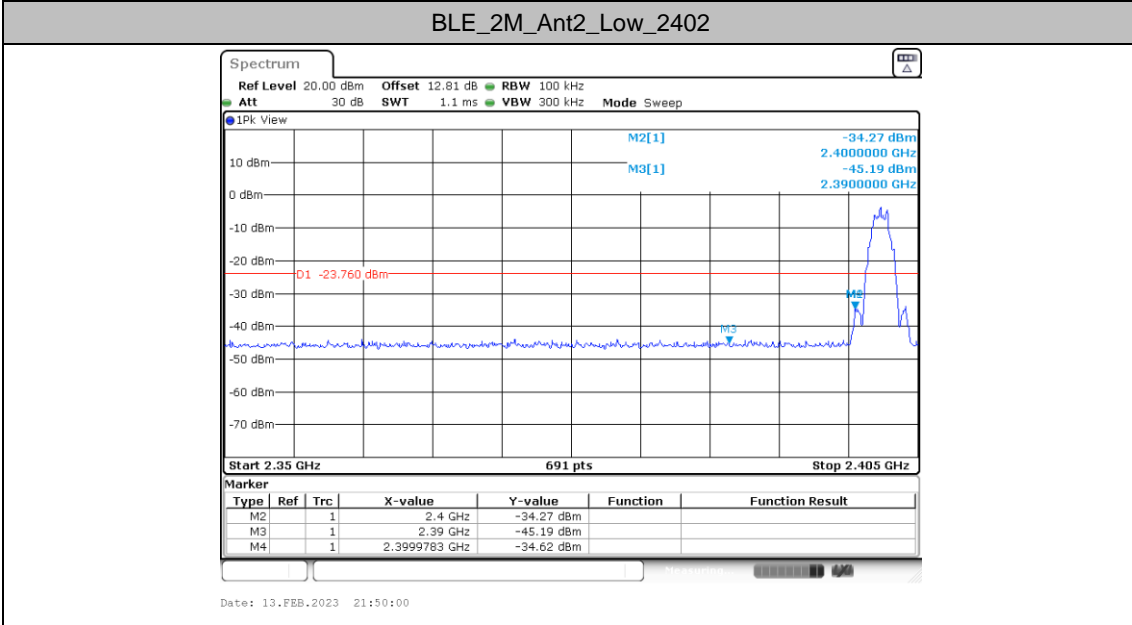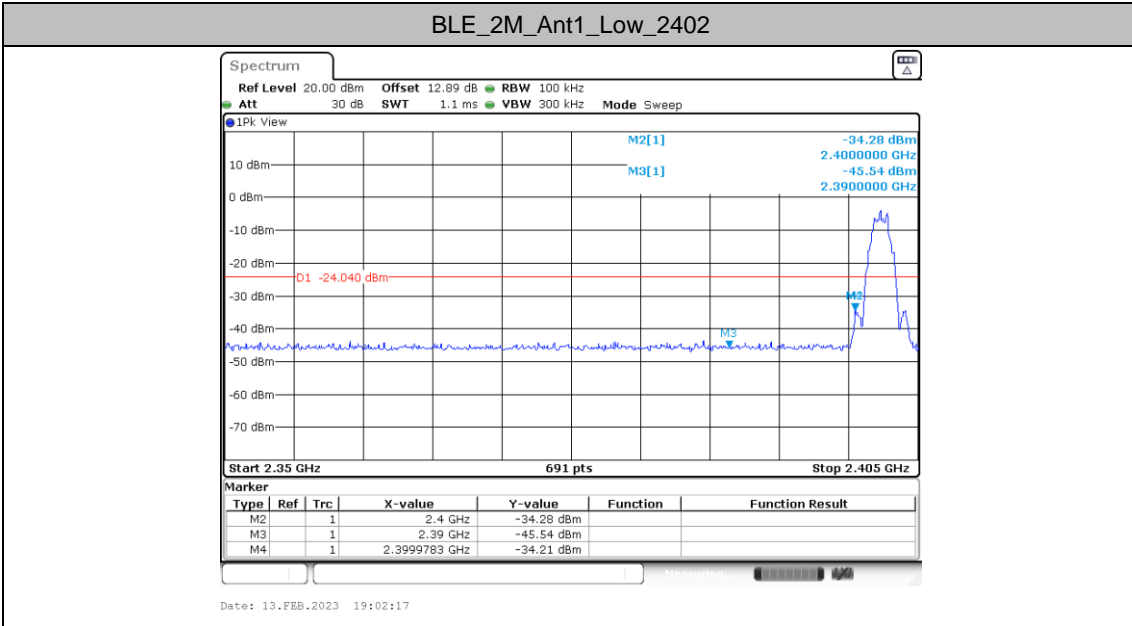




BLE_2M_Ant1_High_2480

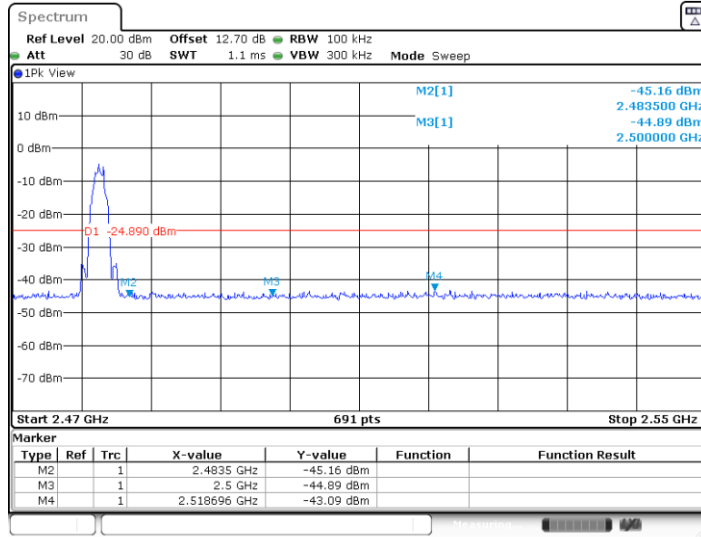

BLE_2M_Ant2_High_2480

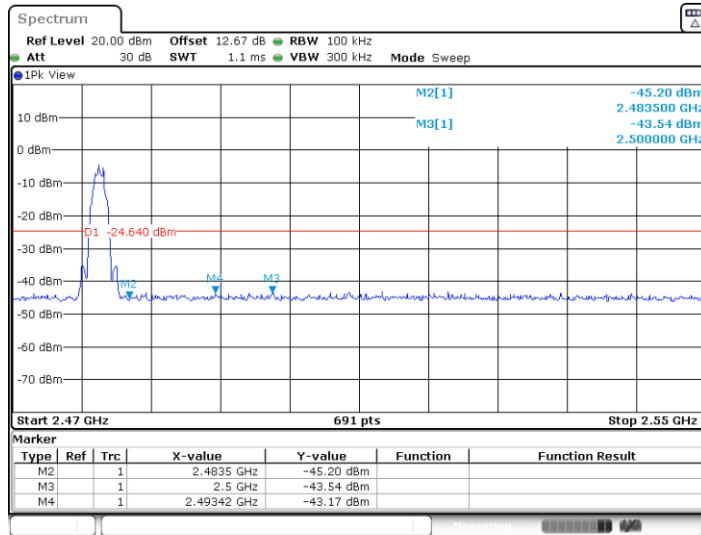




Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Ant1	2402	30~1000	-3.41	-54.86	≤-23.41	PASS
			1000~26500	-3.41	-46.33	≤-23.41	PASS
	Ant2	2402	30~1000	-3.05	-54.08	≤-23.05	PASS
			1000~26500	-3.05	-46.43	≤-23.05	PASS
	Ant1	2440	30~1000	-3.38	-54.9	≤-23.38	PASS
			1000~26500	-3.38	-46.48	≤-23.38	PASS
	Ant2	2440	30~1000	-3.58	-53.69	≤-23.58	PASS
			1000~26500	-3.58	-45	≤-23.58	PASS
	Ant1	2480	30~1000	-4.22	-55.18	≤-24.22	PASS
			1000~26500	-4.22	-46.1	≤-24.22	PASS
	Ant2	2480	30~1000	-3.92	-53.27	≤-23.92	PASS
			1000~26500	-3.92	-46.34	≤-23.92	PASS
BLE_2M	Ant1	2402	30~1000	-4.04	-54.76	≤-24.04	PASS
			1000~26500	-4.04	-45.52	≤-24.04	PASS
	Ant2	2402	30~1000	-3.76	-53.17	≤-23.76	PASS
			1000~26500	-3.76	-45.96	≤-23.76	PASS
	Ant1	2440	30~1000	-3.99	-54	≤-23.99	PASS
			1000~26500	-3.99	-45.97	≤-23.99	PASS
	Ant2	2440	30~1000	-4.29	-54.72	≤-24.29	PASS
			1000~26500	-4.29	-45.45	≤-24.29	PASS
	Ant1	2480	30~1000	-4.89	-55.05	≤-24.89	PASS
			1000~26500	-4.89	-46.02	≤-24.89	PASS
	Ant2	2480	30~1000	-4.64	-49.04	≤-24.64	PASS
			1000~26500	-4.64	-46.05	≤-24.64	PASS




Test Graphs

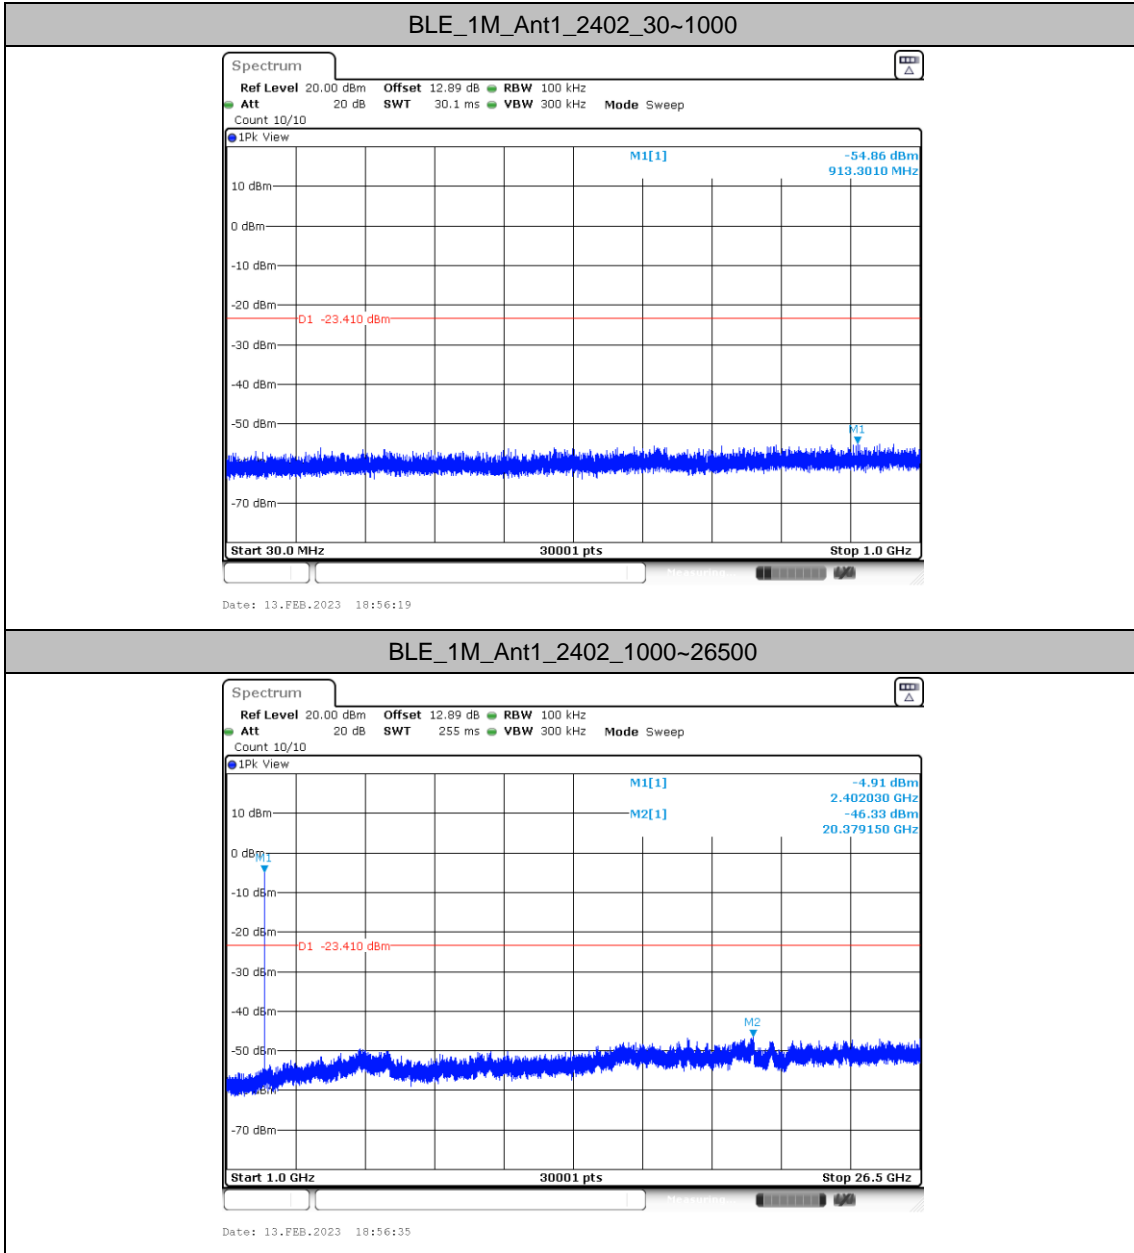








BLE_1M_Ant2_2402_30~1000

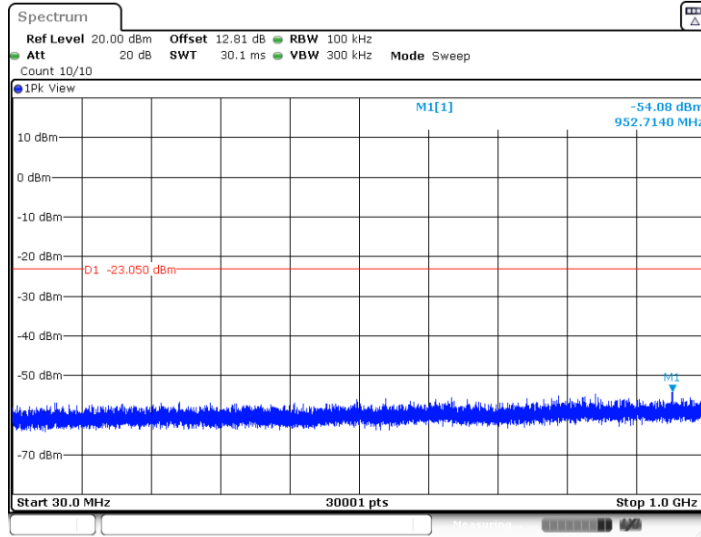

BLE_1M_Ant2_2402_1000~26500

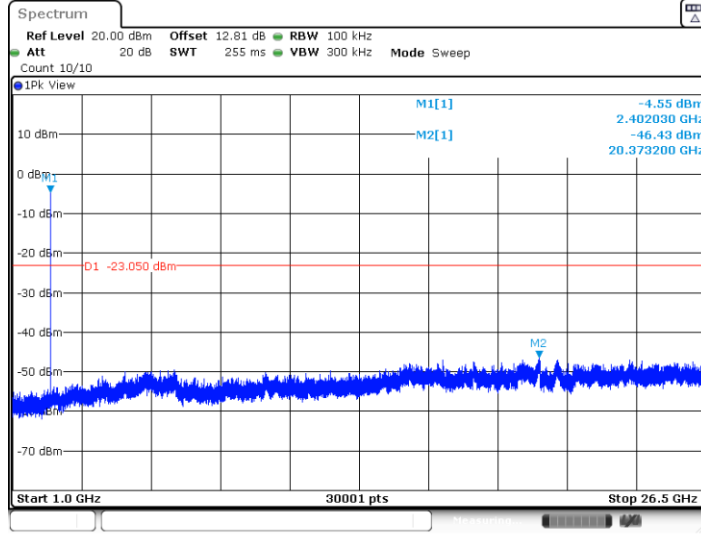


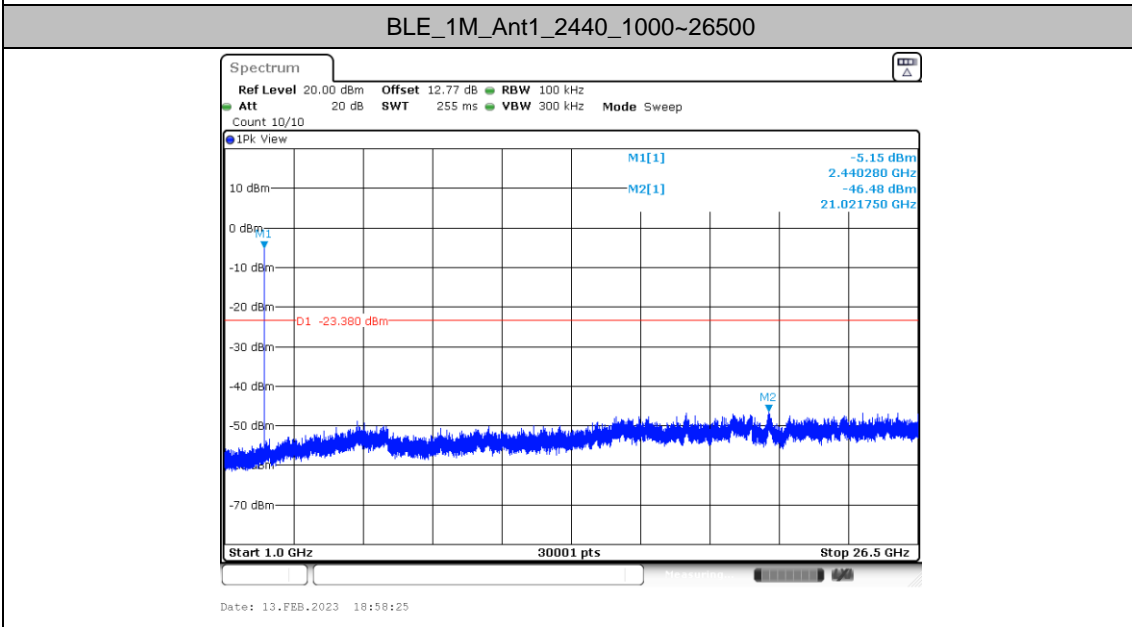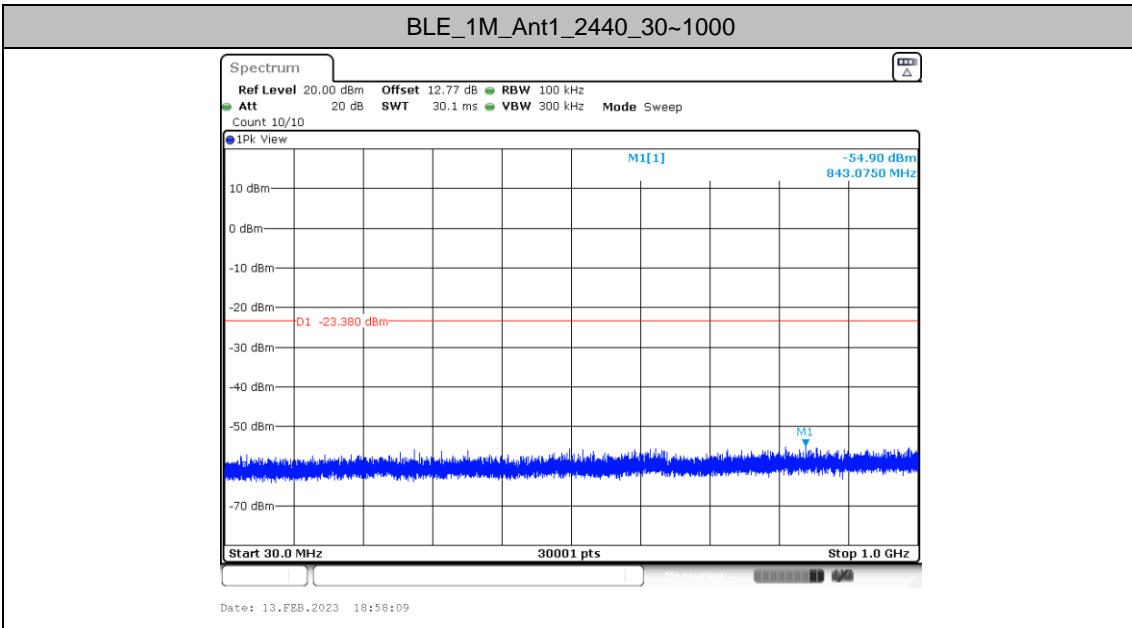

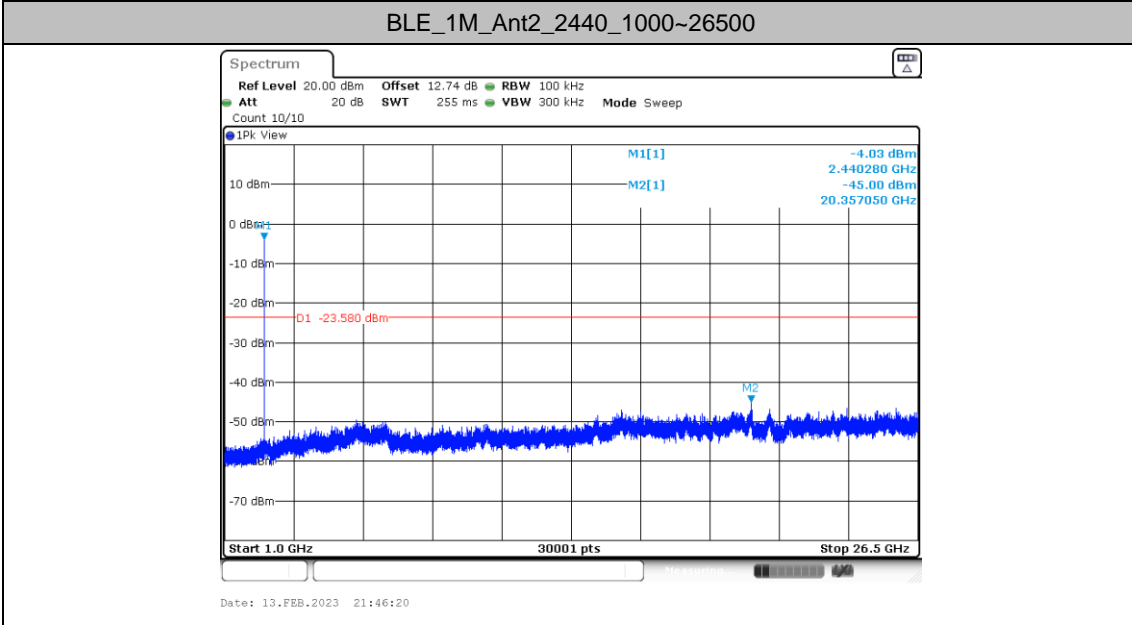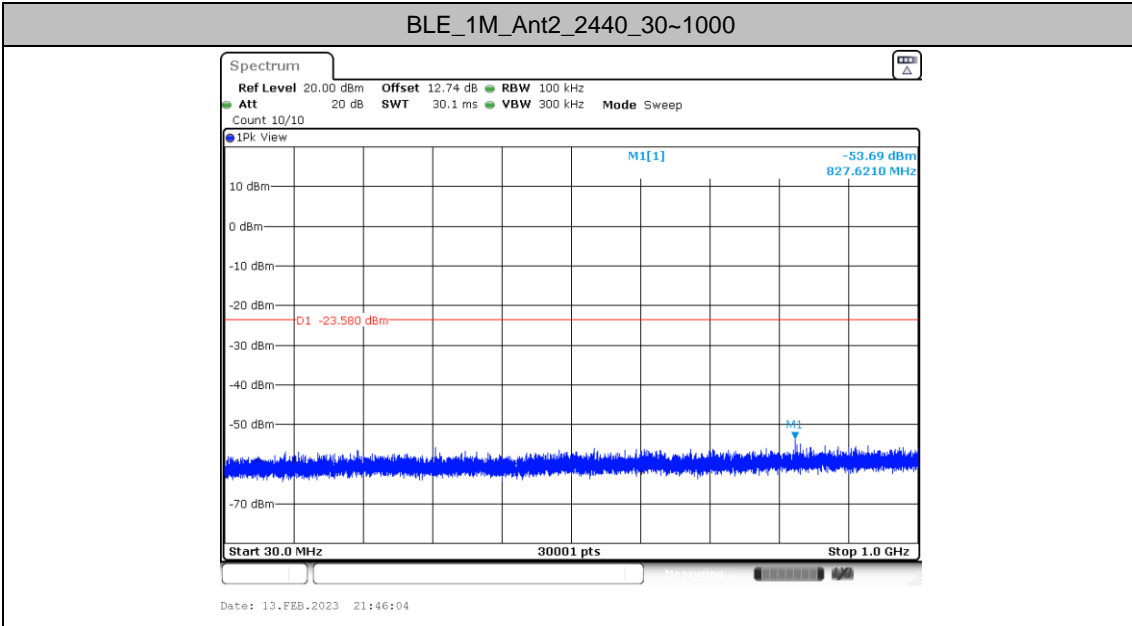




BLE_1M_Ant1_2480_30~1000

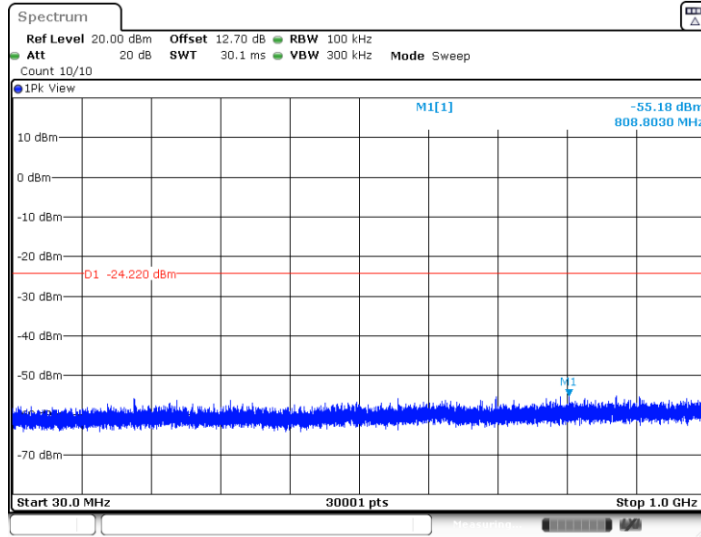


BLE_1M_Ant1_2480_1000~26500

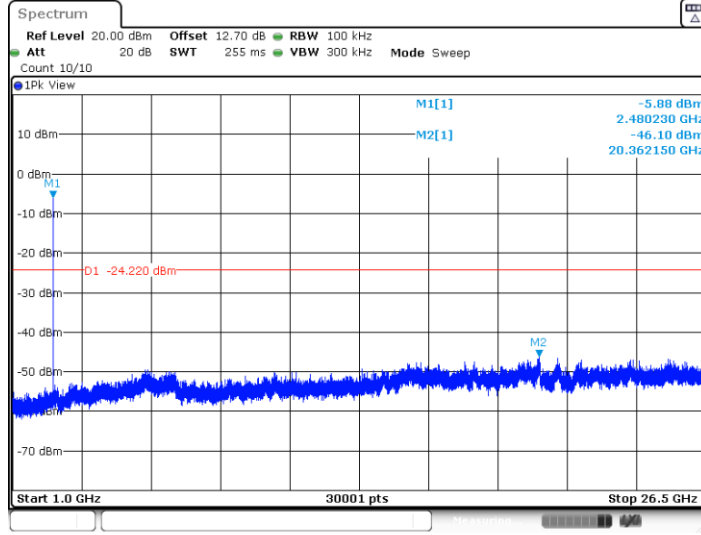




BLE_1M_Ant2_2480_30~1000

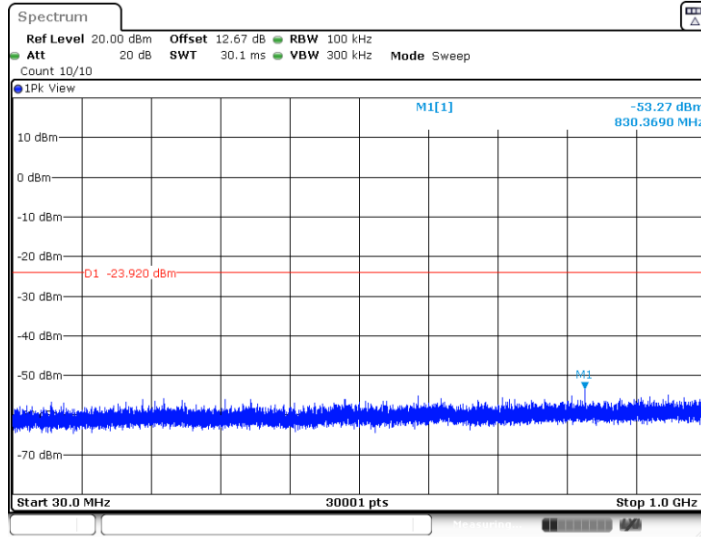


BLE_1M_Ant2_2480_1000~26500

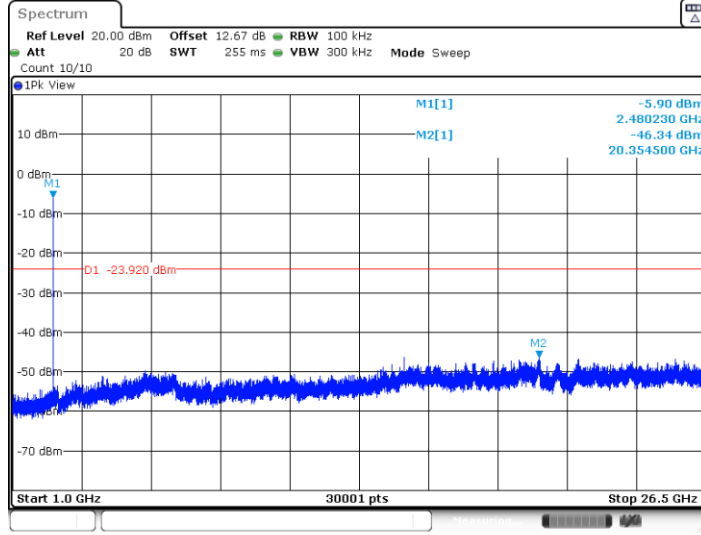






BLE_2M_Ant1_2402_30~1000

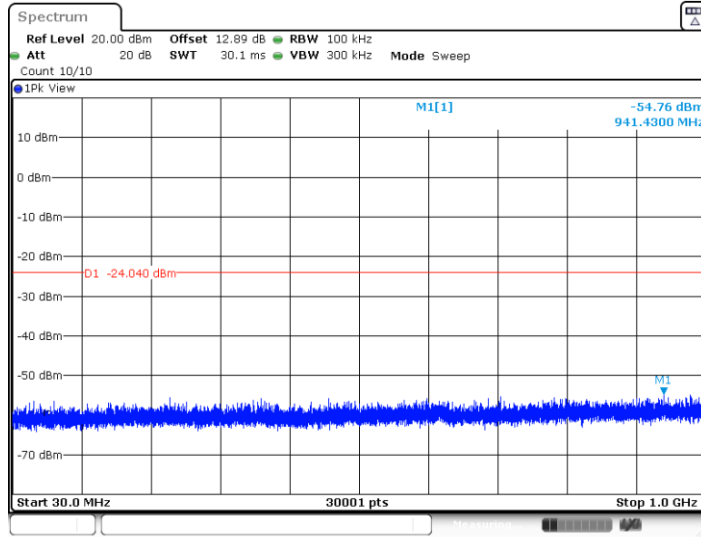


BLE_2M_Ant1_2402_1000~26500

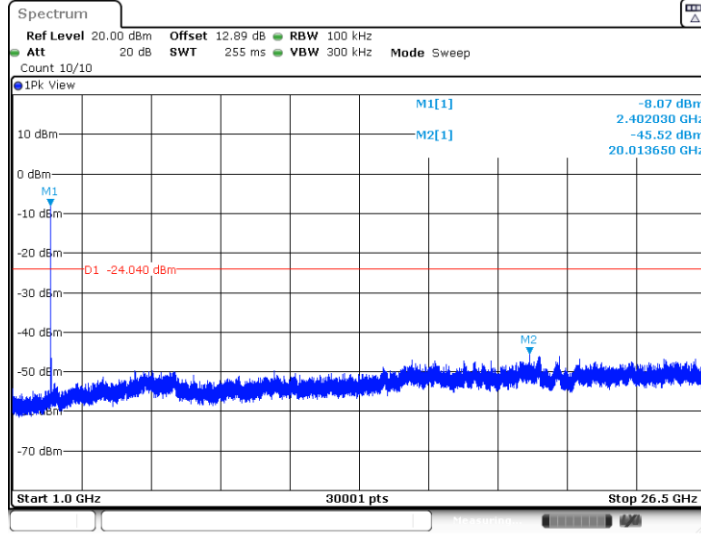

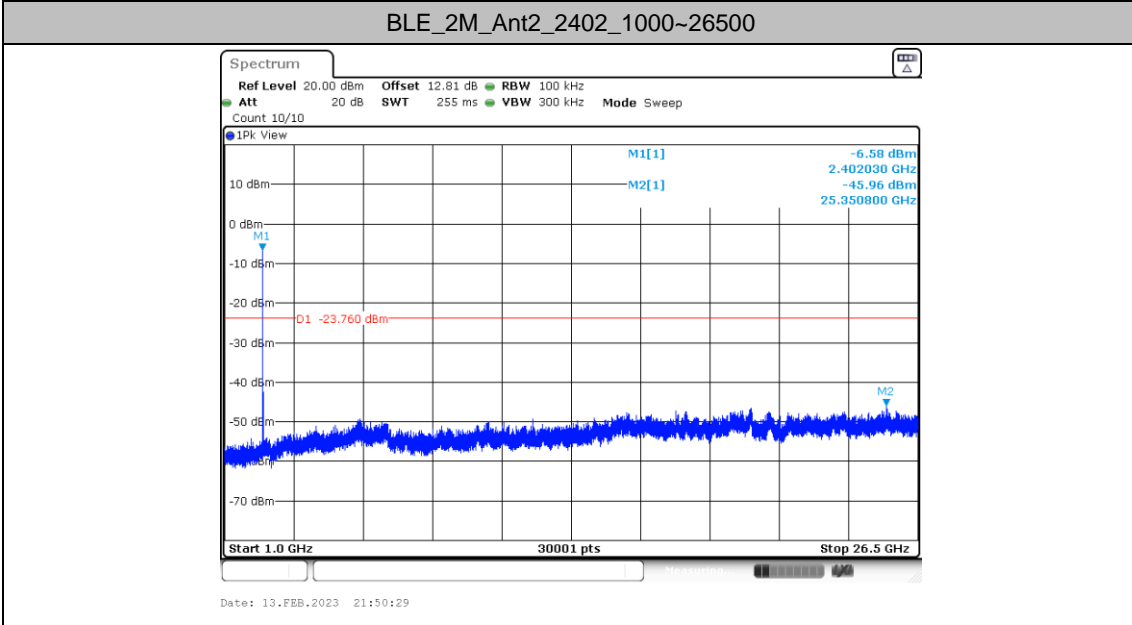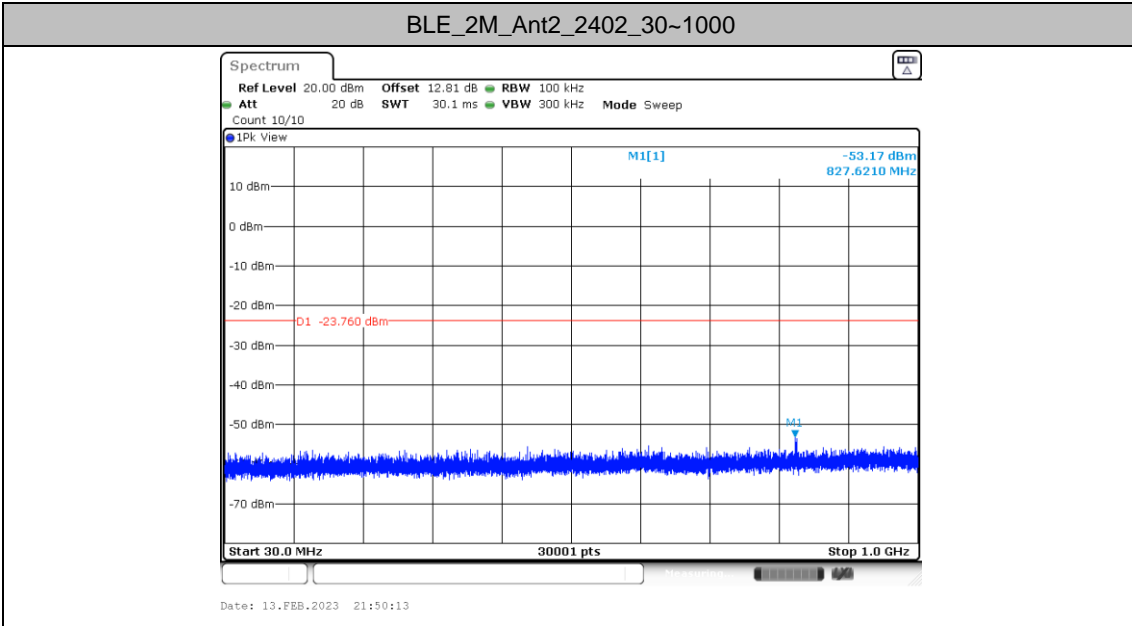




BLE_2M_Ant1_2440_30~1000

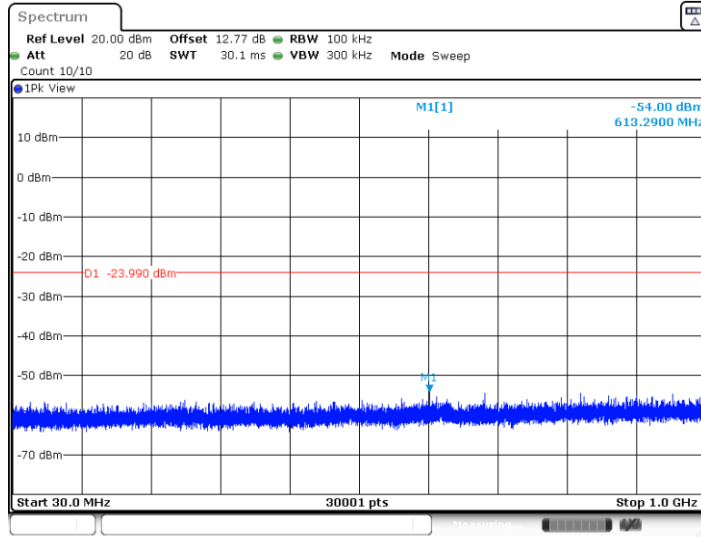


BLE_2M_Ant1_2440_1000~26500

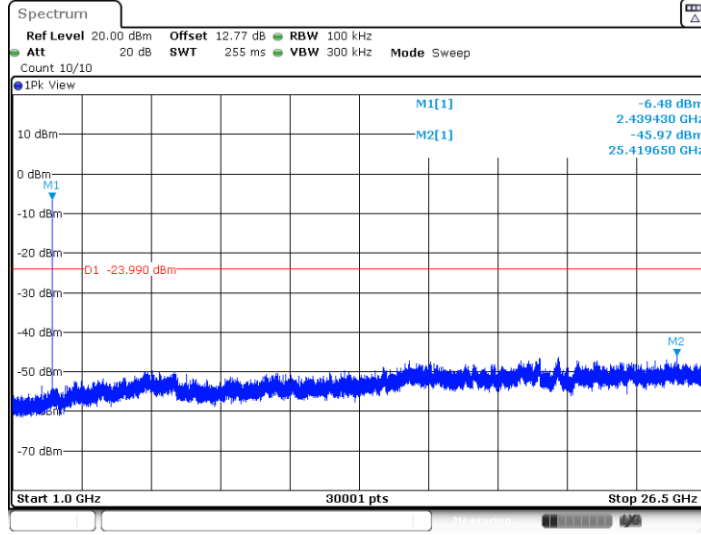




BLE_2M_Ant2_2440_30~1000


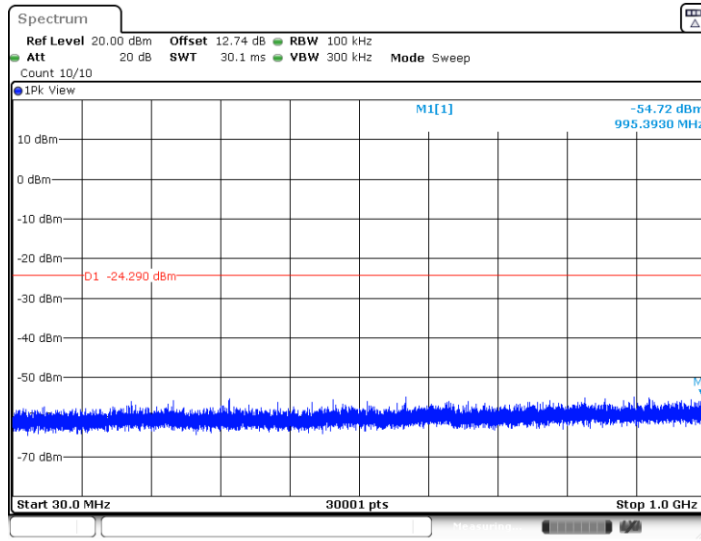




Date: 13.FEB.2023 21:52:18

BLE_2M_Ant2_2440_1000~26500

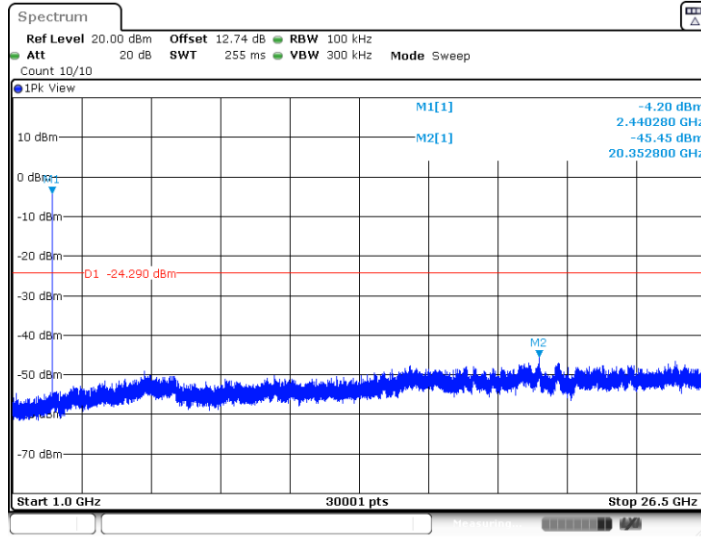

Date: 13.FEB.2023 21:52:34

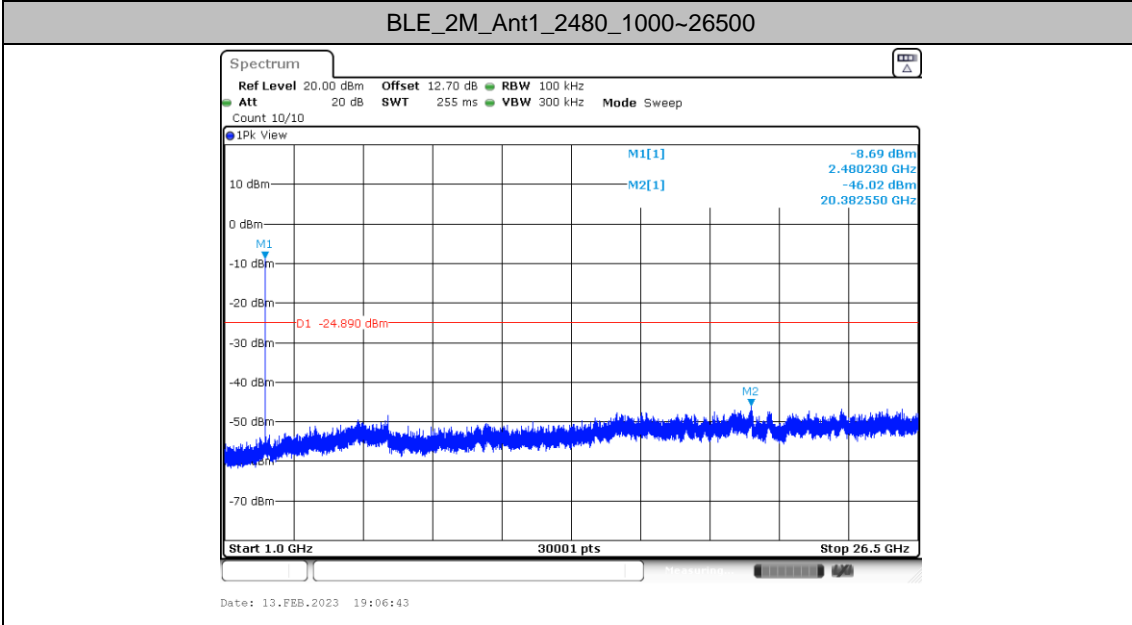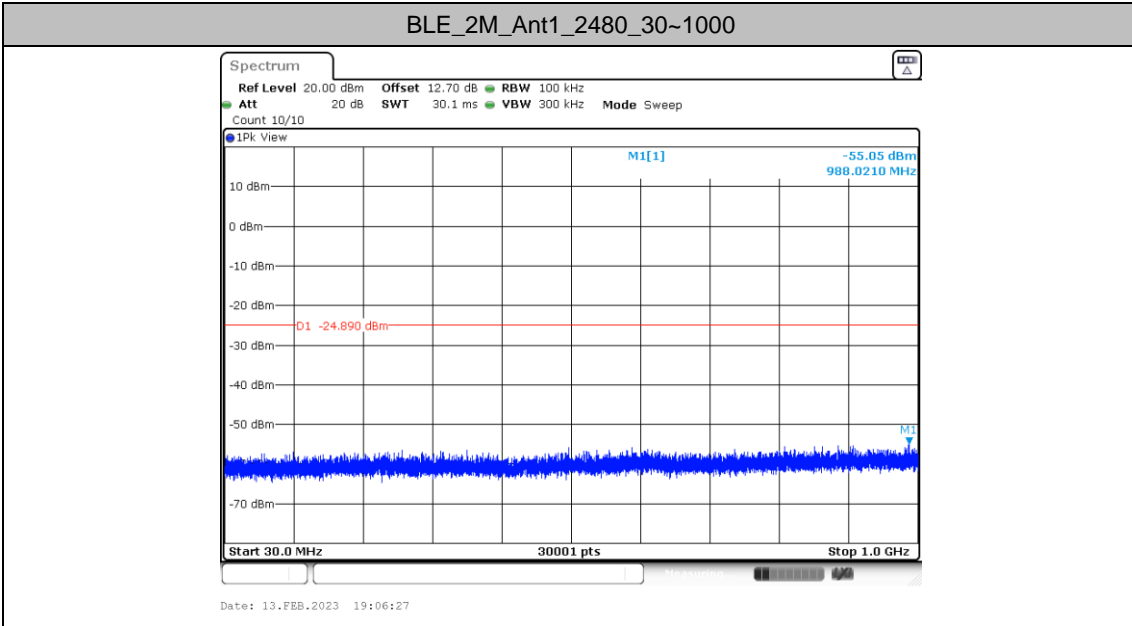


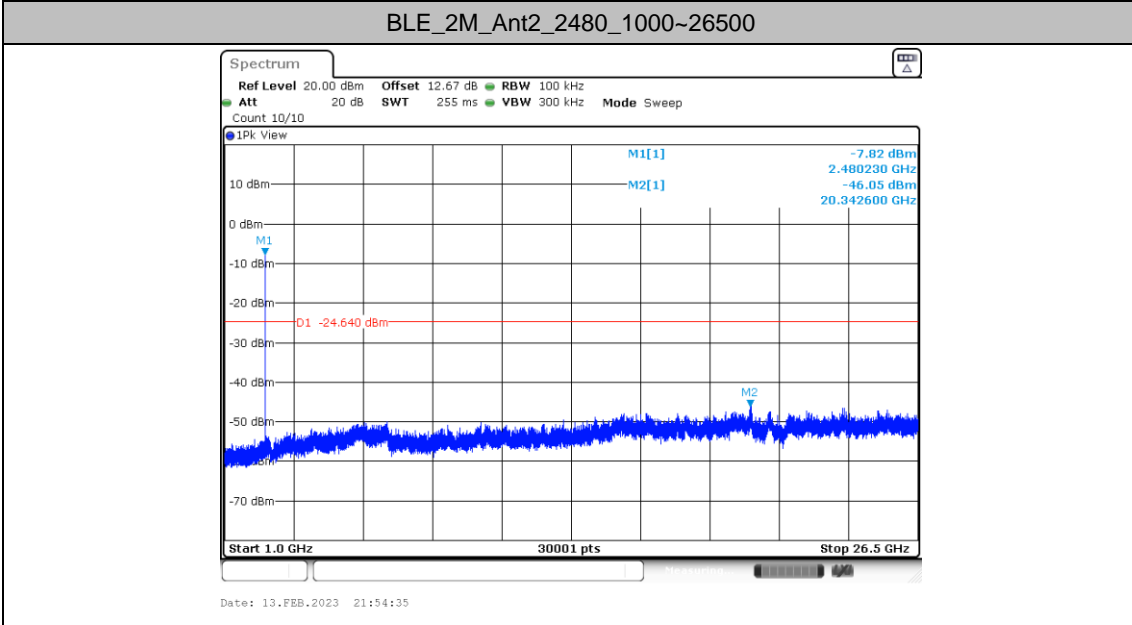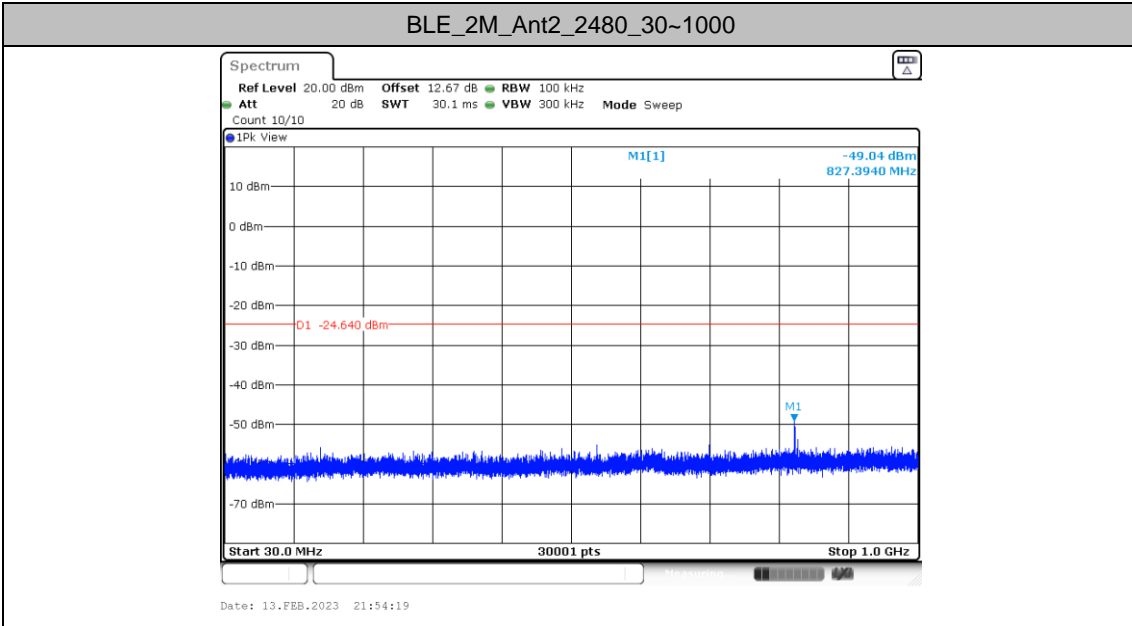



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

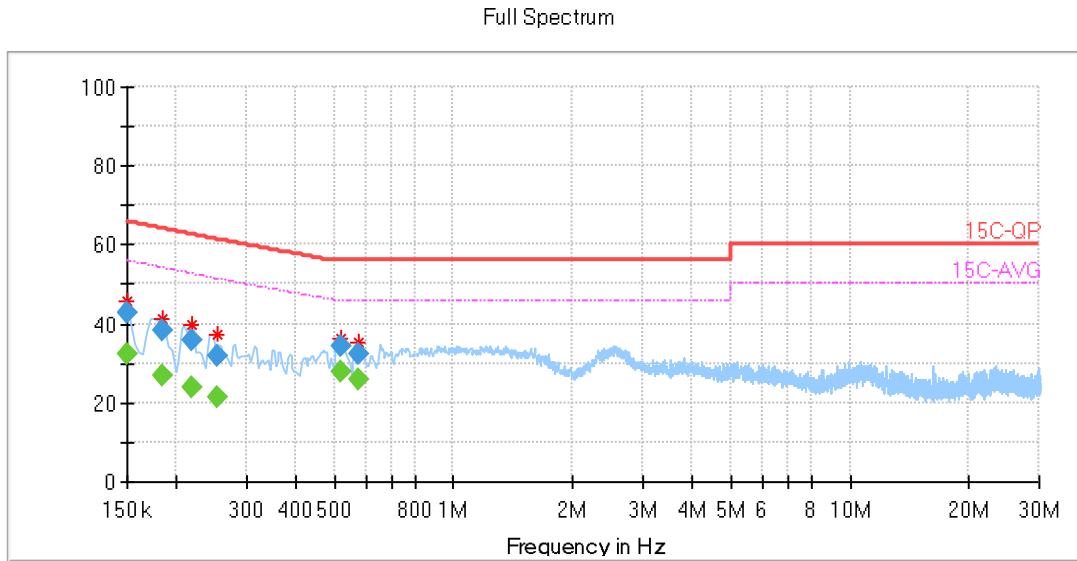

Frequency (MHz)	Quasi Peak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	32.36	56.00	23.64	L1	OFF	20.1
0.150000	42.83	---	66.00	23.17	L1	OFF	20.1
0.183581	---	27.11	54.18	27.07	L1	OFF	20.0
0.183581	38.28	---	64.21	25.93	L1	OFF	20.0
0.218700	---	23.85	52.65	28.81	L1	OFF	20.0
0.218700	35.94	---	62.69	26.75	L1	OFF	20.0
0.252281	---	21.62	51.44	29.82	L1	OFF	19.9
0.252281	31.88	---	61.48	29.60	L1	OFF	19.9
0.517856	---	27.97	46.00	18.03	L1	OFF	19.8
0.517856	34.50	---	56.00	21.50	L1	OFF	19.8
0.573825	---	25.67	46.00	20.33	L1	OFF	19.8
0.573825	32.47	---	56.00	23.53	L1	OFF	19.8



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

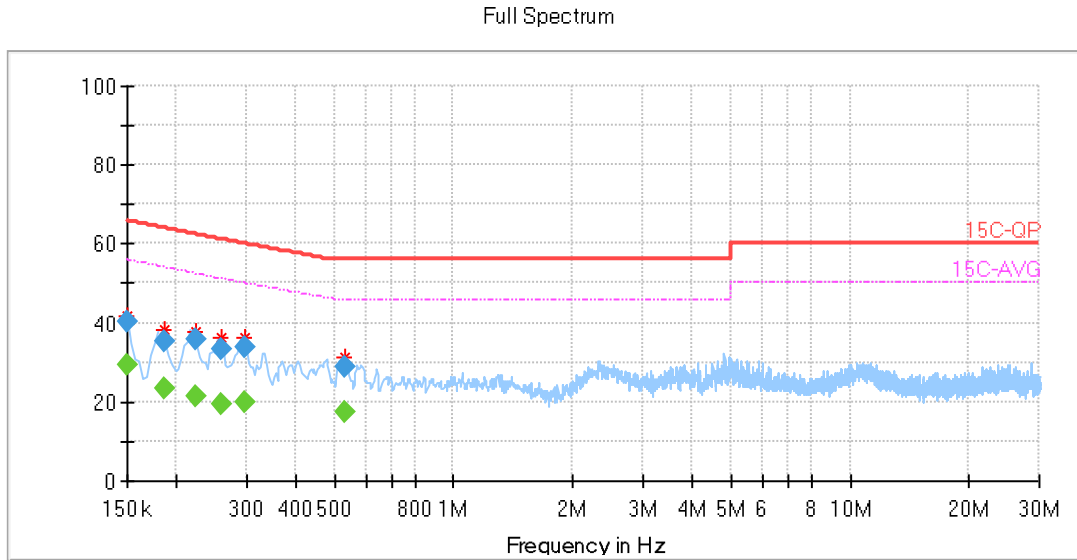

Frequency (MHz)	Quasi Peak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	29.27	56.00	26.73	N	OFF	20.2
0.150000	40.21	---	66.00	25.79	N	OFF	20.2
0.185831	---	23.16	54.07	30.92	N	OFF	20.2
0.185831	35.51	---	64.10	28.59	N	OFF	20.2
0.223144	---	21.64	52.48	30.84	N	OFF	20.1
0.223144	35.85	---	62.52	26.67	N	OFF	20.1
0.260456	---	19.52	51.17	31.65	N	OFF	20.1
0.260456	33.46	---	61.21	27.75	N	OFF	20.1
0.297769	---	19.96	50.07	30.11	N	OFF	20.0
0.297769	33.85	---	60.10	26.25	N	OFF	20.0
0.532838	---	17.18	46.00	28.82	N	OFF	19.9
0.532838	28.77	---	56.00	27.23	N	OFF	19.9

Note: Margin (dB) = Peak/Average (dBuV) – Limit (dBuV)



Appendix C. Radiated Spurious Emission

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE_GSFK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE_GSFK	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE_GSFK	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	1	Bluetooth-LE_GSFK	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE_GSFK	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE_GSFK	39	2480	2Mbps	-	-
Mode 7	2400-2483.5	2	Bluetooth-LE_GSFK	00	2402	1Mbps	-	-
Mode 8	2400-2483.5	2	Bluetooth-LE_GSFK	19	2440	1Mbps	-	-
Mode 9	2400-2483.5	2	Bluetooth-LE_GSFK	39	2480	1Mbps	-	-
Mode 10	2400-2483.5	2	Bluetooth-LE_GSFK	00	2402	2Mbps	-	-
Mode 11	2400-2483.5	2	Bluetooth-LE_GSFK	19	2440	2Mbps	-	-
Mode 12	2400-2483.5	2	Bluetooth-LE_GSFK	39	2480	2Mbps	-	-
Mode 13	2400-2483.5	2	Bluetooth-LE_GSFK	39	2480	2Mbps	-	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSKF	00	2378.90	44.85	54.00	-9.15	H	AVERAGE	Pass	Band Edge
1	Bluetooth-LE_GSKF	00	4804.00	40.98	74.00	-33.02	V	PEAK	Pass	Harmonic
2	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE_GSKF	19	7320.00	42.83	74.00	-31.17	V	PEAK	Pass	Harmonic
3	Bluetooth-LE_GSKF	39	2498.08	45.66	54.00	-8.34	H	AVERAGE	Pass	Band Edge
3	Bluetooth-LE_GSKF	39	7440.00	42.34	74.00	-31.66	H	PEAK	Pass	Harmonic
4	Bluetooth-LE_GSKF	00	2373.31	45.10	54.00	-8.90	H	AVERAGE	Pass	Band Edge
4	Bluetooth-LE_GSKF	00	4804.00	41.54	74.00	-32.46	V	PEAK	Pass	Harmonic
5	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
5	Bluetooth-LE_GSKF	19	7320.00	43.41	74.00	-30.59	H	PEAK	Pass	Harmonic
6	Bluetooth-LE_GSKF	39	2497.48	45.86	54.00	-8.14	V	AVERAGE	Pass	Band Edge
6	Bluetooth-LE_GSKF	39	7440.00	42.80	74.00	-31.20	H	PEAK	Pass	Harmonic
7	Bluetooth-LE_GSKF	00	2378.77	44.93	54.00	-9.07	H	AVERAGE	Pass	Band Edge
7	Bluetooth-LE_GSKF	00	4804.00	41.26	74.00	-32.74	H	PEAK	Pass	Harmonic
8	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
8	Bluetooth-LE_GSKF	19	7320.00	43.13	74.00	-30.87	V	PEAK	Pass	Harmonic
9	Bluetooth-LE_GSKF	39	2499.76	45.92	54.00	-8.08	V	AVERAGE	Pass	Band Edge
9	Bluetooth-LE_GSKF	39	7440.00	42.08	74.00	-31.92	V	PEAK	Pass	Harmonic
10	Bluetooth-LE_GSKF	00	2377.08	45.20	54.00	-8.80	H	AVERAGE	Pass	Band Edge
10	Bluetooth-LE_GSKF	00	4804.00	40.87	74.00	-33.13	V	PEAK	Pass	Harmonic
11	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
11	Bluetooth-LE_GSKF	19	7320.00	42.79	74.00	-31.21	H	PEAK	Pass	Harmonic
12	Bluetooth-LE_GSKF	39	2494.42	46.29	54.00	-7.71	H	AVERAGE	Pass	Band Edge
12	Bluetooth-LE_GSKF	39	7440.00	42.11	74.00	-31.89	H	PEAK	Pass	Harmonic
13	Bluetooth-LE_GSKF	39	61.04	31.05	40.00	-8.95	V	Peak	Pass	LF



Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2381.11</td> <td>56.98</td> <td>74.00</td> <td>-17.02</td> <td>41.18</td> <td>31.96</td> <td>8.74</td> <td>30.90</td> <td>6.00</td> <td>100</td> <td>94</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2381.11	56.98	74.00	-17.02	41.18	31.96	8.74	30.90	6.00	100	94	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.31</td> <td>-----</td> <td>-----</td> <td>80.37</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>100</td> <td>94</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2402.00	96.31	-----	-----	80.37	32.00	8.81	30.87	6.00	100	94	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2381.11	56.98	74.00	-17.02	41.18	31.96	8.74	30.90	6.00	100	94	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2402.00	96.31	-----	-----	80.37	32.00	8.81	30.87	6.00	100	94	PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2378.90</td> <td>44.85</td> <td>54.00</td> <td>-9.15</td> <td>29.06</td> <td>31.95</td> <td>8.74</td> <td>30.90</td> <td>6.00</td> <td>100</td> <td>94</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2378.90	44.85	54.00	-9.15	29.06	31.95	8.74	30.90	6.00	100	94	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>95.02</td> <td>-----</td> <td>-----</td> <td>79.08</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>100</td> <td>94</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2402.00	95.02	-----	-----	79.08	32.00	8.81	30.87	6.00	100	94	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2378.90	44.85	54.00	-9.15	29.06	31.95	8.74	30.90	6.00	100	94	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2402.00	95.02	-----	-----	79.08	32.00	8.81	30.87	6.00	100	94	AVERAGE																																																																						



Mode	1																																																																															
	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2344.58</td> <td>56.77</td> <td>74.00</td> <td>-17.23</td> <td>41.18</td> <td>31.88</td> <td>8.63</td> <td>30.92</td> <td>6.00</td> <td>338</td> <td>74 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2344.58	56.77	74.00	-17.23	41.18	31.88	8.63	30.92	6.00	338	74 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>93.86</td> <td>-----</td> <td>-----</td> <td>77.92</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>338</td> <td>74 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	93.86	-----	-----	77.92	32.00	8.81	30.87	6.00	338	74 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	2344.58	56.77	74.00	-17.23	41.18	31.88	8.63	30.92	6.00	338	74 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	2402.00	93.86	-----	-----	77.92	32.00	8.81	30.87	6.00	338	74 PEAK																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2378.12</td> <td>44.81</td> <td>54.00</td> <td>-9.19</td> <td>29.03</td> <td>31.95</td> <td>8.73</td> <td>30.90</td> <td>6.00</td> <td>338</td> <td>74 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2378.12	44.81	54.00	-9.19	29.03	31.95	8.73	30.90	6.00	338	74 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>92.70</td> <td>-----</td> <td>-----</td> <td>76.76</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>338</td> <td>74 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	92.70	-----	-----	76.76	32.00	8.81	30.87	6.00	338	74 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	2378.12	44.81	54.00	-9.19	29.03	31.95	8.73	30.90	6.00	338	74 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																								
1	2402.00	92.70	-----	-----	76.76	32.00	8.81	30.87	6.00	338	74 AVERAGE																																																																					



Mode	1																																																																											
	Harmonic																																																																											
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Vertical																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>40.78</td> <td>74.00</td> <td>-33.22</td> <td>59.56</td> <td>34.10</td> <td>12.55</td> <td>65.43</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4804.00	40.78	74.00	-33.22	59.56	34.10	12.55	65.43	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>40.98</td> <td>74.00</td> <td>-33.02</td> <td>59.76</td> <td>34.10</td> <td>12.55</td> <td>65.43</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4804.00	40.98	74.00	-33.02	59.76	34.10	12.55	65.43	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	4804.00	40.78	74.00	-33.22	59.56	34.10	12.55	65.43	0.00	300	0	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	4804.00	40.98	74.00	-33.02	59.76	34.10	12.55	65.43	0.00	100	0	PEAK																																																																



Mode	2																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																									
ANT	1																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>40.53</td> <td>74.00</td> <td>-33.47</td> <td>59.60</td> <td>34.10</td> <td>12.27</td> <td>65.44</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>42.75</td> <td>74.00</td> <td>-31.25</td> <td>57.47</td> <td>35.00</td> <td>14.73</td> <td>65.25</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	4880.00	40.53	74.00	-33.47	59.60	34.10	12.27	65.44	0.00	300	0	PEAK	2	7320.00	42.75	74.00	-31.25	57.47	35.00	14.73	65.25	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>39.74</td> <td>74.00</td> <td>-34.26</td> <td>58.81</td> <td>34.10</td> <td>12.27</td> <td>65.44</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>42.83</td> <td>74.00</td> <td>-31.17</td> <td>57.55</td> <td>35.00</td> <td>14.73</td> <td>65.25</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark	1	4880.00	39.74	74.00	-34.26	58.81	34.10	12.27	65.44	0.00	100	0	PEAK	2	7320.00	42.83	74.00	-31.17	57.55	35.00	14.73	65.25	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																																														
1	4880.00	40.53	74.00	-33.47	59.60	34.10	12.27	65.44	0.00	300	0	PEAK																																																																																																														
2	7320.00	42.75	74.00	-31.25	57.47	35.00	14.73	65.25	0.00	300	0	PEAK																																																																																																														
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	Remark																																																																																																														
1	4880.00	39.74	74.00	-34.26	58.81	34.10	12.27	65.44	0.00	100	0	PEAK																																																																																																														
2	7320.00	42.83	74.00	-31.17	57.55	35.00	14.73	65.25	0.00	100	0	PEAK																																																																																																														





Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>57.55</td> <td>74.00</td> <td>-16.45</td> <td>41.02</td> <td>32.13</td> <td>9.05</td> <td>30.65</td> <td>6.00</td> <td>105</td> <td>94</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	57.55	74.00	-16.45	41.02	32.13	9.05	30.65	6.00	105	94	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>95.79</td> <td>-----</td> <td>-----</td> <td>79.29</td> <td>32.12</td> <td>9.04</td> <td>30.66</td> <td>6.00</td> <td>105</td> <td>94</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	95.79	-----	-----	79.29	32.12	9.04	30.66	6.00	105	94	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.68	57.55	74.00	-16.45	41.02	32.13	9.05	30.65	6.00	105	94	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	95.79	-----	-----	79.29	32.12	9.04	30.66	6.00	105	94	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.08</td> <td>45.66</td> <td>54.00</td> <td>-8.34</td> <td>29.03</td> <td>32.15</td> <td>9.09</td> <td>30.61</td> <td>6.00</td> <td>105</td> <td>94</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.08	45.66	54.00	-8.34	29.03	32.15	9.09	30.61	6.00	105	94	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>94.69</td> <td>-----</td> <td>-----</td> <td>78.19</td> <td>32.12</td> <td>9.04</td> <td>30.66</td> <td>6.00</td> <td>105</td> <td>94</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.69	-----	-----	78.19	32.12	9.04	30.66	6.00	105	94	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2498.08	45.66	54.00	-8.34	29.03	32.15	9.09	30.61	6.00	105	94	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	94.69	-----	-----	78.19	32.12	9.04	30.66	6.00	105	94	AVERAGE																																																																								



Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.62</td> <td>57.78</td> <td>74.00</td> <td>-16.22</td> <td>41.13</td> <td>32.15</td> <td>9.10</td> <td>30.60</td> <td>6.00</td> <td>306</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.62	57.78	74.00	-16.22	41.13	32.15	9.10	30.60	6.00	306	73	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>94.32</td> <td>-----</td> <td>-----</td> <td>77.82</td> <td>32.12</td> <td>9.04</td> <td>30.66</td> <td>6.00</td> <td>306</td> <td>73</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.32	-----	-----	77.82	32.12	9.04	30.66	6.00	306	73	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2498.62	57.78	74.00	-16.22	41.13	32.15	9.10	30.60	6.00	306	73	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	94.32	-----	-----	77.82	32.12	9.04	30.66	6.00	306	73	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.86</td> <td>45.56</td> <td>54.00</td> <td>-8.44</td> <td>28.91</td> <td>32.15</td> <td>9.10</td> <td>30.60</td> <td>6.00</td> <td>306</td> <td>73</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.86	45.56	54.00	-8.44	28.91	32.15	9.10	30.60	6.00	306	73	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>93.23</td> <td>-----</td> <td>-----</td> <td>76.73</td> <td>32.12</td> <td>9.04</td> <td>30.66</td> <td>6.00</td> <td>306</td> <td>73</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	93.23	-----	-----	76.73	32.12	9.04	30.66	6.00	306	73	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2498.86	45.56	54.00	-8.44	28.91	32.15	9.10	30.60	6.00	306	73	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	93.23	-----	-----	76.73	32.12	9.04	30.66	6.00	306	73	AVERAGE																																																																								

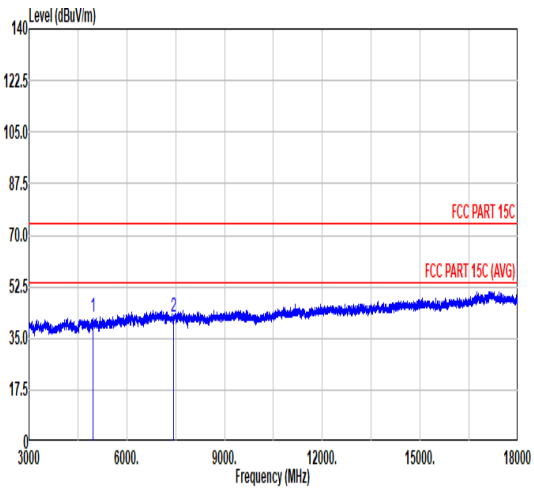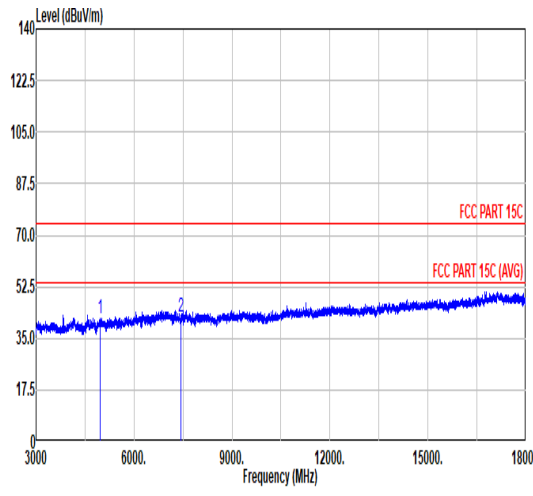

Mode	3																																																																																																													
	Harmonic																																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak																																																																																																														
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>42.21</td> <td>74.00</td> <td>-31.79</td> <td>61.29</td> <td>34.10</td> <td>12.27</td> <td>65.45</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>42.34</td> <td>74.00</td> <td>-31.66</td> <td>56.95</td> <td>35.00</td> <td>14.92</td> <td>65.33</td> <td>0.00</td> <td>300</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	42.21	74.00	-31.79	61.29	34.10	12.27	65.45	0.00	300	360	PEAK	2	7440.00	42.34	74.00	-31.66	56.95	35.00	14.92	65.33	0.00	300	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>41.72</td> <td>74.00</td> <td>-32.28</td> <td>60.80</td> <td>34.10</td> <td>12.27</td> <td>65.45</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>42.02</td> <td>74.00</td> <td>-31.98</td> <td>56.63</td> <td>35.80</td> <td>14.92</td> <td>65.33</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	41.72	74.00	-32.28	60.80	34.10	12.27	65.45	0.00	100	360	PEAK	2	7440.00	42.02	74.00	-31.98	56.63	35.80	14.92	65.33	0.00	100	360	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4960.00	42.21	74.00	-31.79	61.29	34.10	12.27	65.45	0.00	300	360	PEAK																																																																																																		
2	7440.00	42.34	74.00	-31.66	56.95	35.00	14.92	65.33	0.00	300	360	PEAK																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4960.00	41.72	74.00	-32.28	60.80	34.10	12.27	65.45	0.00	100	360	PEAK																																																																																																		
2	7440.00	42.02	74.00	-31.98	56.63	35.80	14.92	65.33	0.00	100	360	PEAK																																																																																																		



Mode	4																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2373.70</td> <td>56.64</td> <td>74.00</td> <td>-17.36</td> <td>40.88</td> <td>31.94</td> <td>8.72</td> <td>30.90</td> <td>6.00</td> <td>181</td> <td>295</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2373.70	56.64	74.00	-17.36	40.88	31.94	8.72	30.90	6.00	181	295	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>93.78</td> <td>-----</td> <td>-----</td> <td>77.84</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>181</td> <td>295</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	93.78	-----	-----	77.84	32.00	8.81	30.87	6.00	181	295	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2373.70	56.64	74.00	-17.36	40.88	31.94	8.72	30.90	6.00	181	295	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2402.00	93.78	-----	-----	77.84	32.00	8.81	30.87	6.00	181	295	PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2373.31</td> <td>45.10</td> <td>54.00</td> <td>-8.90</td> <td>29.34</td> <td>31.94</td> <td>8.72</td> <td>30.90</td> <td>6.00</td> <td>181</td> <td>295</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2373.31	45.10	54.00	-8.90	29.34	31.94	8.72	30.90	6.00	181	295	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>91.23</td> <td>-----</td> <td>-----</td> <td>75.29</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>181</td> <td>295</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	91.23	-----	-----	75.29	32.00	8.81	30.87	6.00	181	295	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2373.31	45.10	54.00	-8.90	29.34	31.94	8.72	30.90	6.00	181	295	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2402.00	91.23	-----	-----	75.29	32.00	8.81	30.87	6.00	181	295	AVERAGE																																																																						



Mode	4																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2336.65</td> <td>57.73</td> <td>74.00</td> <td>-16.27</td> <td>42.19</td> <td>31.06</td> <td>8.61</td> <td>30.93</td> <td>6.00</td> <td>387</td> <td>255</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2336.65	57.73	74.00	-16.27	42.19	31.06	8.61	30.93	6.00	387	255	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>92.52</td> <td>-----</td> <td>-----</td> <td>76.58</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>387</td> <td>255</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	92.52	-----	-----	76.58	32.00	8.81	30.87	6.00	387	255	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2336.65	57.73	74.00	-16.27	42.19	31.06	8.61	30.93	6.00	387	255	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2402.00	92.52	-----	-----	76.58	32.00	8.81	30.87	6.00	387	255	PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2378.77</td> <td>45.09</td> <td>54.00</td> <td>-8.91</td> <td>29.30</td> <td>31.95</td> <td>8.74</td> <td>30.90</td> <td>6.00</td> <td>387</td> <td>255</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2378.77	45.09	54.00	-8.91	29.30	31.95	8.74	30.90	6.00	387	255	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>89.69</td> <td>-----</td> <td>-----</td> <td>73.75</td> <td>32.00</td> <td>8.81</td> <td>30.87</td> <td>6.00</td> <td>387</td> <td>255</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2402.00	89.69	-----	-----	73.75	32.00	8.81	30.87	6.00	387	255	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2378.77	45.09	54.00	-8.91	29.30	31.95	8.74	30.90	6.00	387	255	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2402.00	89.69	-----	-----	73.75	32.00	8.81	30.87	6.00	387	255	AVERAGE																																																																						