

User Manual

DockLinQ

INVERY

www.invery.com

Product: DockLinQ 30 pin bluetooth adapter
Model: DockLinQ
Brand:INVERY
Manufacturer: Guangzhou Invery Technology Co.,Ltd.
Add: 905, A2, Golsun Plaza, Yingbin Avenue, Huadu District Guangzhou Guangdong 510000
CAUTION: RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.
Extreme Temperature: 45° C max

Ver: V2.1-DockLinQ-EN-20210601

INVERY is committed to customer services. We focus on customer experiences.

Any problems, please contact us at first. Any customer cases will be assigned with a ticket ID, we will follow your case ASAP.

Trust us! WE WON'T DISAPPOINT YOU!


1. Write us email to support@invery.com. (Recommended)
2. Talk with us on Facebook messenger. www.facebook.com/goinvery
Search Goinvery on Facebook to find us!



1.Overview

DockLinQ is a brand new design product. It is designed to upgrade your 30 pin iPod/iPhone music docking station with bluetooth audio streaming capability. Outputting High Quality Sound, Extra Long Bluetooth Wireless Range.

As well as DockLinQ is equipped with 3.5mm AUX-out jack and built-in battery, it is able to upgrade your home stereo/car stereo/wired headphone with bluetooth audio streaming capability.

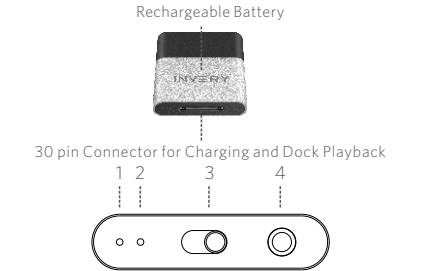


1. Battery charging indicator light	
LED light indicator	Battery charging status
Red constant light	Battery is charging
Red light OFF	Battery is fully charged

2. Bluetooth pairing indicator light

LED light indicator	Bluetooth connection status
Blue blinking light	Waiting for bluetooth connection
Blue constant light	Bluetooth connected


3. Battery ON/OFF switch

- Plug DockLinQ into 30 pin connector, slide the switch button to the right side (OFF position), the battery won't be charged at right position.

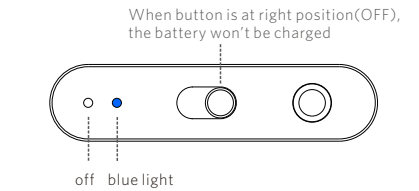

Plug DockLinQ on dock for bluetooth music streaming, we strongly recommend to slide button to the right position(OFF) to play music. This will deactivate battery charging to prolong battery life. DockLinQ is powered by 30 pin connector. No need battery when DockLinQ plugged on dock for music streaming.

- Slide the switch button to the left side(ON position) to activate battery. The battery will be charged at left position when DockLinQ is plugged into 30 Pin docking station .

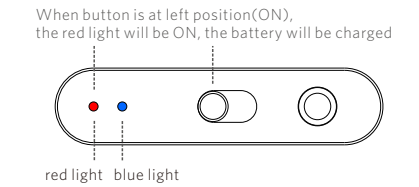


4. 3.5 mm Aux-out jack

- Using included aux cable to plug DockLinQ Aux-out jack to home or car stereo Aux-in jack for music streaming.
- Connect wired headphones/earphones.

2.FAST SETUP


1. PLUG.Plug DockLinQ into 30 Pin connector.

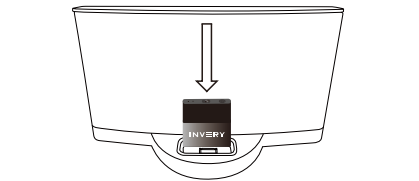


2. PAIR. Open your phone bluetooth setting to search DockLinQ. Tap to pair it.After paired successfully, you will see constant blue light.
3. PLAY. Streaming music from your phone to docking station.

IMPORTANT NOTES:

DockLinQ is compatible with most of Bose dock. If the sound doesn't come out or the sound is not loud or not good , the problem probably is that 30 pin connector is not in good contact condition due to the dock is used for many years. Please try to adjust DockLinQ position to make it in good contact condition, the sound will come out. If it still doesn't work, please contact us support@invery.com

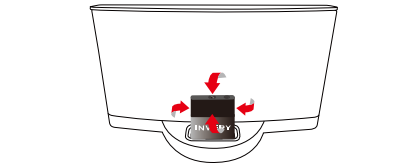


3.Playing Music from a Docking Station via 3.5 mm Aux-in jack

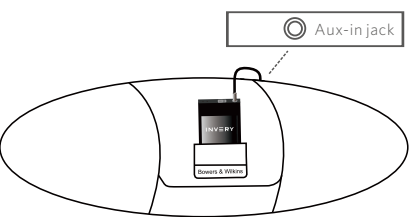

DockLinQ is not compatible with Some digital dock which adopt USB channel such as Bowers&Wilkins Zepplin with Aux-in jack. DockLinQvides alternative bluetooth streaming solution: Use 3.5 mm Aux cable to connect DockLinQ Aux-out jack to docking station speaker Aux-in jack to play music.

4.Playing Music from Home or Car Stereo with a 3.5 mm Aux-in jack

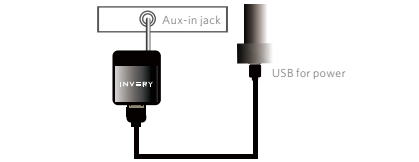

Use 3.5 mm Aux cable to input audio. Use 30 pin-USB cable to supply power for DockLinQ. (We recommend our Airdual series for your car)


5. Playing Music with Wired Earphone




Use DockLinQ and Aux cable to turn wired earphones into bluetooth earphones.

6.Streaming Music from Multi Devices (Dual Link Function)


- a. Pair first mobile device bluetooth. Search DockLinQ and pair it.
- b. Turn off the first mobile device bluetooth.

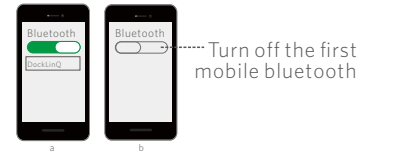

- c. Pair second mobile device bluetooth when first mobile device bluetooth was turned off. Search DockLinQ and pair it.

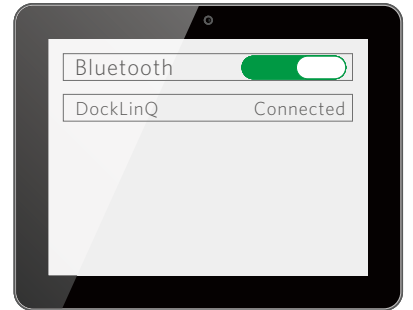


- d. Open first mobile device bluetooth tap to pair it.

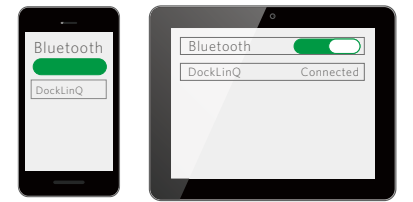

7.Amazon Echo Dot works with DockLinQ

1. Turn OFF the Bluetooth function on your iPhone, iPad or any other mobile device that has Bluetooth.

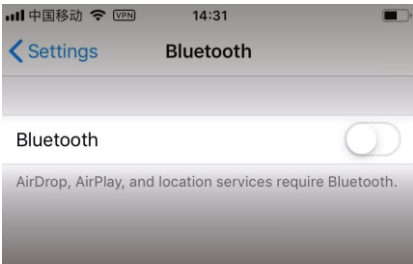


iPhone Menus to Turn Off Bluetooth

2. Take DockLinQ off the Bose SoundDock and slide the power button to the left. This will turn on the battery. Place DockLinQ near Amazon Echo Dot.




- 3.Open the Alexa App on your phone, tablet or laptop. Then tap the 3 Line Menu icon in the upper left-hand corner of the Home Screen.

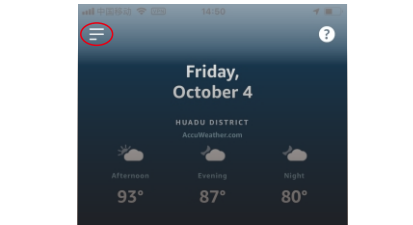


Alexa Home Screen

4. Tap Settings on the Home Menu.

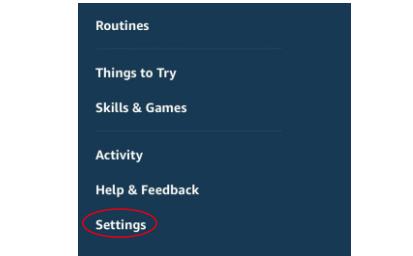

Alexa Home Menu

5. Tap Echo Dot under the Settings Menu. It will be the first choice.

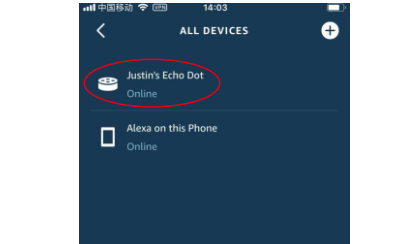

Alexa Settings Menu

FCC Statement: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: • Reorient or relocate the receiving antenna. • Increase the separation between the equipment and receiver. • Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. • Consult the dealer or an experienced radio/TV technician for help. Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.