


R75Pro 说明书折页: 128g双铜四色印刷

正面

反面

尺寸: 285x620 毫米

RK ROYAL KLUDGE 852 MECHANICAL KEYBOARD

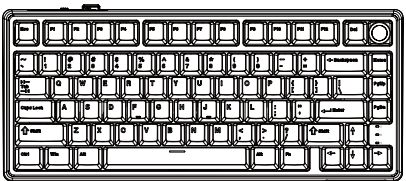

12 MONTHS GUARANTEE
Non-human damage
12-month warranty

PRODUCT BASIC

- Manual
- Switch and Keycaps Puller
- Keyboard
- USB Type-C cable
- 2.4G Dongle

INDICATOR LIGHTS/KNOB FUNCTION

KNOB FUNCTION

- Pluggable knob (can be used instead of backlights)
- Clicklock: Volume+
- Anticlockwise: Volume-
- Press: Mute

WIRED MODE

Recommend: Using 5V 1A Rated power to charge keyboard

BT CONNECTIVITY

Place the switch to "B" side.
Short press Fn+Q/WE to change BT channel.
Long press Fn+Q/WE: enter pairing mode.
Turn on the Bluetooth of computer/another device, find and link to the keyboard whose name on the list shows as RK75Pro.

2.4G CONNECTIVITY

Place the switch to "G" side.
Short press Fn+P to change 2.4 channel.
If the P key flicks slowly, it indicates that your device is successfully linked to the computer. (Order receiver: The receiver is factory paired and does not need to be paired again.)

BATTERY REMINDER

In BT 2.4G mode, Press and hold **Fn+Enter** to view the battery indicator

DFU MODE

There are two methods to enter dfu mode (development Firmware upgrade) on the keyboard:

Method 1: Press and hold the switch located under the space bar, and then connect the keyboard to the computer.

Method 2: Connect the keyboard to the computer first, and then simultaneously short press **Fn + Right Shift + Esc**.

These methods allow you to activate the DFU mode on the keyboard, enabling firmware upgrades and development functionalities.

The keyboard can support VIA drivers: <https://usevia.app/>

BACKLIGHT CONTROL

In USB mode, the backlight brightness is brightest by default
In wireless mode, the backlight is slightly dimmer by default


- Backlight Brightness +
- Backlight Brightness -
- Backlight Mode Switching
- Windows Lock
- Press And Hold For Three Seconds To Restore Factory Settings
- Backlight Speed -
- Backlight Speed +
- Backlight Monochrome Switching
- Switch between six-key rollover and full-key rollover

SECONDARY COMBINATION FUNCTION KEYS

- Switch to windows system
- Pause
- Switch to mac system
- End
- Scroll
- Ins
- Prtc

尺寸: 285x620 毫米

RK ROYAL KLUDGE 852 MECHANICAL KEYBOARD

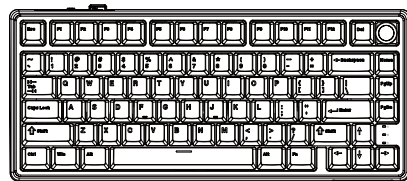

12 MONTHS GUARANTEE
Non-human damage
12-month warranty

CUSTOM BACKLIGHT SET

Note: Fixed lighting effect, not recording

Step 1: Press **Fn + F1** to customize backlight

Step 2: Press **Fn + F2** to enter backlight recording mode

Step 3: Press the keys which you want to record the backlight, and repeat this steps

Step 4: When it is done, pressing **Fn + F2** again will save and exit the backlight recording mode

MULTIMEDIA KEYS FOR WINDOWS

Windows system (Fn + A: switch to Windows system)

- Computer: Fn + F1
- Browser: Fn + F2
- Mailbox: Fn + F3
- Calculator: Fn + F4
- Pager: Fn + F5
- Stop: Fn + F6
- Last Song: Fn + F7
- Play / Pause: Fn + F8
- Next Song: Fn + F9
- Mute: Fn + F10
- Volume-: Fn + F11
- Volume+: Fn + F12

MULTIMEDIA KEYS FOR MAC

MAC system (Fn + S: switch to Mac system)

- Screen Brightness-: Fn + F1
- Screen Brightness+: Fn + F2
- Keyboard Backlight Brightness-: Fn + F3
- Keyboard Backlight Brightness+: Fn + F4
- Last Song: Fn + F5
- Play / Pause: Fn + F6
- Next Song: Fn + F7
- Mute: Fn + F8
- Volume-: Fn + F9
- Volume+: Fn + F10
- Volume-: Fn + F11
- Volume+: Fn + F12

Have an issue with one of our RK products?

Feel free to contact us with any product issues or questions. We will reply as quickly as possible to ensure all your needs are handled. For better technical support, please contact rk gaming@rk gaming.com

RK ROYAL KLUDGE

Exclusive standard GB/T 14281-2010
Made in China www.rk gaming.com
Download Driver Address: www.rk gaming.com/Download/