RK N80 说明书折页：128g双铜四色印刷

正面

反面

尺寸: 285X620 毫米

RK ROYAL KLUDGE

RK N80 MECHANICAL KEYBOARD

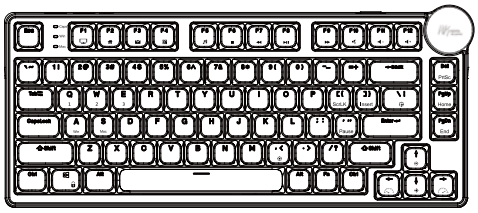

FCC WARNING:

WHEN USING A KEYBOARD:

GUARANTEE
Non-human damage
12-month warranty

PRODUCT BASIC

Manual	Switch and Keycaps Puller	Keyboard	USB Type-c cable	2.4G Dongle
Size: 329.92L×142.15W×27.73H±2	Backlight: RGB	Version: USB/2.4G/BT	Layout: 80keys	Switch: Mechanical switches

INDICATOR LIGHT FUNCTION

Caps Lock Win Lock Mac System

WIRED MODE



It supports 5V 1A rated power supply to charge.

Method 1: Insert the USB cable, press the knob to enter the menu interface, select the USB mode, and confirm. The display screen will show "USB Success".

Method 2: Insert the USB cable and press Fn+R briefly to switch to wired mode.

BT CONNECTION



BT connection with Knob:

1.Set the switch to 'ON' and press the knob to access the menu.
Use the knob to select any of the following icons: BT1 BT2 BT3.

Pairing: For example, using the knob to select "BT1" and then press and hold the knob. The screen will display "BT1 Pairing" to indicate the pairing process is active.

Reconnection : For example, select "BT1" using the knob and then press it briefly. The screen will display "BT1 Reconnecting" to indicate the device has entered the reconnection state.

BT connection with combination keys:

2.Set the switch to 'ON'.
Pairing: Press and hold Fn+Q / W / E for 3 seconds, for example, long-press Fn+Q, the display screen will show "BT1 Pairing" to indicate the pairing process is active.

Reconnection: Press Fn+Q / W / E for example, press Fn+Q briefly, The screen will display "BT1 Reconnecting" to indicate the device has entered the reconnection state.

3.Turn on your computer/mobile device's BT and search for the keyboard. Connect to it with the displayed name: RK N80.

4.After the connection is successful, the display screen will show "BT Success" and return to the Home screen automatically.

Similarly, follow the steps above to store 3 groups of different BT devices.

Friendly reminder: Prior to switching, kindly ensure that you have already paired three sets of BT devices.

2.4G CONNECTION



2.4G connection with Knob:

1.Set the switch to 'ON' and press the knob to access the menu. Use the knob to select the following icon: "2.4G", "Computer", "Browser", "Mailbox", "Calculator", "Player".

2.Press the knob briefly to switch the keyboard to 2.4G mode, and the screen will display "2.4G" to indicate the keyboard is in reconnection state, and then insert the 2.4G dongle.

3.After a successful reconnection, the display screen will show "2.4G Connected" and return to the Home screen automatically.

2.4G pairing with knob:

1.Press the knob to access the menu, choose the icon "2.4G" and long-press the knob until the screen shows "2.4G Pairing", and then insert the 2.4G dongle.

2.After a successful pairing, the display screen will show "2.4G Connected" and return to the Home screen.

2.4G pairing with combination keys:

1.Long-press Fn+P for 3 seconds until the display screen shows "2.4G Pairing", and then insert the receiver.

2.After a successful pairing, the display screen will show "2.4G Connected" and return to the Home screen.

Friendly reminder: The devices are already paired at the factory, so there is no need to pair them again.



2.4G Storage Area

FUNCTION KEY/DISPLAY OPERATION

Press FN+Win together to lock/unlock the WIN key and APP key functions
Press and hold FN+ spacebar for 3 seconds to restore factory settings.

- Home/Layout/Language
  - 1. The main screen can be set to
    - 1).Time interface
    - 2).Customizable GIF image (with driver support)
  - 2. Layout switching: Win/Mac
  - 3. Language selection: English/Chinese
- Backlight Effects/Colour Settings
  - 1. Select the effect icon and press knob.
    Use the knob to choose different backlight effects.
  - 2. Select the colour icon and press knob.
    Use the knob to choose different backlight colour.
- Backlight Brightness/Speed Settings
  - 1. Select the Brightness icon and press knob.
    Use the knob to adjust backlight brightness.
  - 2. Select the Speed icon and press knob.
    Use the knob to adjust backlight effect speed.

Volume Adjustment
Caps Lock
Win Lock
Win mode
Mac mode
Wired mode
2.4G
BT

BACKLIGHT CONTROL

Fn + ↑ Backlight brightness +
Fn + ↓ Backlight brightness -
Fn + ← Backlight speed -
Fn + → Backlight speed +
Fn + \ (RGB Version only) Switch backlight color
Fn + Backspace Switch dynamic backlight effects
Fn + Space bar Press and hold for three seconds to restore factory settings
Fn + Win Window Lock

FN KEY

Fn + Esc ScrLK
Fn + Del PrtSc
Fn + Insert
Fn + PgUp Home
Fn + Pause
Fn + PgDn End
Fn + A Switch to windows system
Fn + 0 Switch to mac system

青色(C) 洋红(M) 黄色(Y) 黑色(K)

文件名: RK N80-英文说明书-100书写纸(620×285mm)-更新24-4-22-转曲.pdf 2024年5月9日 星期四

尺寸: 285X620 毫米

RK ROYAL KLUDGE

RK N80 MECHANICAL KEYBOARD

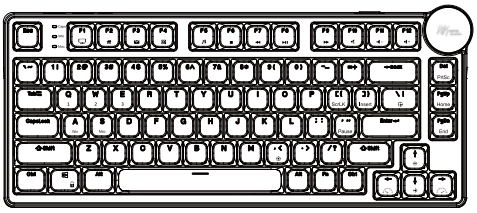

FCC STATEMENT:

BATTERIES:

GUARANTEE
Non-human damage
12-month warranty

CUSTOM BACKLIGHT SET

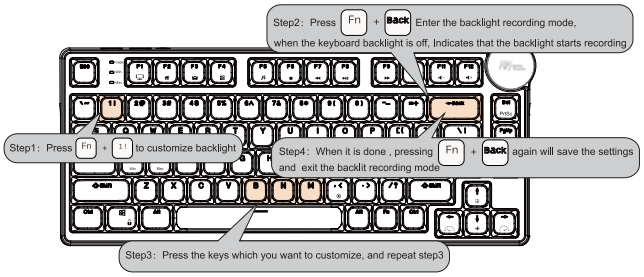

MULTIMEDIA KEY FOR WINDOWS

Windows system(Fn + A: switch to Windows system)

Fn + F1	Computer	Fn + F7	Last Song
Fn + F2	Browser	Fn + F8	Play / Pause
Fn + F3	Mailbox	Fn + F9	Next Song
Fn + F4	Calculator	Fn + F10	Mute
Fn + F5	Player	Fn + F11	Volume-
Fn + F6	Stop	Fn + F12	Volume+

MULTIMEDIA KEY FOR MAC

MAC system(Fn + S: switch to Mac system)

Fn + F1	Screen Brightness -	Fn + F8	Play / Pause
Fn + F2	Screen Brightness +	Fn + F9	Next Song
Fn + F5	Keyboard Backlight Brightness-	Fn + F10	Mute
Fn + F6	Keyboard Backlight Brightness+	Fn + F11	Volume-
Fn + F7	Last Song	Fn + F12	Volume+

Have an issue with one of our RK products?

Feel free to contact us with any product issues or questions.
We will reply as quickly as possible to ensure all your needs are handled.
For better technical support, please contact rkgaming@rkgaming.com

RK ROYAL KLUDGE

Executive standard:GB/T 14081-2010
Made in China www.rkgaming.com

青色(C) 洋红(M) 黄色(Y) 黑色(K)

文件名: RK N80-英文说明书-100书写纸(620×285mm)-更新24-4-22-转曲.pdf 2024年5月9日 星期四