
快速入门指南 Quick start guide

无线立体声耳机 Wireless stereo headset








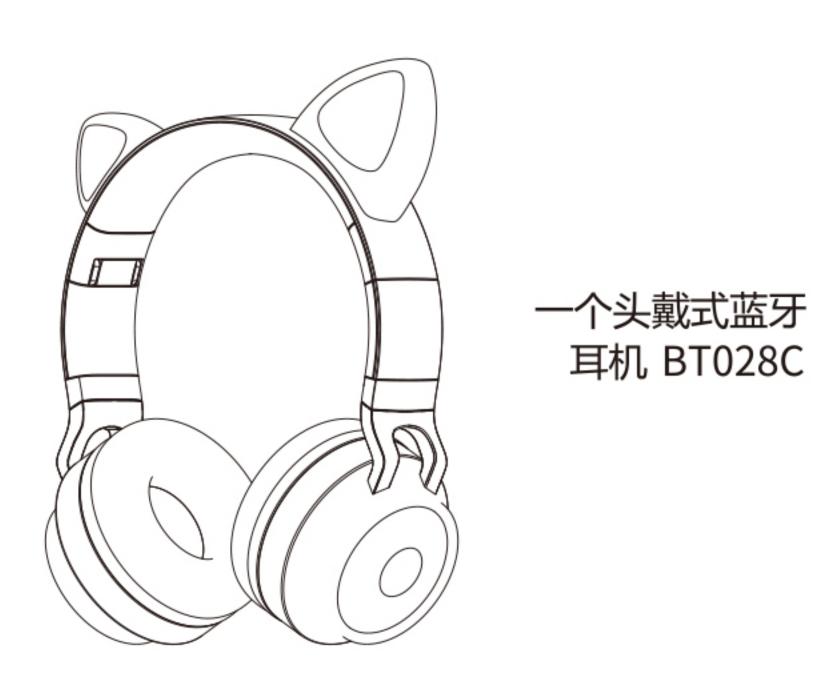



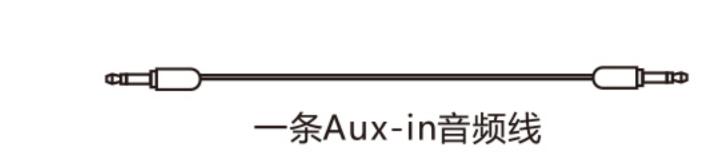

按键功能说明

" (७/▶।/)" 开启/关闭耳机; 暂停/播放音乐;接听/挂断电话

" (₩/٧-)" 短按减音量/长按上一曲

" (▶▶/V+)" 短按加音量/长按下一曲

M 短按FM切换播放模式/长按开关LED灯

3 蓝牙操作模式

一、开机: 长按"﴿)" 三秒以上,设备启动,语音提示"Power on", 自动进入蓝牙模式.

二、配对状态:

a.首次配对:开机自动进入蓝牙模式,语音提示"Power on ", 耳机 自动进入蓝牙匹配模式,语音提示音"Bluetooth mode",LED指示灯蓝、 绿 两色快速交替闪烁,打开智能设备蓝牙功能,开启搜索并选择设备 "BT028C", 无需密码(部分设备若需要密码时,请输入"0000"), 配对成功后语音提示"Connected", LED指示灯蓝色长亮。

b.重新配对:关闭已连接智能设备蓝牙,语音提示 "Disconnec ted",耳机自动重新进入配对模式,LED指示灯蓝、绿 两色快速 交替闪烁。打开新智能设备蓝牙功能,开启搜索并选择设备 "BT028C", 无需密码(部分设备若需要密码时,请输入 "0000"), 配对成功后语音提示"Connected", LED指示灯蓝灯长亮。

c.后续配对: 开机后3秒内会自动搜索并连接最后一次已配对的 设备。

d.按键操作:

1)接通电话:来电时,短按"◎/ਆ/》" 2) 挂断电话:通话中,短按 "

3) 拒绝来电:来电时,长按"﴿ 🗷 " 2秒左右

4) 回拨电话: 双击 " 🐠" "

5)播放音乐:打开播放器状态下,短按"⑩川"可播放或暂

6) 音量控制: 短按 "ખ/V-" 降低音量(当耳机最低音量时语音 提示: "dudu"), 短按 "भ/٧+" 增加音量(当耳机最大音量时语

音提示: "dudu")

7) 上下曲控制: 长按 "w/v-" 上一曲, 长按 "w/v+" 下一曲

三、关机:

耳机开机状态中,长按"@/ખ/)"三秒以上,语音提示"Power off",LED指示灯熄灭,设备关闭。

4 插卡播放模式

1) 在无卡状态下,将TF卡插入,语音提示"TF Mode",进 入插卡播放模式。

5 FM播放模式

1) 耳机开机后,通过 ") 键切换播放模式,语音提示" Radio Mode",进入FM模式, 绿灯亮 2) 搜索电台: 单击 "@/トルイン)", 自动搜台并保存, LED绿色灯快速

闪烁,(中途可以再次长按中止搜索),再次进入FM模式,

自动进入已经保存的第一个电台,绿灯亮。长按"呼~" 或者 "भा/भ" 可以切换频道,如果想重新搜台,在FM模式下再 次 单击 "ຝ⋈"。

Aux-in播放模式

在其他模式下,插入Aux-in线,蓝牙功能自动关闭,切换到 Aux-in播放。

充电模式

1、耳机低电量时语音提示: "please charge it"

2、耳机低电时,请使用配套的充电线进行充电,并且充电电压控 制在:5V/1A.

3、省电模式: 匹配状态持续5分钟后无配对,耳机自动关机;




充电时,红色LED指示灯长亮,满电时,
蓝色LED指示灯长亮
蓝.绿LED指示灯交替闪烁
蓝色LED指示灯长亮
Bluetooth Mode,蓝色LED闪烁
TF Mode, 绿色LED闪烁

Radio Mode,绿灯长亮 Aux-in Mode,蓝牙自动关闭,LED指示灯熄灭



蓝牙耳机进入配对模式后若无配对连接操作,请关闭设备避免电量损耗。 搜索蓝牙时不要进行其他操作,防止程序出错。 在使用中请选择适当的音量,以防对耳朵造成伤害。 请注意蓝牙耳机的良好使用坏境,避免对耳机造成损伤。 长时间未使用的耳机,请先将耳机进行一次充电过程后再使用。

Items Included

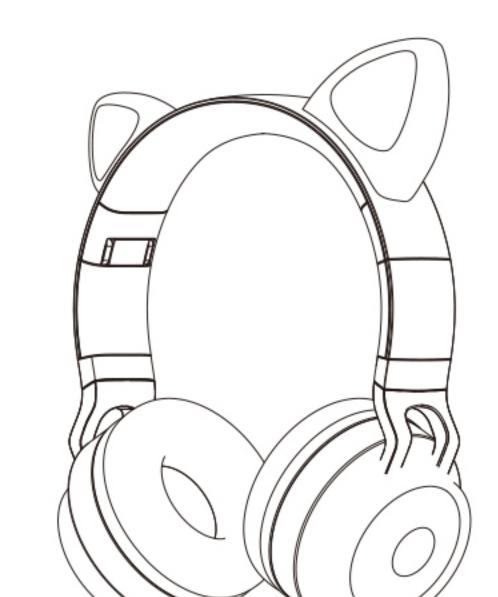

One USB to Micro-USB

charging cable

One Bluetooth headset BT028C

One User's Manual

One Aux-in cable

Button Description

"(U/NI/)" ON/ OFF, Play/ Pause, Answer Calls/ Hang off Calls " short press for reducing volume/ long press for previous song

short press for increasing volume / long press for

Switching Play Mode by Short Press FM/Long Press Switch LED Lamp

Bluetooth Mode

1.Startup: Long press "७/भा/" for more than 3 seconds, the headset will start up and enter into Bluetooth mode automatically, voice prompts "Power on"

2. Pairing Operation:

a. For the first time pairing: start up the Bluetooth headset, voice prompt "Power on ". will be heard, and then enter into Bluetooth mode automatically, voice prompt "Bluetooth mode" LED indicator light alternating flashes with blue and green colors. Please open the smart device's Bluetooth searching function and select the device "BT028C", no password is required (If some devices require is password, please enter "0000"), after successful pairing, voice prompt "Connected" will be heard, LED indicator light turns to blue.

b. Re-pairing: Turn off the attached smart device's Bluetooth function, voice prompt "Disconnected" will be heard, LED indicator light alternating flashes with blue and green colors. Open another smart device's Bluetooth searching function and select the device "BT028C", no password is required (If some devices require password, please enter "0000"), after successful pairing, a tone will be heard, LED indicator light turns to blue.

c. Follow-up pairing: automatically search and pair the last connected device in 3 seconds after power on.

d. Button Operation: 1)Answer calls: Short press "७/◄/")" when calls' coming. 2) Hang off phone calls: Short press "७/◄/")" when calling.

3) Reject phone calls:Long press "@INI)" for 2 seconds when calls'

4) Redial the last number: Double-click "७/ҹ/๖" 5)Music Play: Short press "@/>
" to play/pause the music when the player is on.

6) Volume control :short press "("/V-)" to reduce volume(minimum volume tone "dudu"), short press "(**/V+)" to increase volume (maximum volume tone "dudu"

7) Previous/Next control: long press "("/v-)" for previous song; long press "()) for next song

3. Shutdown:

Long press "@/>"/")" for more than 3 seconds when the headset is on, voice prompts "Power off", LED indicator light turns off.

4 TF Mode

1)When the slot is empty and then insert the TF Card, voice prompts "TF Mode". It plays media automatically.

5 FM mode

1)1) When the headset is on, switch to FM mode with " , voice prompt " Radio Mode", Enter FM mode, green light

Automatically enter the first station that has been saved and the

2) Search Radio: Click "ຝົ∕ພາ/້ວ" Automatically search and save the desk, LED green light flickers fast, (long press to stop searching again halfway), and then enter FM mode again.

green light is on. Long press " w/v- " perhaps " w/v+ " You can switch channels. If you want to search the station again, click again in FM mode" ⊚/ҹ/℩)".



When the headset is on and insert the Aux-in cable, the Bluetooth function will turn off and switch to Aux-in playing.



1.Low battery voice prompt: "please charge it" 2. When the headset is low battery, please use the charging cable to charge and make sure the charging voltage is 5V/1A. 3. Power saving mode: if no successful match for 5 minutes, the headset will automatically shutdown.

LED indicator light Status

	Charge Status	LED indicator light stays red. When fully charged, Blue LED Indicator Lighting
	Pairing Status	LED indicator light rapidly alternating flashes with blue and green colors.
	Connected Status	LED indicator light stays blue.
	Using Status	Bluetooth Mode, LED indicator light flashes blue
		TF Mode, LED indicator flashes green
		Radio Mode, The green light is always on
		Aux-in Mode, the headset automatically turns off, LED light turns off.



If no pairing connection after the Bluetooth headset enters the pairing mode, please turn off the headset to save power.

Do not perform other operations when searching Bluetooth to prevent the program error.

Please select a proper volume while using to prevent damage to your Please note that a good environment for using the Bluetooth headsets

can avoid damage to the headsets. Please charge the headset after a long time none-use.

FCC Warning Statement

requirement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

 Consult the dealer or an experienced radio/TV technician for help. This device complies with part 15 of the FCC Rules. Operation is subject to the following

two conditions: (1) This device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation. The device has been evaluated to meet general RF exposure

产品参数

蓝牙标准: Bluetooth V5.0

支持协议: Support a2dp\avctp\avdtp\avrcp\hfp\spp\ smp\att\gap\gatt\rfcomm\sdp\l2cap profile

有效范围:20m 电池规格: 400mAH内置可充电锂电池

充电电压: 5V/1A

充电时间:约2.5小时 续航时间: LED灯开启约7小时/关闭LED约12小时

工作频率: 2.402-2.480GHz

阻抗: 32Ω

灵敏度: 105±3db

Product parameters

Bluetooth Version: V 5.0 Support Profile: Support a2dp\avctp\avdtp\avrcp\hfp\spp\ smp\att\gap\gatt\rfcomm\sdp\l2cap profile Working Distance Range: 20m

Battery Specifications: 400 mAh, Built-in rechargeable lithium-ion Charging Voltage: 5V/1A

Charging Time: about 2.5 hours Talking/Music time: LED lights turn on for about 7 hours/turn off for about 12 hours

Working Frequency: 2.402-2.480GHz

Impedance: 32Ω Sensitivity:105±3db