



# TEST REPORT

Product Name: Wireless Microphone  
FCC ID: 2A5DUYCC-58  
Trademark: N/A  
Model Number: YCC-58, WM-2  
Prepared For: SHENZHEN YONGCHUANGCHENG TECHNOLOGY CO., LTD  
Address: 6F, MAOCHENG BUILDING, XICHENG INDUSTRIAL AREA, XIXIANG, BAO'AN DISTRICT, SHENZHEN, GUANGDONG, China  
Manufacturer: SHENZHEN YONGCHUANGCHENG TECHNOLOGY CO., LTD  
Address: N6F, MAOCHENG BUILDING, XICHENG INDUSTRIAL AREA, XIXIANG, BAO'AN DISTRICT, SHENZHEN, GUANGDONG, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Apr. 01, 2024  
Sample tested Date: Apr. 01, 2024 to Apr. 22, 2024  
Issue Date: Apr. 22, 2024  
Report No.: CTB240418043RFX  
Test Standards: FCC Part15.236  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is FM radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION.....</b>	<b>3</b>
<b>2. TEST SUMMARY .....</b>	<b>4</b>
<b>3. MEASUREMENT UNCERTAINTY .....</b>	<b>5</b>
<b>4. PRODUCT INFORMATION AND TEST SETUP .....</b>	<b>6</b>
4.1 Product Information .....	6
4.2 Test Setup Configuration.....	6
4.3 Support Equipment.....	6
4.4 Channel List .....	7
4.5 Test Mode .....	7
4.6 Test Environment .....	7
<b>5. TEST FACILITY AND TEST INSTRUMENT USED .....</b>	<b>8</b>
5.1 Test Facility .....	8
5.2 Test Instrument Used .....	8
<b>6. AC POWER LINE CONDUCTED EMISSION .....</b>	<b>10</b>
6.1 Block Diagram Of Test Setup.....	10
6.2 Limit.....	10
6.3 Test procedure .....	10
6.4 Test Result .....	12
<b>7. TRANSMITTER SPURIOUS EMISSION .....</b>	<b>14</b>
7.1 Block Diagram Of Test Setup.....	14
7.2 Limit.....	14
7.3 Test procedure .....	15
7.4 Test Result .....	16
<b>8. CONDUCTED OUTPUT POWER.....</b>	<b>19</b>
8.1 Block Diagram Of Test Setup.....	19
8.2 Limit.....	19
8.3 Test procedure .....	19
8.4 Test Result .....	20
<b>9. OCCUPIED BANDWIDTH.....</b>	<b>22</b>
9.1 Block Diagram Of Test Setup.....	22
9.2 Limit.....	22
9.3 Test procedure .....	22
10.4 Test Result .....	22
<b>10. NECESSARY BANDWIDTH.....</b>	<b>24</b>
10.1 Block Diagram Of Test Setup.....	24
10.2 Limit.....	24
10.3 Test procedure .....	24
10.4 Test Result .....	25
<b>11. FREQUENCY STABILITY .....</b>	<b>26</b>
11.1 Block Diagram Of Test Setup.....	26
11.2 Limit.....	26
11.3 Test procedure .....	26
11.4 Test Result .....	27
<b>12. ANTENNA REQUIREMENT .....</b>	<b>28</b>
<b>13. EUT TEST SETUP PHOTOGRAPHS.....</b>	<b>29</b>

*(Note: N/A means not applicable)*



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240418043RFX	Apr. 22, 2024	Original	Valid



## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.236(g)	ANSI C63.10-2013	PASS
<b>RF Power Output</b>	47 CFR Part 15 Subpart C Section 15.236(d)	ANSI C63.10-2013	PASS
<b>Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.236(f) (2)	ANSI C63.10-2013	PASS
<b>Necessary Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.236(g)	ANSI C63.10-2013	PASS
<b>Frequency Stability</b>	47 CFR Part 15 Subpart C Section 15.236(f) (3)	ANSI C63.10-2013	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9K-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 <sup>-7</sup>
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s):	YCC-58, WM-2
Model Description:	All the model are the same circuit and RF module, only different for model name. Test sample model: YCC-58
Hardware Version:	TX2025VC
Software Version:	V1.0
Operation Frequency:	FRQ-A: 661.85MHz FRQ-B: 661.85MHz
Type of Modulation:	FM
Antenna installation:	PCB antenna
Antenna Gain:	1.0dBi
Ratings:	DC 5V charging from adapter Battery: DC 3.7V, 800mAh, 2.96Wh

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



#### 4.4 Channel List

Microphone1:

CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)
10	661.85	/	/	/	/	/	/

Microphone2:

CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)
20	661.85	/	/	/	/	/	/

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Microphone1:

Test mode	Low channel	Middle channel	High channel
Transmitting (FM)	/	661.85MHz	/

Microphone2:

Test mode	Low channel	Middle channel	High channel
Transmitting (FM)	/	661.85MHz	/

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08



21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2023.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2023.10.30

**Continuous disturbance**


No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
7	Communication test set	R&S	CMW500	108058	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

**Radiated emission**

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	2024.07.05
4	Amplifier	HP	8447E	2945A02747	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	2024.07.05
11	Communication test set	R&S	CMW500	108058	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

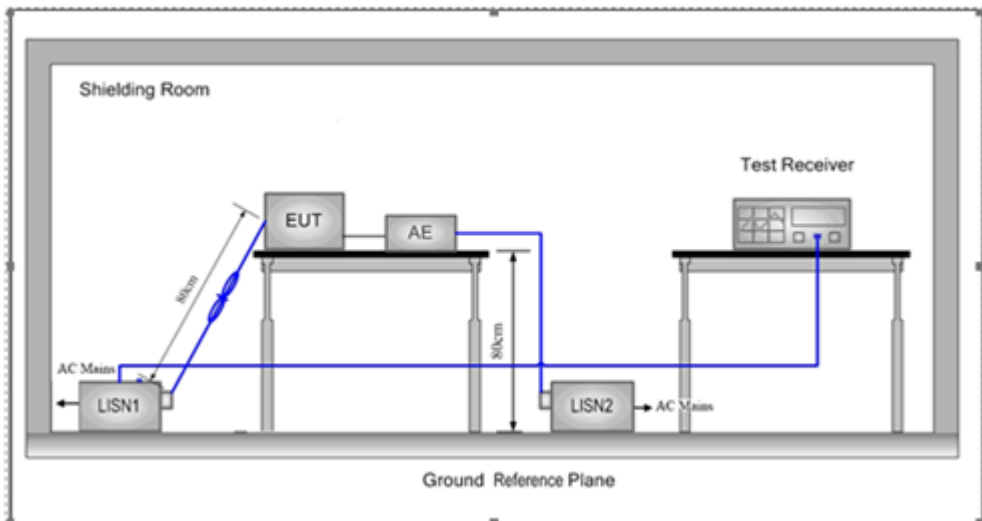

### 6.2 Limit

**Table 4 – AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under


test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.



6.4 Test Result

L: Worst case-FM(low channel)

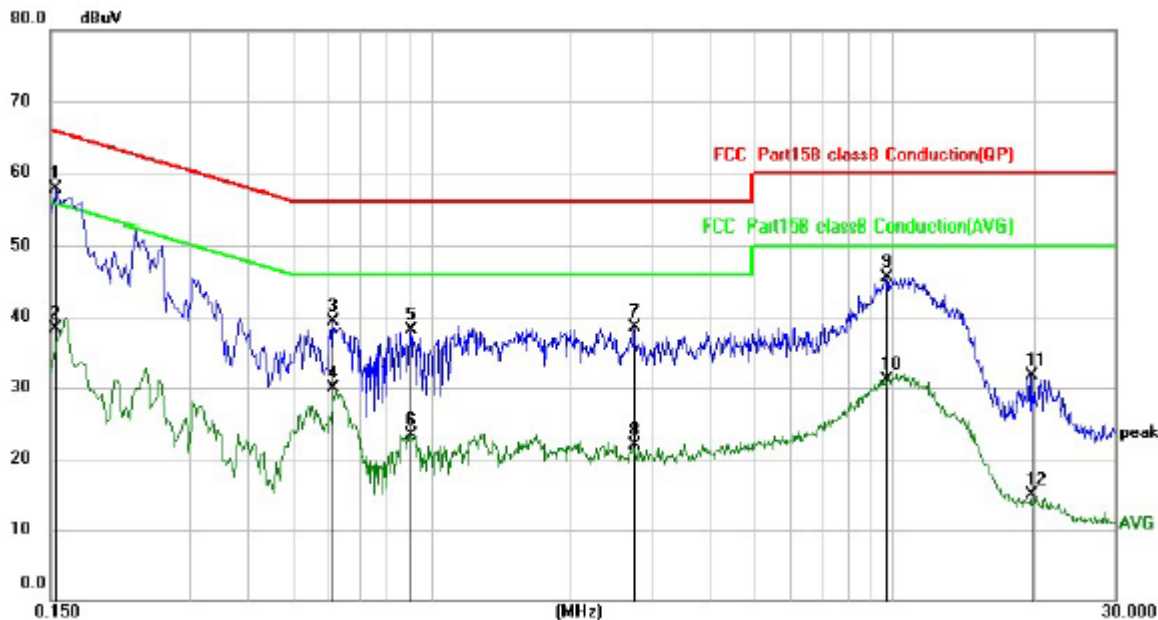


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1539	47.66	9.95	57.61	65.79	-8.18	QP
2		0.1539	28.30	9.95	38.25	55.79	-17.54	AVG
3		0.6140	29.30	10.01	39.31	56.00	-16.69	QP
4		0.6140	19.92	10.01	29.93	46.00	-16.07	AVG
5		0.9020	28.19	10.01	38.20	56.00	-17.80	QP
6		0.9020	13.27	10.01	23.28	46.00	-22.72	AVG
7		2.7620	28.37	10.16	38.53	56.00	-17.47	QP
8		2.7620	11.75	10.16	21.91	46.00	-24.09	AVG
9		9.7020	35.03	10.57	45.60	60.00	-14.40	QP
10		9.7020	20.59	10.57	31.16	50.00	-18.84	AVG
11		19.7580	20.94	10.82	31.76	60.00	-28.24	QP
12		19.7580	4.06	10.82	14.88	50.00	-35.12	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

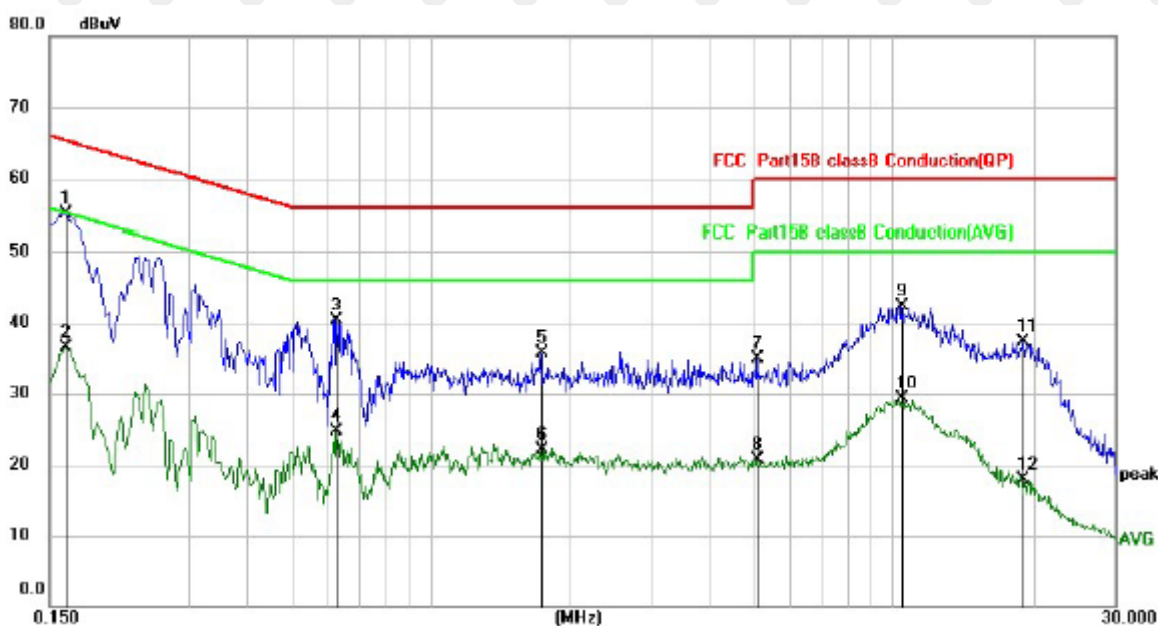

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1620	45.23	9.95	55.18	65.36	-10.18	QP
2		0.1620	26.50	9.95	36.45	55.36	-18.91	AVG
3		0.6260	30.23	10.01	40.24	56.00	-15.76	QP
4		0.6260	14.66	10.01	24.67	46.00	-21.33	AVG
5		1.7420	25.59	10.07	35.66	56.00	-20.34	QP
6		1.7420	12.07	10.07	22.14	46.00	-23.86	AVG
7		5.1020	24.53	10.39	34.92	60.00	-25.08	QP
8		5.1020	10.24	10.39	20.63	50.00	-29.37	AVG
9		10.4620	31.81	10.59	42.40	60.00	-17.60	QP
10		10.4620	18.80	10.59	29.39	50.00	-20.61	AVG
11		19.0060	26.54	10.80	37.34	60.00	-22.66	QP
12		19.0060	7.16	10.80	17.96	50.00	-32.04	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement - Limit

## 7. TRANSMITTER SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

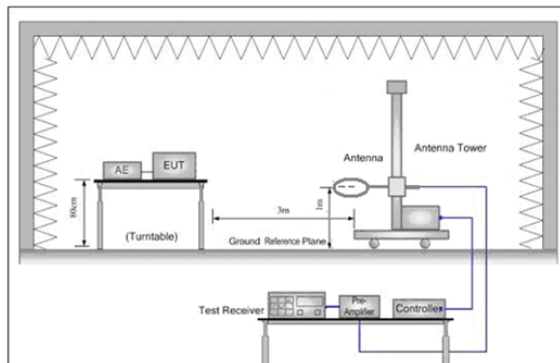


Figure 1. Below 30MHz


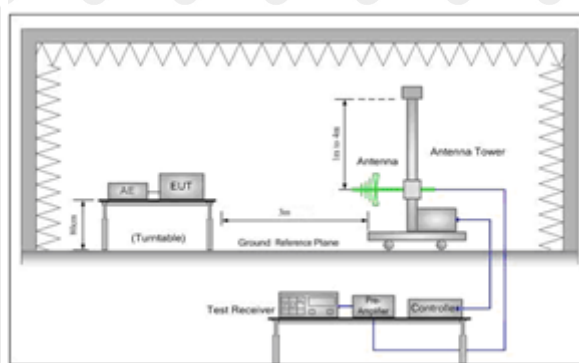


Figure 2. 30MHz to 1GHz

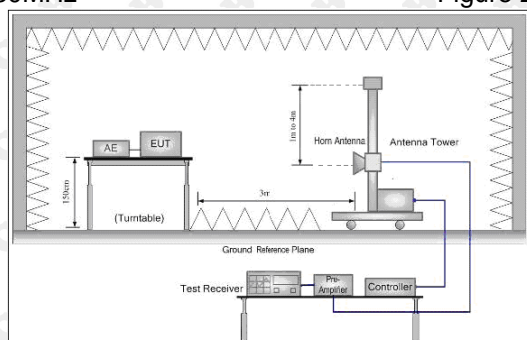

### 7.2 Limit

Spurious emissions are emissions outside the frequency range(s) of the equipment. The power of the spurious emissions shall not exceed the limits of table as below:

State	Frequency		
	47 MHz to 74 MHz 87,5 MHz to 137 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other Frequencies below 1 000 MHz	Frequencies above 1 000 MHz
Operation	4 nW	250 nW	1 μW
Standby	2 nW	2 nW	20 nW



7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
  - h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
  - i.Repeat above procedures until all frequencies measured was complete.
  - j. Full battery is used during test
- Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:  
 Antenna polarity: H  
 Worst case-FM

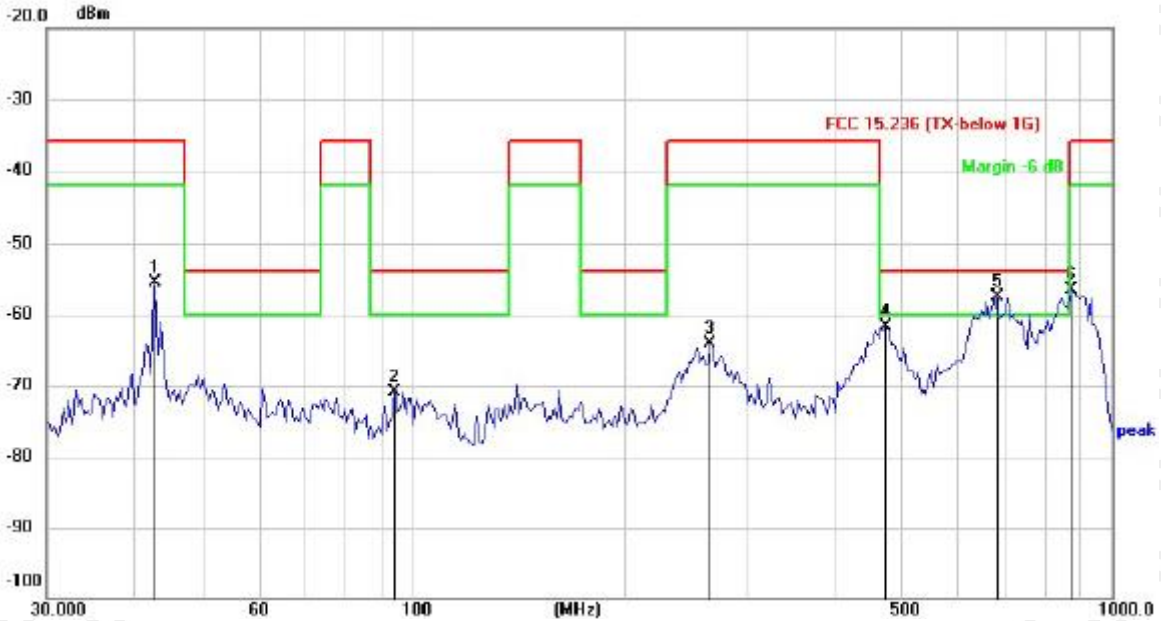


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1		42.9750	-66.48	10.92	-55.56	-36.00	-19.56	peak
2		94.5940	-72.03	1.23	-70.80	-54.00	-16.80	peak
3		266.1419	-76.00	11.84	-64.16	-36.00	-28.16	peak
4		474.6661	-78.07	16.30	-61.77	-54.00	-7.77	peak
5	*	679.9600	-76.62	19.21	-57.41	-54.00	-3.41	peak
6		876.7828	-77.27	20.72	-56.55	-36.00	-20.55	peak

Remark:

- Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit  
 Measurement=Reading level+correct facto
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Note: a filter is used during the test.

Antenna polarity: V  
Worst case-GFSK(low channel)

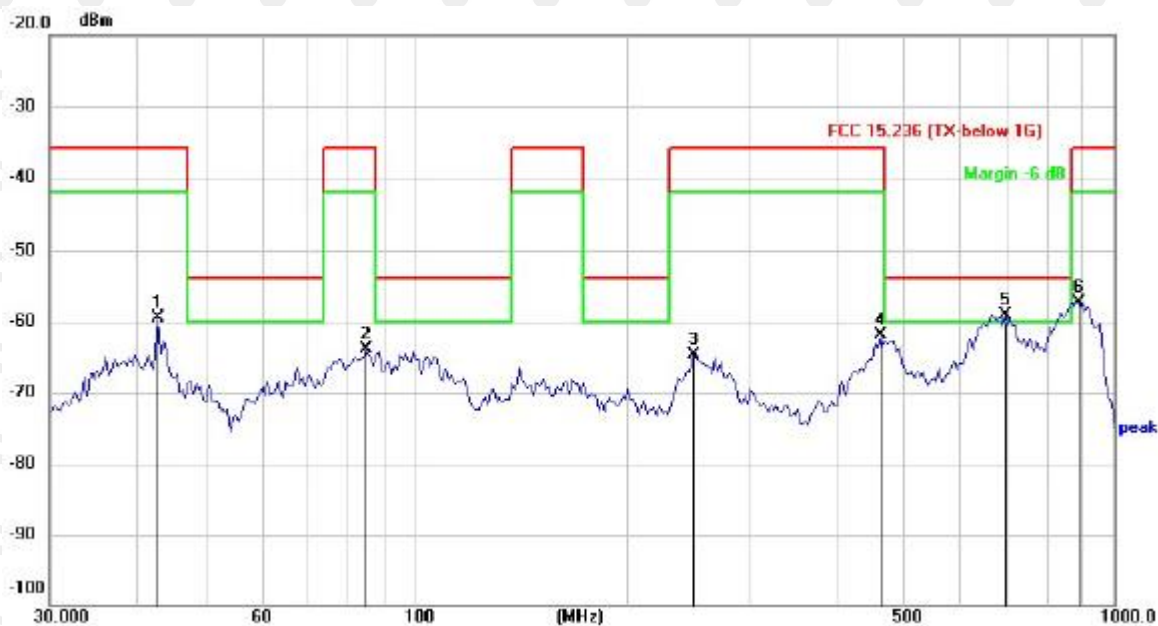

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dB	Over dB	Detector
1		42.9750	-70.47	10.92	-59.55	-36.00	-23.55	peak
2		85.1486	-65.04	1.18	-63.86	-36.00	-27.86	peak
3		250.3011	-76.81	12.19	-64.62	-36.00	-28.62	peak
4		462.3455	-78.05	16.24	-61.81	-36.00	-25.81	peak
5	*	698.0795	-78.23	19.17	-59.06	-54.00	-5.06	peak
6		892.2908	-78.02	20.77	-57.25	-36.00	-21.25	peak

Remark:

- Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit  
Measurement=Reading level+correct facto
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- Note: a filter is used during the test.



Above 1G:

Freq	Rd_level	Factor	Level	Limit	Over	detector	Height	Degree	Antenna polarization
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)				
1323.7	-55.90	8.43	-47.47	-30	-17.47	peak	1.3	165	H
1985.55	-56.83	12.45	-44.38	-30	-14.38	peak	1.6	347	H
2647.4	-56.75	8.43	-48.32	-30	-18.32	peak	1.1	25	H
3309.25	-55.06	8.43	-46.63	-30	-16.63	peak	1.4	230	H
3971.1	-55.74	12.45	-43.29	-30	-13.29	peak	1.6	44	H
4632.95	-54.04	8.43	-45.61	-30	-15.61	peak	1.3	316	H

Remark:

$$\text{Absolute Level} = \text{Receiver Reading} + \text{Factor}$$

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-amplifier}$$

Freq	Rd_level	Factor	Level	Limit	Over	detector	Height	Degree	Antenna polarization
(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)				
1323.7	-55.68	8.43	-47.25	-30	-17.25	peak	1.1	30	V
1985.55	-55.34	12.45	-42.89	-30	-12.89	peak	1.6	11	V
2647.4	-56.53	8.43	-48.10	-30	-18.10	peak	1.3	240	V
3309.25	-55.45	8.43	-47.02	-30	-17.02	peak	1.8	157	V
3971.1	-56.99	12.45	-44.54	-30	-14.54	peak	1.2	239	V
4632.95	-55.34	8.43	-46.91	-30	-16.91	peak	1.7	204	V


Remark:

$$\text{Absolute Level} = \text{Receiver Reading} + \text{Factor}$$

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-amplifier}$$

## 8. CONDUCTED OUTPUT POWER

### 8.1 Block Diagram Of Test Setup

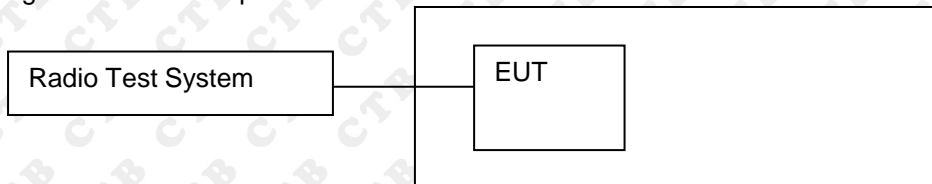

### 8.2 Limit

The maximum radiated power shall not exceed the following values:

- (1) In the bands allocated and assigned for broadcast television and in the 600 MHz service band: 50 mW EIRP
- (2) In the 600 MHz guard band and the 600 MHz duplex gap: 20 mW EIRP.


### 8.3 Test procedure

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

8.4 Test Result

Microphone1:


Frequency (MHz)	CONDUCTED OUTOUT POWER (dBm)	Antenna Gain (dBi)	EIRP (dBm)	FCC Limit (mW)	FCC Limit (dBm)	Reselt
661.85	9.483	1	10.483	20	13	PASS

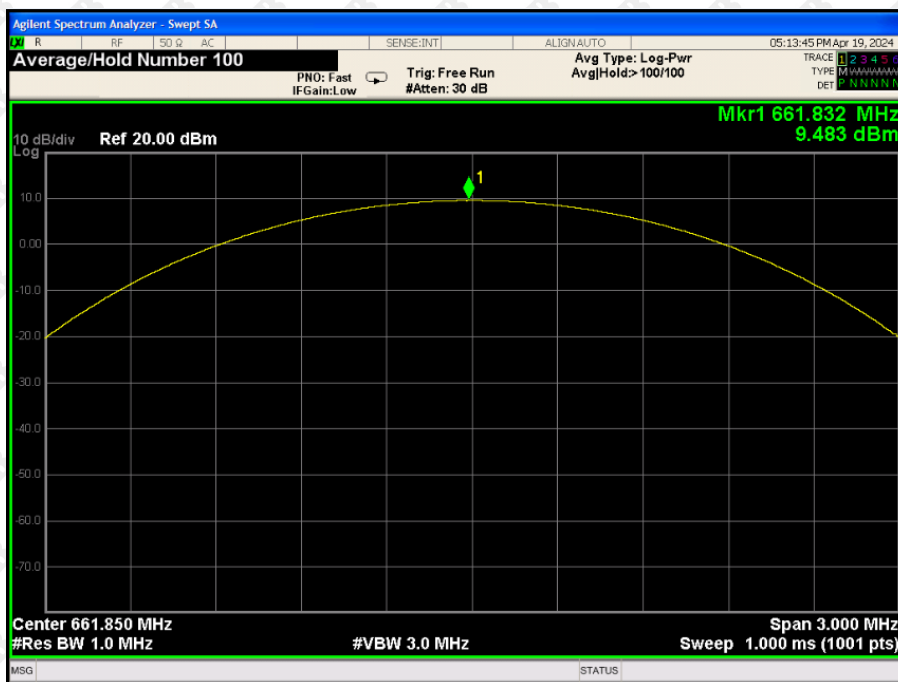




Microphone2:

Frequency (MHz)	CONDUCTED OUTOUT POWER (dBm)	Antenna Gain (dBi)	EIRP (dBm)	FCC Limit (mW)	FCC Limit (dBm)	Reselt
661.85	8.998	1	9.998	20	13	PASS

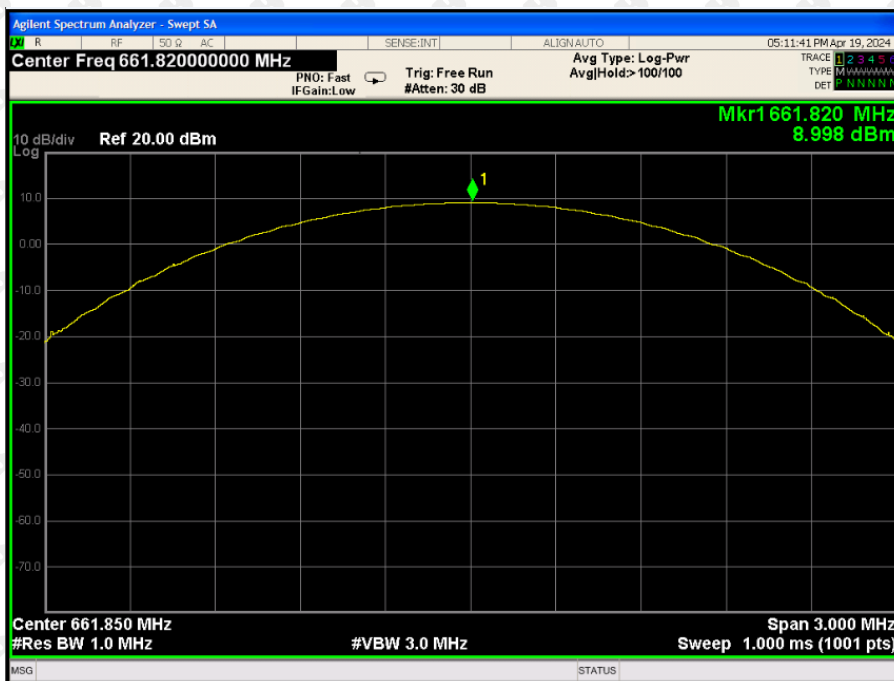

## 9. OCCUPIED BANDWIDTH

### 9.1 Block Diagram Of Test Setup

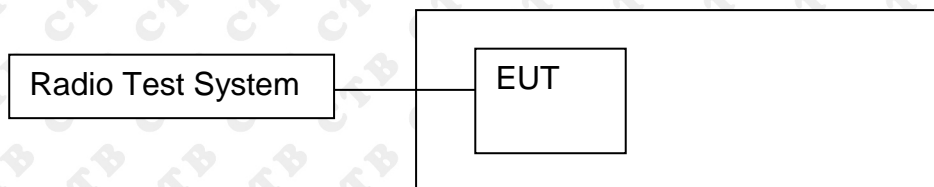

### 9.2 Limit

One or more adjacent 25 kHz segments within the assignable frequencies may be combined to form a channel whose maximum bandwidth shall not exceed 200 kHz. The operating bandwidth shall not exceed 200 kHz.

### 9.3 Test procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 3 KHz RBW and 10 KHz VBW.

### 9.4 Test Result

Microphone1:

Test Mode	Frequency (MHz)	99% OBW (KHz)	Limit (KHz)	Result
FM	661.85	59.886	200	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.


Microphone2:

Test Mode	Frequency (MHz)	99% OBW (KHz)	Limit (KHz)	Result
FM	661.85	60.288	200	PASS


Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

Microphone1:

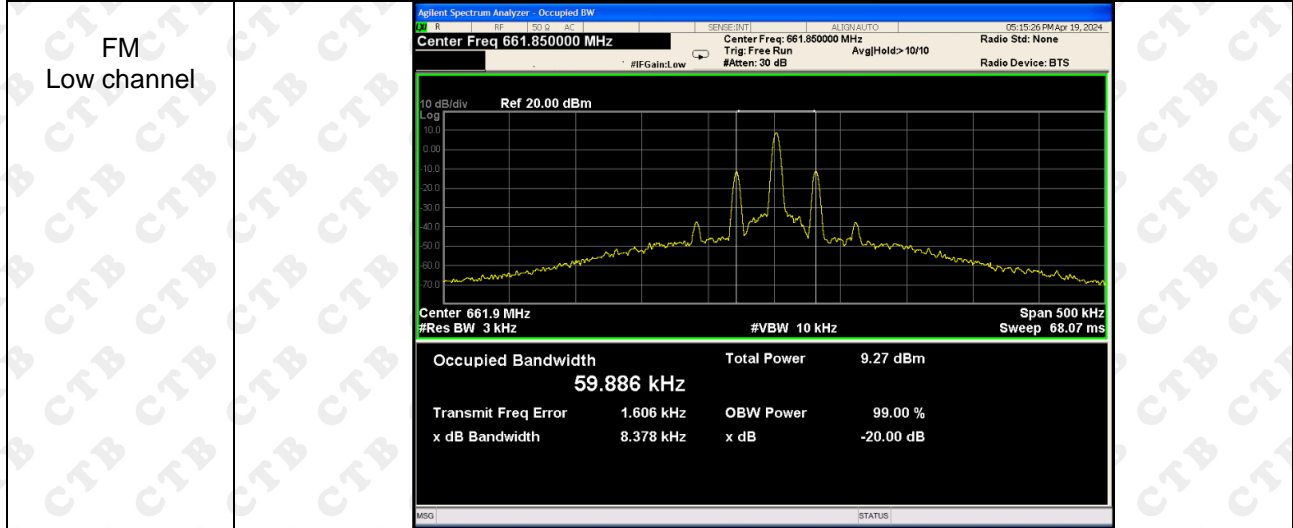


Microphone2:

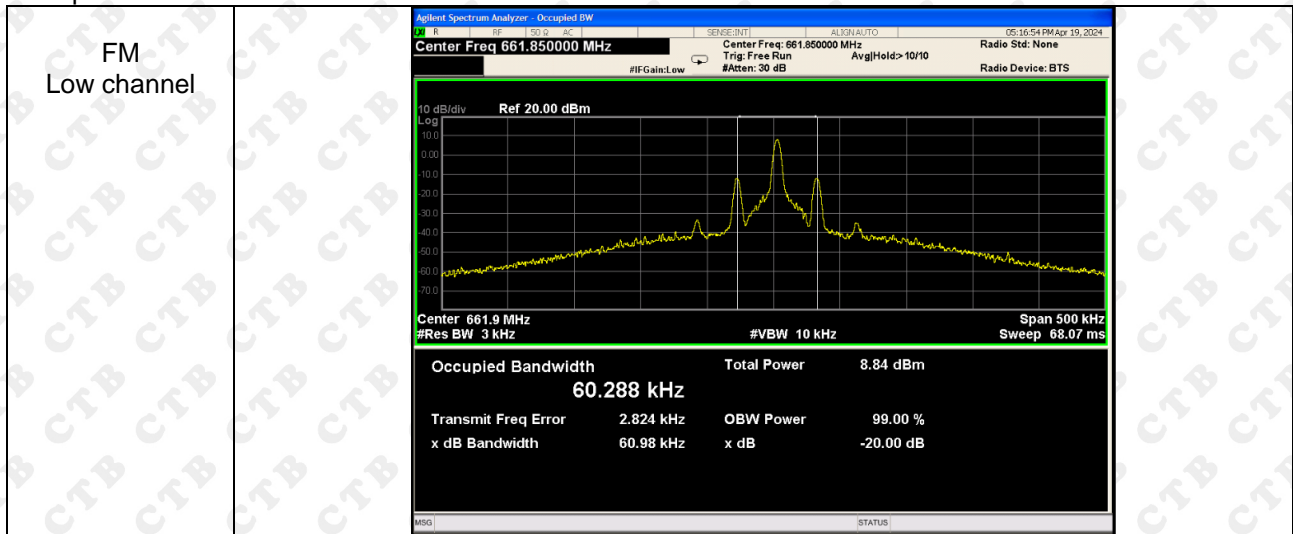



## 10. NECESSARY BANDWIDTH


### 10.1 Block Diagram Of Test Setup

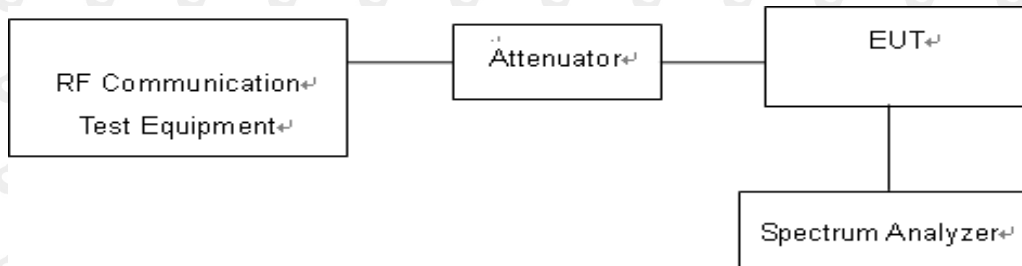

### 10.2 Limit

Emissions within the band from one megahertz below to one megahertz above the carrier frequency shall comply with the emission mask in §8.3 of ETSI EN 300 422-1 V1.4.2 (2011-08) as below:

The transmitter output spectrum shall be within the mask defined in figure below where B is the declared channel bandwidth

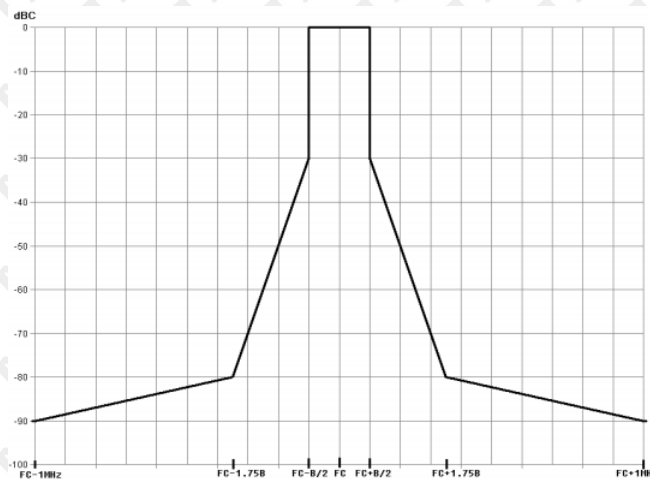

### 10.3 Test procedure

- 1) With the Low Frequency (LF) audio signal generator set to 500 Hz, the audio input level to the EUT shall be Adjusted to 8 dB below the limiting threshold (-8dB limit) as declared by the manufacturer.
- 2) The corresponding audio output level from the demodulator shall be measured and recorded.
- 3) The input impedance of the noise meter shall be sufficiently high to avoid more than 0.1 dB changes in input level when the meter is switched between input and output.
- 4) The audio input level shall be increased by 20 dB, i.e. to 12 dB (lim), and the corresponding change in output level shall be measured.
- 5) It shall be checked that the audio output level has increased by  $\leq 10$  dB.
- 6) If the step 5 is not met, the initial audio input level shall be increased from -8 dB (lim) in 1 dB steps until the above condition is fulfilled, and the input level recorded in the test report. This level replaces the value derived from the manufacturer's declaration and is defined as -8dB (lim).
- 7) Measure the input level at the transmitter required to give +12 dB (lim) and record the EUT output level test plots by the spectrum analyzer.
- 8) The transmitter RF output spectrum shall be measured, using a spectrum analyser with the following settings:
  - centre frequency: fc: Transmitter (Tx) nominal frequency;
  - dispersion (Span): fc - 1 MHz to fc + 1 MHz;
  - Resolution BandWidth (RBW): 1 kHz;

-Video BandWidth (VBW): 1 kHz;  
 -detector: Peak hold.

10.4 Test Result

Microphone1:


Requirement (MHz)	Reading (dBm)	Result (dBm)
660.85-661.65	-83.07	Pass
661.65-661.75	-78.89	Pass
661.75-661.78	-57.96	Pass
661.78-661.80	-26.28	Pass
661.80-661.90	5.74	Pass
661.90-661.92	-26.73	Pass
661.92-661.95	-55.41	Pass
661.95-662.05	-77.84	Pass
662.05-662.85	-84.97	Pass

Microphone2:

Requirement (MHz)	Reading (dBm)	Result (dBm)
660.85-661.65	-84.80	Pass
661.65-661.75	-79.04	Pass
661.75-661.78	-57.49	Pass
661.78-661.80	-27.31	Pass
661.80-661.90	4.82	Pass
661.90-661.92	-26.06	Pass
661.92-661.95	-55.16	Pass
661.95-662.05	-78.93	Pass
662.05-662.85	-83.76	Pass

## 11. FREQUENCY STABILITY

### 11.1 Block Diagram Of Test Setup

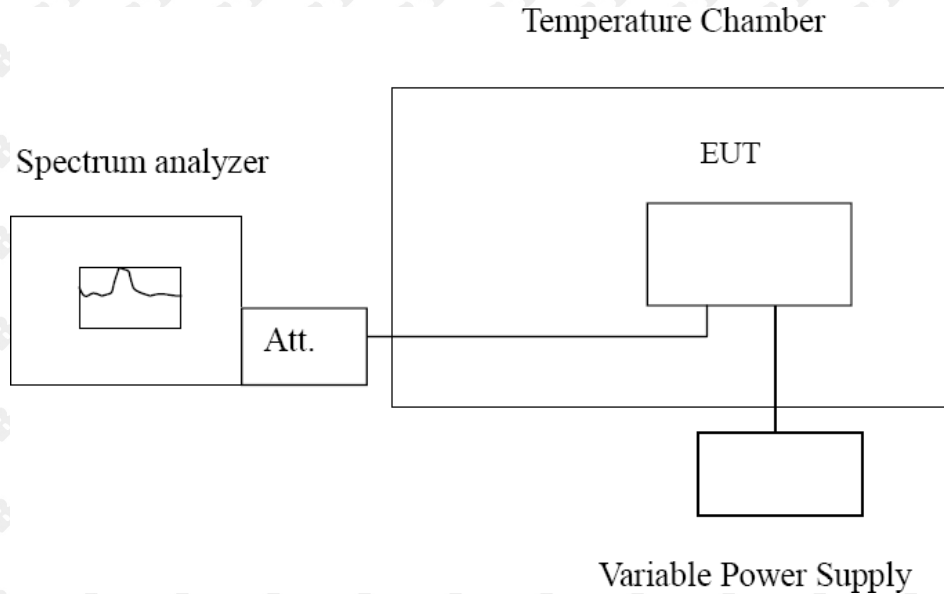

### 11.2 Limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.005\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. Battery operated equipment shall be tested using a new battery.

### 11.3 Test procedure

a, With the Low Frequency (LF) audio signal generator set to 500 Hz, the audio input level to the EUT shall be Adjusted to 8 dB below the limiting threshold (-8dB limit) as declared by the manufacturer.

Frequency stability versus environmental temperature

1) Setup asTest Configuration for frequencies measured at ambient temperature if it is within  $15^{\circ}\text{C}$  to  $25^{\circ}\text{C}$ . Otherwise, an environmental chamber set for a temperature of  $20^{\circ}\text{C}$  shall be used.

1) Turn on EUT and set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 3 kHz, VBW to 10kHz and frequency span to 500 kHz. Record this frequency to be a reference.

1) Set the temperature of chamber to  $50^{\circ}\text{C}$ . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.

1) Repeat step 2 with a  $10^{\circ}\text{C}$  decreased per stage until the lowest temperature  $-20^{\circ}\text{C}$  is measured, record all measurement frequencies.

b, Frequency stability versus input voltage

1) Setup asTest Configuration for frequencies measured at ambient temperature if it is within  $15^{\circ}\text{C}$  to  $25^{\circ}\text{C}$ . Otherwise, an environmental chamber set for a temperature of  $20^{\circ}\text{C}$  shall be used. Install new batteries in the EUT.

1) Set SA center frequency to the right frequency needs to be measured. Then set SA RBW to 3kHz, VBW to 10kHz and frequency span to 500 kHz. Record this frequency to be a reference.

1) For non hand carried, battery operated device, supply the EUT primary voltage with 85 and 115 percent of the nominal value and record the frequency.



## 11.4 Test Result

## Microphone1:

Reference Frequency: 661.85MHz					
Voltage ( V )	Temperature(°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.70	-20	-0.00047	-0.000073%	±0.005	PASS
	-10	0.00440	0.000672%		
	0	0.00039	0.000060%		
	10	-0.00126	-0.000192%		
	20	0.00262	0.000401%		
	30	-0.00107	-0.000163%		
	40	0.00384	0.000587%		
4.07	20	0.00239	0.000365%		
3.33	20	0.00499	0.000764%		

## Microphone2:

Reference Frequency: 661.85MHz					
Voltage ( V )	Temperature(°C)	Frequency error (MHz)	Frequency Tolerance (%)	Limit (%)	Result
3.70	-20	0.00325	0.000492%	±0.005	PASS
	-10	0.00083	0.000125%		
	0	-0.00345	-0.000522%		
	10	-0.00110	-0.000166%		
	20	-0.00124	-0.000187%		
	30	-0.00087	-0.000132%		
	40	0.00419	0.000634%		
4.07	20	0.00023	0.000035%		
3.33	20	0.00077	0.000116%		

## 12. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

The EUT antenna is PCB antenna. The best case gain of the antenna is 1.0dBi.

### 13. EUT TEST SETUP PHOTOGRAPHS

#### Radiated Emissions

Below 1G



Above 1G





Conducted emission



※※※※ END OF REPORT ※※※※