



# TEST Report

**Applicant:** SHENZHEN SHUOCAI PHOTOELECTRIC TECHNOLOGY CO., LTD

**Address of Applicant:** 4th Floor, Building B5, Fenghuanggang Third Industrial Zone, Xixiang Street, Baoan, Shenzhen

**Manufacturer :** SHENZHEN SHUOCAI PHOTOELECTRIC TECHNOLOGY CO., LTD

**Address of Manufacturer :** 4th Floor, Building B5, Fenghuanggang Third Industrial Zone, Xixiang Street, Baoan, Shenzhen

**Equipment Under Test (EUT)**

**Product Name:** Sound-sensitive Music Atmosphere Lights

**Model No.:** SCSYD001

**Series model:** SCSYD002, SCSYD003, SCSYD004, SCSYD005, SCSYD006, SCSYD007, SCSYD008, SCSYD009, SCSYD0010, SCSYD0011, SCSYD0012, SCSYD0013, SCSYD0014, SCSYD0015, SCSYD0016, SCSYD0017, SCSYD0018, SCSYD0019, SCSYD0020

**Trade Mark:** N/A

**FCC ID:** 2A5EJ-SCSYD001

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Date of sample receipt:** Feb.24,2022

**Date of Test:** Feb.24,2022~Mar.05,2022

**Date of report issued:** Mar.05,2022

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.



### 1. Version

Version No.	Date	Description
00	Mar.05,2022	Original

**Tested/ Prepared By** Ervin Xu **Date:** Mar.05,2022  
**Project Engineer**

**Check By:** Bruce Zhu **Date:** Mar.05,2022  
**Reviewer**

**Approved By :** Kevin Yang **Date:** Mar.05,2022  
**Authorized Signature**



## 2. Contents

Page

<b>1. VERSION</b> .....	<b>2</b>
<b>2. CONTENTS</b> .....	<b>3</b>
<b>3. TEST SUMMARY</b> .....	<b>4</b>
<b>4. GENERAL INFORMATION</b> .....	<b>5</b>
4.1. GENERAL DESCRIPTION OF EUT .....	5
4.2. TEST MODE .....	7
4.3. DESCRIPTION OF SUPPORT UNITS .....	7
4.4. DEVIATION FROM STANDARDS .....	7
4.5. ABNORMALITIES FROM STANDARD CONDITIONS.....	7
4.6. TEST FACILITY.....	7
4.7. TEST LOCATION.....	7
4.8. ADDITIONAL INSTRUCTIONS .....	7
<b>5. TEST INSTRUMENTS LIST</b> .....	<b>8</b>
<b>6. TEST RESULTS AND MEASUREMENT DATA</b> .....	<b>9</b>
6.1. CONDUCTED EMISSIONS .....	9
6.2. CONDUCTED OUTPUT POWER .....	12
6.3. CHANNEL BANDWIDTH .....	13
6.4. POWER SPECTRAL DENSITY.....	15
6.5. BAND EDGES .....	17
6.5.1. <i>Conducted Emission Method</i> .....	17
6.5.2. <i>Radiated Emission Method</i> .....	18
6.6. SPURIOUS EMISSION.....	20
6.6.1. <i>Conducted Emission Method</i> .....	20
6.6.2. <i>Radiated Emission Method</i> .....	23
<b>7. TEST SETUP PHOTO</b> .....	<b>31</b>
<b>8. EUT CONSTRUCTIONAL DETAILS</b> .....	<b>31</b>



### 3. Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

*Remarks:*

1. *Pass: The EUT complies with the essential requirements in the standard.*
2. *Test according to ANSI C63.10:2013*

#### Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	3.45 dB	(1)
Radiated Emission	1~6GHz	3.54 dB	(1)
Radiated Emission	6~40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.66 dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.



## 4. General Information

### 4.1. General Description of EUT

Product Name:	Sound-sensitive Music Atmosphere Lights
Model No.:	SCSYD001
Series model:	SCSYD002, SCSYD003, SCSYD004, SCSYD005, SCSYD006, SCSYD007, SCSYD008, SCSYD009, SCSYD0010, SCSYD0011, SCSYD0012, SCSYD0013, SCSYD0014, SCSYD0015, SCSYD0016, SCSYD0017, SCSYD0018, SCSYD0019, SCSYD0020
Test sample(s) ID:	HTT202202336-1(Engineer sample) HTT202202336-2(Normal sample)
Operation frequency	2402~2480 MHz
Number of Channels	40
Modulation Type	GFSK
Channel separation	2MHz
Antenna Type:	PCB Antenna
Antenna Gain:	0 dBi
Power Supply:	DC 3.7V/200mAh Form Battery and DC 5V From External Circuit
Adapter Information (Auxiliary test provided by the lab):	Mode: CD122 Input: AC100-240V, 50/60Hz, 500mA Output: DC 5V, 2A



Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz



#### 4.2. Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

#### 4.3. Description of Support Units

None.
-------

#### 4.4. Deviation from Standards

None.
-------

#### 4.5. Abnormalities from Standard Conditions

None.
-------

#### 4.6. Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <p><b>FCC-Registration No.: 779513 Designation Number: CN1319</b> Shenzhen HTT Technology Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.</p> <p><b>A2LA-Lab Cert. No.: 6435.01</b> Shenzhen HTT Technology Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.</p> <p>The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.</p>
---

#### 4.7. Test Location

All tests were performed at:
Shenzhen HTT Technology Co.,Ltd. 1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road,Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-23595200 Fax: 0755-23595201

#### 4.8. Additional Instructions

Test Software	Special AT test command provided by manufacturer to Keep the EUT in continuously transmitting mode and hopping mode
Power level setup	Default




## 5. Test Instruments list

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	Shenzhen C.R.T technology co., LTD	9*6*6	HTT-E028	Aug. 10 2020	Aug. 09 2024
2	Control Room	Shenzhen C.R.T technology co., LTD	4.8*3.5*3.0	HTT-E030	Aug. 10 2020	Aug. 09 2024
3	EMI Test Receiver	Rohde&Schwar	ESCI7	HTT-E022	May 21 2021	May 20 2022
4	Spectrum Analyzer	Rohde&Schwar	FSP	HTT-E037	May 21 2021	May 20 2022
5	Coaxial Cable	ZDecl	ZT26-NJ-NJ-0.6M	HTT-E018	May 21 2021	May 20 2022
6	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-2M	HTT-E019	May 21 2021	May 20 2022
7	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-0.6M	HTT-E020	May 21 2021	May 20 2022
8	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-8.5M	HTT-E021	May 21 2021	May 20 2022
9	Composite logarithmic antenna	Schwarzbeck	VULB 9168	HTT-E017	Aug. 22 2021	Aug. 21 2022
10	Horn Antenna	Schwarzbeck	BBHA9120D	HTT-E016	Aug. 22 2021	Aug. 21 2022
11	Loop Antenna	Zhinan	ZN30900C	HTT-E039	Aug. 22 2021	Aug. 21 2022
12	Horn Antenna	Beijing Hangwei Dayang	OBH100400	HTT-E040	Aug. 22 2021	Aug. 21 2022
13	low frequency Amplifier	Sonoma Instrument	310	HTT-E015	May 21 2021	May 20 2022
14	high-frequency Amplifier	HP	8449B	HTT-E014	May 21 2021	May 20 2022
15	Variable frequency power supply	Shenzhen Anbiao Instrument Co., Ltd	ANB-10VA	HTT-082	May 21 2021	May 20 2022
16	EMI Test Receiver	Rohde & Schwarz	ESCS30	HTT-E004	May 21 2021	May 20 2022
17	Artificial Mains	Rohde & Schwarz	ESH3-Z5	HTT-E006	May 21 2021	May 20 2022
18	Artificial Mains	Rohde & Schwarz	ENV-216	HTT-E038	May 21 2021	May 20 2022
19	Cable Line	Robinson	Z302S-NJ-BNCJ-1.5M	HTT-E001	May 21 2021	May 20 2022
20	Attenuator	Robinson	6810.17A	HTT-E007	May 21 2021	May 20 2022
21	Variable frequency power supply	Shenzhen Yanghong Electric Co., Ltd	YF-650 (5KVA)	HTT-E032	May 21 2021	May 20 2022
22	Control Room	Shenzhen C.R.T technology co., LTD	8*4*3.5	HTT-E029	May 21 2021	May 20 2022
23	DC power supply	Agilent	E3632A	HTT-E023	May 21 2021	May 20 2022
24	EMI Test Receiver	Agilent	N9020A	HTT-E024	May 21 2021	May 20 2022
25	Analog signal generator	Agilent	N5181A	HTT-E025	May 21 2021	May 20 2022
26	Vector signal generator	Agilent	N5182A	HTT-E026	May 21 2021	May 20 2022
27	Power sensor	Keysight	U2021XA	HTT-E027	May 21 2021	May 20 2022
28	Temperature and humidity meter	Shenzhen Anbiao Instrument Co., Ltd	TH10R	HTT-074	May 21 2021	May 20 2022
29	Radiated Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
30	Conducted Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
31	RF Test Software	panshanrf	TST	N/A	N/A	N/A



## 6. Test results and Measurement Data

### 6.1. Conducted Emissions

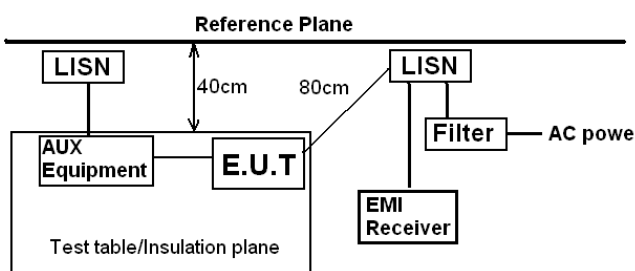
Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak	Average		
	0.15-0.5		66 to 56*	56 to 46*		
	0.5-5		56	46		
	5-30		60	50		
* Decreases with the logarithm of the frequency.						
Test setup:	 <p><i>Remark:</i>  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>					
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.




Measurement data:

Line:

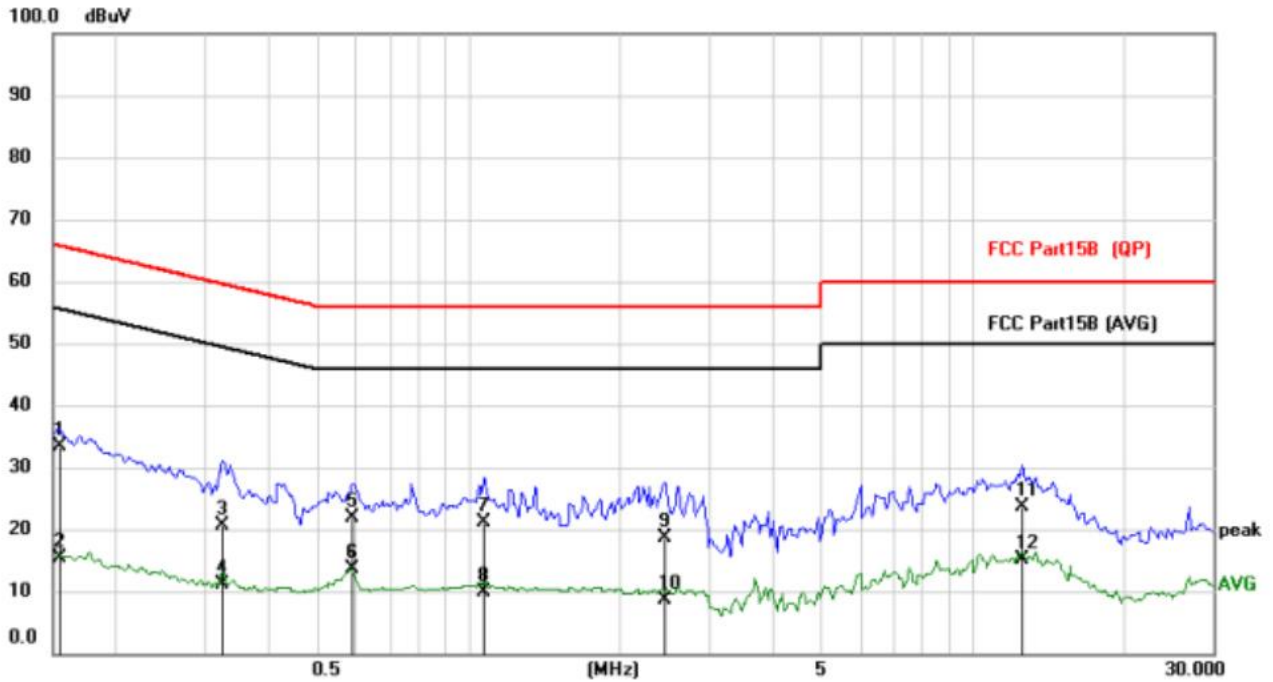

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1556	23.11	10.37	33.48	65.70	-32.22	QP
2		0.1556	4.94	10.37	15.31	55.70	-40.39	AVG
3		0.3255	10.22	10.42	20.64	59.57	-38.93	QP
4		0.3255	0.79	10.42	11.21	49.57	-38.36	AVG
5		0.5907	11.25	10.58	21.83	56.00	-34.17	QP
6		0.5907	2.95	10.58	13.53	46.00	-32.47	AVG
7		1.0743	10.24	10.89	21.13	56.00	-34.87	QP
8		1.0743	-0.90	10.89	9.99	46.00	-36.01	AVG
9		2.4588	7.84	10.83	18.67	56.00	-37.33	QP
10		2.4588	-2.16	10.83	8.67	46.00	-37.33	AVG
11		12.5472	11.76	11.80	23.56	60.00	-36.44	QP
12		12.5472	3.45	11.80	15.25	50.00	-34.75	AVG

**Neutral:**

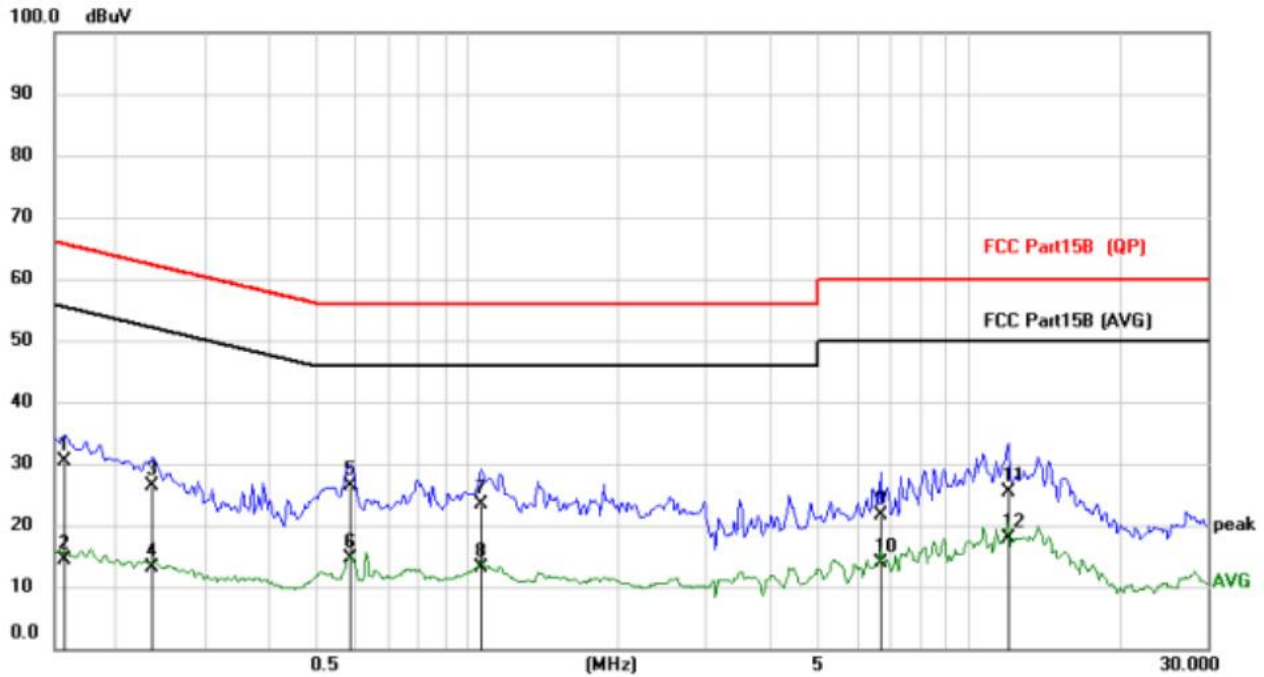


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1578	20.21	10.26	30.47	65.58	-35.11	QP
2		0.1578	4.05	10.26	14.31	55.58	-41.27	AVG
3		0.2358	16.24	10.21	26.45	62.24	-35.79	QP
4		0.2358	2.92	10.21	13.13	52.24	-39.11	AVG
5	*	0.5868	15.81	10.48	26.29	56.00	-29.71	QP
6		0.5868	4.12	10.48	14.60	46.00	-31.40	AVG
7		1.0665	12.66	10.80	23.46	56.00	-32.54	QP
8		1.0665	2.41	10.80	13.21	46.00	-32.79	AVG
9		6.6699	10.59	10.93	21.52	60.00	-38.48	QP
10		6.6699	3.02	10.93	13.95	50.00	-36.05	AVG
11		12.0246	13.54	11.78	25.32	60.00	-34.68	QP
12		12.0246	5.98	11.78	17.76	50.00	-32.24	AVG

*Notes:*

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Los


## 6.2. Conducted Output Power

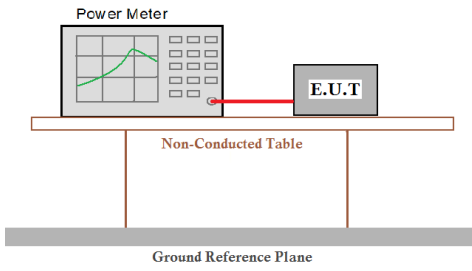Test Requirement:	FCC Part15 C Section 15.247 (b)(3)					
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05r02					
Limit:	30dBm					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

## Measurement Data

Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	-8.46	30.00	Pass
Middle	-8.77		
Highest	-9.14		

### 6.3. Channel Bandwidth

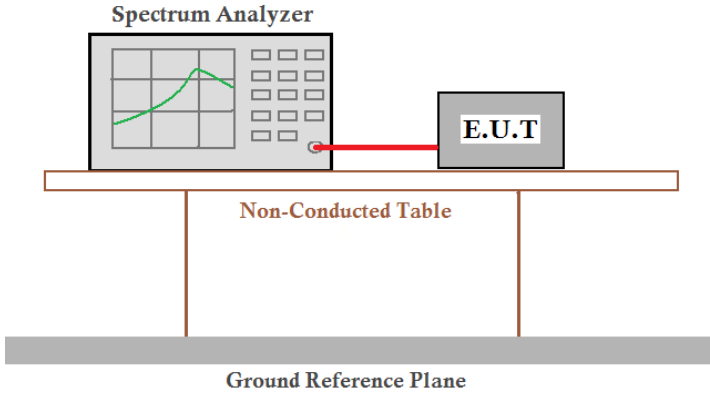
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)					
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05r02					
Limit:	>500KHz					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

#### Measurement Data


Test channel	Channel Bandwidth (MHz)	Limit(KHz)	Result
Lowest	0.682	>500	Pass
Middle	0.698		
Highest	0.709		




Test plot as follows:

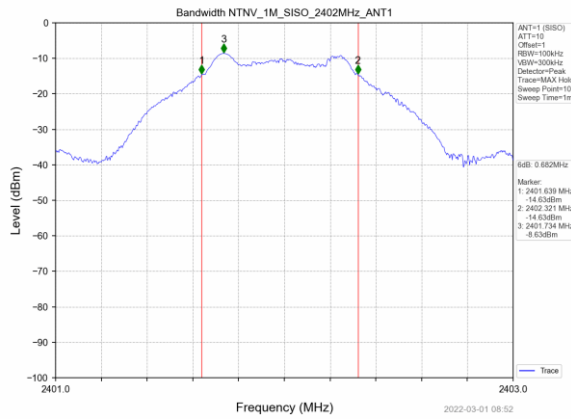

Lowest channel

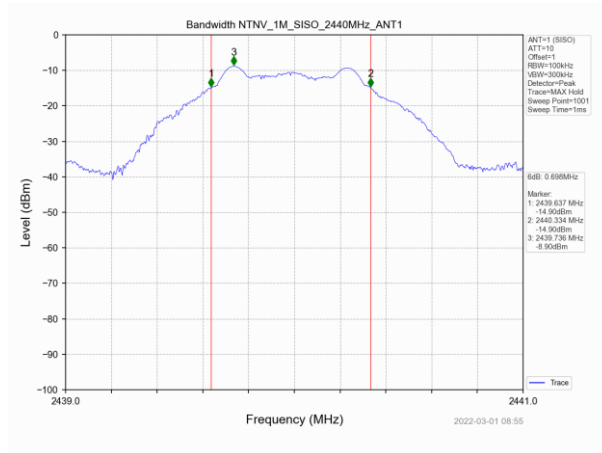


Middle channel

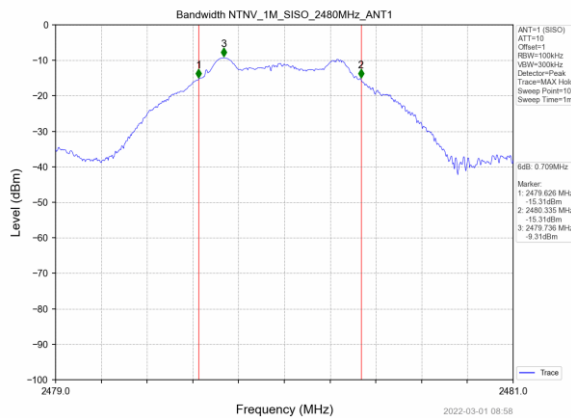

Highest channel

### 6.4. Power Spectral Density

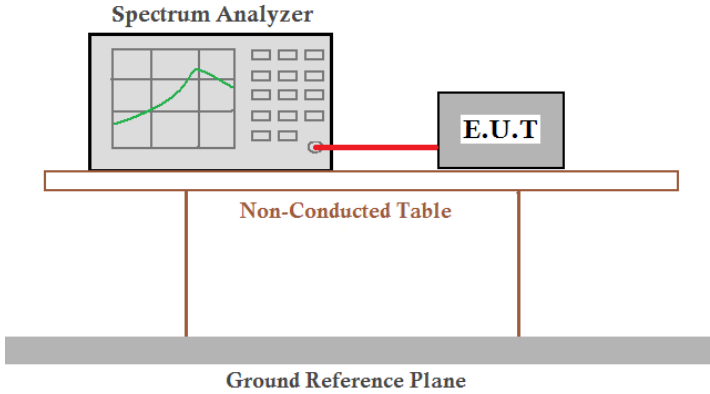
Test Requirement:	FCC Part15 C Section 15.247 (e)					
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05r02					
Limit:	8dBm/3kHz					
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

#### Measurement Data


Test channel	Power Spectral Density (dBm/3kHz)	Limit(dBm/3kHz)	Result
Lowest	-17.43	8.00	Pass
Middle	-17.51		
Highest	-17.95		




Test plot as follows:

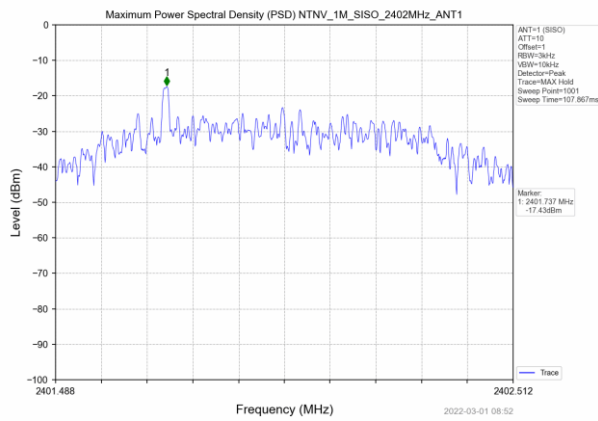

Lowest channel

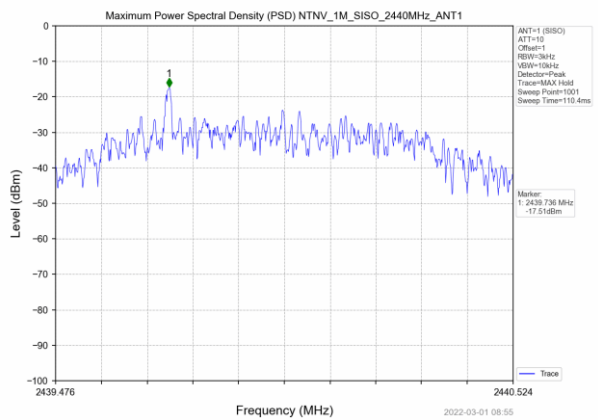

Middle channel

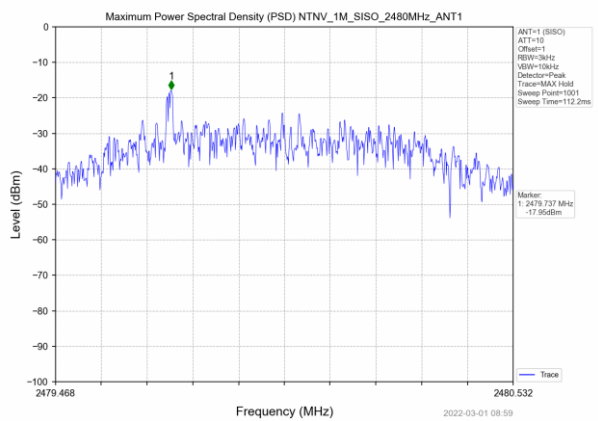


Highest channel




## 6.5. Band edges


### 6.5.1 Conducted Emission Method

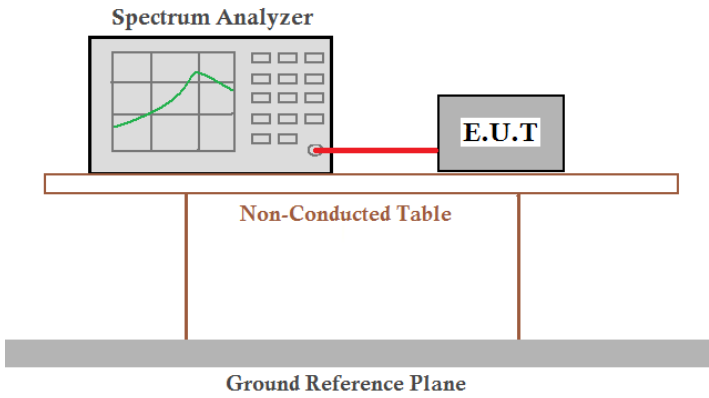Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05r02					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

### Test plot as follows:

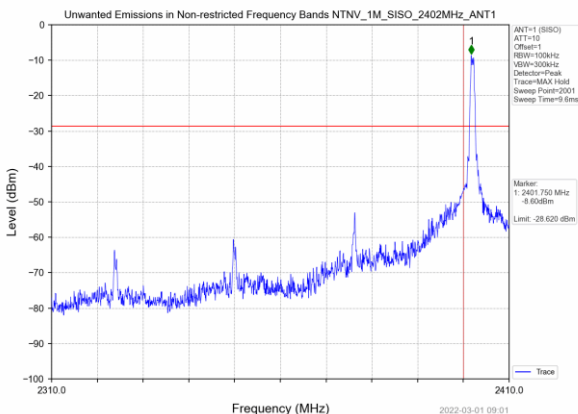


Lowest channel

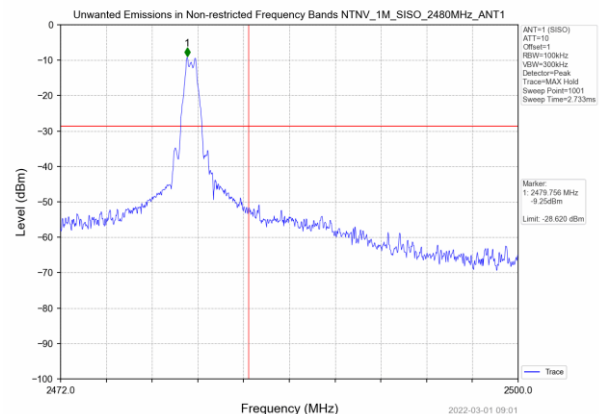

Highest channel

**6.5.2 Radiated Emission Method**

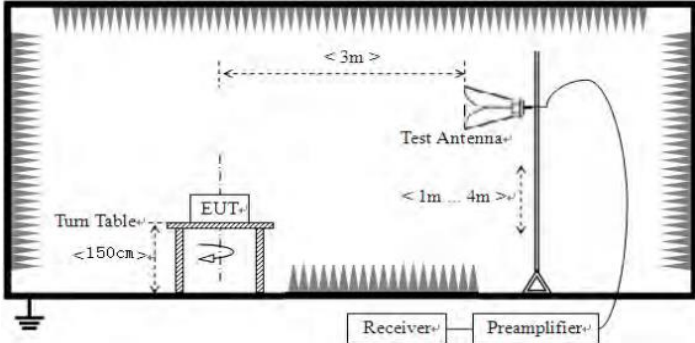Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ol>				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				



Report No.: HTT202202336F01

Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
-------------------	--------	-------	---------	-----	---------	----------

## Measurement Data

Operation Mode: GFSK TX Low channel(2402MHz)

### Horizontal (Worst case)

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	58.26	26.20	5.72	33.30	56.88	74	-17.12	peak
2390	46.30	26.20	5.72	33.30	44.92	54	-9.08	AVG

### Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	60.37	26.20	5.72	33.30	58.99	74	-15.01	peak
2390	46.27	26.20	5.72	33.30	44.89	54	-9.11	AVG

Operation Mode: GFSK TX High channel (2480MHz)

### Horizontal (Worst case)


Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.5	55.21	28.60	6.97	32.70	58.08	74	-15.92	peak
2483.5	41.38	28.60	6.97	32.70	44.25	54	-9.75	AVG

### Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.5	57.15	28.60	6.97	32.70	60.02	74	-13.98	peak
2483.5	42.57	28.60	6.97	32.70	45.44	54	-8.56	AVG


## 6.6. Spurious Emission

### 6.6.1 Conducted Emission Method

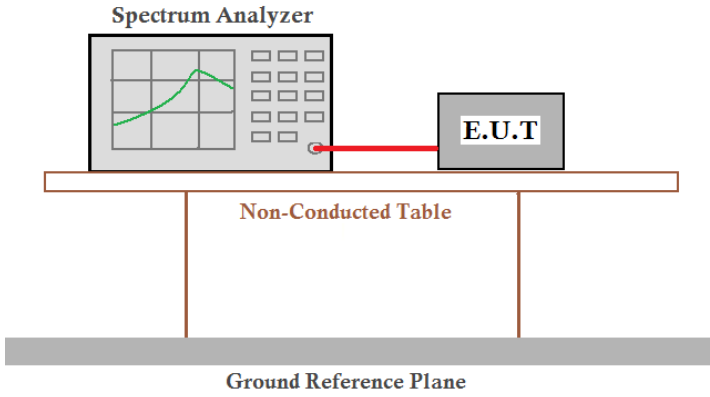Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05r02					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

Test plot as follows:


<b>GFSK</b>
-------------

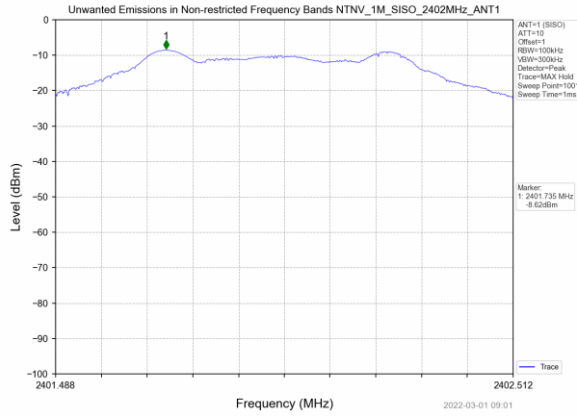


*reference*




### GFSK

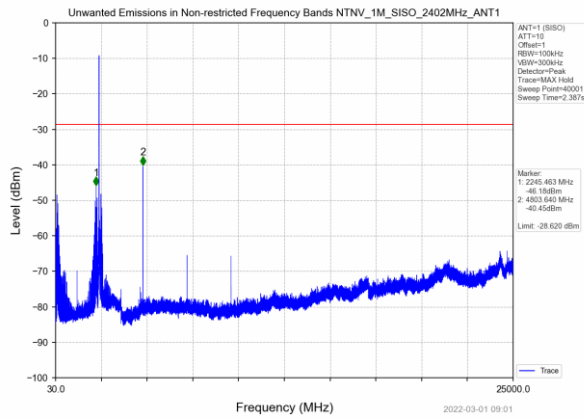

### Low Channel

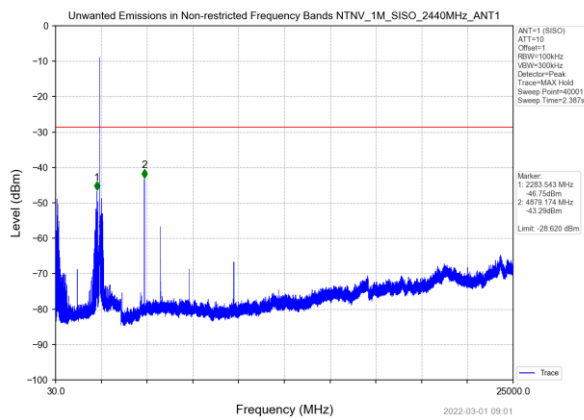




### Mid Channel

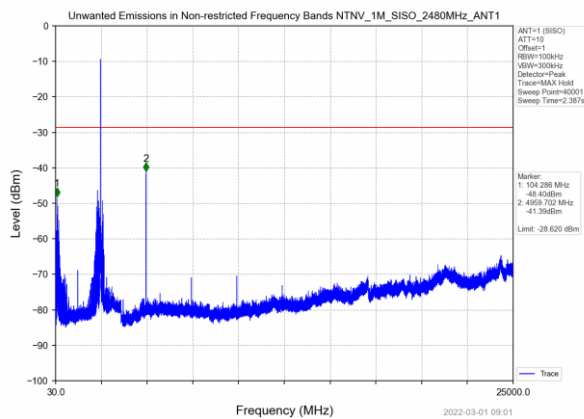

### High Channel

**6.6.2 Radiated Emission Method**

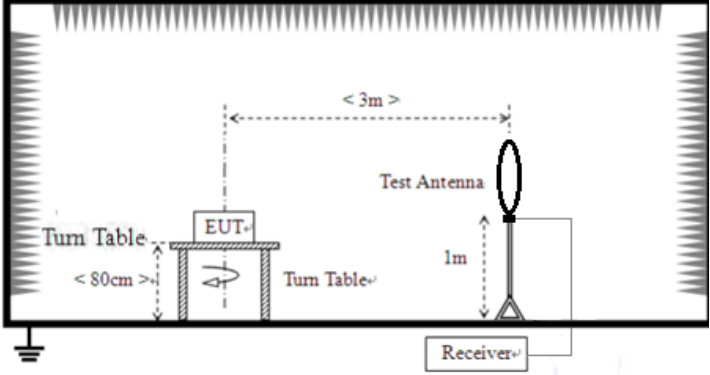Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>The diagram illustrates the test setup for radiated emissions. It shows a Turn Table with a diameter of less than 80cm, upon which an EUT (Equipment Under Test) is placed. A Test Antenna is positioned at a distance of 3m from the EUT. The antenna is mounted on a stand that is 1m high. A Receiver is connected to the antenna. The entire setup is enclosed in a shielded chamber, indicated by the hatched walls.</p>				

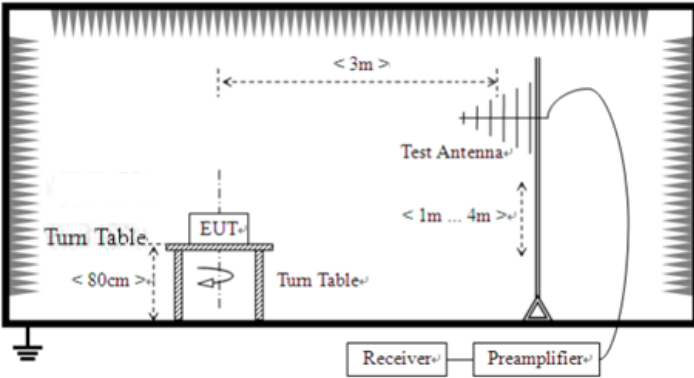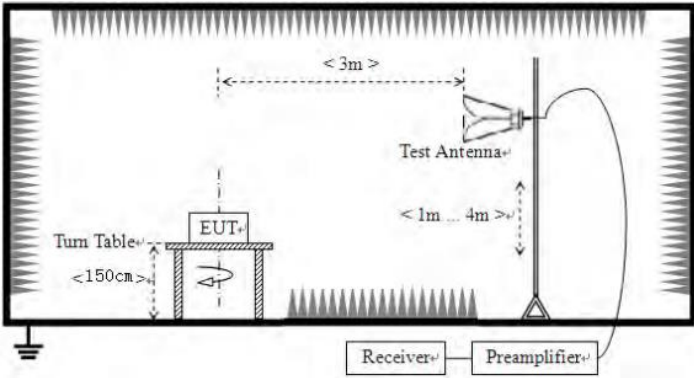	<p>For radiated emissions from 30MHz to1GHz</p>  <p>For radiated emissions above 1GHz</p> 
<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>





Report No.: HTT202202336F01

Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

**Measurement data:**

*Remark:*

*Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*


■ **9kHz~30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.



■ Below 1GHz


■ Horizontal

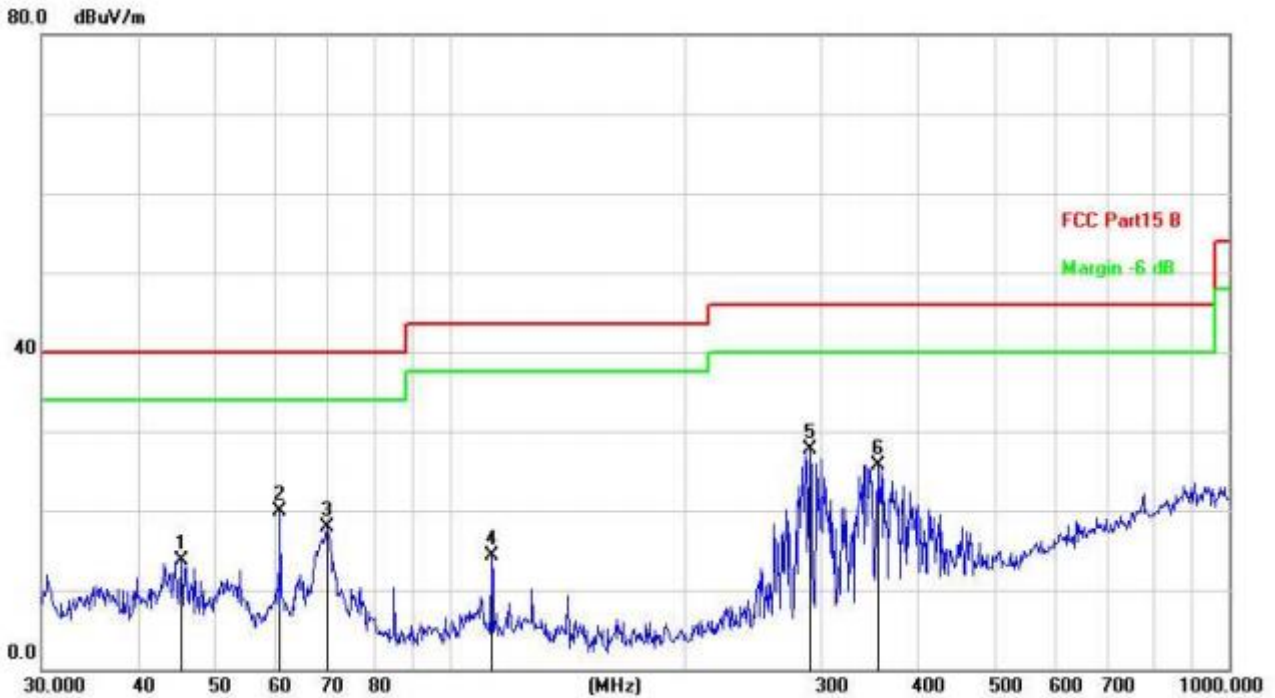

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		45.3755	30.99	-17.21	13.78	40.00	-26.22	QP
2		60.7044	38.25	-18.26	19.99	40.00	-20.01	QP
3		69.6005	37.87	-19.89	17.98	40.00	-22.02	QP
4		113.3163	34.53	-20.18	14.35	43.50	-29.15	QP
5	*	290.0172	45.05	-17.26	27.79	46.00	-18.21	QP
6		354.1831	42.57	-16.81	25.76	46.00	-20.24	QP



Vertical

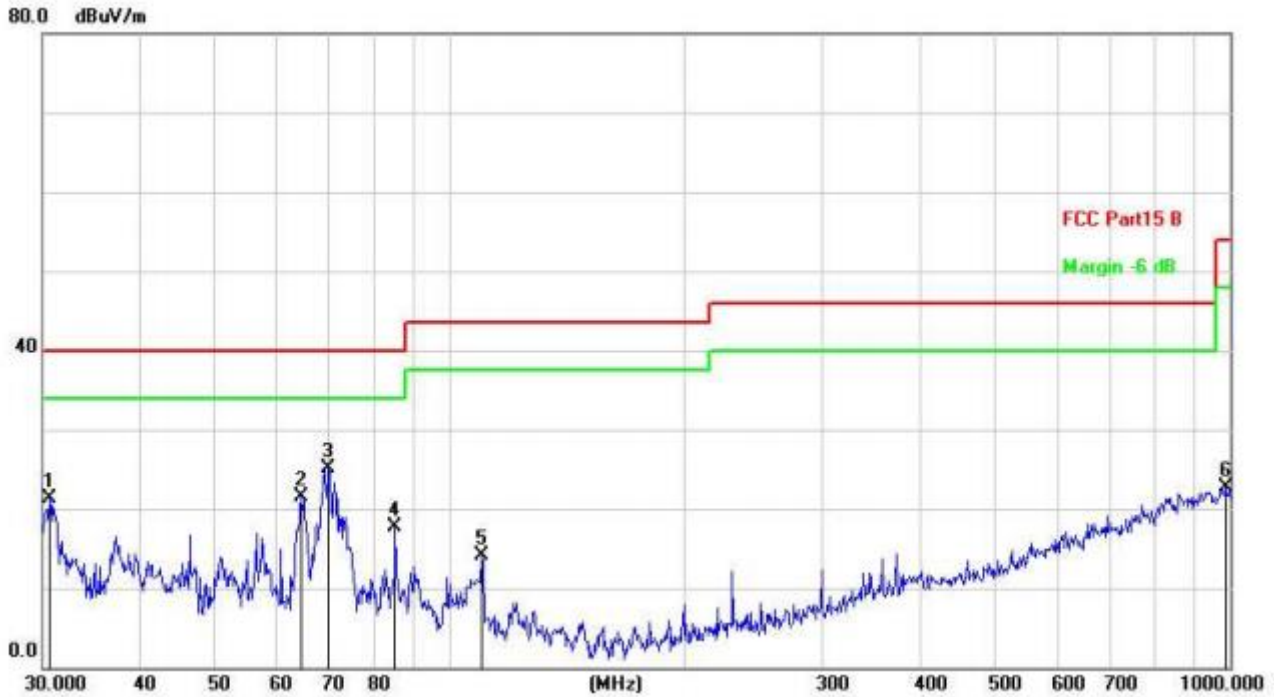

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		30.6379	39.75	-18.53	21.22	40.00	-18.78	QP
2		64.4331	40.37	-18.94	21.43	40.00	-18.57	QP
3	*	69.8450	45.01	-19.94	25.07	40.00	-14.93	QP
4		84.9995	39.61	-21.96	17.65	40.00	-22.35	QP
5		109.7960	35.09	-20.89	14.20	43.50	-29.30	QP
6		986.0717	26.76	-3.97	22.79	54.00	-31.21	QP

Final Level = Receiver Read level + Correct Factor



## ■ Above 1-25GHz

## CH Low (2402MHz)

## Horizontal:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4804	51.33	31.40	8.18	32.10	58.81	74.00	-15.19	peak
4804	36.57	31.40	8.18	32.10	44.05	54.00	-9.95	AVG
7206	44.25	35.80	10.83	31.40	59.48	74.00	-14.52	peak
7206	28.77	35.80	10.83	31.40	44.00	54.00	-10.00	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4804	52.39	31.40	8.18	32.10	59.87	74.00	-14.13	peak
4804	36.27	31.40	8.18	32.10	43.75	54.00	-10.25	AVG
7206	42.99	35.80	10.83	31.40	58.22	74.00	-15.78	peak
7206	30.22	35.80	10.83	31.40	45.45	54.00	-8.55	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH Middle (2440MHz)

Horizontal:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4880	51.26	31.40	9.17	32.10	59.73	74.00	-14.27	peak
4880	36.47	31.40	9.17	32.10	44.94	54.00	-9.06	AVG
7320	44.32	35.80	10.83	31.40	59.55	74.00	-14.45	peak
7320	29.88	35.80	10.83	31.40	45.11	54.00	-8.89	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4880	53.30	31.40	9.17	32.10	61.77	74.00	-12.23	peak
4880	36.15	31.40	9.17	32.10	44.62	54.00	-9.38	AVG
7320	42.88	35.80	10.83	31.40	58.11	74.00	-15.89	peak
7320	29.31	35.80	10.83	31.40	44.54	54.00	-9.46	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## CH High (2480MHz)

## Horizontal:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	51.47	31.40	9.17	32.10	59.94	74.00	-14.06	peak
4960	37.15	31.40	9.17	32.10	45.62	54.00	-8.38	AVG
7440	42.90	35.80	10.83	31.40	58.13	74.00	-15.87	peak
7440	27.25	35.80	10.83	31.40	42.48	54.00	-11.52	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	52.38	31.40	9.17	32.10	60.85	74.00	-13.15	peak
4960	34.28	31.40	9.17	32.10	42.75	54.00	-11.25	AVG
7440	41.66	35.80	10.83	31.40	56.89	74.00	-17.11	peak
7440	28.57	35.80	10.83	31.40	43.80	54.00	-10.20	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Remark:

(1) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(2) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed.



## 7. Test Setup Photo

Reference to the **appendix I** for details.

## 8. EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----