

# TEST REPORT

Product Name: TWS earbuds  
FCC ID: 2A5JGJ08  
Trademark: N/A  
Model Number: J08, J01, J03, J05, J06, J09, J11, J13, J15, J16, J18, X1, X14  
Prepared For: Dongguan jialisi Electronic Technology Co., Ltd  
Address: Room 202, building 2, No. 106, Shaxin Road, Tangxia Town, Dongguan City, Guangdong Province, China  
Manufacturer: Dongguan jialisi Electronic Technology Co., Ltd  
Address: Room 202, building 2, No. 106, Shaxin Road, Tangxia Town, Dongguan City, Guangdong Province, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China  
Sample Received Date: Feb. 23, 2022  
Sample tested Date: Feb. 23, 2022 to Feb. 25, 2022  
Issue Date: Feb. 25, 2022  
Report No.: CTB220225065RF  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is Bluetooth radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## TABLE OF CONTENT

Test Report Declaration	Page
<b>1. VERSION</b> .....	4
<b>2. TEST SUMMARY</b> .....	5
<b>3. MEASUREMENT UNCERTAINTY</b> .....	6
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment .....	7
4.4 Channel List .....	8
4.5 Test Mode .....	8
4.6 Test Environment .....	8
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	9
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	12
6.1 Block Diagram Of Test Setup .....	12
6.2 Limit .....	12
6.3 Test procedure .....	12
6.4 Test Result .....	14
<b>7. RADIATED SPURIOUS EMISSION</b> .....	16
7.1 Block Diagram Of Test Setup .....	16
7.2 Limit .....	16
7.3 Test procedure .....	17
7.4 Test Result .....	18
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	27
8.1 Block Diagram Of Test Setup .....	27
8.2 Limit .....	27
8.3 Test procedure .....	27
8.4 Test Result .....	28
<b>9. CONDUCTED PEAK OUTPUT POWER</b> .....	33
9.1 Block Diagram Of Test Setup .....	33
9.2 Limit .....	33
9.3 Test procedure .....	33
9.4 Test Result .....	34
<b>10. 20DB OCCUPIED BANDWIDTH</b> .....	37
10.1 Block Diagram Of Test Setup .....	37
10.2 Limit .....	37
10.3 Test procedure .....	37
10.4 Test Result .....	37
<b>11. CARRIER FREQUENCIES SEPARATION</b> .....	40
11.1 Block Diagram Of Test Setup .....	40
11.2 Limit .....	40

11.3	Test procedure .....	40
11.4	Test Result .....	40
<b>12.</b>	<b>HOPPING CHANNEL NUMBER .....</b>	<b>43</b>
12.1	Block Diagram Of Test Setup .....	43
12.2	Limit .....	43
12.3	Test procedure .....	43
12.4	Test Result .....	43
<b>13.</b>	<b>DWELL TIME .....</b>	<b>45</b>
13.1	Block Diagram Of Test Setup .....	45
13.2	Limit .....	45
13.3	Test procedure .....	45
13.4	Test Result .....	46
<b>14.</b>	<b>PSEUDORANDOM FREQUENCY .....</b>	<b>50</b>
14.1	Limit .....	50
14.2	Test procedure .....	50
14.3	Test Result .....	51
<b>15.</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>52</b>
<b>16.</b>	<b>EUT PHOTOGRAPHS .....</b>	<b>53</b>
<b>17.</b>	<b>EUT TEST SETUP PHOTOGRAPHS .....</b>	<b>54</b>

*(Note: N/A means not applicable)*

## 1. VERSION

Report No.	Issue Date	Description	Approved
CTB220225065RF	Feb. 25, 2022	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	ANSI C63.10-2013	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	$1 \times 10^{-7}$
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

## 4. PRODUCT INFORMATION AND TEST SETUP

### 4.1 Product Information

Model(s):	J08, J01, J03, J05, J06, J09, J11, J13, J15, J16, J18, X1, X14
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: J08
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 3.499dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK
Antenna installation:	Bluetooth: Ceramic antenna
Antenna Gain:	Bluetooth: 1.0dBi
Ratings:	DC 5V charging from adapter Battery DC 3.7V

### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC adapter	SHENZHEN ENGINE ELECTRONIC CO.,LTD	EE-0501000E	N/A	AE

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK)	2402MHz	2441MHz	2480MHz

#### 4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(AC):	120V
Normal Temperature( $^{\circ}$ C)	25
Low Temperature( $^{\circ}$ C)	0
High Temperature( $^{\circ}$ C)	40



## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05


16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

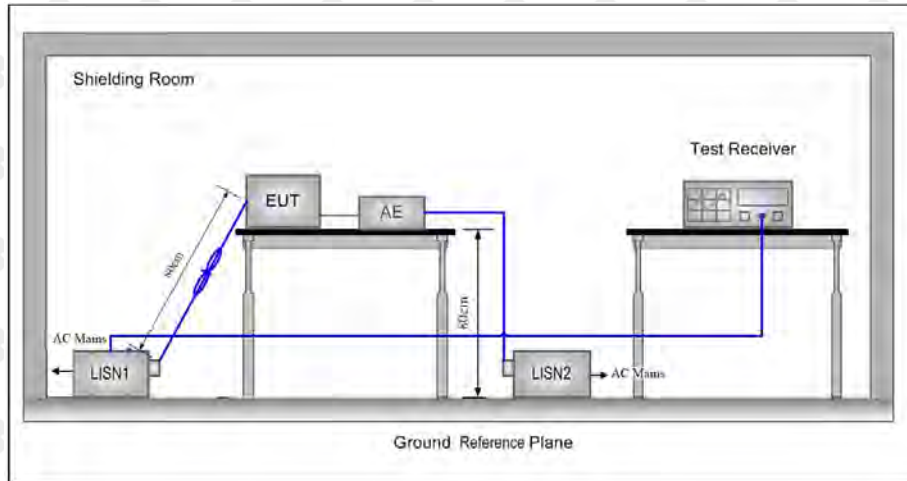

### 6.2 Limit

**Table 4 - AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference

plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

### 6.4 Test Result

L:

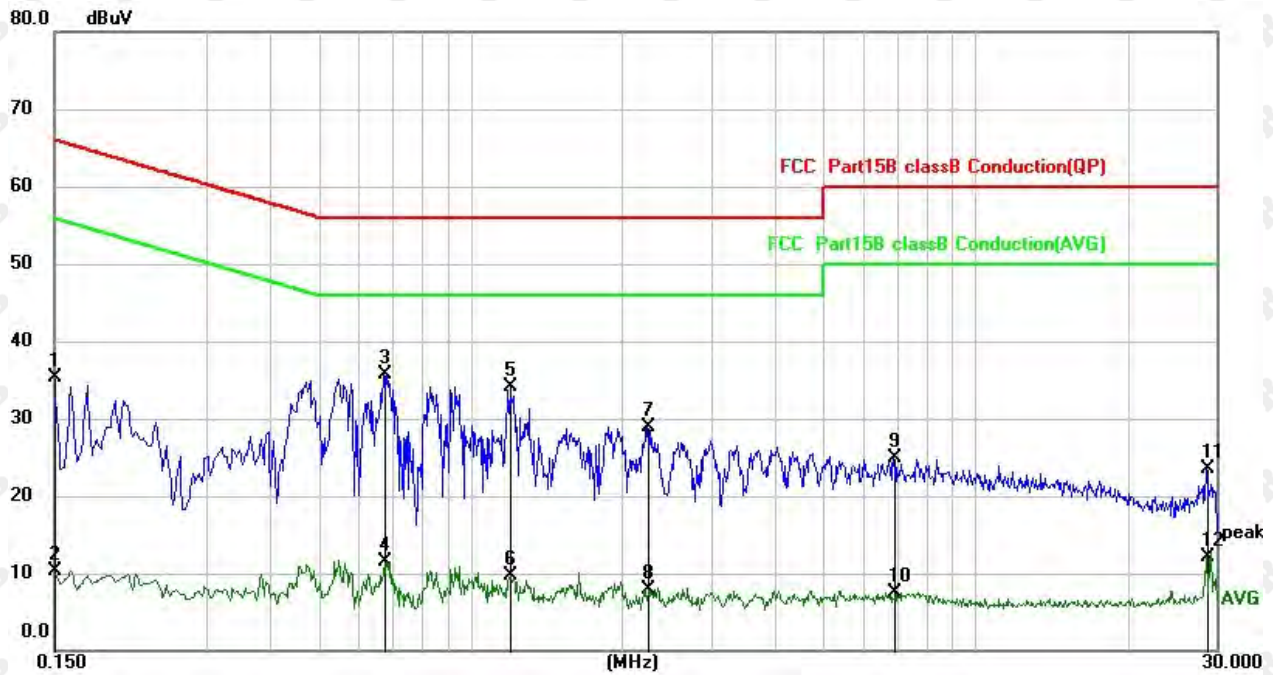


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1500	24.55	10.72	35.27	66.00	-30.73	QP
2		0.1500	-0.46	10.72	10.26	56.00	-45.74	AVG
3	*	0.6740	25.22	10.55	35.77	56.00	-20.23	QP
4		0.6740	0.87	10.55	11.42	46.00	-34.58	AVG
5		1.1980	23.49	10.62	34.11	56.00	-21.89	QP
6		1.1980	-0.89	10.62	9.73	46.00	-36.27	AVG
7		2.2420	18.18	10.63	28.81	56.00	-27.19	QP
8		2.2420	-2.67	10.63	7.96	46.00	-38.04	AVG
9		6.9020	14.10	10.71	24.81	60.00	-35.19	QP
10		6.9020	-3.25	10.71	7.46	50.00	-42.54	AVG
11		28.6860	12.48	11.02	23.50	60.00	-36.50	QP
12		28.6860	1.12	11.02	12.14	50.00	-37.86	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

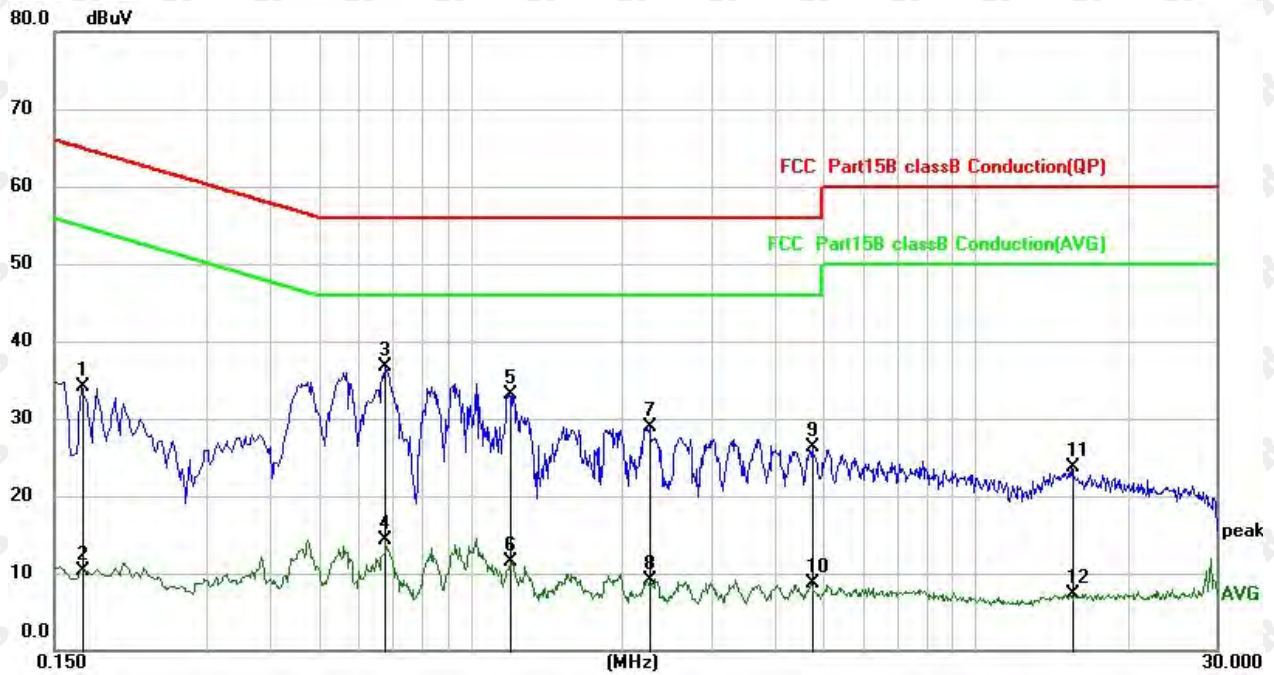

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.1700	23.41	10.71	34.12	64.96	-30.84	QP
2		0.1700	-0.38	10.71	10.33	54.96	-44.63	AVG
3	*	0.6780	26.06	10.56	36.62	56.00	-19.38	QP
4		0.6780	3.75	10.56	14.31	46.00	-31.69	AVG
5		1.1940	22.57	10.62	33.19	56.00	-22.81	QP
6		1.1940	0.80	10.62	11.42	46.00	-34.58	AVG
7		2.2659	18.21	10.63	28.84	56.00	-27.16	QP
8		2.2659	-1.47	10.63	9.16	46.00	-36.84	AVG
9		4.7580	15.62	10.65	26.27	56.00	-29.73	QP
10		4.7580	-2.01	10.65	8.64	46.00	-37.36	AVG
11		15.4860	12.88	10.91	23.79	60.00	-36.21	QP
12		15.4860	-3.68	10.91	7.23	50.00	-42.77	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

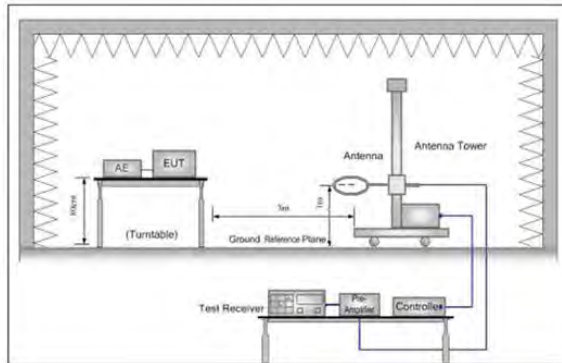


Figure 1. Below 30MHz

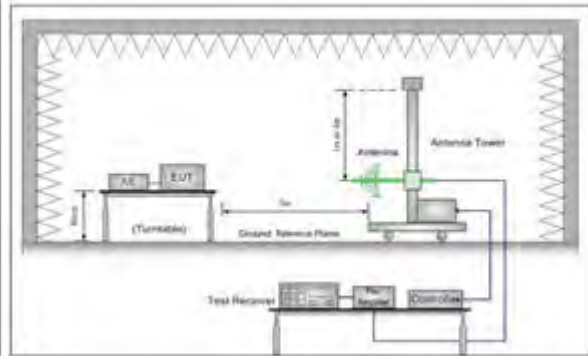


Figure 2. 30MHz to 1GHz

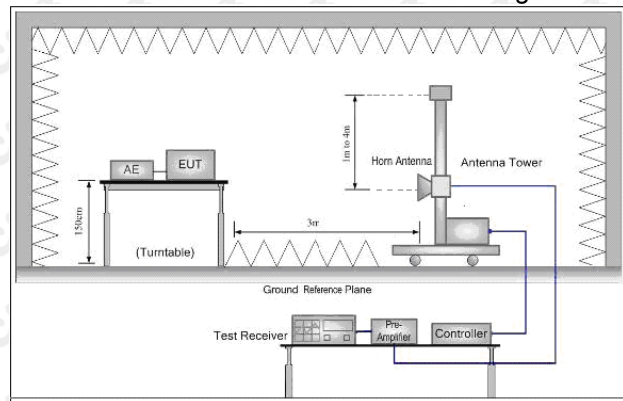


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



### 7.3 Test procedure

**Below 1GHz test procedure as below:**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**


- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

### 7.4 Test Result


Below 1GHz Test Results:  
Antenna polarity: H

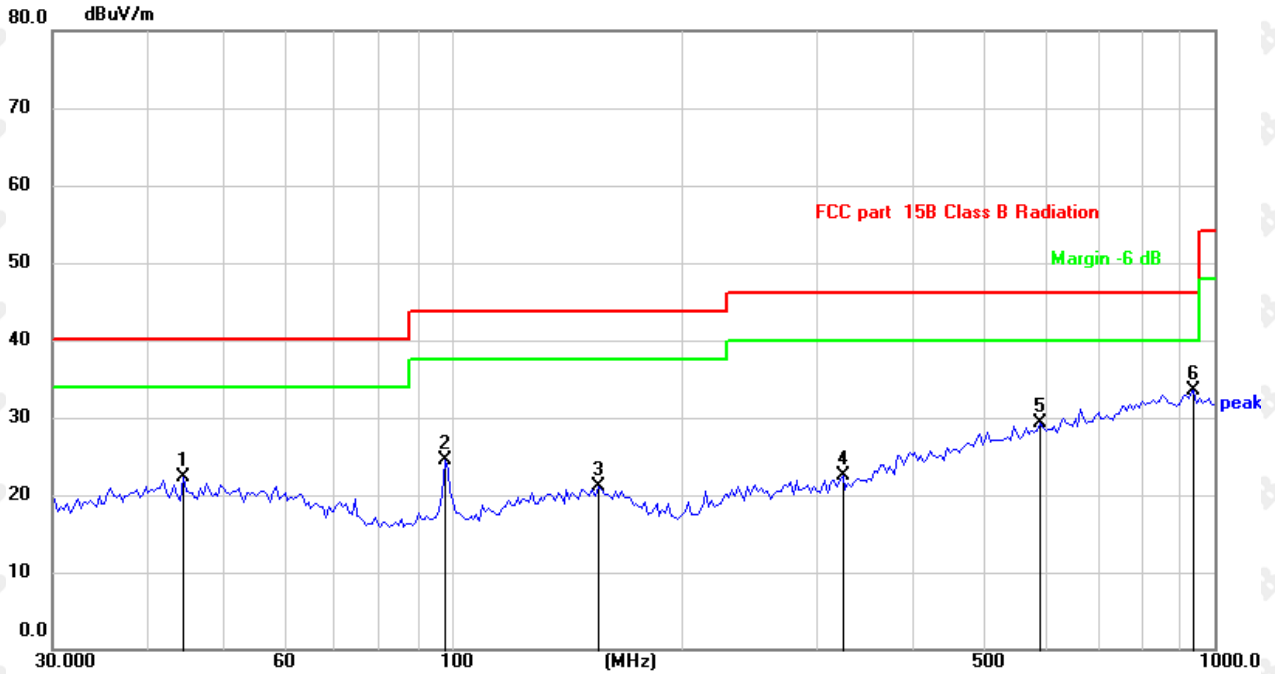

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		44.5087	27.68	-5.44	22.24	40.00	-17.76	QP
2		97.9699	33.37	-8.86	24.51	43.50	-18.99	QP
3		155.9101	26.65	-5.54	21.11	43.50	-22.39	QP
4		325.5958	26.77	-4.31	22.46	46.00	-23.54	QP
5		590.9737	26.91	2.40	29.31	46.00	-16.69	QP
6	*	940.4801	27.49	5.96	33.45	46.00	-12.55	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V

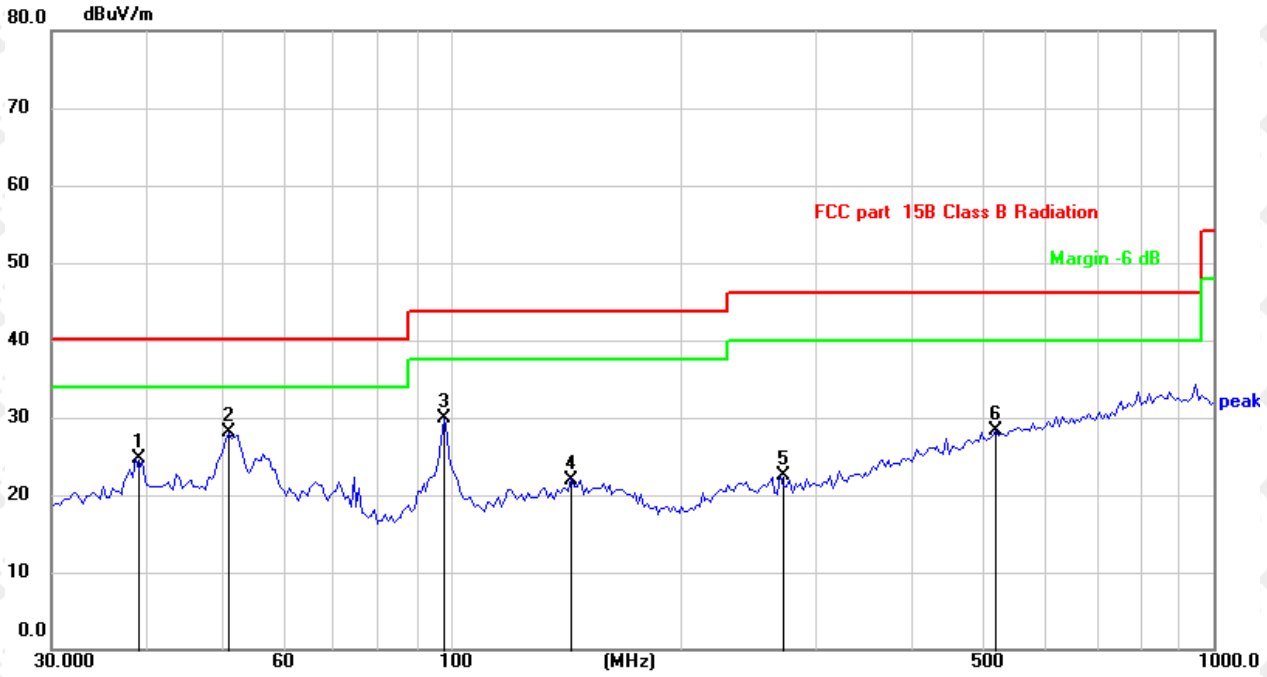

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		38.6839	30.38	-5.59	24.79	40.00	-15.21	QP
2	*	51.2106	33.71	-5.70	28.01	40.00	-11.99	QP
3		97.9699	38.80	-8.86	29.94	43.50	-13.56	QP
4		144.0819	27.46	-5.46	22.00	43.50	-21.50	QP
5		270.8493	28.07	-5.50	22.57	46.00	-23.43	QP
6		518.1556	27.21	1.05	28.26	46.00	-17.74	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4804	58.75	-3.65	55.10	74.00	-18.90	peak
4804	50.54	-3.65	46.89	54.00	-7.11	AVG
7206	59.59	-0.95	58.64	74.00	-15.36	peak
7206	42.16	-0.95	41.21	54.00	-12.79	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4804	58.51	-3.65	54.86	74.00	-19.14	peak
4804	48.43	-3.65	44.78	54.00	-9.22	AVG
7206	60.94	-0.95	59.99	74.00	-14.01	peak
7206	41.91	-0.95	40.96	54.00	-13.04	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)  
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	59.83	-3.54	56.29	74.00	-17.71	peak
4882.00	48.31	-3.54	44.77	54.00	-9.23	AVG
7323.00	57.43	-0.81	56.62	74.00	-17.38	peak
7323.00	41.90	-0.81	41.09	54.00	-12.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882.00	57.93	-3.54	54.39	74.00	-19.61	peak
4882.00	48.15	-3.54	44.61	54.00	-9.39	AVG
7323.00	58.07	-0.81	57.26	74.00	-16.74	peak
7323.00	43.34	-0.81	42.53	54.00	-11.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)  
Horizontal:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4960	57.70	-3.43	54.27	74.00	-19.73	peak
4960	47.65	-3.44	44.21	54.00	-9.79	AVG
7440	61.33	-0.77	60.56	74.00	-13.44	peak
7440	40.57	-0.77	39.80	54.00	-14.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4960	59.13	-3.43	55.70	74.00	-18.30	peak
4960	50.08	-3.44	46.64	54.00	-7.36	AVG
7440	58.89	-0.77	58.12	74.00	-15.88	peak
7440	41.24	-0.77	40.47	54.00	-13.53	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz ◦
- (2). All modes of GFSK,  $\pi/4$  DQPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 Low Channel was reported for below 1GHz test.
- (3). For BT above 1GHz test all modes of GFSK,  $\pi/4$  DQPSK were test at Low, Middle, and High channel, only the worst result of GFSK DH5 was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

### Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	57.14	-5.81	51.33	74.00	-22.67	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.30	-5.84	49.46	74.00	-24.54	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	55.85	-5.81	50.04	74.00	-23.96	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.12	-5.84	50.28	74.00	-23.72	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	55.47	-5.81	49.66	74.00	-24.34	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.95	-6.06	47.89	74.00	-26.11	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	56.82	-5.81	51.01	74.00	-22.99	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.91	-6.06	48.85	74.00	-25.15	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



NO hopping

Operation Mode: TX CH Low (2402MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	54.45	-5.81	48.64	74.00	-25.36	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.89	-5.84	49.05	74.00	-24.95	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2310.00	54.40	-5.81	48.59	74.00	-25.41	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.28	-5.84	48.44	74.00	-25.56	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: TX CH High (2480MHz)  
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	57.39	-5.81	51.58	74.00	-22.42	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	56.38	-6.06	50.32	74.00	-23.68	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:


Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.50	55.95	-5.81	50.14	74.00	-23.86	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.97	-6.06	47.91	74.00	-26.09	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

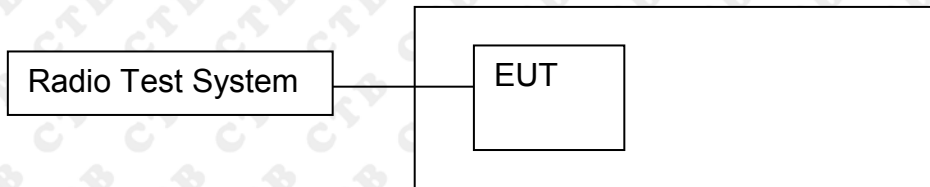

### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
Below 30MHz:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold  
Above 30MHz:  
RBW = 100KHz, VBW = 300KHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 8.4 Test Result


BAND EDGE Graphs																																														
GFSK/LCH/ No Hop	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.36000000 GHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.40192 GHz 2.560 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40192 GHz</td> <td>2.560 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-54.499 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.39000 GHz</td> <td>-56.277 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.32618 GHz</td> <td>-49.651 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.40192 GHz	2.560 dBm				2	N	1	f	2.40000 GHz	-54.499 dBm				3	N	1	f	2.39000 GHz	-56.277 dBm				4	N	1	f	2.32618 GHz	-49.651 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.40192 GHz	2.560 dBm																																									
2	N	1	f	2.40000 GHz	-54.499 dBm																																									
3	N	1	f	2.39000 GHz	-56.277 dBm																																									
4	N	1	f	2.32618 GHz	-49.651 dBm																																									
GFSK/LCH/ Hop	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.37000000 GHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.429148 GHz 4.080 dBm</p> <p>Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.429148 GHz</td> <td>4.080 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-51.200 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.38000 GHz</td> <td>-52.730 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.36820 GHz</td> <td>-47.179 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.429148 GHz	4.080 dBm				2	N	1	f	2.40000 GHz	-51.200 dBm				3	N	1	f	2.38000 GHz	-52.730 dBm				4	N	1	f	2.36820 GHz	-47.179 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.429148 GHz	4.080 dBm																																									
2	N	1	f	2.40000 GHz	-51.200 dBm																																									
3	N	1	f	2.38000 GHz	-52.730 dBm																																									
4	N	1	f	2.36820 GHz	-47.179 dBm																																									
GFSK/HCH/ No Hop	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.48900000 GHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>Mkr1 2.4799998 GHz 3.039 dBm</p> <p>Start 2.47800 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4799998 GHz</td> <td>3.039 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4800000 GHz</td> <td>-54.130 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.5000000 GHz</td> <td>-56.011 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4895830 GHz</td> <td>-44.206 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4799998 GHz	3.039 dBm				2	N	1	f	2.4800000 GHz	-54.130 dBm				3	N	1	f	2.5000000 GHz	-56.011 dBm				4	N	1	f	2.4895830 GHz	-44.206 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4799998 GHz	3.039 dBm																																									
2	N	1	f	2.4800000 GHz	-54.130 dBm																																									
3	N	1	f	2.5000000 GHz	-56.011 dBm																																									
4	N	1	f	2.4895830 GHz	-44.206 dBm																																									

<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 8.96 dB Ref 20.00 dBm Mkr1 2.46315000 GHz 4.069 dBm Start 2.43750 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 6.000 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.46315000 GHz</td> <td>4.069 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.48350000 GHz</td> <td>-52.084 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.49000000 GHz</td> <td>-53.102 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.48780000 GHz</td> <td>-45.808 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.46315000 GHz	4.069 dBm				2	N	1	f	2.48350000 GHz	-52.084 dBm				3	N	1	f	2.49000000 GHz	-53.102 dBm				4	N	1	f	2.48780000 GHz	-45.808 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.46315000 GHz	4.069 dBm																																									
2	N	1	f	2.48350000 GHz	-52.084 dBm																																									
3	N	1	f	2.49000000 GHz	-53.102 dBm																																									
4	N	1	f	2.48780000 GHz	-45.808 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 8.96 dB Ref 20.00 dBm Mkr1 2.40184 GHz 0.944 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.41000 GHz Sweep 10.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40184 GHz</td> <td>0.944 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-50.282 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.39900 GHz</td> <td>-51.288 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.32815 GHz</td> <td>-50.908 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.40184 GHz	0.944 dBm				2	N	1	f	2.40000 GHz	-50.282 dBm				3	N	1	f	2.39900 GHz	-51.288 dBm				4	N	1	f	2.32815 GHz	-50.908 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.40184 GHz	0.944 dBm																																									
2	N	1	f	2.40000 GHz	-50.282 dBm																																									
3	N	1	f	2.39900 GHz	-51.288 dBm																																									
4	N	1	f	2.32815 GHz	-50.908 dBm																																									
<p><math>\pi/4</math>DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.370000000 GHz Ref Offset 8.96 dB Ref 20.00 dBm Mkr1 2.421000 GHz 2.038 dBm Start 2.31000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.43000 GHz Sweep 12.00 ms (10001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.421000 GHz</td> <td>2.038 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.40000 GHz</td> <td>-51.249 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.38000 GHz</td> <td>-53.209 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.332228 GHz</td> <td>-48.351 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.421000 GHz	2.038 dBm				2	N	1	f	2.40000 GHz	-51.249 dBm				3	N	1	f	2.38000 GHz	-53.209 dBm				4	N	1	f	2.332228 GHz	-48.351 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.421000 GHz	2.038 dBm																																									
2	N	1	f	2.40000 GHz	-51.249 dBm																																									
3	N	1	f	2.38000 GHz	-53.209 dBm																																									
4	N	1	f	2.332228 GHz	-48.351 dBm																																									




RF Conducted Spurious Emissions Graphs


GFSK/LCH

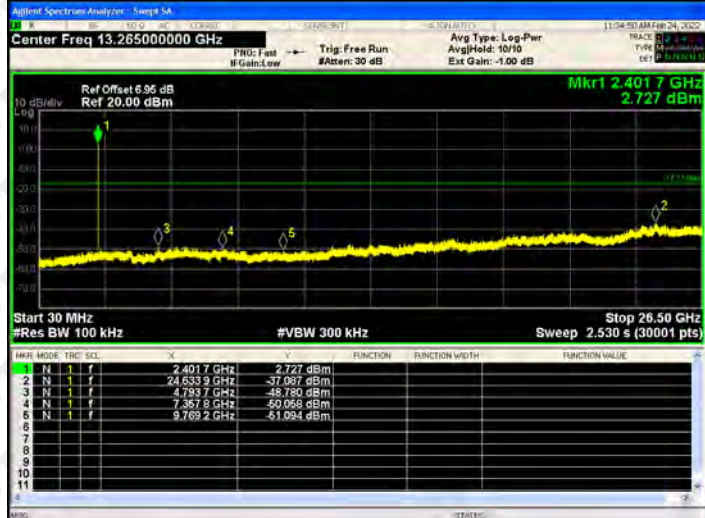

GFSK/MCH

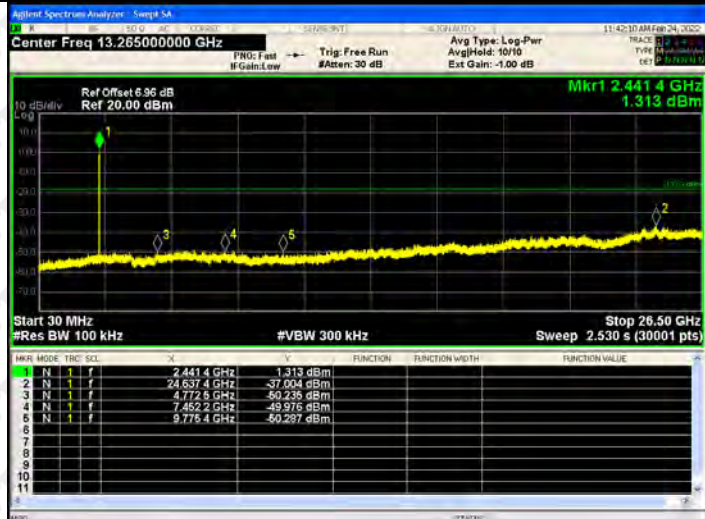

GFSK/HCH

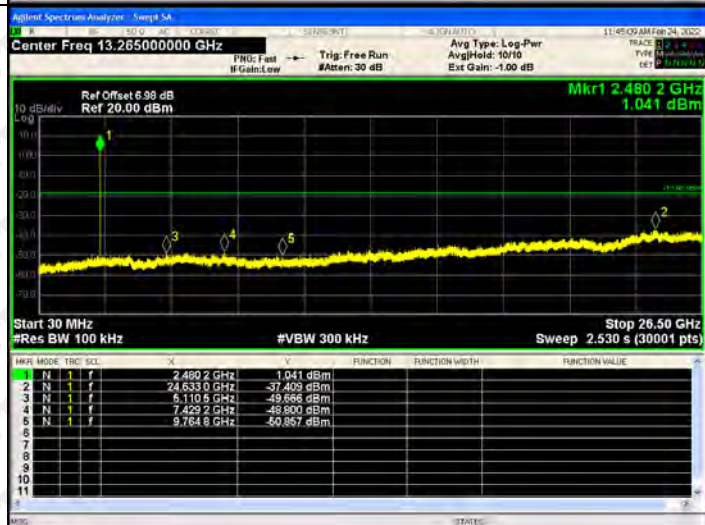


<p><math>\pi/4</math>DQPSK /LCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>-0.711 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6409 GHz</td> <td>-36.852 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7245 GHz</td> <td>-50.638 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3984 GHz</td> <td>-49.801 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6389 GHz</td> <td>-50.896 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	-0.711 dBm				2	N	1	f	24.6409 GHz	-36.852 dBm				3	N	1	f	4.7245 GHz	-50.638 dBm				4	N	1	f	7.3984 GHz	-49.801 dBm				5	N	1	f	9.6389 GHz	-50.896 dBm				
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4017 GHz	-0.711 dBm																																																			
2	N	1	f	24.6409 GHz	-36.852 dBm																																																			
3	N	1	f	4.7245 GHz	-50.638 dBm																																																			
4	N	1	f	7.3984 GHz	-49.801 dBm																																																			
5	N	1	f	9.6389 GHz	-50.896 dBm																																																			
<p><math>\pi/4</math>DQPSK/MCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>-1.920 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6197 GHz</td> <td>-36.032 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.7229 GHz</td> <td>-50.422 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4417 GHz</td> <td>-49.588 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6777 GHz</td> <td>-51.294 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-1.920 dBm				2	N	1	f	24.6197 GHz	-36.032 dBm				3	N	1	f	4.7229 GHz	-50.422 dBm				4	N	1	f	7.4417 GHz	-49.588 dBm				5	N	1	f	9.6777 GHz	-51.294 dBm				
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4414 GHz	-1.920 dBm																																																			
2	N	1	f	24.6197 GHz	-36.032 dBm																																																			
3	N	1	f	4.7229 GHz	-50.422 dBm																																																			
4	N	1	f	7.4417 GHz	-49.588 dBm																																																			
5	N	1	f	9.6777 GHz	-51.294 dBm																																																			
<p><math>\pi/4</math>DQPSK/HCH</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4794 GHz</td> <td>-1.714 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.0165 GHz</td> <td>-37.121 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.1089 GHz</td> <td>-50.221 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3881 GHz</td> <td>-49.042 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9487 GHz</td> <td>-50.272 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4794 GHz	-1.714 dBm				2	N	1	f	26.0165 GHz	-37.121 dBm				3	N	1	f	5.1089 GHz	-50.221 dBm				4	N	1	f	7.3881 GHz	-49.042 dBm				5	N	1	f	9.9487 GHz	-50.272 dBm				
MKR	MODE	TRIG	SCAL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4794 GHz	-1.714 dBm																																																			
2	N	1	f	26.0165 GHz	-37.121 dBm																																																			
3	N	1	f	5.1089 GHz	-50.221 dBm																																																			
4	N	1	f	7.3881 GHz	-49.042 dBm																																																			
5	N	1	f	9.9487 GHz	-50.272 dBm																																																			



## 9. COUDUCTED PEAK OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

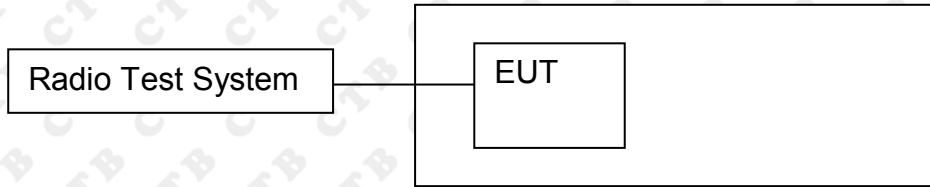

### 9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

## 9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
EDR mode (GFSK)	LCH	3.192	PASS
	MCH	3.499	PASS
	HCH	3.022	PASS
EDR mode ( $\pi/4$ DQPSK)	LCH	3.317	PASS
	MCH	3.417	PASS
	HCH	2.639	PASS


Test Graph:

Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.40211 GHz 3.192 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44100000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.44097 GHz 3.499 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 6.96 dB Ref 20.00 dBm Mkr1 2.47997 GHz 3.022 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>

<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	

## 10. 20DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

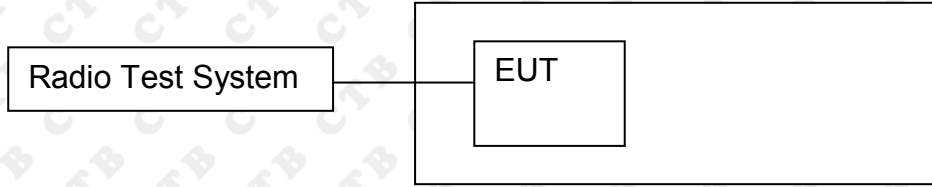

### 10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

### 10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.873	<b>PASS</b>
	Mid channel	0.912	<b>PASS</b>
	High channel	0.942	<b>PASS</b>
$\pi/4$ DQPSK	Low channel	1.445	<b>PASS</b>
	Mid channel	1.444	<b>PASS</b>
	High channel	1.435	<b>PASS</b>

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.


Test Graph:

<p>GFSK Low channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Ref Offset 6.95 dB</p> <p>Ref 26.95 dBm</p> <p>Mkr3 2.40242 GHz</p> <p>-19.798 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 847.09 kHz</p> <p>Total Power 9.48 dBm</p> <p>Transmit Freq Error -16.144 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 872.8 kHz</p> <p>x dB -20.00 dB</p>	
<p>GFSK Mid channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Ref Offset 6.95 dB</p> <p>Ref 26.95 dBm</p> <p>Mkr3 2.441445 GHz</p> <p>-19.920 dBm</p> <p>Center 2.441 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 828.31 kHz</p> <p>Total Power 9.98 dBm</p> <p>Transmit Freq Error -10.687 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 912.0 kHz</p> <p>x dB -20.00 dB</p>	
<p>GFSK High channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Ref Offset 6.95 dB</p> <p>Ref 26.98 dBm</p> <p>Mkr3 2.480462 GHz</p> <p>-19.275 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 30 kHz</p> <p>#VBW 100 kHz</p> <p>Span 3 MHz</p> <p>Sweep 3.2 ms</p> <p>Occupied Bandwidth 837.57 kHz</p> <p>Total Power 9.62 dBm</p> <p>Transmit Freq Error -8.772 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 941.6 kHz</p> <p>x dB -20.00 dB</p>	

<p><math>\pi/4</math>-DQPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupant BW</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.95 dBm</p> <p>Mkr3 2.402707 GHz -22.441 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>8.75 dBm</td> </tr> <tr> <td>1.3576 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-15.683 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.445 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	8.75 dBm	1.3576 MHz			Transmit Freq Error	OBW Power	99.00 %	-15.683 kHz			x dB Bandwidth	x dB	-20.00 dB	1.445 MHz		
Occupied Bandwidth	Total Power	8.75 dBm																	
1.3576 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-15.683 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
1.445 MHz																			
<p><math>\pi/4</math>-DQPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupant BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.96 dBm</p> <p>Mkr3 2.441704 GHz -21.275 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>8.75 dBm</td> </tr> <tr> <td>1.3558 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-18.095 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.444 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	8.75 dBm	1.3558 MHz			Transmit Freq Error	OBW Power	99.00 %	-18.095 kHz			x dB Bandwidth	x dB	-20.00 dB	1.444 MHz		
Occupied Bandwidth	Total Power	8.75 dBm																	
1.3558 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-18.095 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
1.444 MHz																			
<p><math>\pi/4</math>-DQPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupant BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset: 6.96 dB Ref: 26.98 dBm</p> <p>Mkr3 2.480701 GHz -22.230 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>8.03 dBm</td> </tr> <tr> <td>1.3554 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-16.147 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>1.435 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	8.03 dBm	1.3554 MHz			Transmit Freq Error	OBW Power	99.00 %	-16.147 kHz			x dB Bandwidth	x dB	-20.00 dB	1.435 MHz		
Occupied Bandwidth	Total Power	8.03 dBm																	
1.3554 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-16.147 kHz																			
x dB Bandwidth	x dB	-20.00 dB																	
1.435 MHz																			

## 11. CARRIER FREQUENCIES SEPARATION

### 11.1 Block Diagram Of Test Setup

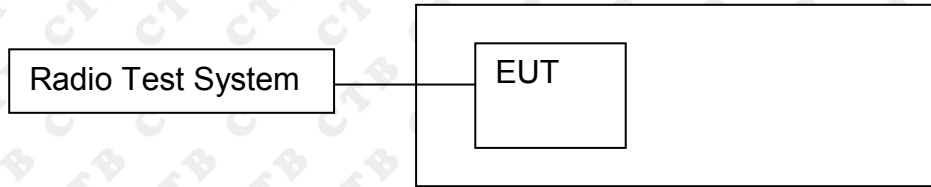

### 11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

### 11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.002	PASS
GFSK	MCH	1.002	PASS
GFSK	HCH	1.002	PASS
$\pi/4$ DQPSK	LCH	1.000	PASS
$\pi/4$ DQPSK	MCH	1.000	PASS
$\pi/4$ DQPSK	HCH	1.000	PASS




### Test Graph

Graphs																																		
GFSK/LCH	<p>Agilent Spectrum Analyzer - Sweep SA          Marker 1 <math>\Delta</math> 1.002000000 MHz          Ref Offset: 6.96 dB          Ref: 20.00 dBm          Avg Type: Log-Pwr          Avg Hold: 100/100          Ext Gain: -1.00 dB          Center 2.402500 GHz          #Res BW 30 kHz          #VBW 100 kHz          Span 2.000 MHz          Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MARK</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>F</th> <th>F</th> <th>Δ</th> <th>dB</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td>1.652 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401 974 GHz</td> <td></td> <td>-9.613 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MARK	MODE	TRIG	SCAL	F	F	Δ	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.002 MHz	(Δ)	1.652 dB				2	F	1	f		2.401 974 GHz		-9.613 dBm			
MARK	MODE	TRIG	SCAL	F	F	Δ	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																								
1	A2	1	f	(Δ)	1.002 MHz	(Δ)	1.652 dB																											
2	F	1	f		2.401 974 GHz		-9.613 dBm																											
GFSK/MCH	<p>Agilent Spectrum Analyzer - Sweep SA          Marker 1 <math>\Delta</math> 1.002000000 MHz          Ref Offset: 6.96 dB          Ref: 20.00 dBm          Avg Type: Log-Pwr          Avg Hold: 100/100          Ext Gain: -1.00 dB          Center 2.441500 GHz          #Res BW 30 kHz          #VBW 100 kHz          Span 2.000 MHz          Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MARK</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>F</th> <th>F</th> <th>Δ</th> <th>dB</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td>0.646 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440 978 GHz</td> <td></td> <td>1.093 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MARK	MODE	TRIG	SCAL	F	F	Δ	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.002 MHz	(Δ)	0.646 dB				2	F	1	f		2.440 978 GHz		1.093 dBm			
MARK	MODE	TRIG	SCAL	F	F	Δ	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																								
1	A2	1	f	(Δ)	1.002 MHz	(Δ)	0.646 dB																											
2	F	1	f		2.440 978 GHz		1.093 dBm																											
GFSK/HCH	<p>Agilent Spectrum Analyzer - Sweep SA          Marker 1 <math>\Delta</math> 1.002000000 MHz          Ref Offset: 6.96 dB          Ref: 20.00 dBm          Avg Type: Log-Pwr          Avg Hold: 100/100          Ext Gain: -1.00 dB          Center 2.479500 GHz          #Res BW 30 kHz          #VBW 100 kHz          Span 2.000 MHz          Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MARK</th> <th>MODE</th> <th>TRIG</th> <th>SCAL</th> <th>F</th> <th>F</th> <th>Δ</th> <th>dB</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td>-0.103 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 976 GHz</td> <td></td> <td>1.433 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MARK	MODE	TRIG	SCAL	F	F	Δ	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(Δ)	1.002 MHz	(Δ)	-0.103 dB				2	F	1	f		2.479 976 GHz		1.433 dBm			
MARK	MODE	TRIG	SCAL	F	F	Δ	dB	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																								
1	A2	1	f	(Δ)	1.002 MHz	(Δ)	-0.103 dB																											
2	F	1	f		2.479 976 GHz		1.433 dBm																											

<p><math>\pi/4</math>DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Marker 1 <math>\Delta</math> 1.000000000 MHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>AMkr1 1.000 MHz 0.338 dB</p> <p>Center 2.402500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.000 MHz</td> <td>(A)</td> <td></td> <td>0.338 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401978 GHz</td> <td></td> <td></td> <td>-2.013 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.000 MHz	(A)		0.338 dB	2	F	1	f		2.401978 GHz			-2.013 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.000 MHz	(A)		0.338 dB																				
2	F	1	f		2.401978 GHz			-2.013 dBm																				
<p><math>\pi/4</math>DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Marker 1 <math>\Delta</math> 1.000000000 MHz</p> <p>Ref Offset 6.96 dB Ref 20.00 dBm</p> <p>AMkr1 1.000 MHz 0.454 dB</p> <p>Center 2.441500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.000 MHz</td> <td>(A)</td> <td></td> <td>0.454 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440984 GHz</td> <td></td> <td></td> <td>-1.452 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.000 MHz	(A)		0.454 dB	2	F	1	f		2.440984 GHz			-1.452 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.000 MHz	(A)		0.454 dB																				
2	F	1	f		2.440984 GHz			-1.452 dBm																				
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA</p> <p>Marker 1 <math>\Delta</math> 1.000000000 MHz</p> <p>Ref Offset 6.98 dB Ref 20.00 dBm</p> <p>AMkr1 1.000 MHz -0.422 dB</p> <p>Center 2.479500 GHz #Res BW 30 kHz #VBW 100 kHz Span 2.000 MHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.000 MHz</td> <td>(A)</td> <td></td> <td>-0.422 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478982 GHz</td> <td></td> <td></td> <td>-1.378 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.000 MHz	(A)		-0.422 dB	2	F	1	f		2.478982 GHz			-1.378 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.000 MHz	(A)		-0.422 dB																				
2	F	1	f		2.478982 GHz			-1.378 dBm																				

## 12. HOPPING CHANNEL NUMBER

### 12.1 Block Diagram Of Test Setup

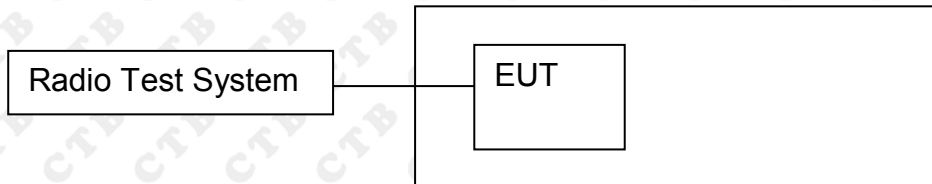

### 12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


### 12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS


Test Graph

Graphs

GFSK/Hop

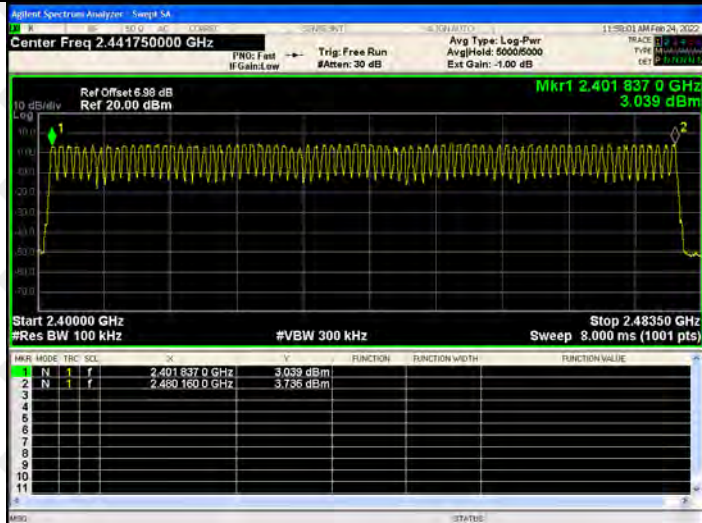


$\pi/4$ DQPSK/Hop

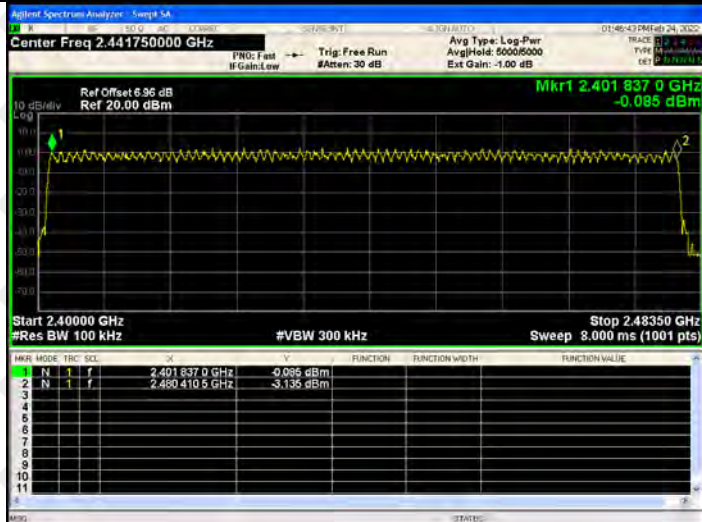

## 13. DWELL TIME

### 13.1 Block Diagram Of Test Setup

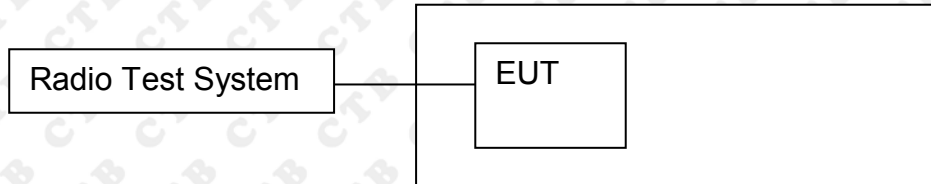

### 13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 13.4 Test Result

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.38	121.6	400	PASS
	DH1	MCH	0.381	121.92	400	PASS
	DH1	HCH	0.381	121.92	400	PASS
	DH3	LCH	1.197	191.52	400	PASS
	DH3	MCH	1.642	262.72	400	PASS
	DH3	HCH	1.641	262.56	400	PASS
	DH5	LCH	2.885	307.733	400	PASS
	DH5	MCH	2.885	307.733	400	PASS
	DH5	HCH	2.885	307.733	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5:  $1600/79/6*0.4*79*(MkrDelta)/1000$

DH3:  $1600/79/4*0.4*79*(MkrDelta)/1000$

DH1:  $1600/79/2*0.4*79*(MkrDelta)/1000$


Remark: Mkr Delta is once pulse time.

Test Graph

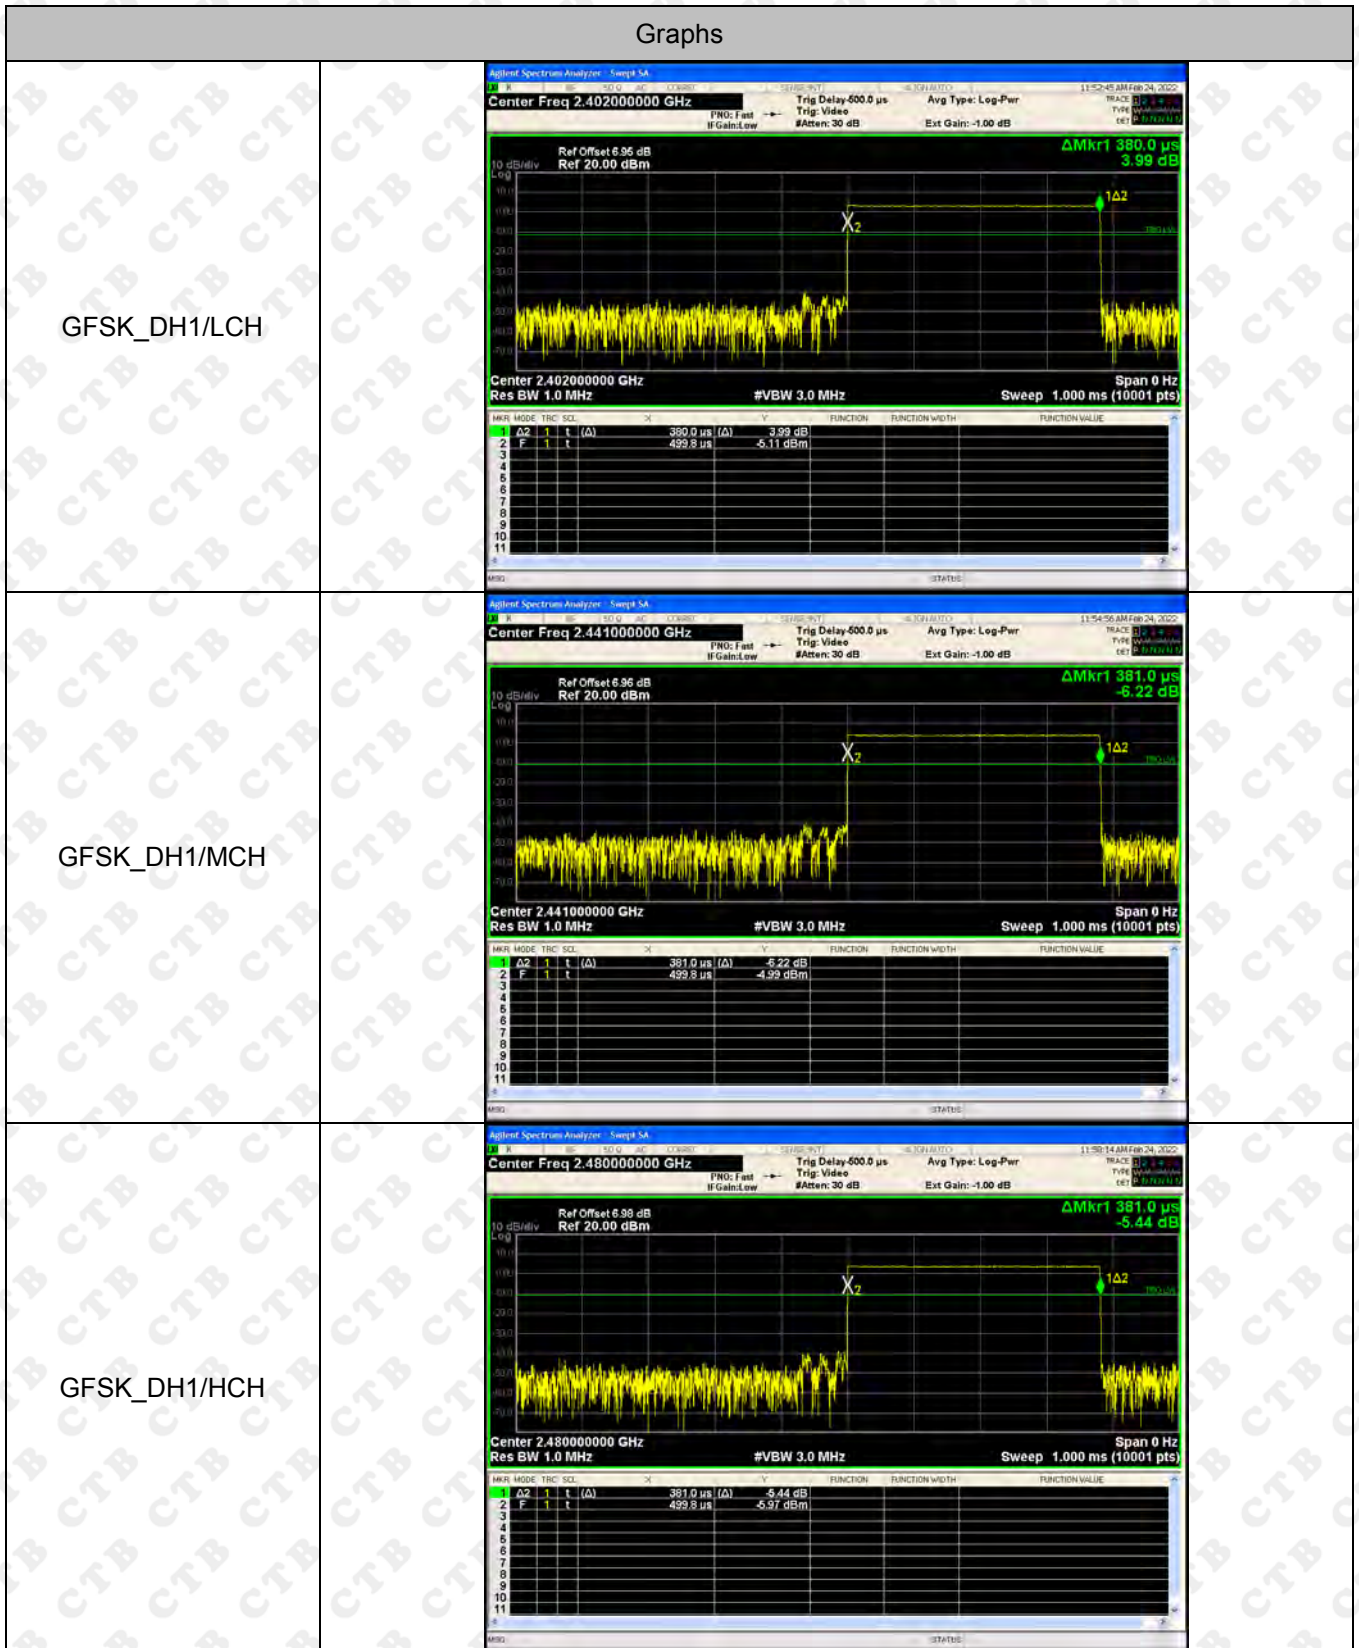

<p>GFSK_DH3/LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>OK</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.641 ms</td> <td>(A)</td> <td>4.77 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.8 <math>\mu</math>s</td> <td></td> <td>-4.18 dBm</td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.641 ms	(A)	4.77 dB		2	F	1	t		499.8 $\mu$ s		-4.18 dBm		3									4									5									6									7									8									9									10									11								
MNR	MODE	TRC	SCL	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	A2	1	t	(A)	1.641 ms	(A)	4.77 dB																																																																																																						
2	F	1	t		499.8 $\mu$ s		-4.18 dBm																																																																																																						
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p>GFSK_DH3/MCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>OK</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.641 ms</td> <td>(A)</td> <td>4.55 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.8 <math>\mu</math>s</td> <td></td> <td>-4.64 dBm</td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.641 ms	(A)	4.55 dB		2	F	1	t		499.8 $\mu$ s		-4.64 dBm		3									4									5									6									7									8									9									10									11								
MNR	MODE	TRC	SCL	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	A2	1	t	(A)	1.641 ms	(A)	4.55 dB																																																																																																						
2	F	1	t		499.8 $\mu$ s		-4.64 dBm																																																																																																						
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
<p>GFSK_DH3/HCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>OK</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>t</td> <td>(A)</td> <td>1.641 ms</td> <td>(A)</td> <td>3.06 dB</td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>t</td> <td></td> <td>499.8 <math>\mu</math>s</td> <td></td> <td>-3.86 dBm</td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(A)	1.641 ms	(A)	3.06 dB		2	F	1	t		499.8 $\mu$ s		-3.86 dBm		3									4									5									6									7									8									9									10									11								
MNR	MODE	TRC	SCL	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	A2	1	t	(A)	1.641 ms	(A)	3.06 dB																																																																																																						
2	F	1	t		499.8 $\mu$ s		-3.86 dBm																																																																																																						
3																																																																																																													
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													



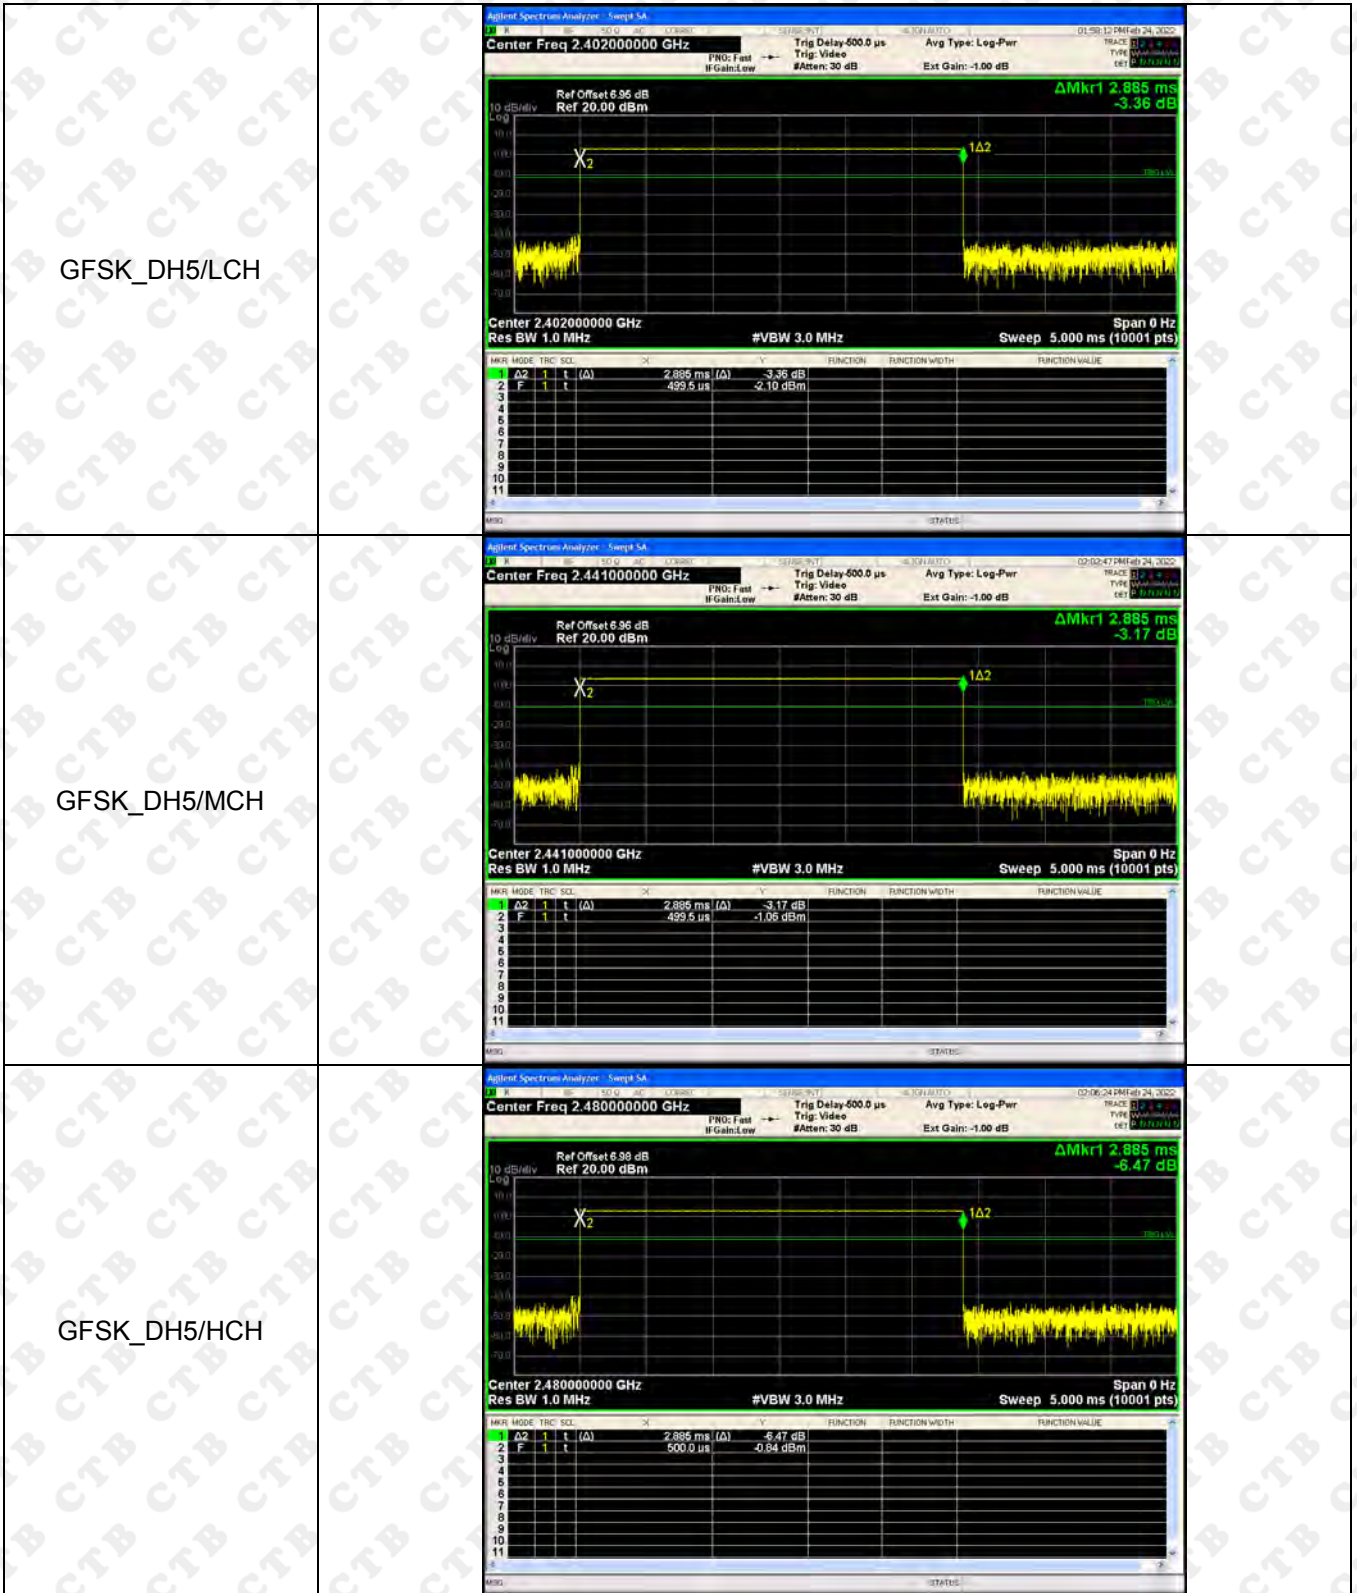

## 14. PSEUDORANDOM FREQUENCY


### 14.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


### 14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

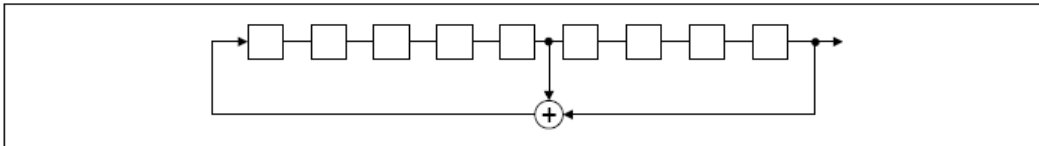

An example of Pseudorandom Frequency Hopping Sequence as follow:

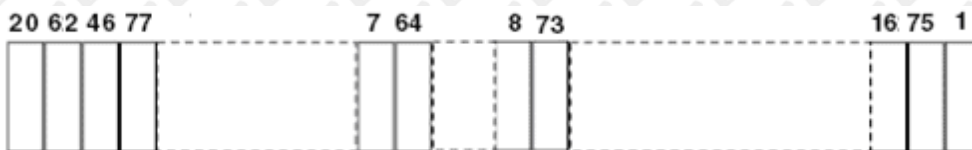

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

## 15. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

The antenna is Ceramic antenna. The best case gain of the antenna is 1.0dBi.

## 16. EUT PHOTOGRAPHS

EUT Photo 1



EUT Photo 2



## 17. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emission



## Conducted emissions



\*\*\*\*\* END OF REPORT \*\*\*\*\*