100±0.25mm

60±0.25mm

Portable Power Station

- Model: CAPTAIN 700
- Capacity: 22.4V, 30Ah, 672Wh
- Anderson Input: 12-30V⎓12A Max, 240W Max
- AC Input: 120V~60Hz, 600W Max
- AC Output (x4): 120V~60Hz, Total 700W (Surge 1300W)
- DC5521 Output (x2): 12V⎓3A, 36W Max per port, Total 72W
- Car Port: 12V⎓10A, 120W Max
  (2 x DC5521 Output + Car Port: Total 120W)
- USB-C Output (x2): 5V⎓3A, 9V⎓3A, 12V⎓3A, 15V⎓3A, 20V⎓3A
  60W Max per port, Total 120W
- USB-A Output (x2): 5V⎓3A, 9V⎓2A, 12V⎓1.5A
  18W Max per port, Total 36W
- Wireless Output: 10W Max
- Max. Output Power: 770W
- Discharging Temperature: -10-40˚C
- Charging Temperature: 0-40˚C
- S/N

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.
FCC ID: 2A5SKVP31700

Li-ion

VIGORPOOL

MADE IN CHINA

WARNING

- Do not overcharge the internal battery. See Instruction Manual.
- Do not smoke, strike a match, or cause a spark in the vicinity of the power pack.
- Only charge the internal battery in a well ventilated area.

CAUTION

- Risk of Electric Shock. Connect only to properly grounded outlets.
- Risk of Injury To Persons. Do not use this product if the power cord or the battery cables are damaged in any way.
- This device is not intended for use in a commercial repair facility.

DANGER

- This device is intended to be used indoors only. Do not use outdoors.

AVERTISSEMENT

- Ne pas surcharger la batterie interne. Consulter le manuel d'utilisation.
- Il ne faut pas fumer, allumer une allumette ou produire des étincelles à proximité du bloc d'alimentation.
- Charger la batterie uniquement dans un endroit bien aéré.

MISE EN GARDE

- Risque de décharge électrique. Brancher l'unité uniquement à des prises de courant correctement mises à la masse.
- Risque de blessure aux personnes. Ne pas utiliser ce produit si le cordon d'alimentation ou les câbles de batterie sont endommagés de quelque façon.
- Le dispositif n'est pas destiné à être utilisé dans un atelier de réparation commercial.

DANGER

- Le dispositif est destiné à être utilisé à l'intérieur seulement. Ne pas l'utiliser à l'extérieur.
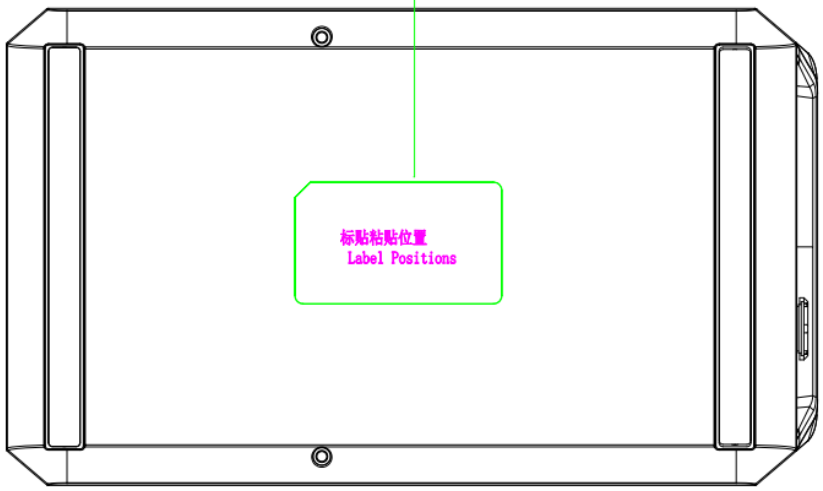
标贴粘贴位置如下
Label Positions