



东莞市仕研电子通讯有限公司

DONGGUAN SEYA ELECTRONIC COMMUNICATION CO.,LTD

规格承认书

SPECIFICATION FOR APPROVAL

Rev.A

客户

CUSTOMER: _____

客户料号

CUSTOMER NO: _____

品名

PART NAME: WIFI-N9N PRO ANTENNA

供方料号

SUPPLIER NO: SY-W90PE2347G230C-L01

送样日期Date: 2023.05.09

送样数量Q' TY: PCS

客户确认 CUSTOMER APPROVED BY		
APPROVAL	CHIEF	SUPERVISOR

供方确认 SUPPLIER SIGNATURE		
APPROVAL	CHECK	DESIGN
Jammy	Jerry	Patrick



承认书项目表


NO.	内容 (Contents)	页数 (Number of Page)	页码 (Page Code)
1	承认书封面 (Spec Cover)	1	1
2	承认书项目表 (Spec Item)	1	2
3	产品图片 (Product Pictures)	1	3
4	产品规格描述 (Product specification describes)	1	4
5	工程成品图 (Drawing)	1	5
6	网络测试 (Network Test)	4	6-9



東莞市仕研電子通訊有限公司

DONGGUAN SEYA ELECTRONIC COMMUNICATION CO.,LTD


产品图片

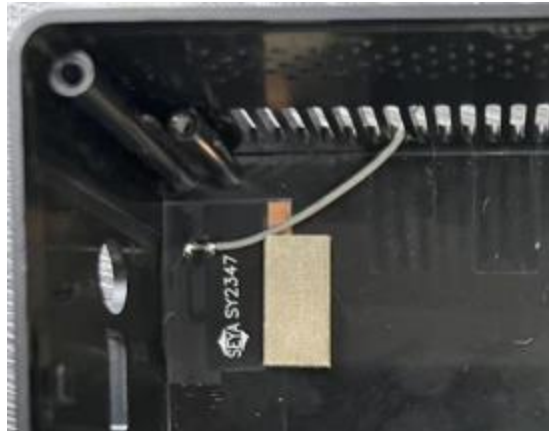




产品规格概述

Electrical Properties	
Frequency	2400-2500;5150-5850MHz
Impedance	50 Ohm Nominal
Return Loss	≤-10 dB
VSWR	≤2.0
Gain	2-3dBi
Polarization	Linear Polarization
Physical Properties	
Antenna Material	FPC
Cable Type	Φ1.13 CABLE
Working Temp.	-20 ~ +70 °C
Cable Color	GRAY

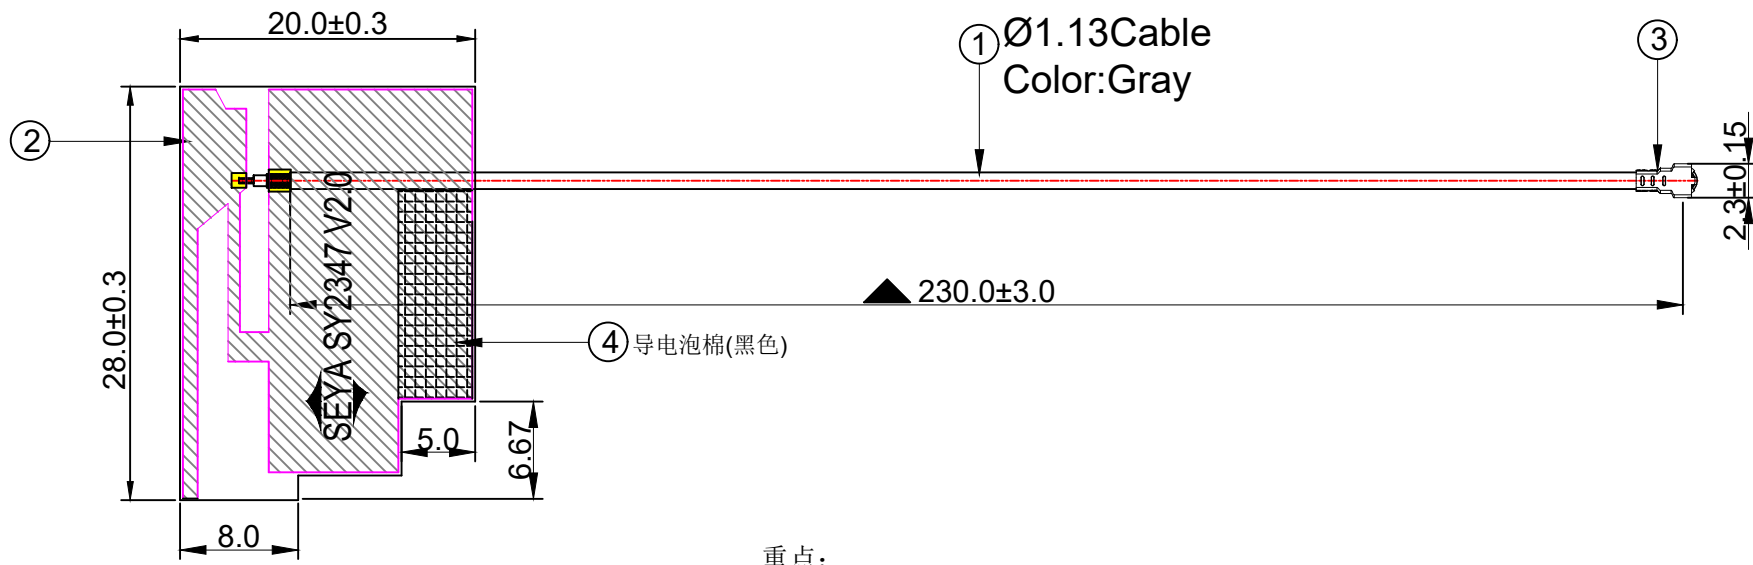


重点:

1. 裁线尺寸: 230.0mm
2. ▲ 为重点检验尺寸
3. 天线整体外观不可损伤, 不可有破损、脏污、毛边、掉漆露铜、虚焊、假焊等现象:





FPC STRIPPING DIM'S

④ 导电泡棉 (黑色) L14.0*W5.0*T6.0mm

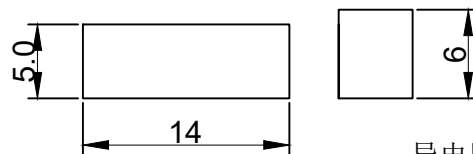

导电胶



MHF-4L STRIPPING DIM'S


备注:
网络测试:
测试频段: 2400-2500;5150-5850MHz
VSWR:2.0MAX
GAIN:2-3dBi

东莞市仕研电子通讯有限公司 DONGGUAN SEYA ELECTRONIC COMMUNICATION CO.,LTD		CUSTOMER		
		PART NO		
		TITLE		WIFI-L ANTENNA FOR N9N PRO
		S. H P/NO		SY-W90PE2347G230C-L01
		SIZE	DRAWN	CHECKED
		A4		APPROVED
UNIT: mm		TOLERANCE UNLESS OTHERWISE SPECIFIED		
SHEET: 1/1		ANGLES ±0.5°	X. ±2.0	
SCALE: 1/1		X. XX ±0.2	XX. ±5.0	
		DATE: 2023-05-08		
		Patrick		Jerry
				Jammy

4	EVA10XXXXA	导电泡棉(黑色) L14.0*W5.0*T6.0mm	1PC
3	TER10010A.P01	MHF-4L端子Ø1.13mm Coaxial Cable专用	1PC
2	FPC10515A-SY2347	天线FPC, 附黑油, SIZE:28.0*20.0*T0.1mm	1PC
1	COA11301A	Ø1.13mm Coaxial Cable同轴线 (灰色) L=240.0mm	1PC
NO.	Name	Finished	Q'ty



网络测试

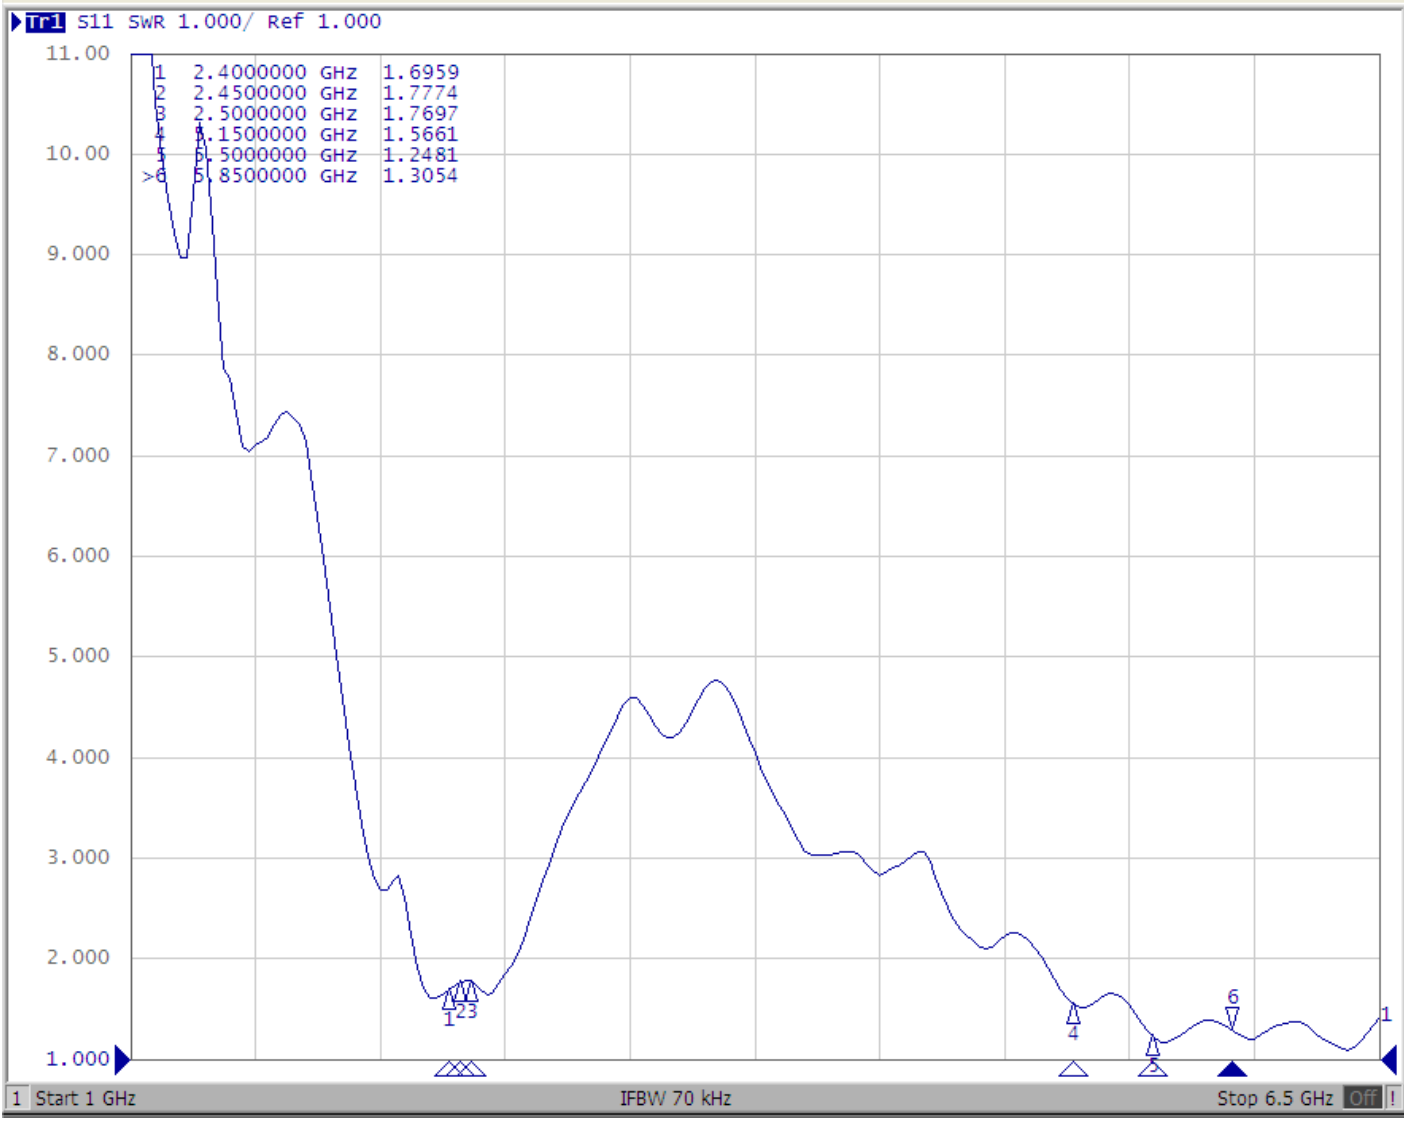





東莞市仕研電子通訊有限公司

DONGGUAN SEYA ELECTRONIC COMMUNICATION CO.,LTD


Total_3D_H_2.45GHz




Total_Polar_H_2.45GHz

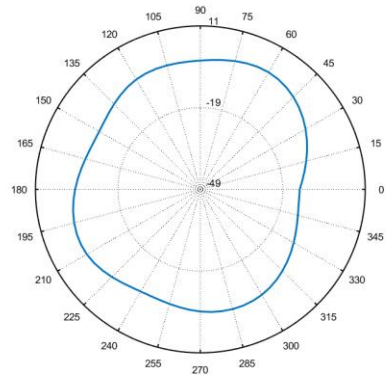

Total_Polar_E1_2.45GHz

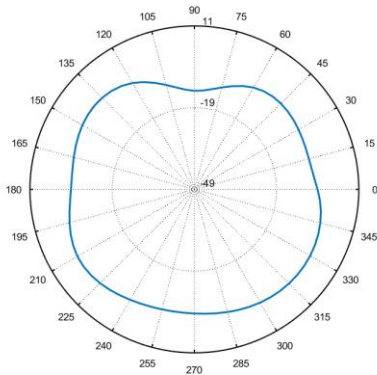

Total_Polar_E2_2.45GHz

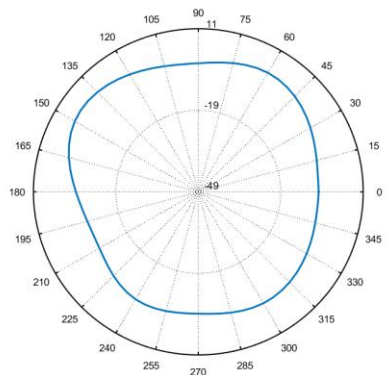





東莞市仕研電子通訊有限公司

DONGGUAN SEYA ELECTRONIC COMMUNICATION CO.,LTD


Total_3D_H_5.5GHz




Total_Polar_H_5.5GHz

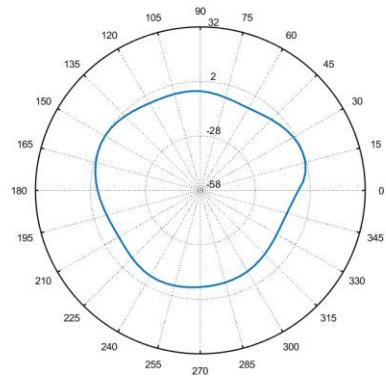

Total_Polar_E1_5.5GHz

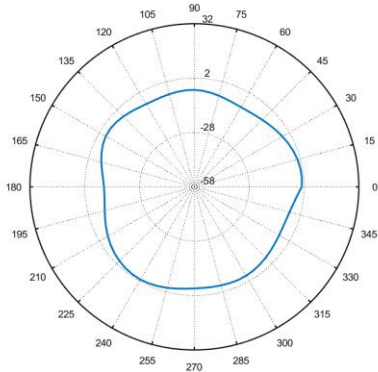

Total_Polar_E2_5.5GHz

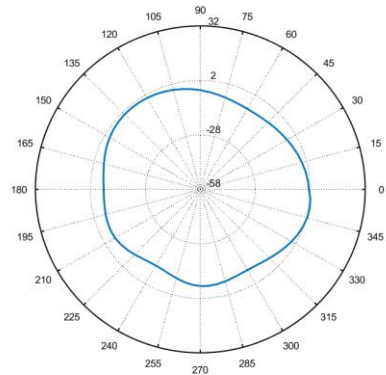



東莞市仕研電子通訊有限公司

DONGGUAN SEYA ELECTRONIC COMMUNICATION CO.,LTD

Freq (MHz)	Effi(%)	Gain (dBi)
2400	56.88	3.37
2450	58.13	3.40
2500	57.98	3.25
5150	52.68	2.65
5250	51.67	2.21
5350	53.48	2.71
5500	52.26	2.14
5650	54.36	3.69
5750	56.78	4.26
5850	55.25	3.42

	CH	TRP	TIS
802.11b 11M	1	12.14	-80.74
	6	12.51	-81.54
	11	11.58	-81.05
802.11a 54M	36	11.54	-70.54
	149	11.57	-70.42
	161	10.57	-70.45