



### 可折叠式蓝牙5.1键盘使用说明书



注意：正确操作本产品，请仔细阅读用户手册。



**支持系统**  
Windows/ios/Android/Mac

**技术规格**

键盘尺寸：269.3x97.4x7.9mm (打开) 重量：165g  
142.7x97.4x16mm (折叠) 待机电流：< 0.7mA  
使用按键工作电流：< 1.5mA 休眠电流：20uA  
工作距离：10m 休眠时间：10分钟  
锂电池容量：80 mAh 充电方式：按键唤醒  
输入电压：5V 输入电流：50-100mA

**产品功能**

Fn +	IOS/Mac/Android	Fn + Shift	Windows	Fn +	Windows
[Return]	返回桌面	[Return]	返回桌面	[Esc]	Esc
[Search]	搜索	[Search]	搜索	[F1]	F1
[Select]	全选	[Select]	全选	[F2]	F2
[Copy]	复制	[Copy]	复制	[F3]	F3
[Stick]	粘贴	[Stick]	粘贴	[F4]	F4
[Cut]	剪切	[Cut]	剪切	[F5]	F5
[Pre-Track]	上一曲?	[Pre-Track]	上一曲?	[F6]	F6
[Play/Pause]	暂停/播放?	[Play/Pause]	暂停/播放?	[F7]	F7
[Next]	下一曲?	[Next]	下一曲?	[F8]	F8
[Mute]	静音?	[Mute]	静音?	[F9]	F9
[Volume-]	音量减小?	[Volume-]	音量减小?	[F10]	F10
[Volume+]	音量增大?	[Volume+]	音量增大?	[F11]	F11
[Lock]	锁屏?	[Lock]	锁屏?	[F12]	F12


**系统切换语言：**

- Windows: Alt+Shift 切换语言。
- IOS/Mac: Ctrl +空格键 切换语言。
- Android: Shift +空格键 切换语言。

**多通道连接：**


- 连接第 1 个设备时 先按 Fn+[ ]，再按 Fn+[ ] 对码，开始连接。
- 连接第 2 个设备时 先按 Fn+[ ]，再按 Fn+[ ] 对码，开始连接。
- 连接第 3 个设备时 先按 Fn+[ ]，再按 Fn+[ ] 对码，开始连接。
- 在多个设备同时使用，按 Fn+[ ]/[ ] 切换，即可自由切换到已连接的设备。

**·IOS系统连接使用说明：**




1. 请打开键盘电源开关，蓝色灯亮起，选择通道，按 Fn + C 键蓝灯闪烁进入配对模式。
2. 打开“蓝牙”进入搜索模式。
3. 直到发现“BT 5.1 keyboard-1505”，然后点击配对名连接。
4. 提示连接成功，您就可以舒适的使用您的键盘了。

**·Mac系统连接使用说明：**

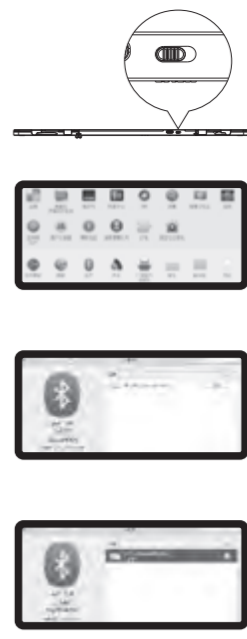


1. 请打开键盘电源开关，蓝色灯亮起，选择通道，按 Fn + C 键蓝灯闪烁进入配对模式。
2. 打开系统偏好设置，点击“蓝牙”进入搜索模式。
3. 直到发现“BT 5.1 keyboard-1505”，然后点击配对名连接。
4. 提示连接成功，您就可以舒适的使用您的键盘了。

**·Windows 10 系统连接使用说明：**



1. 请打开键盘电源开关，蓝色灯亮起，选择通道，按 Fn + C 键蓝灯闪烁进入配对模式。
2. 打开设置，打开蓝牙，点击添加蓝牙或其他设备。
3. 在添加设备里选择“蓝牙”，进行搜索。
4. 直到发现“BT 5.1 keyboard-1505”，然后点击配对名连接。
5. 提示连接成功，您就可以舒适的使用您的键盘了。

**·Android 系统连接使用说明：**

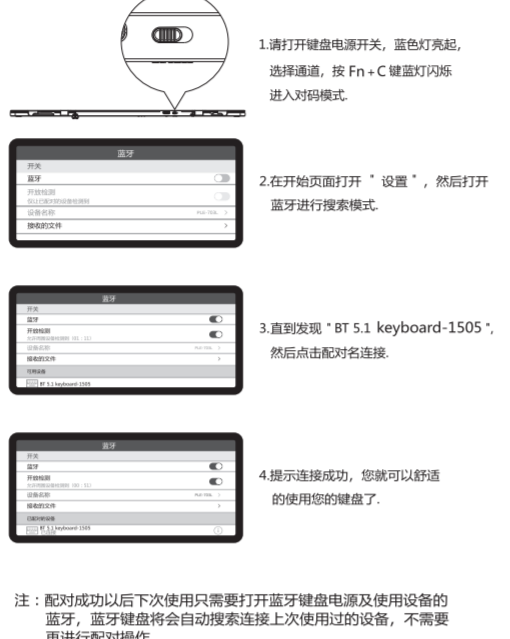

1. 请打开键盘电源开关，蓝色灯亮起，选择通道，按 Fn + C 键蓝灯闪烁进入配对模式。
2. 在开始页面打开“设置”，然后打开蓝牙进行搜索模式。
3. 直到发现“BT 5.1 keyboard-1505”，然后点击配对名连接。
4. 提示连接成功，您就可以舒适的使用您的键盘了。

注：配对成功以后下次使用只需要打开蓝牙键盘电源及使用设备的蓝牙，蓝牙键盘将会自动搜索上次使用过的设备，不需要再进行配对操作。

**状态显示LED**

- 电源指示：打开电源开关，蓝色指示灯点亮后熄灭。
- 通道指示：选择及切换通道，对应通道蓝色指示灯点亮后熄灭。
- 配对指示：按对码键，蓝色指示灯闪烁，配对成功后熄灭。
- 低电压指示：红色指示灯闪烁表示进入低电压状态需充电。
- 充电指示：红色指示灯亮，充满电后熄灭。
- Capslock指示：绿色指示灯亮。

**键盘保养**

1. 请勿将设备暴露在液体和潮湿的环境中或使其淋雨，请勿在浴缸、水槽、桑拿房、游泳池或蒸汽房附近使用。
2. 请勿将设备暴露于过高或过低的温度下。
3. 请勿长时间放置在阳光直射的地方。
4. 请勿靠近明火，如烹饪用炉、蜡烛或者壁炉。
5. 避免使用锋利利器刮擦产品，及时给产品进行充电以保证正常使用。

**常见问题解答**

- 平板无法连接蓝牙键盘?**  
1) 请先检查蓝牙键盘是否有进入配对状态。然后再打开平板电脑蓝牙搜索设备进行连接。  
2) 检查蓝牙键盘电量是否充足，电量不足也会导致无法连接，请将蓝牙键盘充电后再使用。
- 键盘指示灯在使用途中一直闪烁?**  
键盘指示灯在使用途中一直闪烁，表示电池即将没电，请尽快将键盘充电。
- 设备显示蓝牙键盘断开连接?**  
蓝牙键盘在一段时间内不使用，设备为了省电将自动关闭蓝牙功能，按任意键唤醒，蓝牙连接自动恢复。

**保修卡**

用户填写资料  
公司或个人名称 \_\_\_\_\_


通讯地址 \_\_\_\_\_

电话 \_\_\_\_\_ 邮编 \_\_\_\_\_

所购产品名称及型号 \_\_\_\_\_


购买日期 \_\_\_\_\_

本有限质保不覆盖由于以下原因导致的任何损坏：  
 (1) 意外事件、误用、操作不当或任何未经授权、改装或拆卸；  
 (2) 操作或维护不当，使用过程中违反产品使用或连接不当的电源；  
 (3) 或者使用并非本公司提供的消耗品（如锂电池），但适用法律禁止此类限制的情况除外。




正面

### Foldable Bluetooth 5.1 Keyboard User Manual



Note: Please read the user manual carefully before you start using this product.

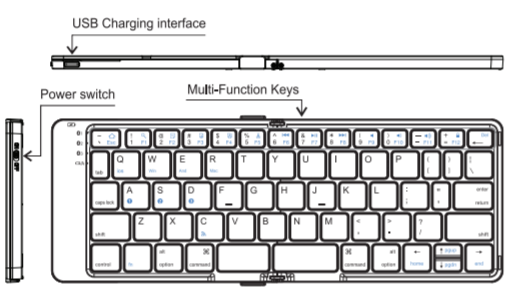

**Compatible system**  
Windows/ios/Android/Mac

**Technical Specifications**

Keyboard size: 269.3x97.4x7.9mm (open) Weight: 165g  
142.7x97.4x16mm (folding)  
Standby current:<0.7mA  
Key working current:<1.5mA Working  
Sleep current: 20uA  
Sleep time: Ten minutes  
distance: 10m  
Lithium battery capacity: 80 mAh  
Awaken way: Press key  
Input: 5V/50-100mA

**Product features**

Fn +	IOS/Mac/Android	Fn + Shift	Windows	Fn +	Windows
[Return]	Return to Desk	[Return]	Return to Desk	[Esc]	Esc
[Search]	Search	[Search]	Search	[F1]	F1
[Select]	Select	[Select]	Select	[F2]	F2
[Copy]	Copy	[Copy]	Copy	[F3]	F3
[Stick]	Stick	[Stick]	Stick	[F4]	F4
[Cut]	Cut	[Cut]	Cut	[F5]	F5
[Pre-Track]	Pre-Track	[Pre-Track]	Pre-Track	[F6]	F6
[Play/Pause]	Play/Pause	[Play/Pause]	Play/Pause	[F7]	F7
[Next]	Next	[Next]	Next	[F8]	F8
[Mute]	Mute	[Mute]	Mute	[F9]	F9
[Volume-]	Volume-	[Volume-]	Volume-	[F10]	F10
[Volume+]	Volume+	[Volume+]	Volume+	[F11]	F11
[Lock]	Lock	[Lock]	Lock	[F12]	F12


**Three system switching language:**

- Windows: Alt+Shift switch language.
- IOS/Mac: Ctrl+Space key switch language.
- Android: Shift+Space key switch language.

**Multi-channel connection:**


When connecting the first device, press Fn+[ ] then press Fn+[ ] to pair the code to start the connection.  
When connecting the second device, press Fn+[ ] then press Fn+[ ] to pair the code to start the connection.  
When connecting the third device, press Fn+[ ] then press Fn+[ ] to pair the code to start the connection.  
When using multiple devices at the same time, press Fn+[ ]/[ ] switch to the connected device freely.

**IOS Connection instructions:**




1. Slide the keyboard on/off switch to on, select the bluetooth model when green light is visible. Then press Fn+C, start to pair when the blue light is flashing.
2. Open the set up button at starting interface and select "Bluetooth", then searching.
3. You will find the "BT 5.1 keyboard-1505" and click the pairing name to connect.
4. There is a tip for connecting successfully, you can use your keyboard comfortably.

**Mac Connection instructions:**

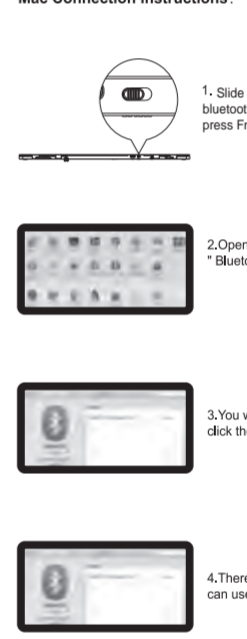


1. Slide the keyboard on/off switch to on, select the bluetooth model when green light is visible. Then press Fn+C, start to pair when the blue light is flashing.
2. Open the Mac System Preferences and select "Bluetooth", then searching.
3. You will find the "BT 5.1 keyboard-1505" and click the pairing name to connect.
4. There is a tip for connecting successfully, you can use your keyboard comfortably.

**Win 10 Connection instructions:**

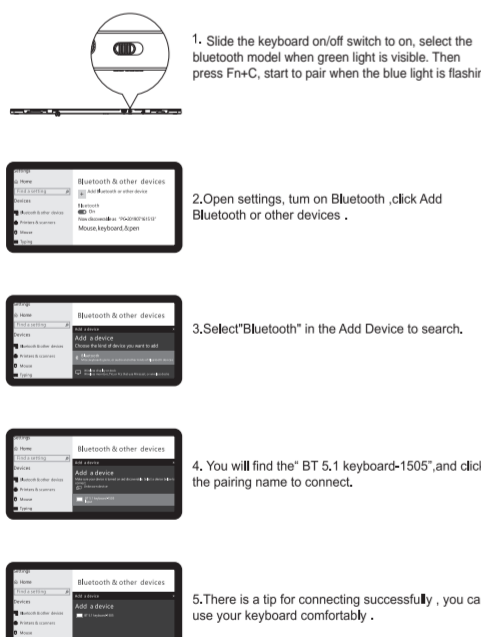

1. Slide the keyboard on/off switch to on, select the bluetooth model when green light is visible. Then press Fn+C, start to pair when the blue light is flashing.
2. Open settings, turn on Bluetooth, click Add Bluetooth or other devices.
3. Select "Bluetooth" in the Add Device to search.
4. You will find the "BT 5.1 keyboard-1505" and click the pairing name to connect.
5. There is a tip for connecting successfully, you can use your keyboard comfortably.

**Android Connection instructions:**

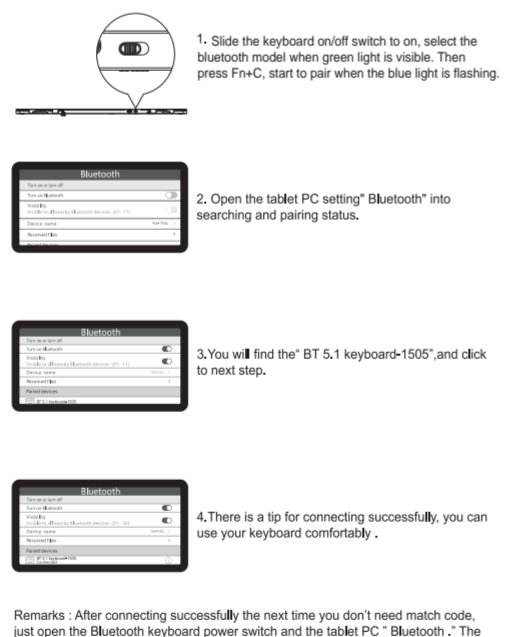

1. Slide the keyboard on/off switch to on, select the bluetooth model when green light is visible. Then press Fn+C, start to pair when the blue light is flashing.
2. Open the tablet PC setting "Bluetooth" into searching and pairing status.
3. You will find the "BT 5.1 keyboard-1505" and click to next step.
4. There is a tip for connecting successfully, you can use your keyboard comfortably.

Remarks: After connecting successfully the next time you don't need match code, just open the Bluetooth keyboard power switch and the tablet PC "Bluetooth". The BT keyboard will search the device and automatic connects.

**Status Display LED**

Power: Slide the keyboard on/off switch to on, the green is visible for seconds.  
Bluetooth: Choose the mode, the blue light is visible for seconds.  
Pairing: Press Fn+C, Blue light flash. When connected, the lights turns off.  
Low-Battery: Red light flash  
Charging: Red light on. When fully charged, the light turns off.  
Capslock: Green light on

**Keyboard Maintenance**

1. Please keep the keyboard away from liquid or humid environment, saunas, swimming pool, steam room and don't let the keyboard get wet in the rain.
2. Please don't expose the keyboard at too high or too low temperature condition.
3. Please don't put keyboard under sun for a long time.
4. Please don't put keyboard dose to the flame, such as cooking stoves, candles or fireplace.
5. Avoid sharp objects scratching products, likely to recharge products to ensure the normal use.

**FAQ**

- 1. The tablet PC can't connect the BT keyboard?**  
1) At first check the BT keyboard is into match code state, then open the tablet PC Bluetooth searching.  
2) Checking the BT keyboard Battery is enough, the battery low is also lead to can't connect, you need charge.
- 2. The keyboard indication light always flashing when use?**  
Keyboard indication always flashing when use, is means the keyboard will be no power, please charge the power as soon as possible.
- 3. The table PC display BT keyboard is disconnect?**  
The Bluetooth keyboard is not used for a period of time, the device will, automatically enter the sleep state in order to save power. Press any key on the keyboard to wake up and the Bluetooth connection will be automatically restored.

**FCC Statement**

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

**Warranty Card**

**User information**  
Company or personage full name \_\_\_\_\_


Contact address \_\_\_\_\_

TEL \_\_\_\_\_ Zip \_\_\_\_\_

The purchased product name and model NO. \_\_\_\_\_


Purchased date \_\_\_\_\_

This reason due to the product broken and damage is not include on the warranty.  
1) Accident, misuse, improper operation, or any unauthorized repair, modified or removed.  
2) Improper operation or maintenance, when operation violation of the instructions or connection suitability power supply.  
3) Or use consumables ( such as spare batteries ) that are not provided by the company, but applicable laws Except where such restrictions are prohibited.



反面

折法: 左右S折, 封面朝外

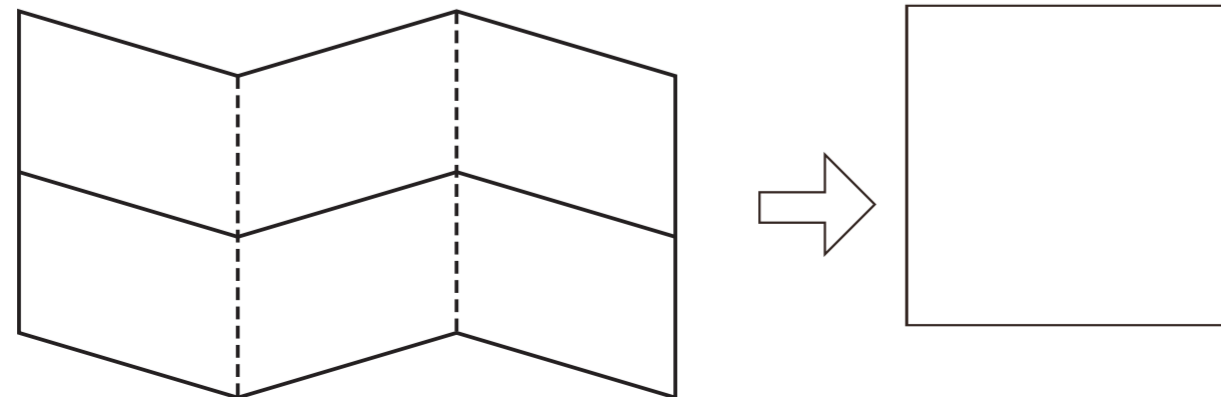

- 注意:
1. 须正反面(双面)印刷
  2. 印刷面不可产生影像模糊或有余影
  3. 裁切边不可有裁切不良现象
  4. 交货时需左右S折, 封面需朝正面

说明书尺寸 100 \* 70 mm (折合尺寸)  
材质 80g 双胶纸 单黑