


User Manual

Aurora k-song speaker

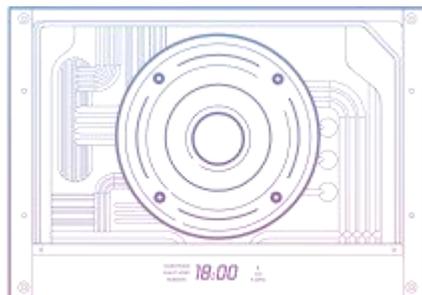

1、 Product Declaration

Thankyou for purchasing and using Star Singing K8. Before using this product, please carefully read the product manual and check the accessories. This will help you better use this product. Please keep the product and product manual properly and operate strictly according to the requirements. Our company has carefully reviewed the product manual and cannot guarantee that it is completely free from any errors or omissions. However, the images in our promotional advertisements are for reference only. If any individual images do not match the actual display of the product, please refer to the actual product. In order to provide better services, our company reserves the right to update and improve the products and software programs described in this product manual at any time without prior notice.

2、 Packaging List


ITEM NAME	number
Audio main body	*1
microphone	*1 (single person)
microphone	*2 (Double)
Charging+data cable	*1
instructions	*1

3、 Specification parameters

Product size: 20cm*11cm*14cm	Nominal charging time: approximately 3 hours
Speaker with built-in battery:3.7V/3000Mah	working temperature: -10°C ~ 45°C
Bluetooth version: 5.0	Storage temperature: -20°C ~ 60°C
Speaker charging:5V/2A	Rated consumption power: < 15W
Frequency Response : 30Hz—18KHz	Rated consumption current: > 3A
Signal-to-noise ratio:≥90DB	
Speakerspecification: 20W 3 inch full frequency speaker+maze guidance system	


4、 product use

1.loudspeaker box

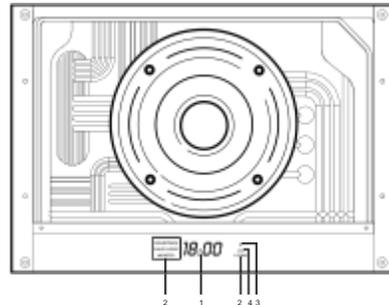

1. Clock area: Display the current time
- 2.Sound effect mode area: The illuminated sound effect represents the currently selected sound effect (only enabled)After the microphone, it will light up, and this area will not be displayed in listening mode
3. Bluetooth indicator light: Bluetooth terminated, permanently lit after connection, turned off after entering U mode
4. Battery/charging indicator light: Normal battery. This light remains on for a long time, and there will be a low battery after a low battery voice prompt, power off state enters charging state. This light flashes and remains on after being fully charged


Warning! The product contains lithium batteries: 1. It is prohibited to disassemble, collide, squeeze or put into fire; 2. If severe swelling occurs, do not continue to use; 3. Do not place in a high-temperature environment;



1. Music volume knob: Rotate the music volume to the left to decrease, and rotate it to the right to increase music volume
2. Microphone volume knob: Rotate the microphone volume to the left to decrease, and rotate the microphone volume to the right to increase
3. on/off/sound effect switch button: Long press for 3 seconds to turn on/off, short press to switch K song sound effect
4. Light effect switch button: Short press to switch light effects
5. AUX/live streaming port: Use 4 3.5mm connecting cables for audio input or live streaming connection
6. Charging/OTG port: Standard charging cable for charging, or OTG for connecting to a computer/phone

Warning! The product contains lithium batteries: 1. It is prohibited to disassemble, collide, squeeze or put into fire; 2. If severe swelling occurs, do not continue to use; 3. Do not place in a high-temperature environment;

2.microphones



1. Switch/mode switch button: Long press to switch the microphone, short press to switch sound effect mode
Status light: Fast flashing when not connected, permanently lit after connection indicates that the speaker has been connected and the microphone has entered low power mode. The red light will flash when the battery is fully charged, and the red light will remain on when charging the microphone. It will turn off when fully charged

2. Volume up/down original singing button: Short press the microphone volume up one level, long press to turn on/off the original singing function
3. Volume reduction/dodge reduction: Short press the microphone volume to decrease by one level, long press to turn on/off the dodge function
4. Radio port
5. Charging port: Use type-c charging cable to charge the microphone

5、 Manufacturer Information

Brand: Xingchang Product model: K8

Product Name: Aurora k-song speaker

Manufacturer: Shenzhen Xingchang Technology Co., Ltd

Production address: 9th floor, Building A, Nanchang Jianyu Second Industrial Zone, Gucheng 1st Road, Bao'an District, Shenzhen, Guangdong Province

Executive standard: GB8898-2011

FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.