


SMART **AIR QUALITY MONITOR**

ATU-S500

USER MANUAL



AIRTOALL

Operation Instruction

- The product is recommended for indoor use. Please do not use in a humid environment such as a bathroom.
- The product can only be used below 2000 meters above sea level.
- To avoid interference, please pay attention to the installation position of the monitor, and it is recommended to avoid shielding.
- After the power supply is switched on, wait for a certain period of time for data to be recorded stably.
- Before use it, please check whether the monitor is damaged, the screw is loose, and the wiring is off. If there is obvious damage, please contact us.

Product Introduction

ATU-S500 smart air quality monitor is an indoor environmental monitoring instrument, which can connect into internet via Wi-Fi. It can transmit data to user interface, via Tuya Smart APP to display air quality data, enable convenient checking of the indoor environment status, and real-time monitoring part of the indoor temperature and humidity, PM2.5, TVOC, CO2 .

Typical applications

- Smart automated buildings
- Villas, high-end residential buildings
- Office buildings
- Brand outlets
- Schools, hospitals, airports, public buildings
- Hotels, supermarkets

Basic Parameters

Monitoring Parameters	<ul style="list-style-type: none">● Ambient Temperature● Volatile Compound TVOC● PM1 / PM2.5 / PM10 (optional)● Relative Humidity● CO2 / eCO2 (optional)		
Communication	Wi-Fi @2.4GHz 802.11b/g/n		
Wireless Standard	Wi-Fi 2.4G		
Voltage	<ul style="list-style-type: none">● AC85~305V,50/60Hz● DC12V~24V		
Remote Control	Tuya Smart APP (Support <ul style="list-style-type: none">● IOS● Android)		
Installation	Socket installation		
Operation Environment	<ul style="list-style-type: none">● Temperature -5°C~50°C● Humidity 5%~95% RH (no condensation)		
Storage Temp	-10°C~55°C	Mounting Hole	60mm (standard)
Dimension (mm)	109*109*27	Certification	3C
Case material / Protection class	PC/ABS fireproof material IP30		

Range & Accuracy

	Measuring range	Precision
Temperature & Humidity	<ul style="list-style-type: none">• Temperature : $-40^{\circ}\text{C}\sim 125^{\circ}\text{C}$• Humidity : $0\sim 99\%RH$	<ul style="list-style-type: none">• Temperature : $< \pm 0.2^{\circ}\text{C}$ @ $0^{\circ}\text{C}\sim 65^{\circ}\text{C}$• Humidity : $< \pm 2.0\%$ RH @ ($10\%\sim 90\%RH$)
TVOC	<ul style="list-style-type: none">• TVOC : $0\sim 1\text{ppm}$• eCO₂ : $400\sim 2000\text{ppm}$	
PM1 PM2.5 PM10	$0\sim 500\ \mu\text{g}/\text{m}^3$	<ul style="list-style-type: none">• $\pm 10\%$@$100\sim 500\ \mu\text{g}/\text{m}^3$• $\pm 10\ \mu\text{g}/\text{m}^3$ @$0\sim 100\ \mu\text{g}/\text{m}^3$
CO ₂	$400\sim 2000\text{ppm}$	$\pm 40\text{ppm} + \pm 3\%$ of reading data

Internet Connection

Please scan this QR code



Preparation:

- Terminals such as mobile phones are connected to the **2.4G** frequency band network.
- Make sure the network of the device is consistent with the network where the terminal is located.
- Scan the QR code on the right via mobile phone, download the App, and enter network configuration interface.

Connection Steps

- Go to the App Store or Android app stores, search for **"Tuya Smart"**, download and log in to the App.
- Plug in the device with power supply, wait for its blue light to flash, with long beep on the buzzer, and successfully enter the network distribution mode.
- After the device enters the network distribution mode, use the "Tuya Smart" App to add devices and wait for the network connection to complete.
- If network connection is successful, the buzzer will beep three times firstly and then beep twice. If network connection fails, the buzzer will only beep three times.
- If network connection fails, press middle button for 5 seconds to reset .
Once blue light flashes on the device, press and hold the button again for 5 seconds to switch the App network configuration mode. Select "Reconfigure Network" on Tuya Smart App and wait for the network configuration to complete.



Reconnect with Internet

- Open the "Tuya Smart" app and delete the "added" device.
- The monitor will automatically enter the internet connection mode and wait for its "blue light flashing". At this time, the device can be reconnected with internet via Wifi.
- If the monitor does not automatically enter the internet connection mode, press the middle button of the monitor and wait for its "blue light flashing", and the buzzer will "sound for a long time". At this time, the device can be reconnected with internet.

Device Status Description


	Warning Light	Buzzer
Boot Prompt	Green light always on	
Wi-Fi Connecting	Blue light flashing	Long beep
Wi-Fi Connected		Two short beeps
Wi-Fi Network Connection Failed	Red light flashing	Three short beeps
Good Environmental Data	Gradual green light	
Moderate Environmental Data	Gradual orange light	
Poor Environmental Data	Gradual red light	

Size Indication





- Length 109 mm
- Height 109 mm
- Width 27 mm

Installation Instructions

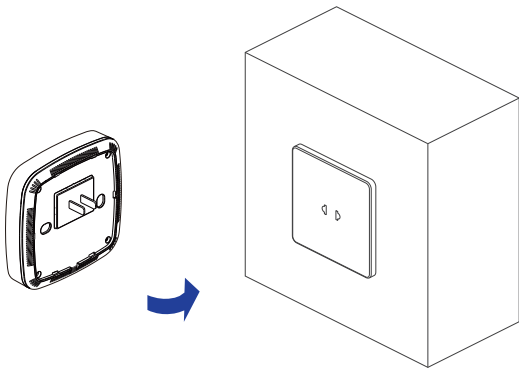

- Socket type

Packing List



- Smart Air Quality Monitor X 1
- User Manual X 1
(Includes: Warranty Card X 1 ; Certificate X 1)

Warranty Card

Thank you for purchasing our company's products. To ensure the best interests of our users, any user who purchases our products may contact us in case of product issues, with the presence of invoice and warranty card.

Warranty Notice

- In case of product failure under normal use within 6 months from purchase date, our company will provide respective free services or parts replacement under free warranty.
- This warranty card and purchase invoice will be the proof for the company to provide after-sales service. This card must be filled in with the following details. The form is only valid after it has been affixed by the company's official seal.
- This card is issued together with the product; one card for one machine; in order to ensure that user can fully enjoy the free warranty service provided by the company. Please keep this card properly, it will not be replaced if lost.

Warranty Card

Product Information	Product Name		Serial Number	
	Product Model		Production Date	
Customer Information	Company Name		Contact Person	
	Address		Contact Number	
Sales Information	Invoice Number		Purchase Date	
	Sales Address		Contact Number	
Maintenance Records	Error	Repair Results	Maintenance PIC's Signature	Date

FCC Warning



This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- -Increase the separation between the equipment and receiver.
- -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Contact Us



AIRTOALL

Airtoall (Suzhou) Technology Co., Ltd.

- Address: Room 1608, Building 3, No. 209, Zhuyuan Road,
- High-tech Zone, Suzhou
- Hotline: 086-0512-6635 6794

Test Certificate

Inspector : _____

Production Date: _____

Airtoall (Suzhou)Technology Co., Ltd.

Service Hotline: 086-0512-6635 6794

Version: 1.5

MADE IN CHINA

Date: Mar. 2022



AIRTOALL