



TEST REPORT

APPLICANT : YINUOLINK CO.,LTD
PRODUCT NAME : AX1800 Wi-Fi 6 High Powere
Range Extender
MODEL NAME : Y5
BRAND NAME : YINUO-LINK
FCC ID : 2A66J-Y5
STANDARD(S) : 47 CFR Part 15 Subpart C
RECEIPT DATE : 2023-09-12
TEST DATE : 2023-09-20 to 2023-10-24
ISSUE DATE : 2023-11-03



Edited by: Peng Mi
Peng Mi (Rapporteur)
Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	10
2.4. Test Configuration of EUT	11
2.5. Test Conditions	11
2.6. Test Setup Layout Diagram	12
3. Test Results	15
3.1. Antenna Requirement	15
3.2. Duty Cycle of Test Signal	16
3.3. Maximum Peak and Average Conducted Output Power	17
3.4. 6 dB Bandwidth and 99% OBW	18
3.5. Conducted Spurious Emissions and Band Edge	19
3.6. Power Spectral Density	20
3.7. Conducted Emission	21
3.8. Restricted Frequency Bands	22
3.9. Radiated Emission	23
Annex A Test Data and Result	25



Change History		
Version	Date	Reason for change
1.0	2023-11-03	First edition

1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Sep. 20, 2023	Zhong Yanshan	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Oct. 20, 2023	Zhong Yanshan	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Oct. 20, 2023	Zhong Yanshan	PASS	No deviation
5	15.247(a)	Bandwidth	Sep. 20, 2023	Zhong Yanshan	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Sep. 20, 2023	Zhong Yanshan	PASS	No deviation
7	15.247(e)	Power Spectral Density	Sep. 20, 2023	Zhong Yanshan	PASS	No deviation
8	15.207	Conducted Emission	Sep. 25, 2023	Wang Deyong	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Oct. 17, 2023	Gao Jianrou	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Oct. 16, 2023	Gao Jianrou	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05r02.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
Power Sensor	MY54180008	U2021XA	Agilent	2023.09.19	2024.09.18
Attenuator	MTJ6004-20	VAT-10+	MTJ Cooperation	N/A	N/A
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Conducted Spurious Emission	$\pm 2.77\text{dB}$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174

2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	YINUOLINK CO.,LTD
Applicant Address	301,Bldg 6, Gaoxinjian Industrial Park, Fuyuan 1st Road, Heping, Fuhai, Bao'an, Shenzhen, China
Manufacturer	YINUOLINK CO.,LTD
Manufacturer Address	301,Bldg 6, Gaoxinjian Industrial Park, Fuyuan 1st Road, Heping, Fuhai, Bao'an, Shenzhen, China

2.2. Information of EUT

Product Name:	AX1800 Wi-Fi 6 High Powere Range Extender
Sample No.:	1#
Hardware Version:	1.2
Software Version:	Y5EN140623OV1.01
Modulation Technology:	DSSS, OFDM
Modulation Type:	Refer to section1.3
Wireless Technology:	802.11b, 802.11g, 802.11n (HT20), 802.11n (HT40) 802.11ax (HEW20), 802.11ax (HEW40)
Operating Frequency Range:	2412MHz–2472MHz
Antenna Type:	PCB Antenna
Antenna Gain:	ANT 1: 1.18dBi; ANT 2: 1.05dBi
Directional Gain:	4.13dBi <small>Note 2</small>

Note 1: The EUT supports a MIMO function. Physically, the EUT provides two completed transmitters and two receivers for 802.11n and 802.11ax modulation mode.

Modulation Mode:	TX Function
802.11b/g	1TX
802.11n	2TX

Note 2: According to KDB 662911 D01, the directional gain = $10\log[(10^{G0/20}+10^{G1/20})^2/2] = 4.13\text{dBi}$.

Note 3: All radiation test items for 802.11n modulation mode operate at MIMO mode during the test. Other modulation mode operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result(ANT 1) in this report.

Note 4: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3.Channel List of EUT

Nominal Channel Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	13	2472
	7	2442		
Nominal Channel Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
40MHz	3	2422	8	2447
	4	2427	9	2452
	5	2432	10	2457
	6	2437	11	2462
	7	2442		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate	RU Size
802.11b	20	DSSS	DBPSK	1/2/5.5/11Mbps	N/A
			DQPSK		
			CCK		
802.11g	20	OFDM	BPSK	6/9/12/18/24/36/48/54 Mbps	N/A
			QPSK		
			16QAM		
			64QAM		
802.11n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7	N/A
			QPSK		
			16QAM		
			64QAM		
802.11ax	20/40 (HEW20/40)	OFDMA	BPSK	MSC0~MCS11	26/52/106/242/484
			QPSK		
			16QAM		
			64QAM		
			256QAM		
			1024QAM		

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

Note2: The RF signal transmission of EUT is controlled by the build-in engineering mode which is provided by the manufacturer. The recorded power setting value is the maximum that the engineering mode has configuration during testing.

Note3: Only the full ru allocation is supported for 802.11ax mode.

2.5. Test Conditions

Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

Power item



Other items



2.6.2. Conducted Emission Measurement



2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz



2) For radiated emissions from 30MHz to 1GHz



3) For radiated emissions above 1GHz

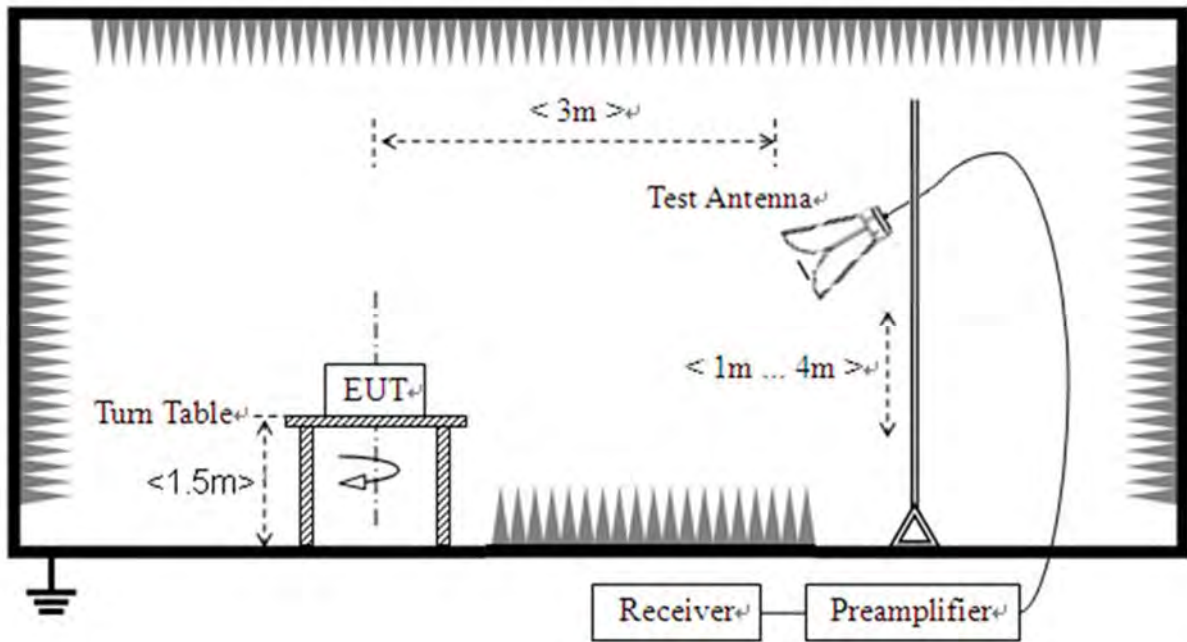



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.



3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak and Average Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum conducted output power of the intentional radiator shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in above of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2. Test Procedures

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 and A.3 in this report.



3.4.6 dB Bandwidth and 99% OBW

3.4.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.4.1.Test Procedures

KDB 558074 Section 8.2 was used in order to prove compliance.

3.4.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3.Test Result

Refer to Annex A.4 in this report.



3.5. Conducted Spurious Emissions and Band Edge

3.5.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.5.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.6. Power Spectral Density

3.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 30kHz
- d) Set VBW to 100kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level and recorded as PD
- j) Use below formula to calculate the Conducted PSD value that at specified RBW:

Conducted PSD = PD - 10lg(30k/3k)

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.7 in this report.

3.7. Conducted Emission

3.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.7.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.7.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4. Test Result

Refer to Annex A.8 in this report.



3.8. Restricted Frequency Bands

3.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.8.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.8.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4. Test Result

Refer to Annex A.9 in this report.



3.9. Radiated Emission

3.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.9.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.10 in this report.



Annex A Test Data and Result

A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	99.34	0.03	0.12
NVNT	b	2412	Ant2	99.32	0.03	0.12
NVNT	b	2442	Ant1	99.34	0.03	0.12
NVNT	b	2442	Ant2	99.32	0.03	0.12
NVNT	b	2472	Ant1	99.32	0.03	0.12
NVNT	b	2472	Ant2	99.34	0.03	0.12
NVNT	g	2412	Ant1	96.01	0.18	0.72
NVNT	g	2412	Ant2	96.01	0.18	0.72
NVNT	g	2442	Ant1	96.01	0.18	0.72
NVNT	g	2442	Ant2	96.01	0.18	0.72
NVNT	g	2472	Ant1	96.01	0.18	0.72
NVNT	g	2472	Ant2	96.01	0.18	0.72
NVNT	n20	2412	Ant1	95.75	0.19	0.76
NVNT	n20	2412	Ant2	95.61	0.19	0.76
NVNT	n20	2412	Sum	95.75	0.19	0.76
NVNT	n20	2442	Ant1	95.75	0.19	0.76
NVNT	n20	2442	Ant2	95.75	0.19	0.76
NVNT	n20	2442	Sum	95.75	0.19	0.76
NVNT	n20	2472	Ant1	95.75	0.19	0.76
NVNT	n20	2472	Ant2	66.67	1.76	125
NVNT	n20	2472	Sum	95.61	0.19	0.76
NVNT	n40	2422	Ant1	91.78	0.37	1.54
NVNT	n40	2422	Ant2	91.78	0.37	1.54
NVNT	n40	2422	Sum	91.78	0.37	1.54
NVNT	n40	2442	Ant1	91.78	0.37	1.54
NVNT	n40	2442	Ant2	91.78	0.37	1.54
NVNT	n40	2442	Sum	91.78	0.37	1.54
NVNT	n40	2462	Ant1	91.78	0.37	1.54
NVNT	n40	2462	Ant2	91.78	0.37	1.54
NVNT	n40	2462	Sum	91.78	0.37	1.54
NVNT	ax20	2412	Ant1	94.61	0.24	0.98
NVNT	ax20	2412	Ant2	94.61	0.24	0.98
NVNT	ax20	2412	Sum	90.33	0.44	1.85




NVNT	ax20	2442	Ant1	94.61	0.24	0.98
NVNT	ax20	2442	Ant2	94.61	0.24	0.98
NVNT	ax20	2442	Sum	90.33	0.44	1.85
NVNT	ax20	2472	Ant1	94.61	0.24	0.98
NVNT	ax20	2472	Ant2	94.6	0.24	0.98
NVNT	ax20	2472	Sum	90.33	0.44	1.85
NVNT	ax40	2422	Ant1	90.27	0.44	1.86
NVNT	ax40	2422	Ant2	83.8	0.77	3.33
NVNT	ax40	2422	Sum	83.8	0.77	3.33
NVNT	ax40	2442	Ant1	90.27	0.44	1.86
NVNT	ax40	2442	Ant2	83.8	0.77	3.33
NVNT	ax40	2442	Sum	83.89	0.76	3.31
NVNT	ax40	2462	Ant1	90.27	0.44	1.86
NVNT	ax40	2462	Ant2	83.8	0.77	3.33
NVNT	ax40	2462	Sum	83.89	0.76	3.31




Test Graphs

Duty Cycle NVNT b 2412MHz Ant1

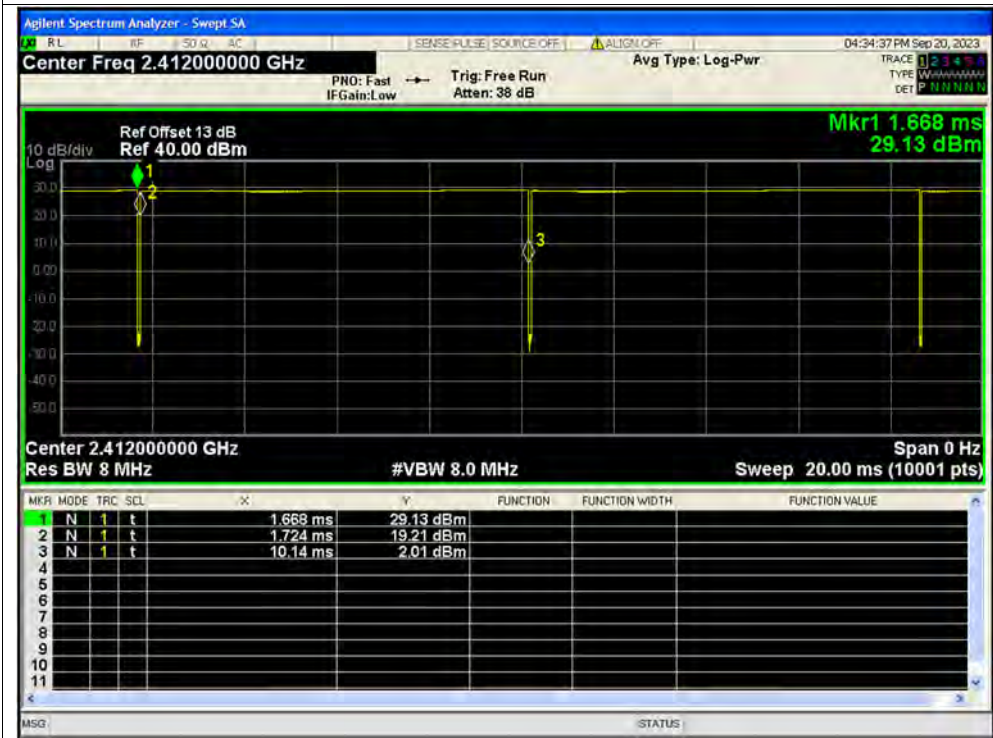


Duty Cycle NVNT b 2412MHz Ant2

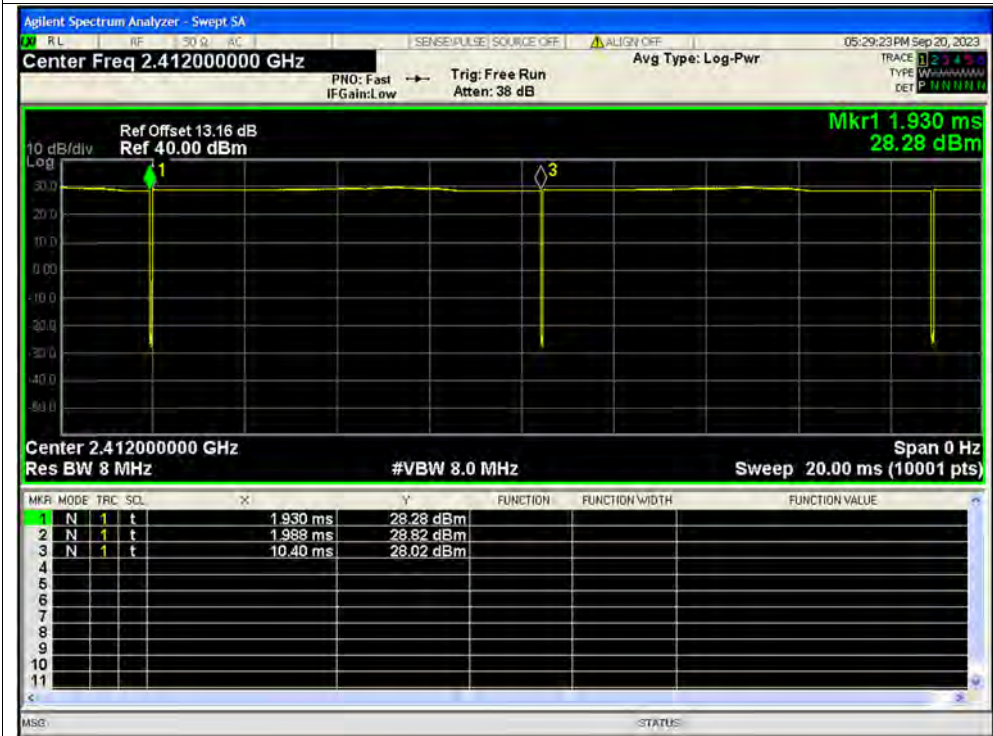




Duty Cycle NVNT b 2442MHz Ant1

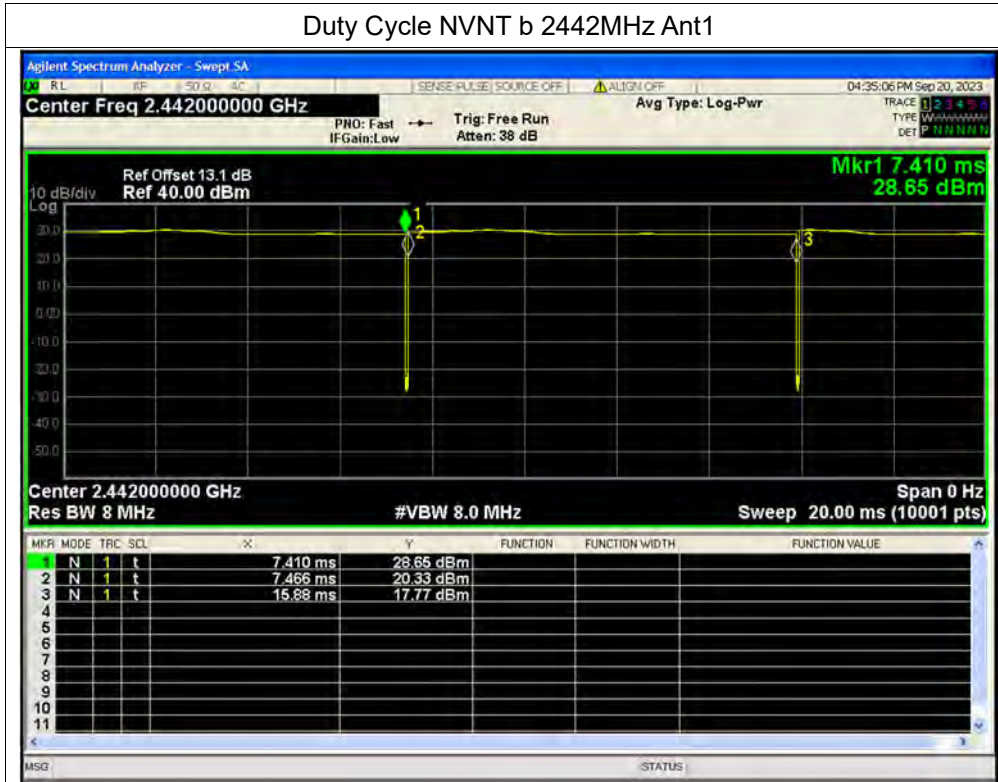


Duty Cycle NVNT b 2442MHz Ant2

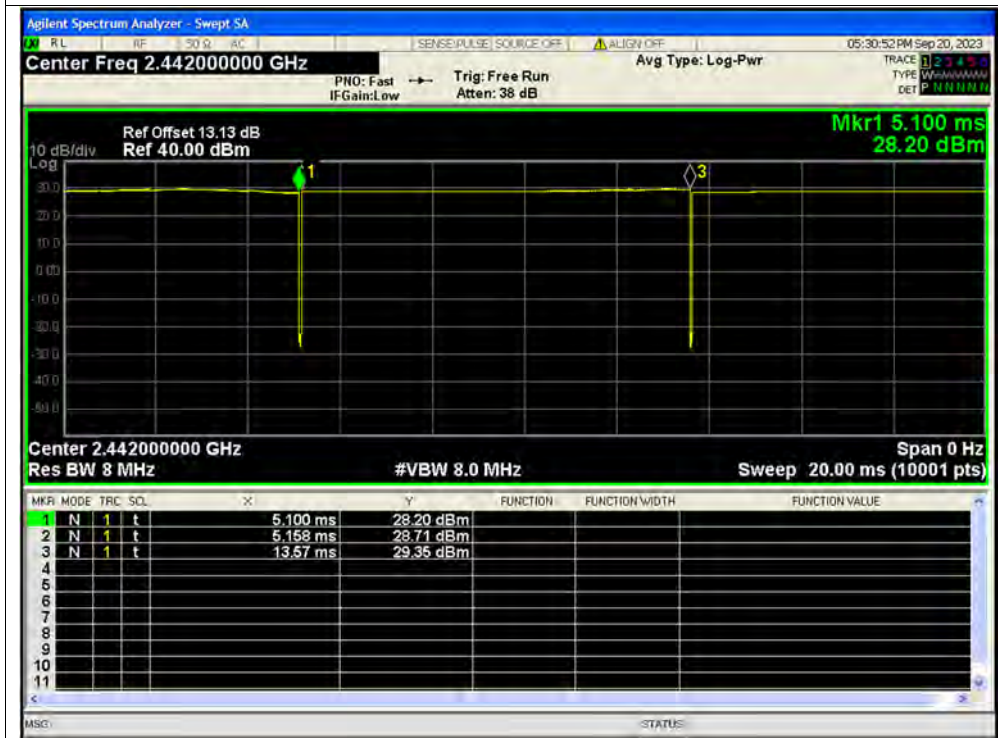




Duty Cycle NVNT b 2472MHz Ant1

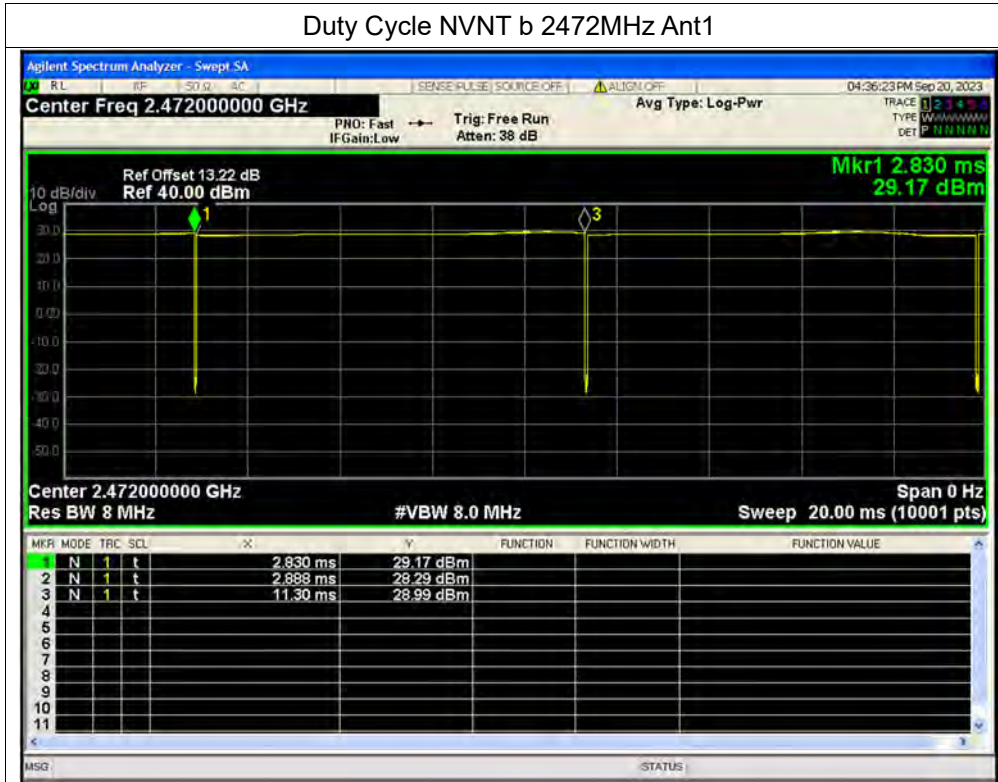


Duty Cycle NVNT b 2472MHz Ant2

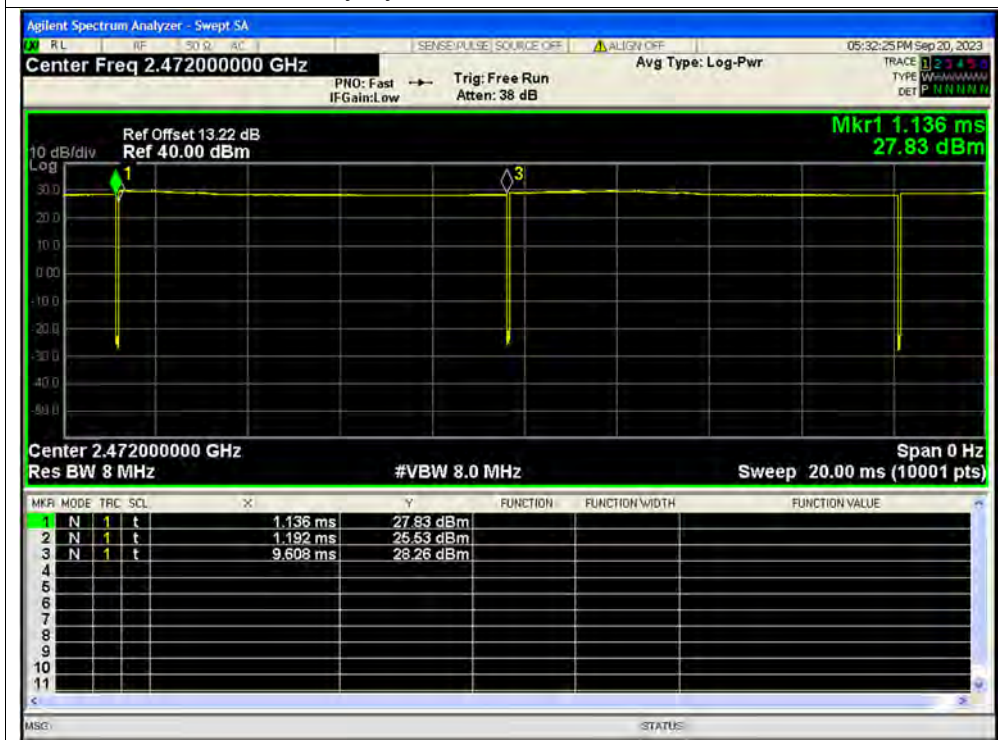




Duty Cycle NVNT g 2412MHz Ant1

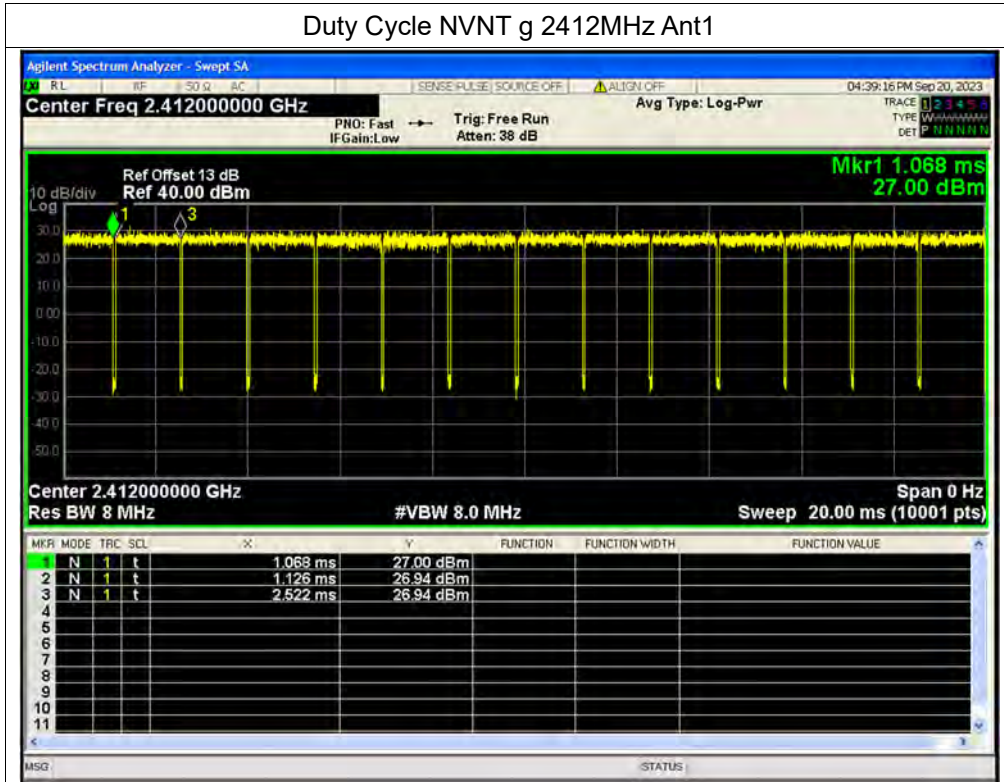


Duty Cycle NVNT g 2412MHz Ant2

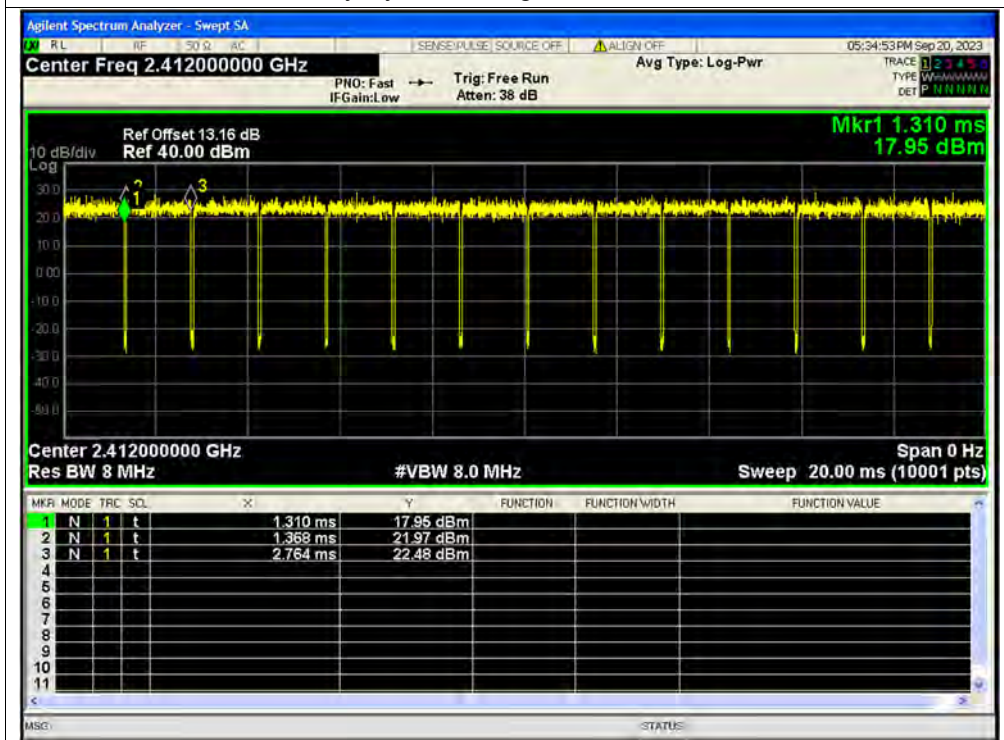




Duty Cycle NVNT g 2442MHz Ant1

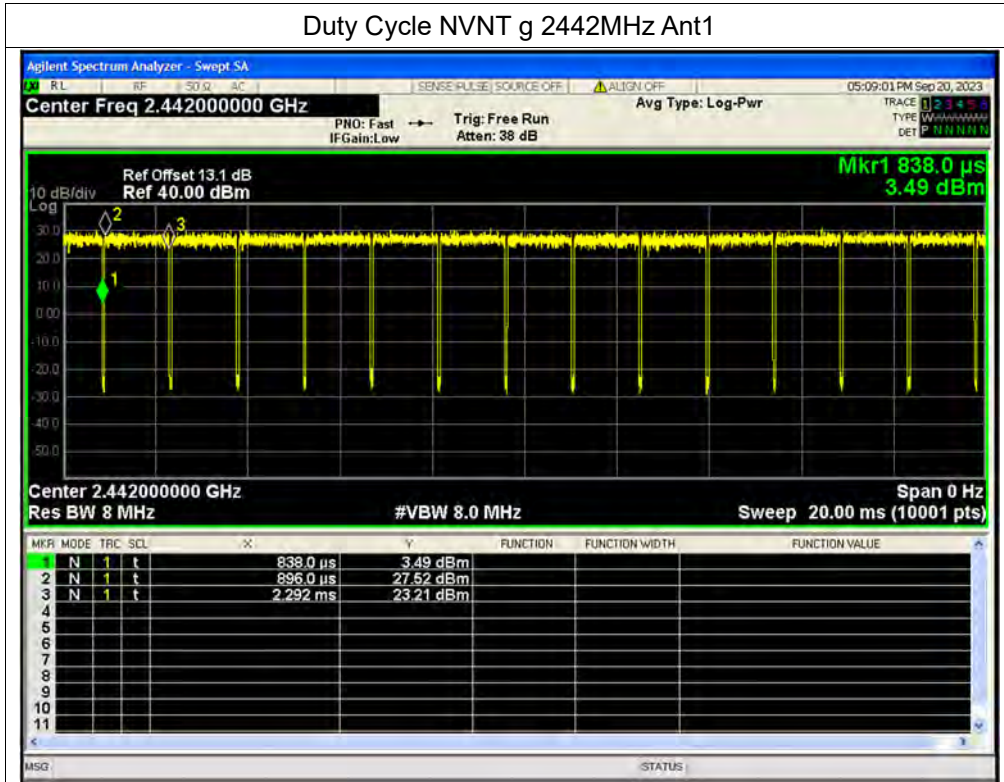


Duty Cycle NVNT g 2442MHz Ant2

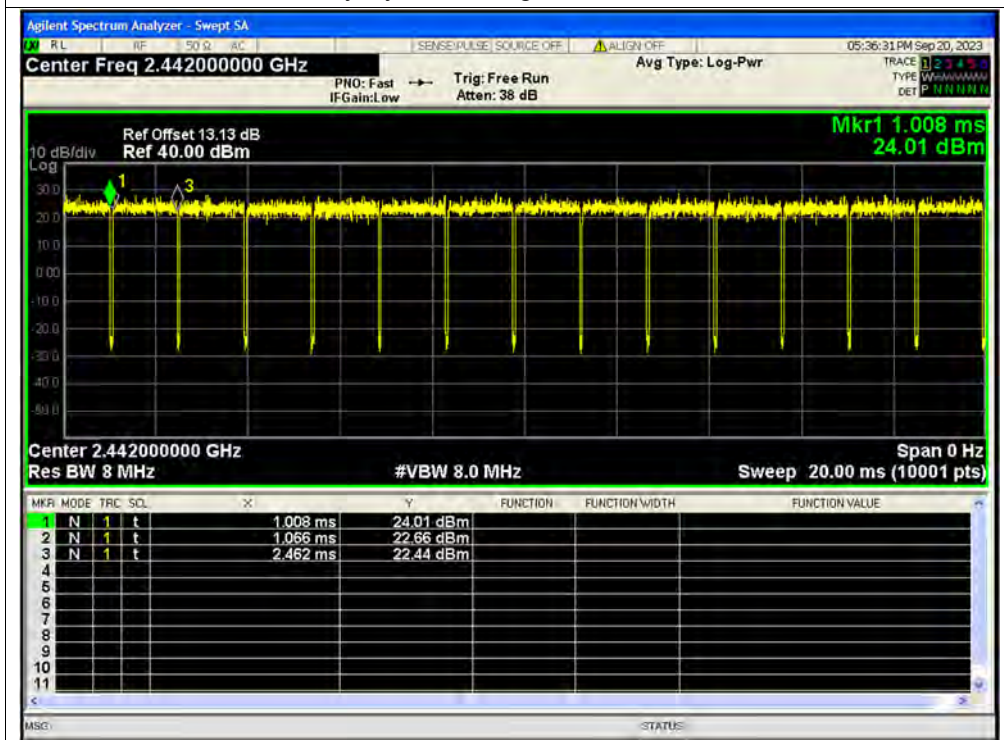




Duty Cycle NVNT g 2472MHz Ant1

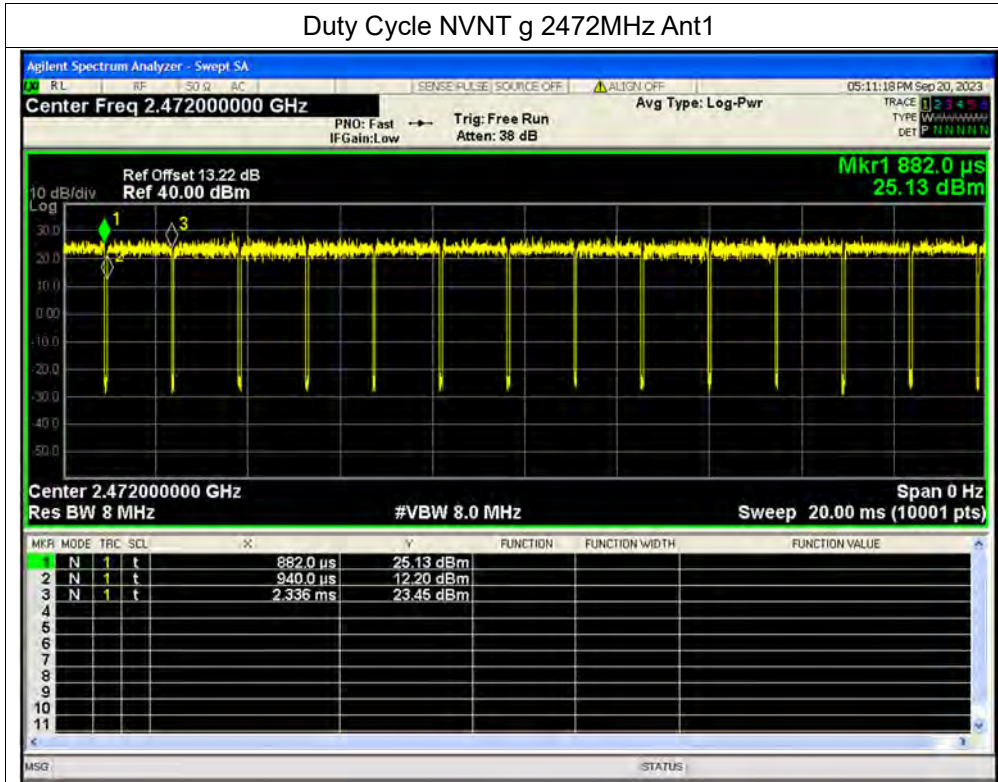


Duty Cycle NVNT g 2472MHz Ant2

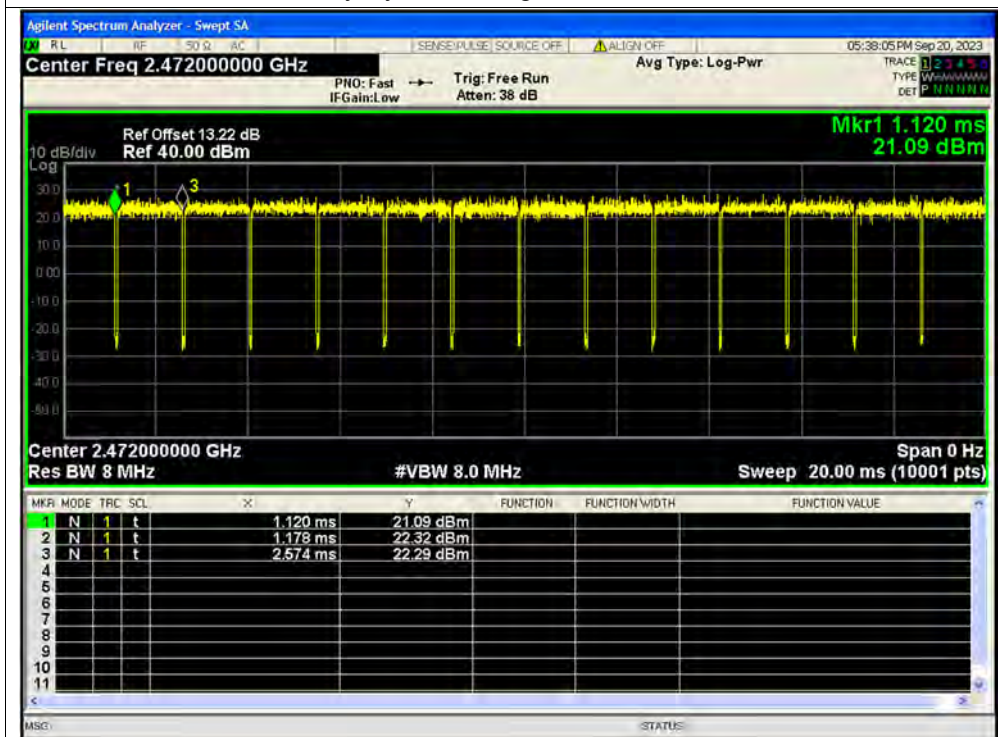




Duty Cycle NVNT n20 2412MHz Ant1

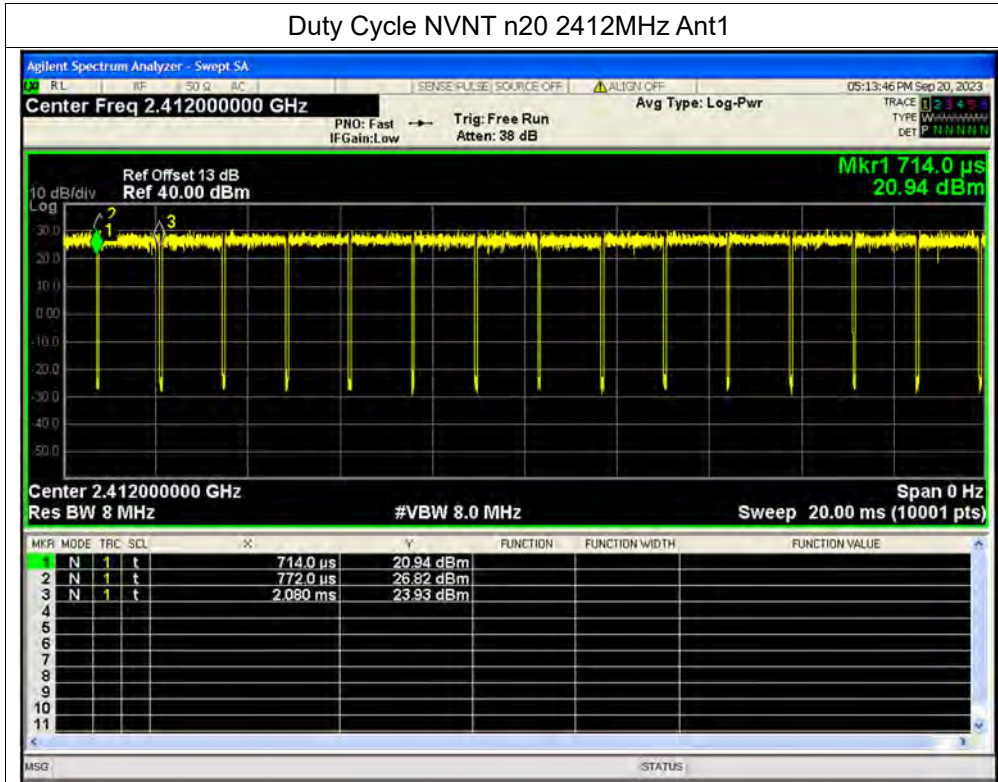


Duty Cycle NVNT n20 2412MHz Ant2

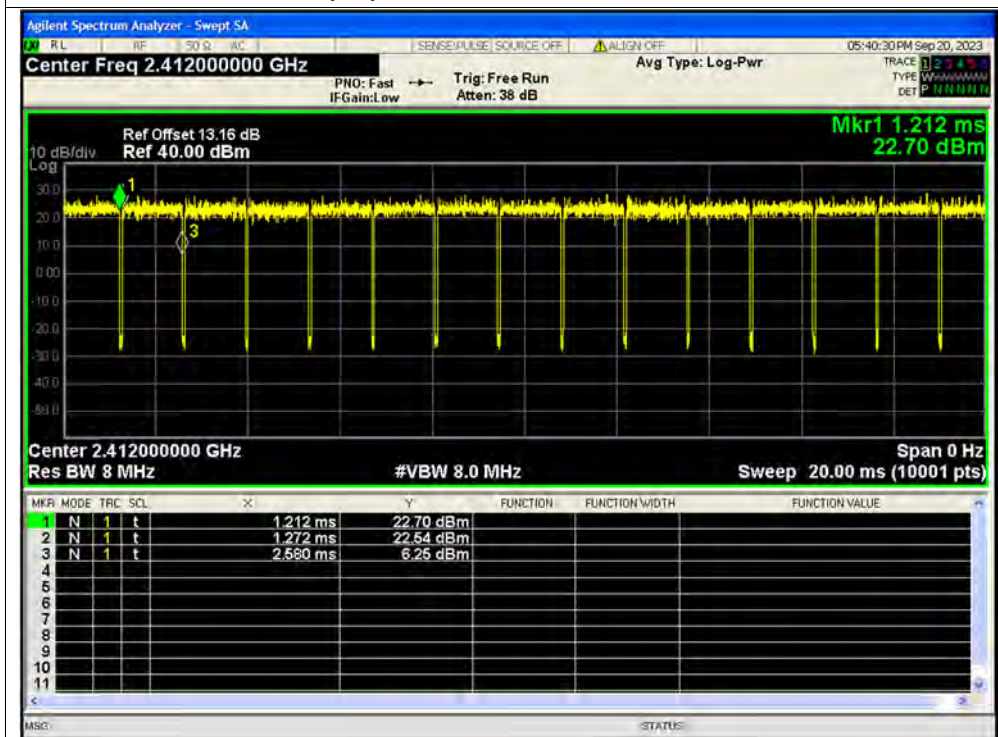




Duty Cycle NVNT n20 2412MHz Sum

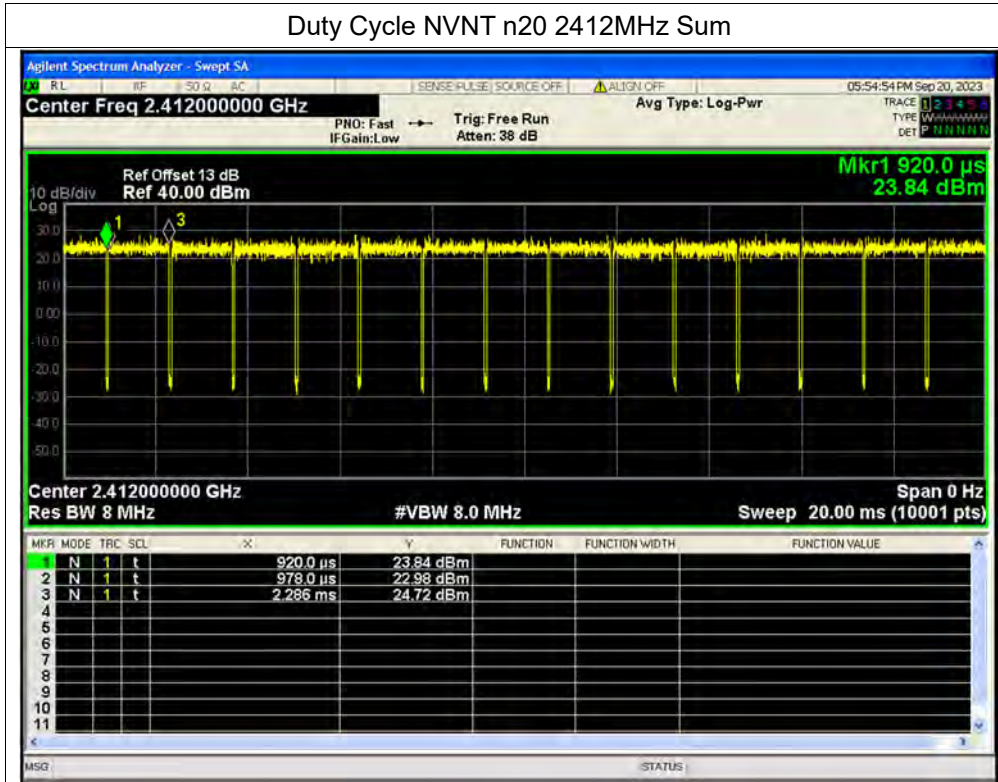


Duty Cycle NVNT n20 2442MHz Ant1

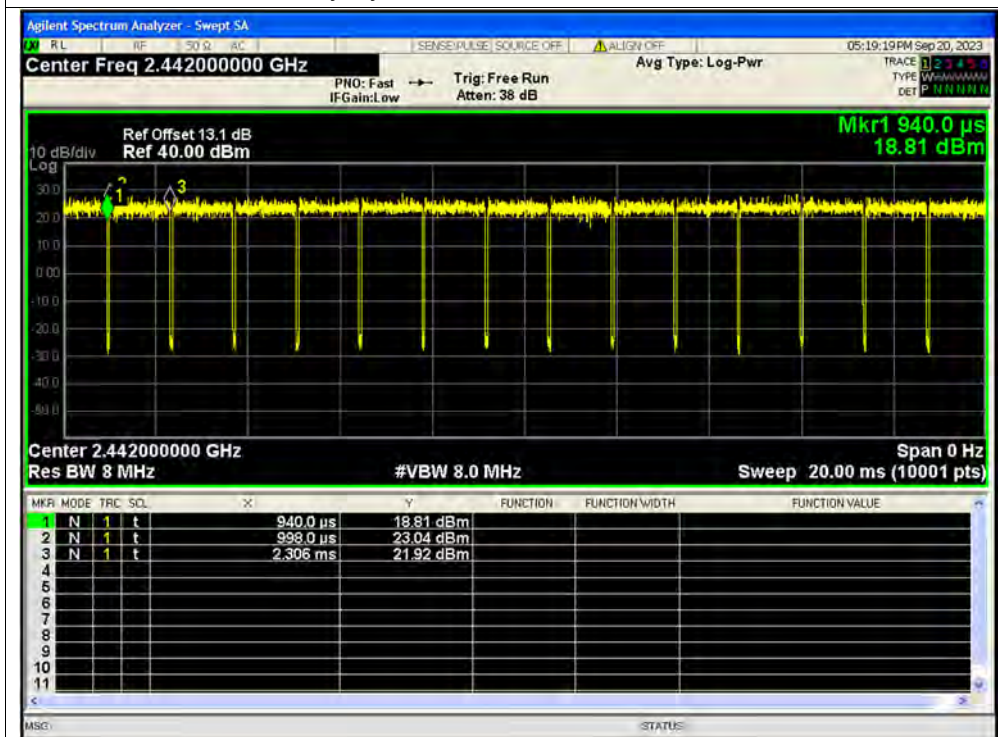




Duty Cycle NVNT n20 2442MHz Ant2

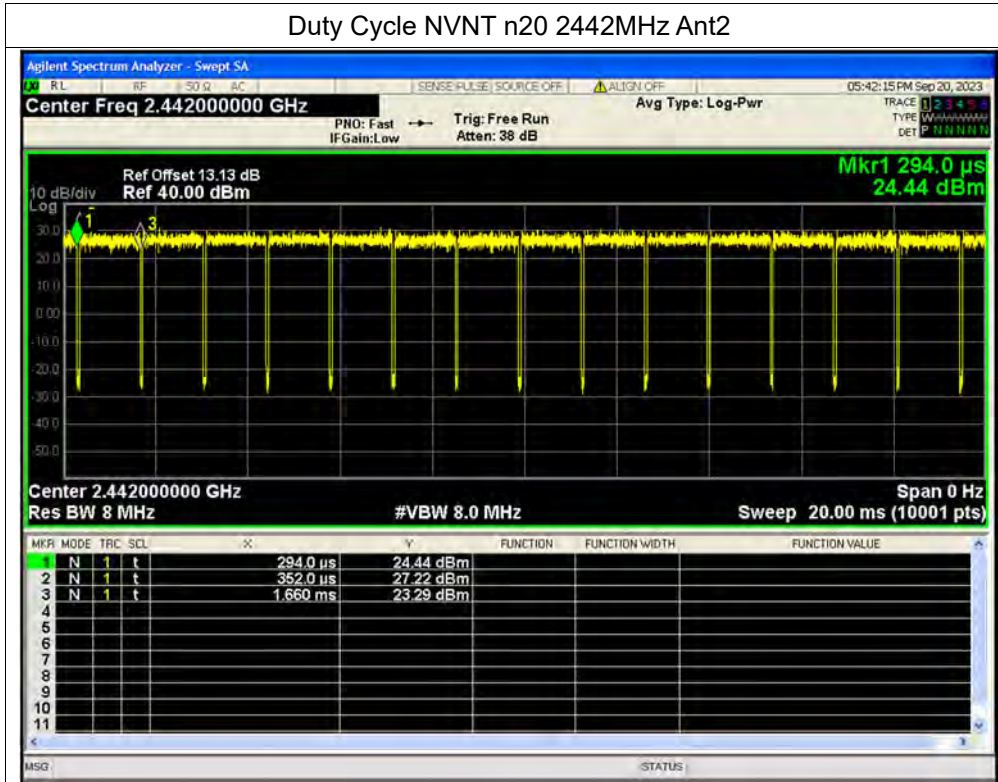


Duty Cycle NVNT n20 2442MHz Sum

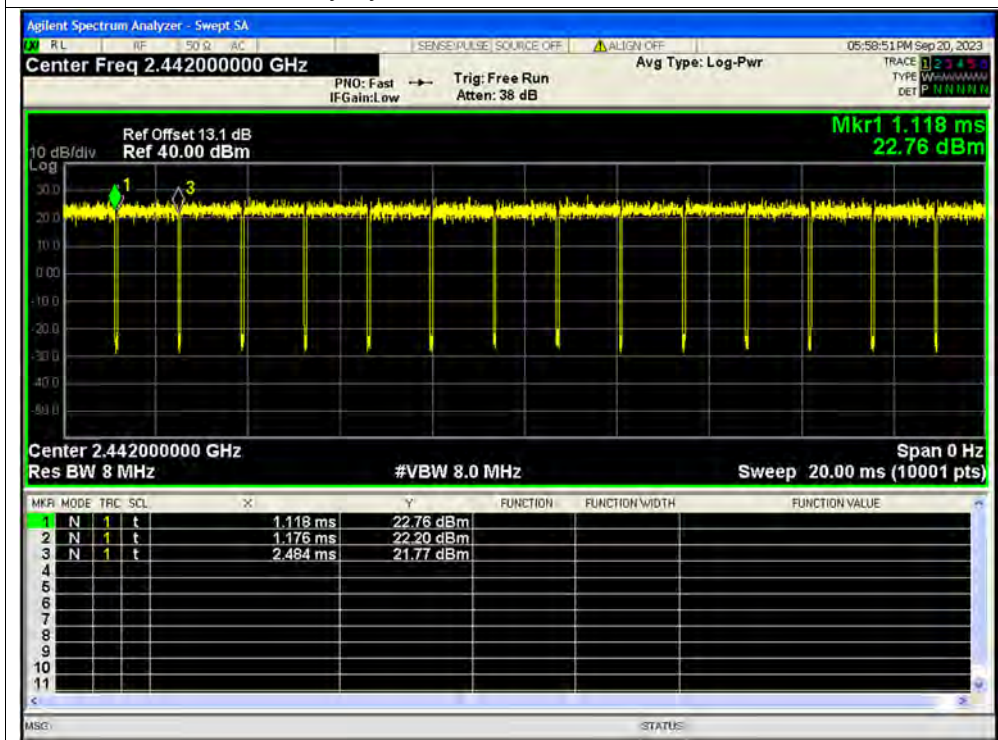




Duty Cycle NVNT n20 2472MHz Ant1

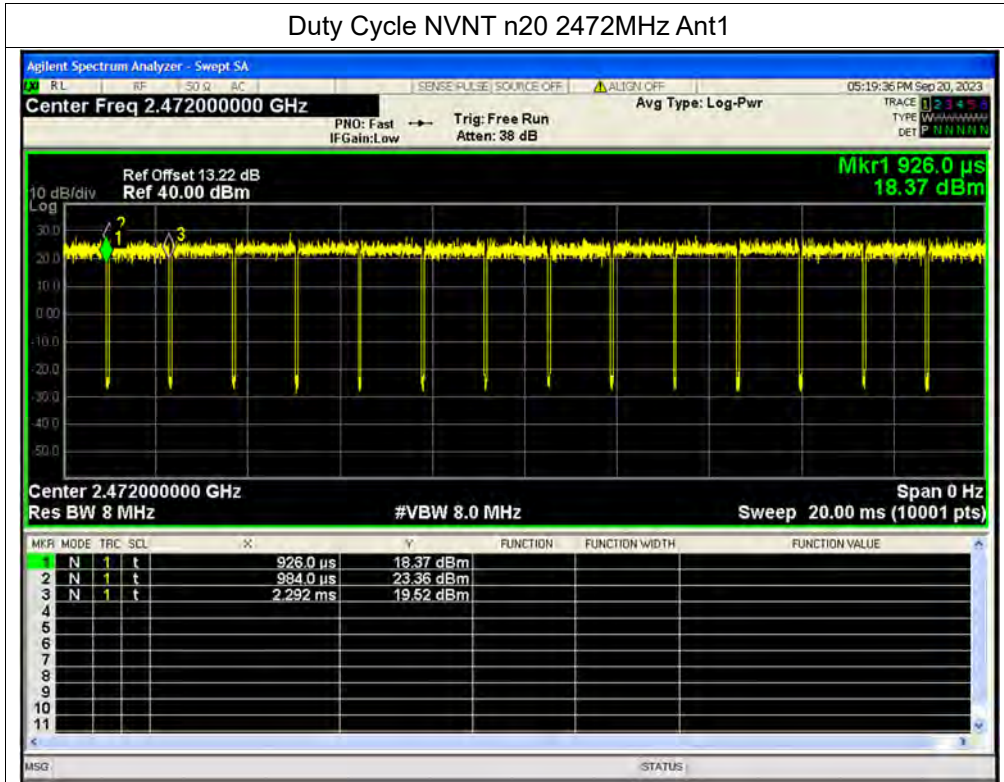


Duty Cycle NVNT n20 2472MHz Ant2

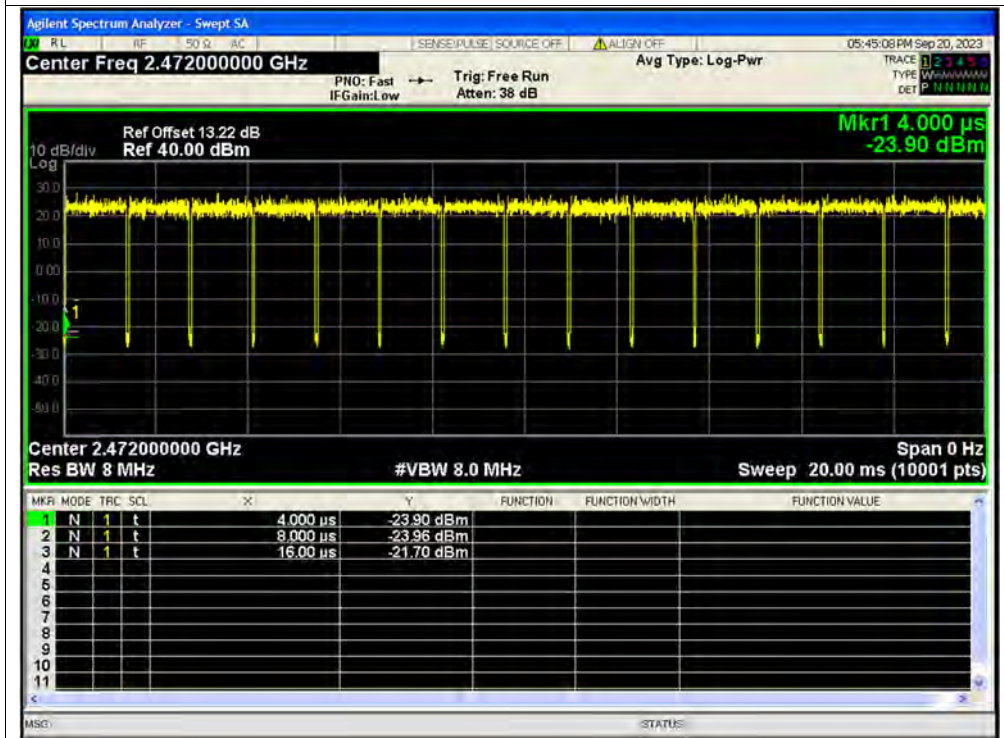




Duty Cycle NVNT n20 2472MHz Sum

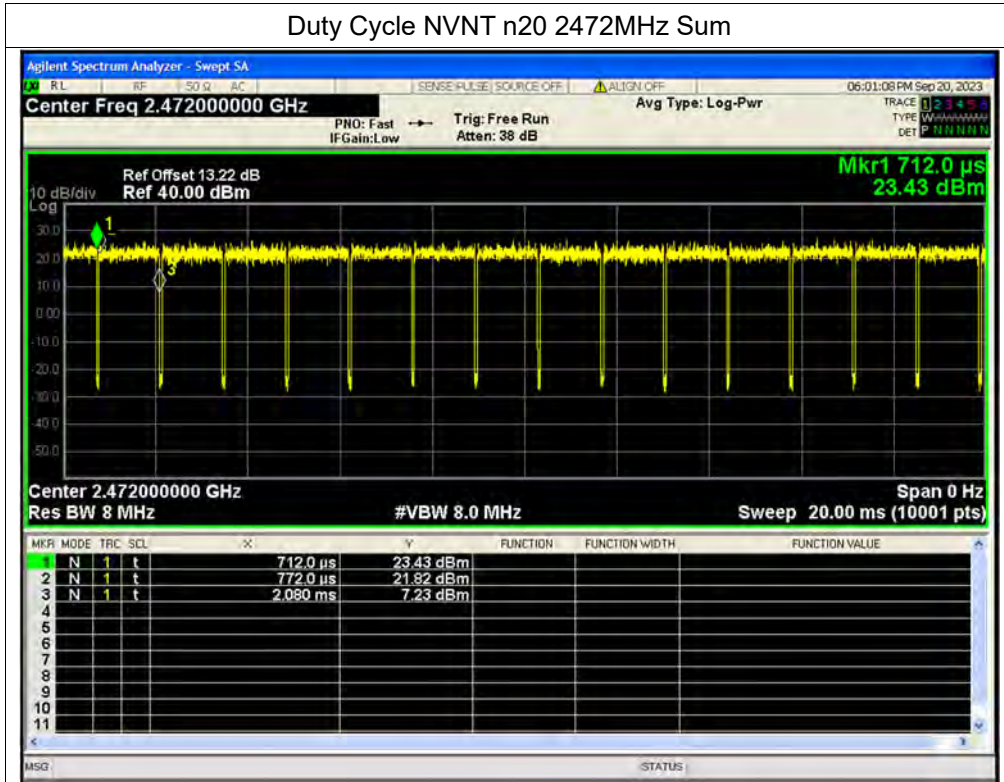


Duty Cycle NVNT n40 2422MHz Ant1

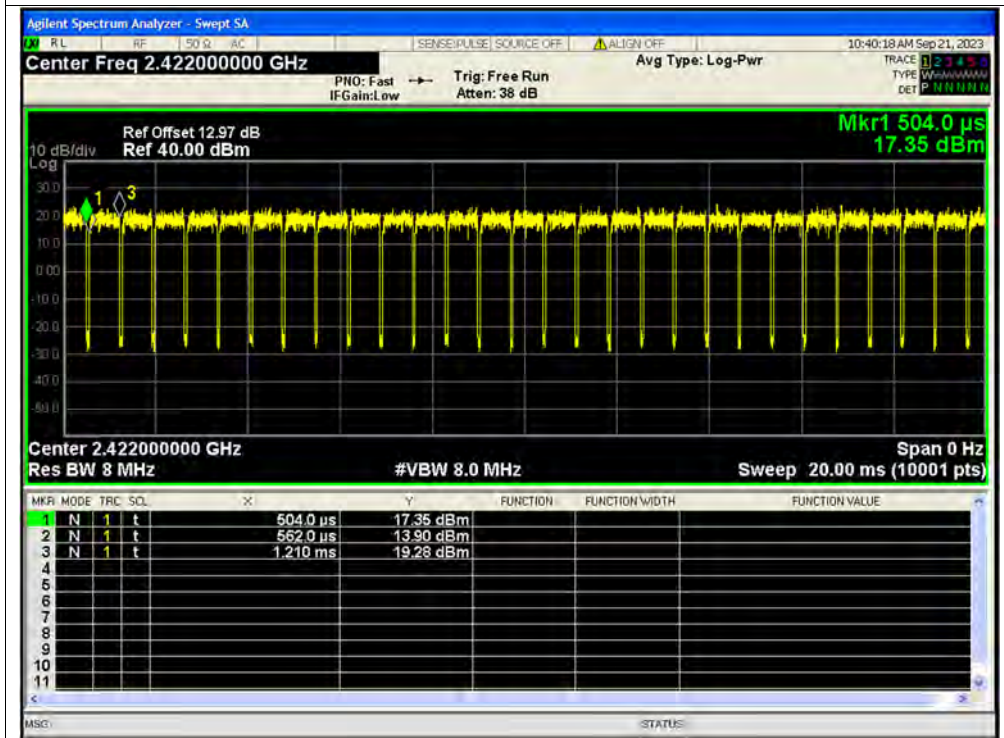




Duty Cycle NVNT n40 2422MHz Ant2

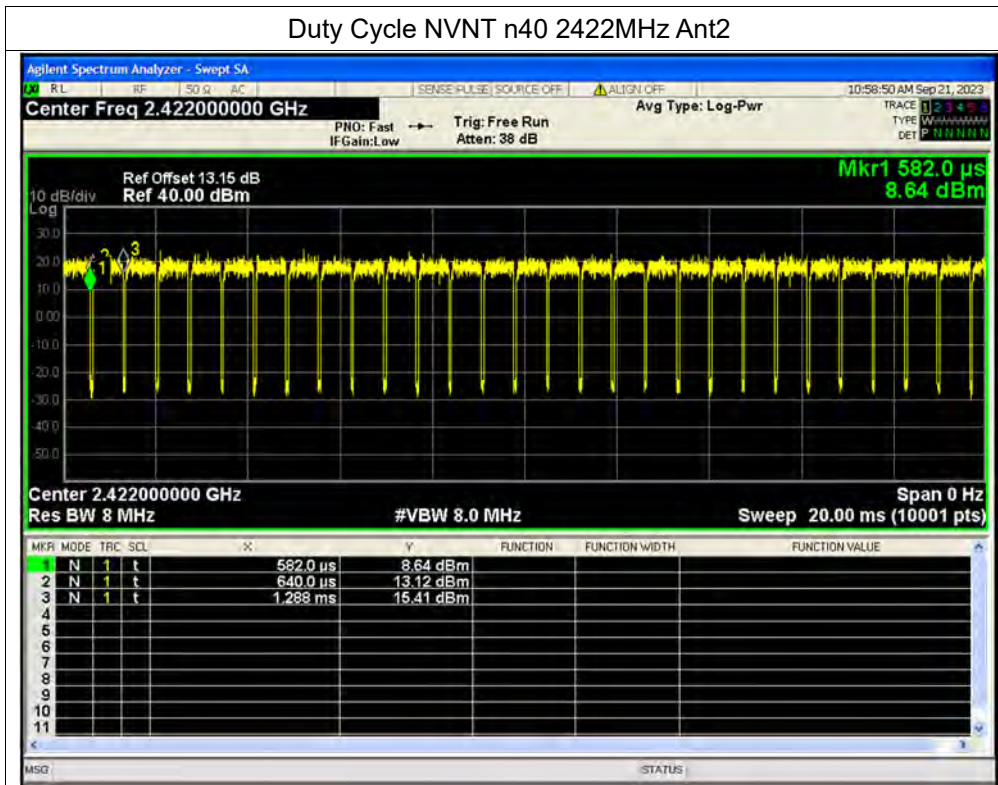


Duty Cycle NVNT n40 2422MHz Sum

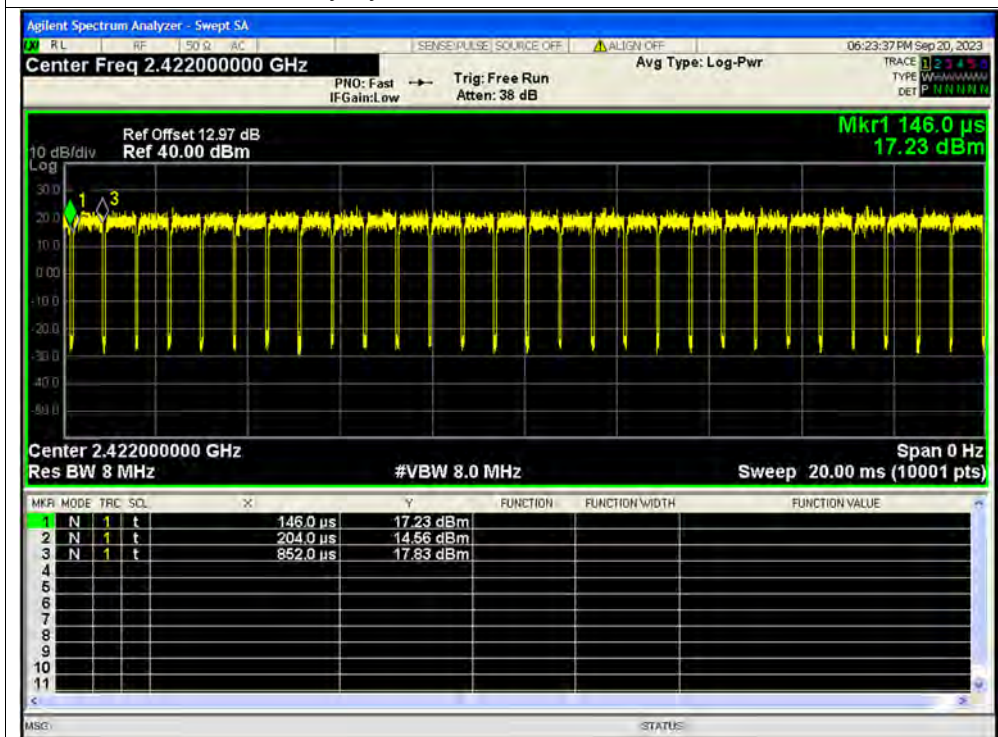




Duty Cycle NVNT n40 2442MHz Ant1

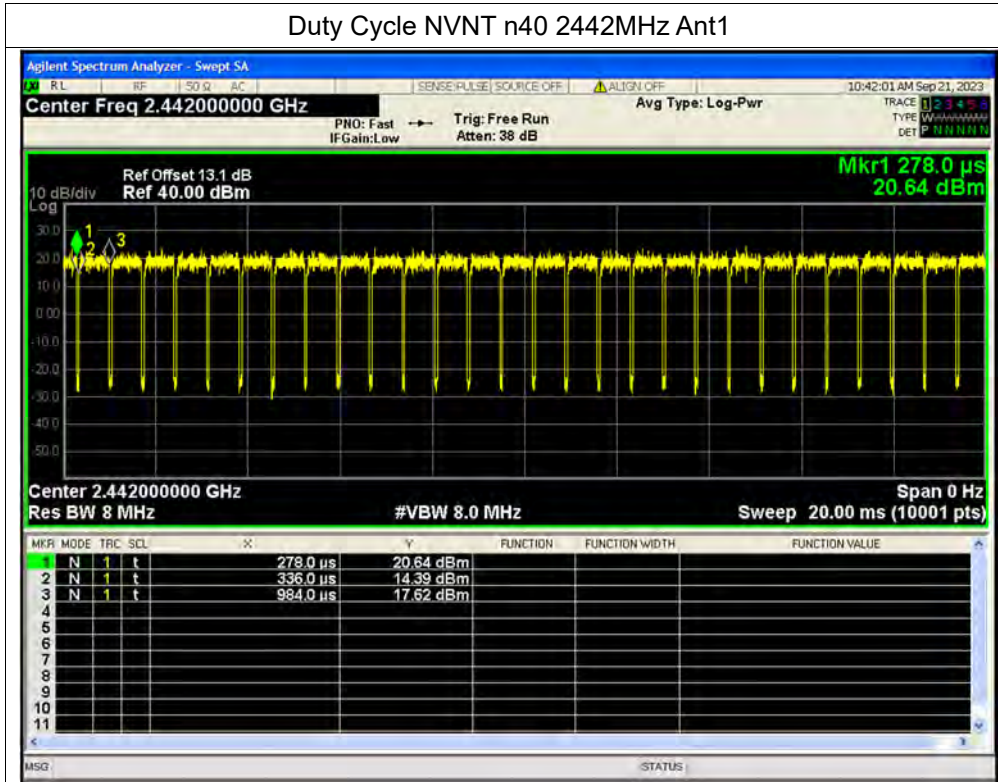


Duty Cycle NVNT n40 2442MHz Ant2

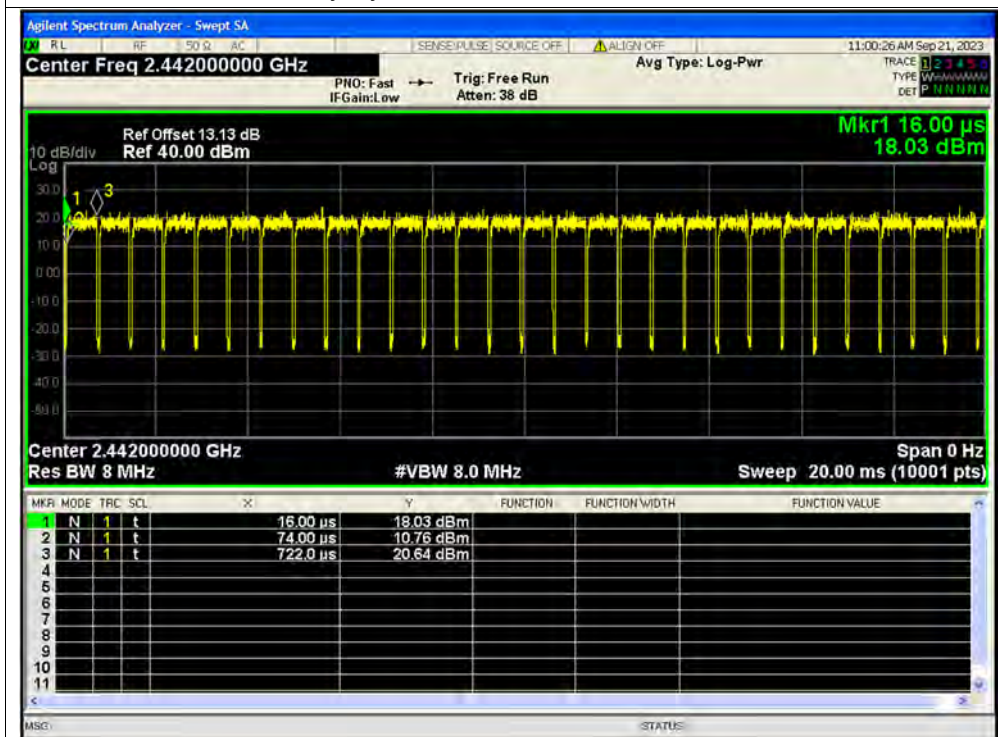




Duty Cycle NVNT n40 2442MHz Sum

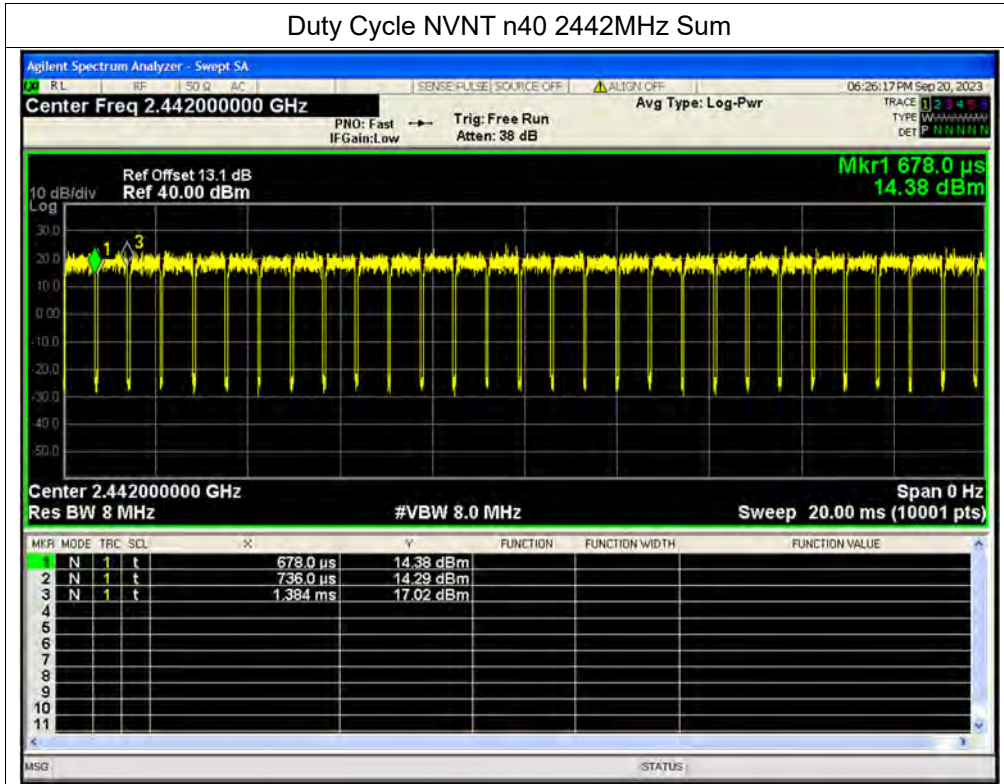


Duty Cycle NVNT n40 2462MHz Ant1

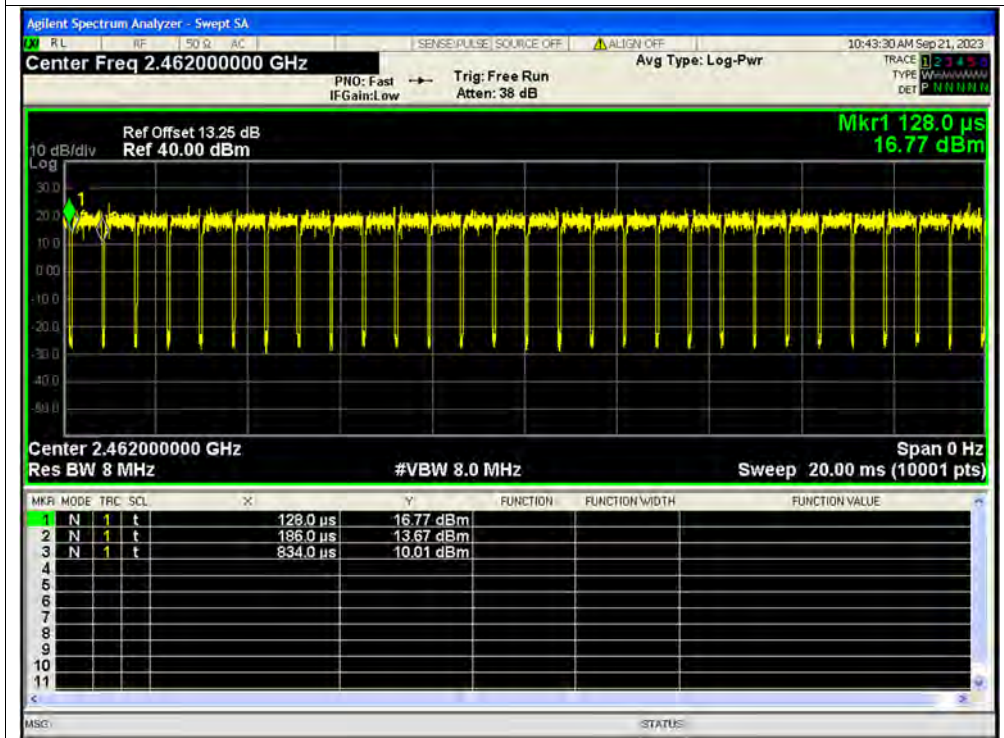




Duty Cycle NVNT n40 2462MHz Ant2

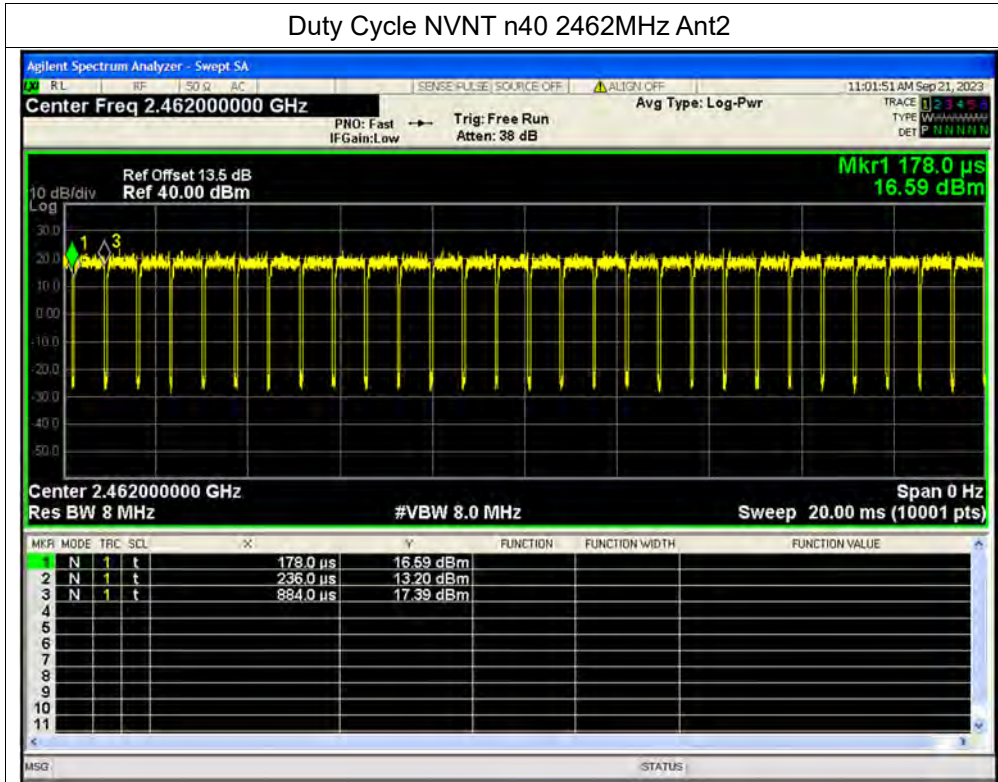


Duty Cycle NVNT n40 2462MHz Sum

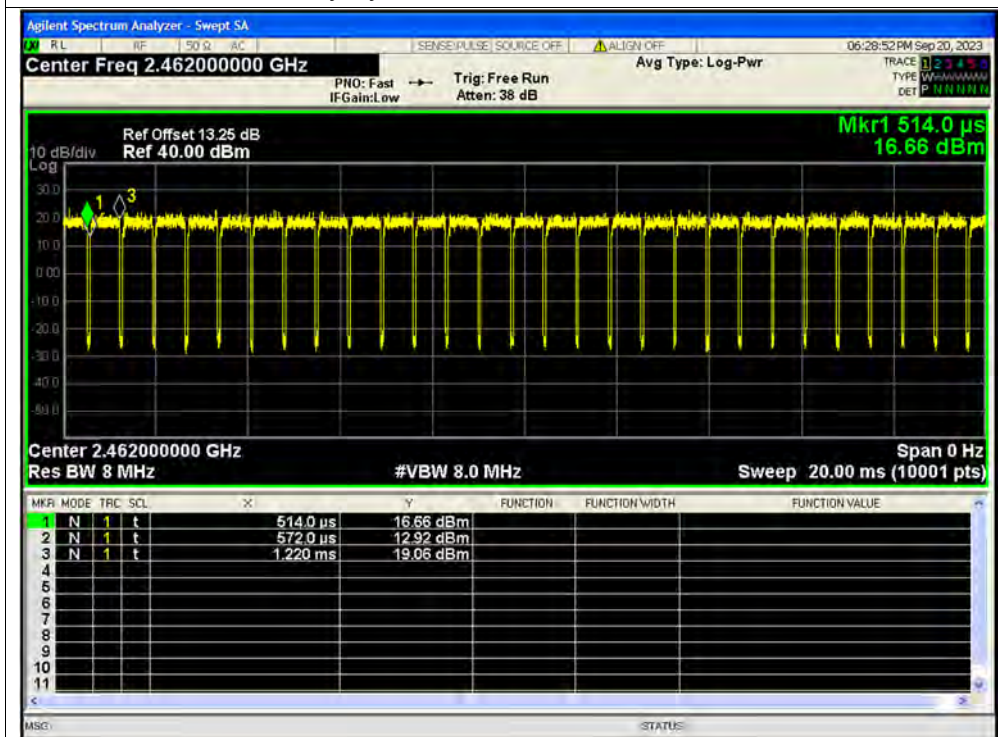




Duty Cycle NVNT ax20 2412MHz Ant1

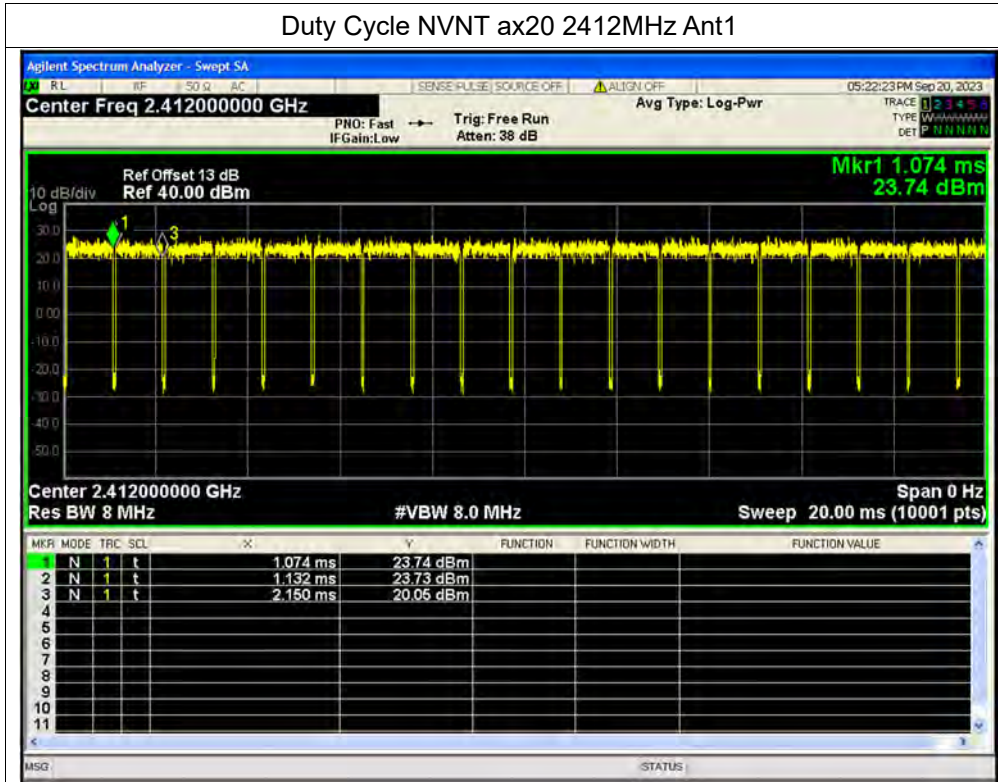


Duty Cycle NVNT ax20 2412MHz Ant2

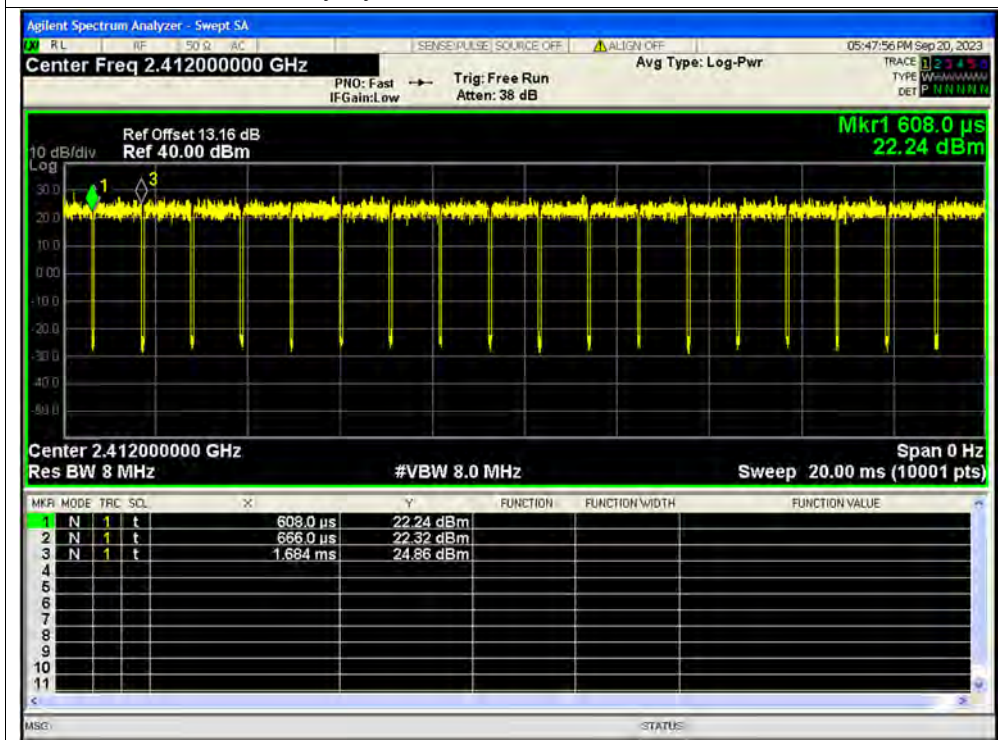




Duty Cycle NVNT ax20 2412MHz Sum

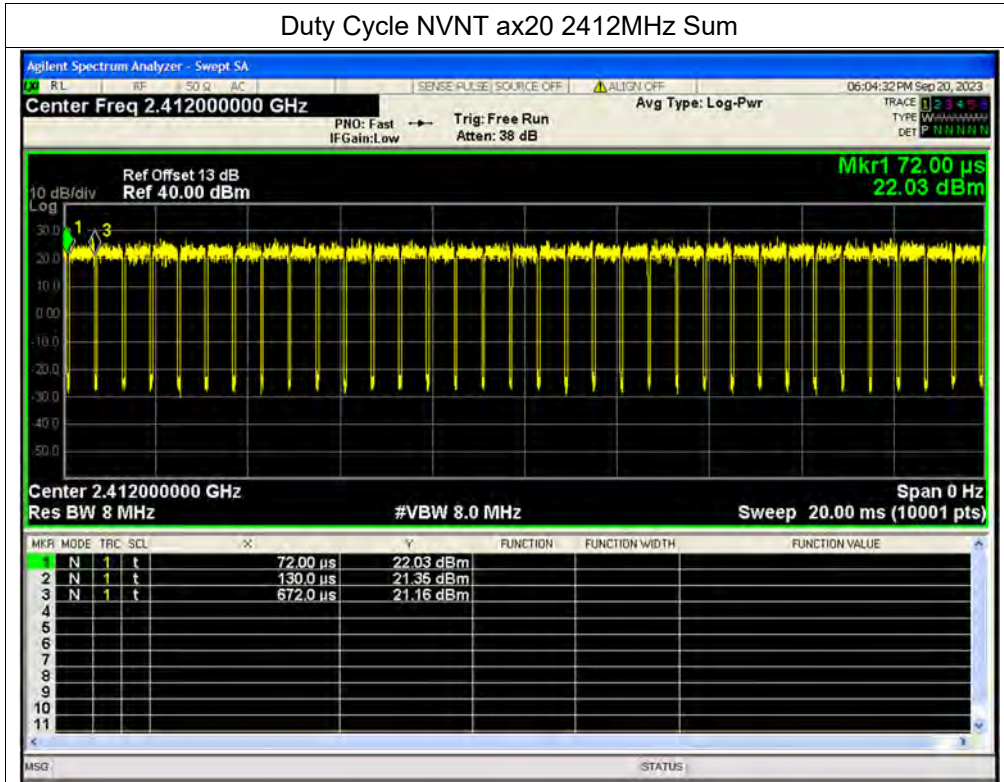


Duty Cycle NVNT ax20 2442MHz Ant1

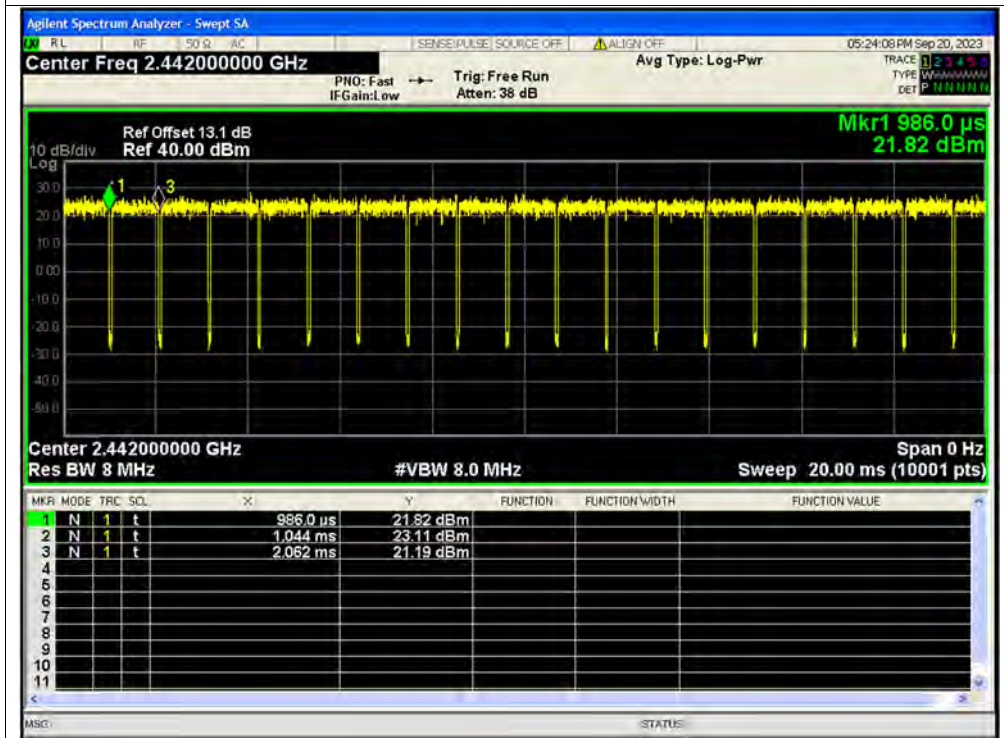




Duty Cycle NVNT ax20 2442MHz Ant2

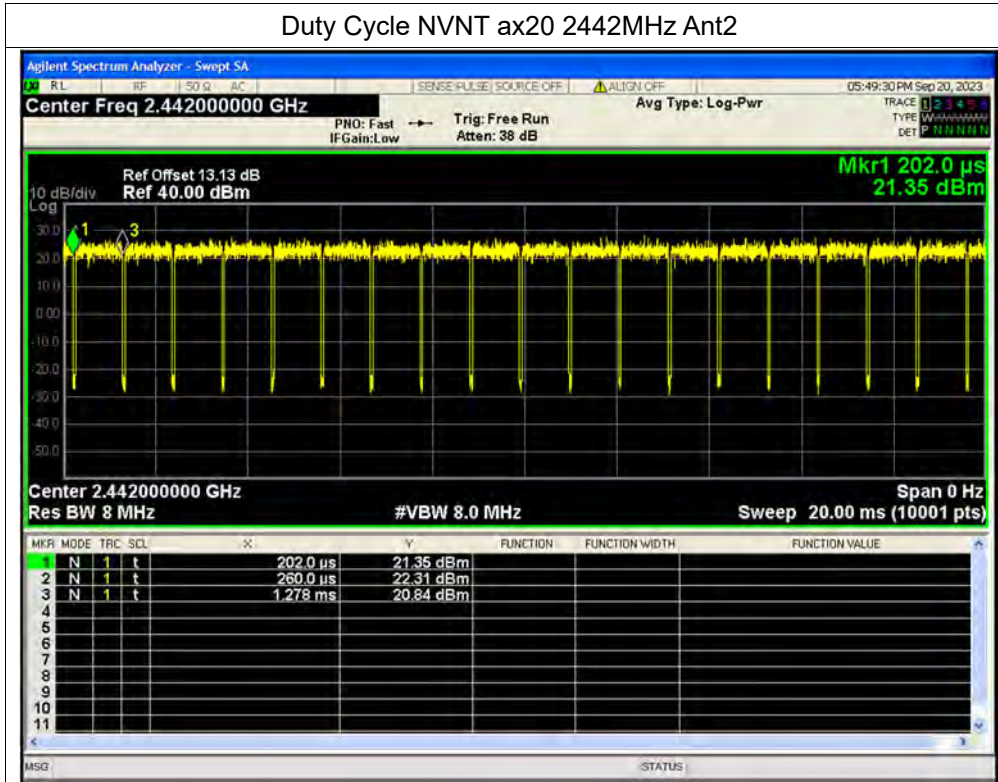


Duty Cycle NVNT ax20 2442MHz Sum

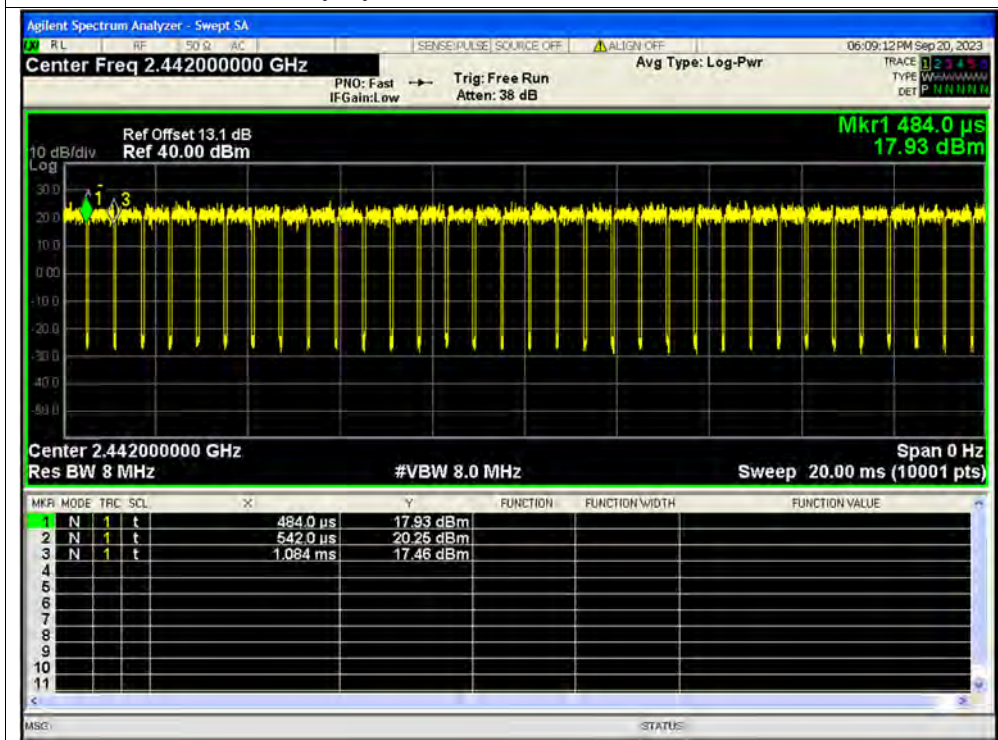




Duty Cycle NVNT ax20 2472MHz Ant1

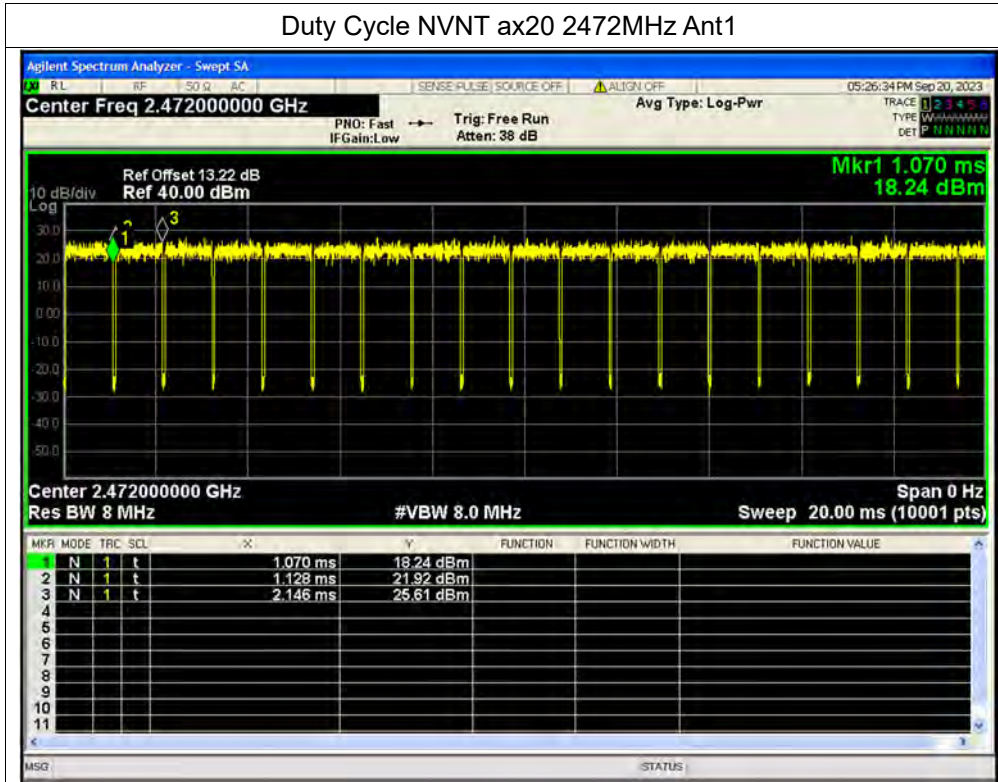


Duty Cycle NVNT ax20 2472MHz Ant2

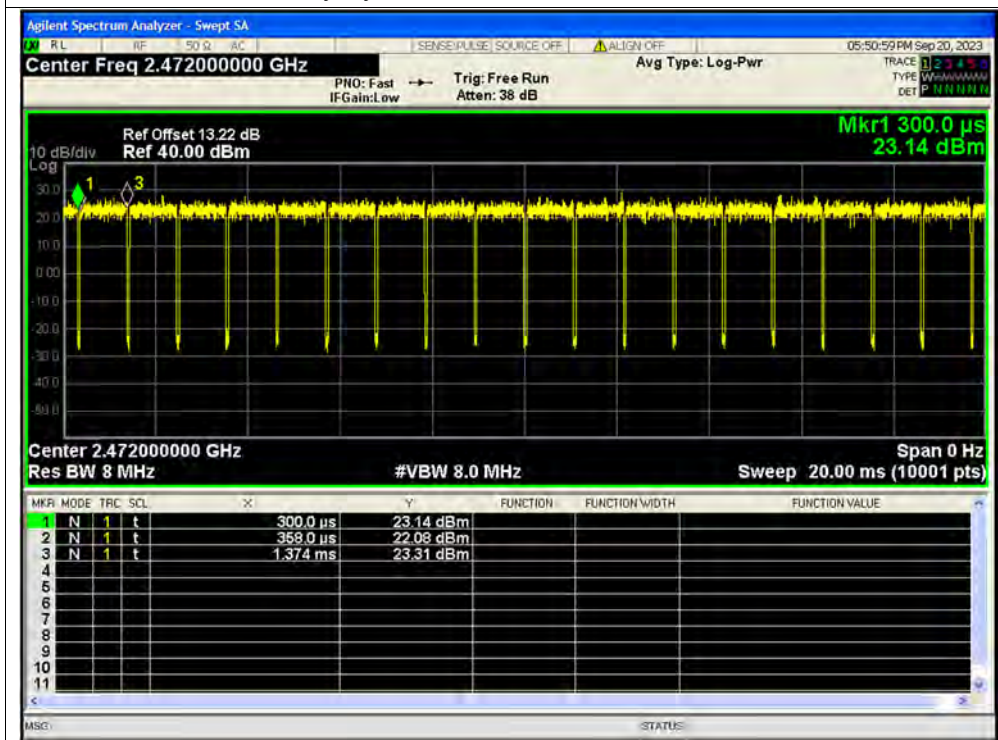




Duty Cycle NVNT ax20 2472MHz Sum

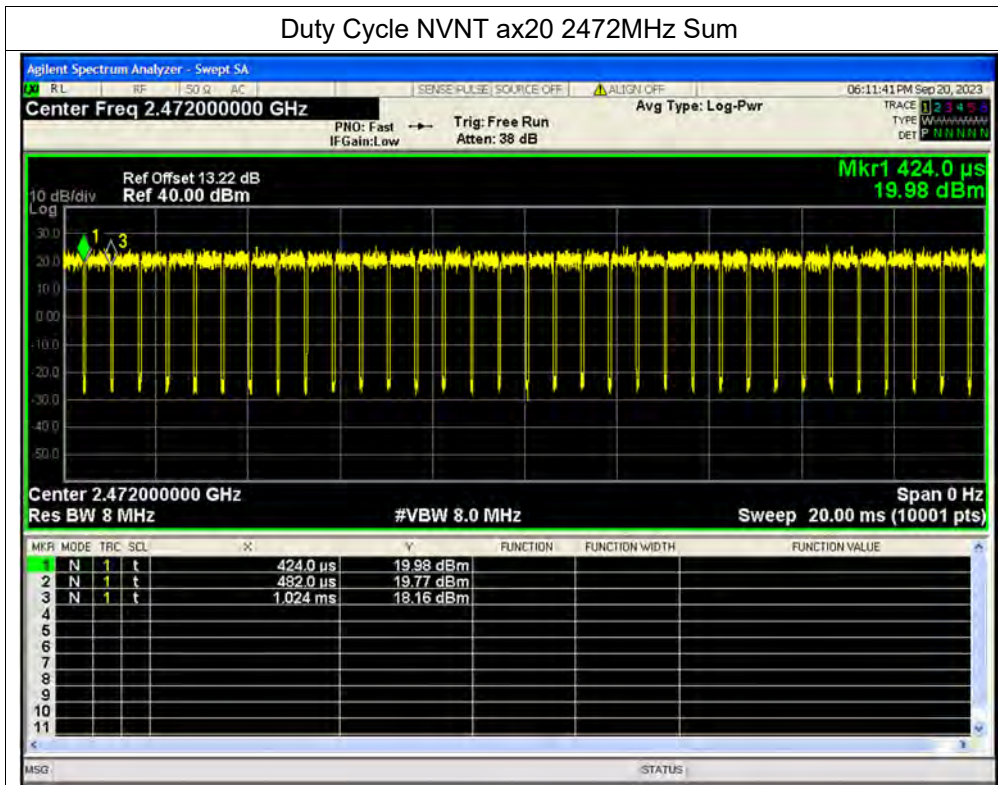


Duty Cycle NVNT ax40 2422MHz Ant1

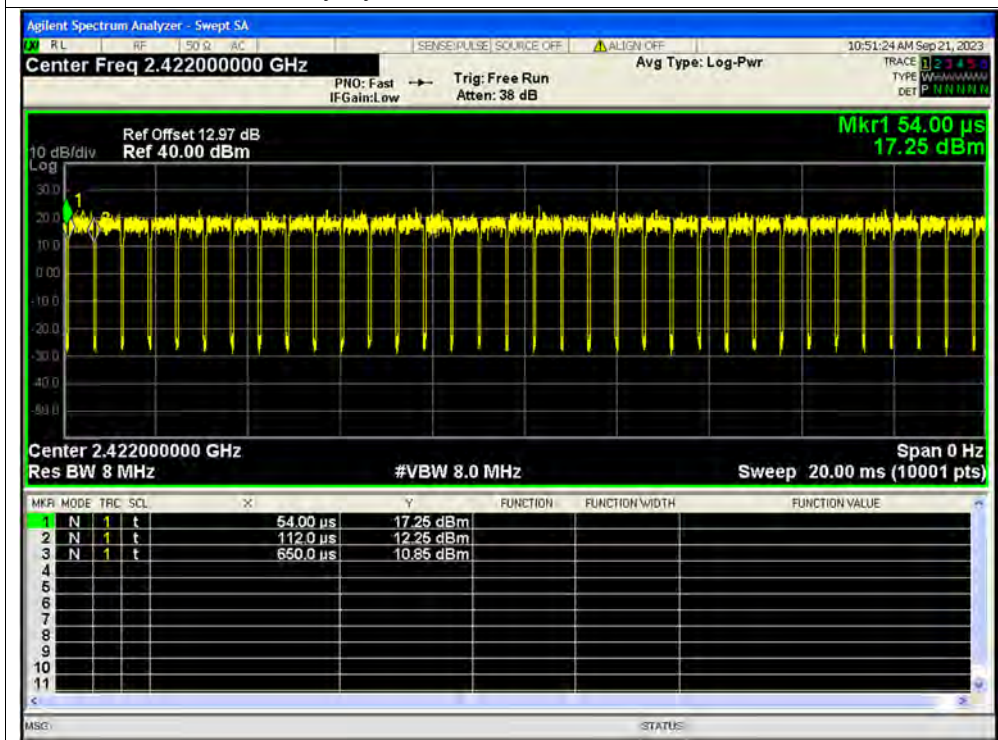




Duty Cycle NVNT ax40 2422MHz Ant2

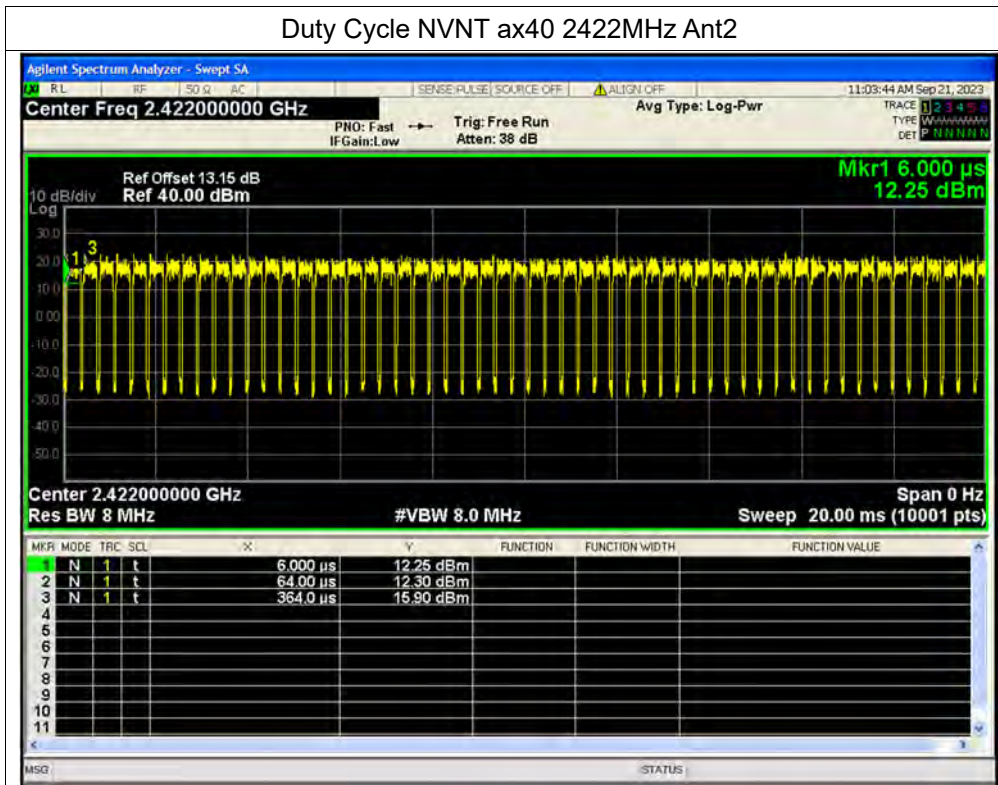


Duty Cycle NVNT ax40 2422MHz Sum

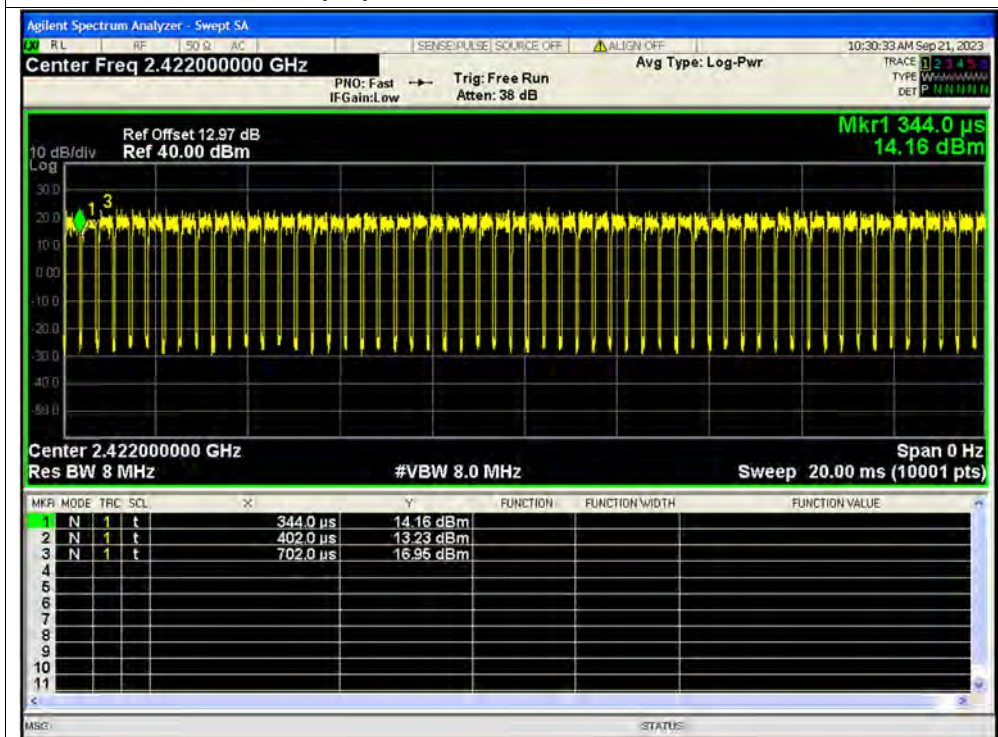




Duty Cycle NVNT ax40 2442MHz Ant1

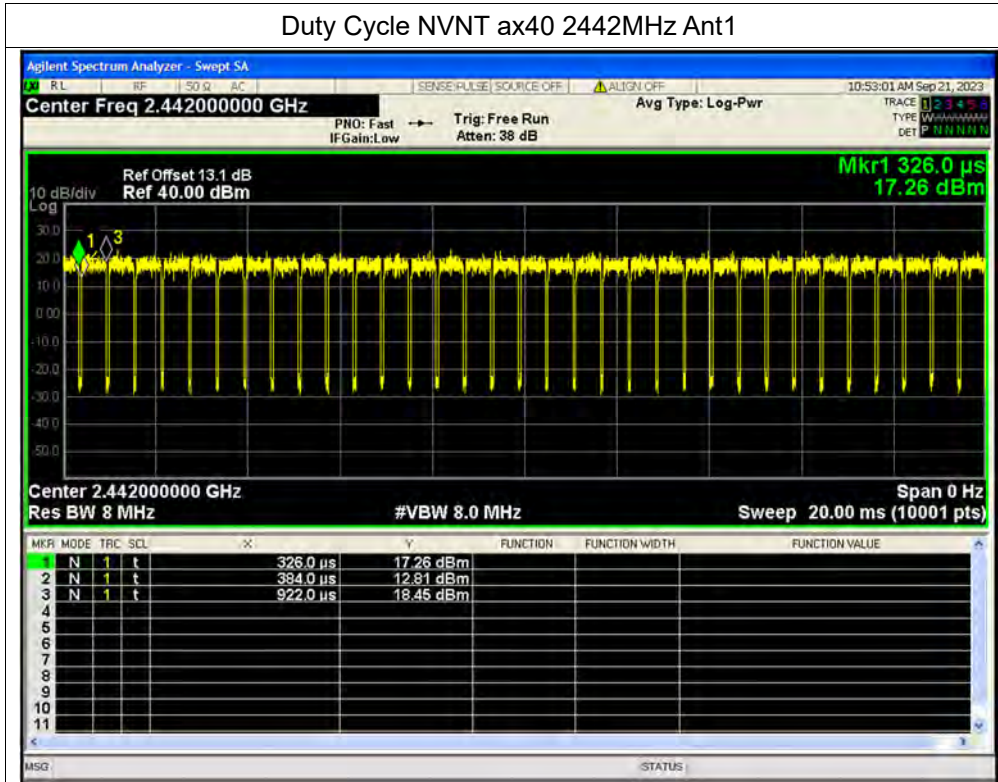


Duty Cycle NVNT ax40 2442MHz Ant2

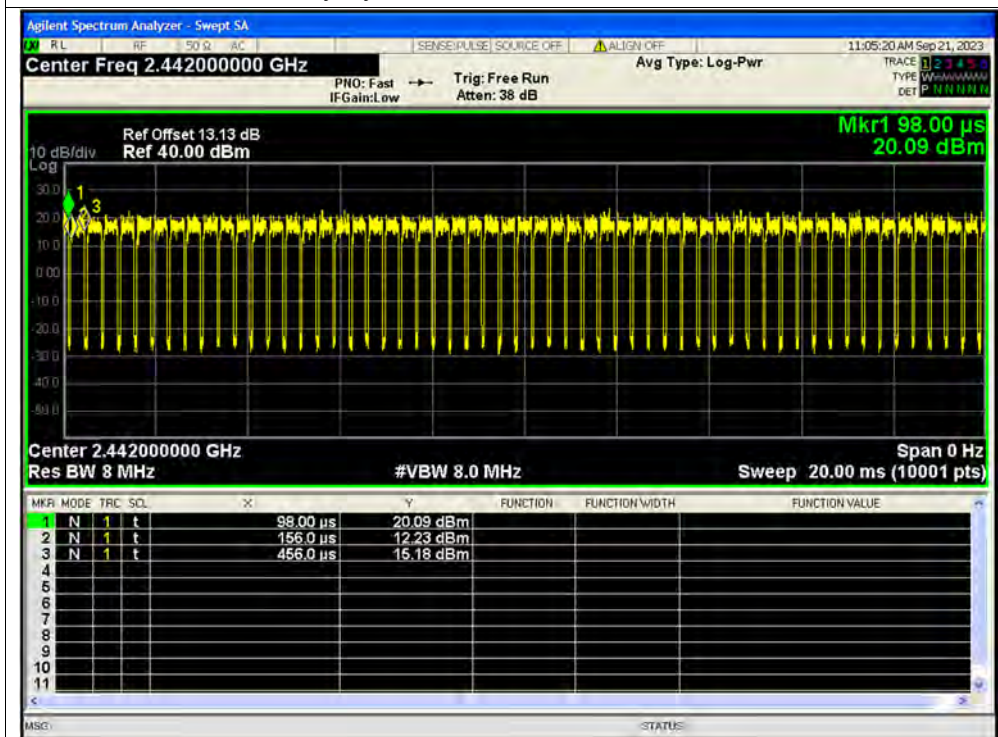




Duty Cycle NVNT ax40 2442MHz Sum

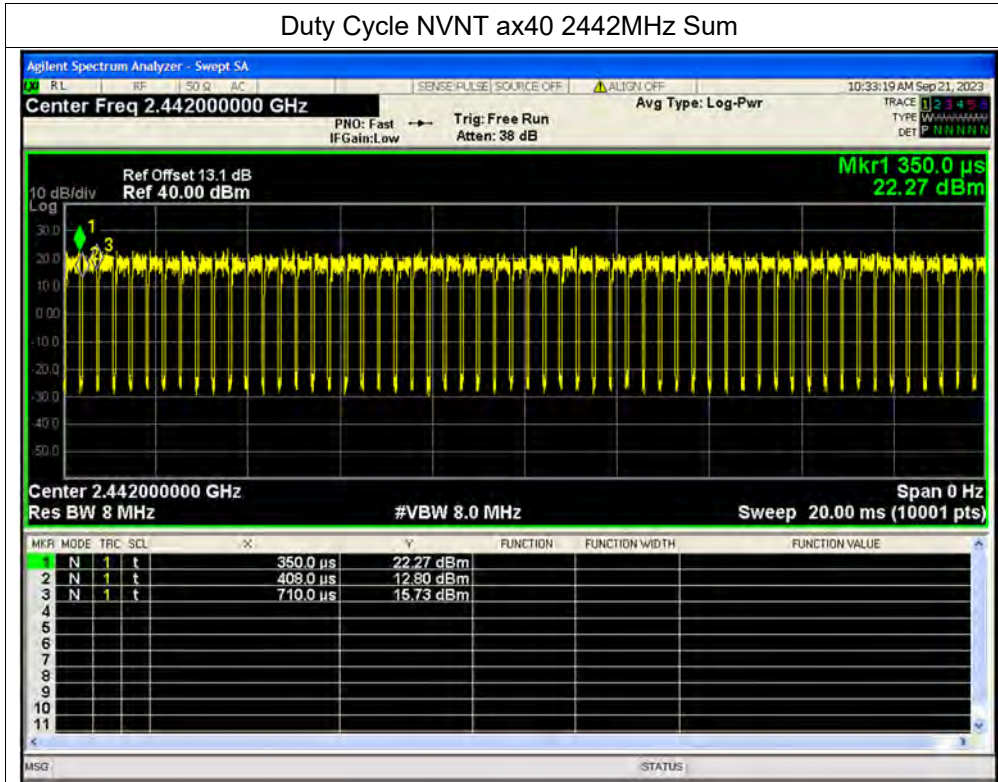


Duty Cycle NVNT ax40 2462MHz Ant1

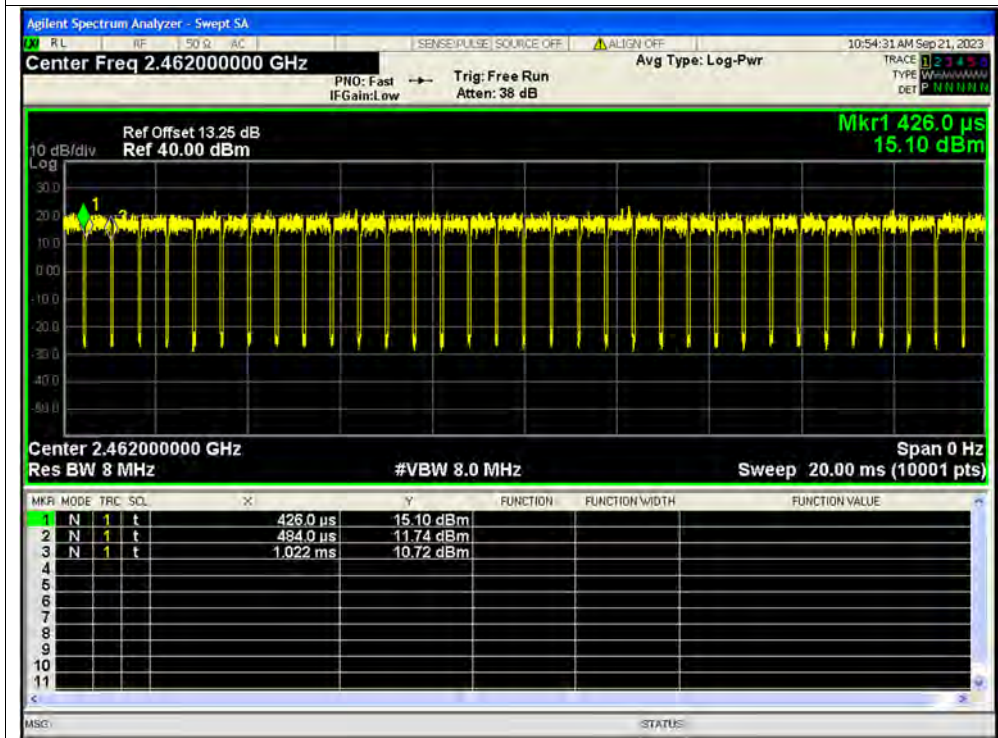




Duty Cycle NVNT ax40 2462MHz Ant2

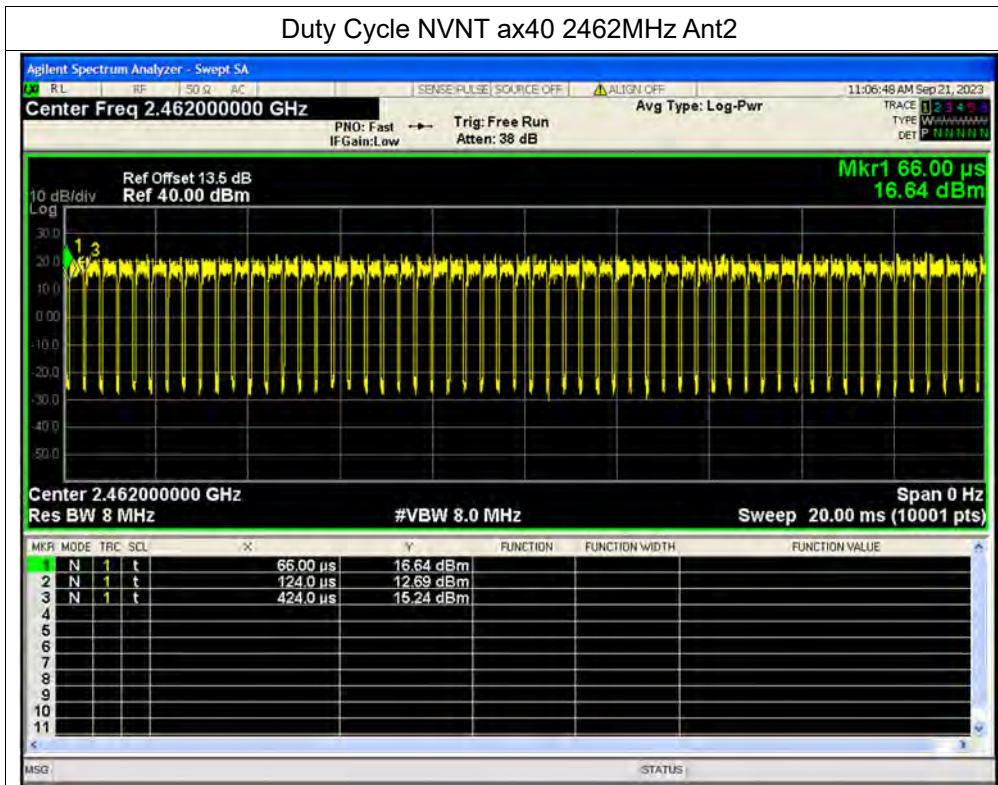

Duty Cycle NVNT ax40 2462MHz Sum

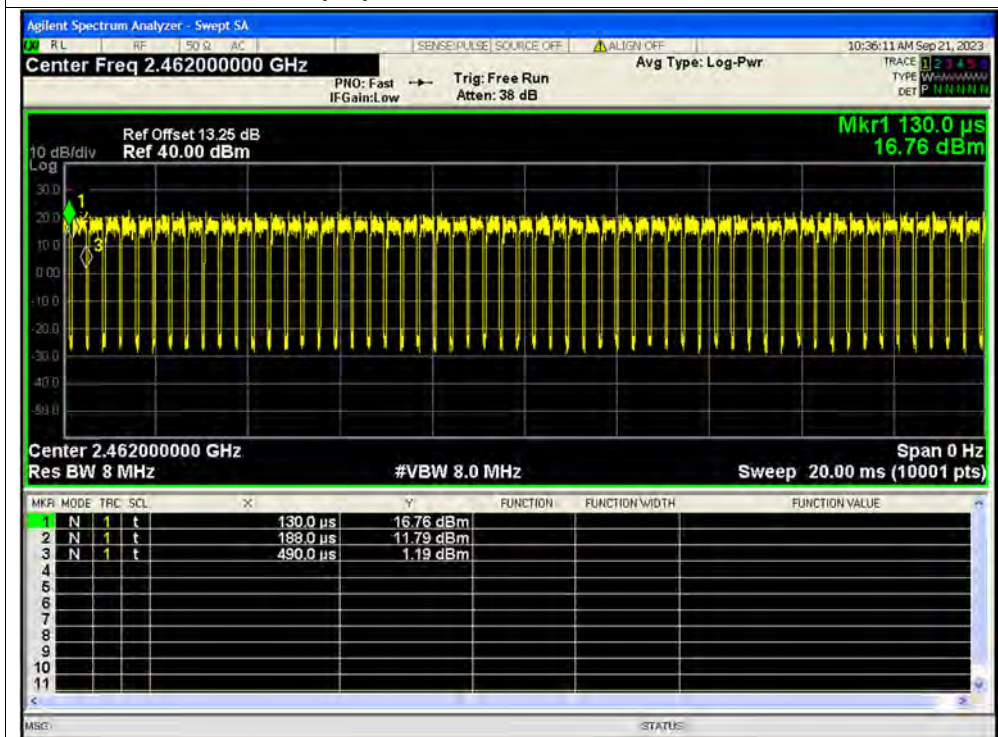



A.2. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	b	2412	Ant1	26.53	0	26.53	0.44978	30	Pass
NVNT	b	2412	Ant2	25.85	0	25.85	0.38459	30	Pass
NVNT	b	2442	Ant1	27.11	0	27.11	0.51404	30	Pass
NVNT	b	2442	Ant2	26.89	0	26.89	0.48865	30	Pass
NVNT	b	2472	Ant1	19.08	0	19.08	0.08091	30	Pass
NVNT	b	2472	Ant2	17.85	0	17.85	0.06095	30	Pass
NVNT	g	2412	Ant1	29.65	0	29.65	0.92257	30	Pass
NVNT	g	2412	Ant2	29.53	0	29.53	0.89743	30	Pass
NVNT	g	2442	Ant1	29.46	0	29.46	0.88308	30	Pass
NVNT	g	2442	Ant2	29.46	0	29.46	0.88308	30	Pass
NVNT	g	2472	Ant1	20.62	0	20.62	0.11535	30	Pass
NVNT	g	2472	Ant2	18.51	0	18.51	0.07096	30	Pass
NVNT	n20	2412	Ant1	29.2	0	29.2	0.83176	30	Pass
NVNT	n20	2412	Ant2	28.82	0	28.82	0.76208	30	Pass
NVNT	n20	2412	Ant1	27.13	0	27.13	0.51642	30	Pass
NVNT	n20	2412	Ant2	26.38	0	26.38	0.43451	30	Pass
NVNT	n20	2412	Sum	NaN	NaN	29.78	0.95093	30	Pass
NVNT	n20	2442	Ant1	29.51	0	29.51	0.89331	30	Pass
NVNT	n20	2442	Ant2	28.7	0	28.7	0.74131	30	Pass
NVNT	n20	2442	Ant1	27.21	0	27.21	0.52602	30	Pass
NVNT	n20	2442	Ant2	26.18	0	26.18	0.41495	30	Pass
NVNT	n20	2442	Sum	NaN	NaN	29.74	0.94097	30	Pass
NVNT	n20	2472	Ant1	29.24	0	29.24	0.83946	30	Pass
NVNT	n20	2472	Ant2	28.51	0	28.51	0.70958	30	Pass
NVNT	n20	2472	Ant1	27.12	0	27.12	0.51523	30	Pass
NVNT	n20	2472	Ant2	26.21	0	26.21	0.41783	30	Pass
NVNT	n20	2472	Sum	NaN	NaN	29.7	0.93306	30	Pass
NVNT	n40	2422	Ant1	29.34	0	29.34	0.85901	30	Pass
NVNT	n40	2422	Ant2	28.94	0	28.94	0.78343	30	Pass
NVNT	n40	2422	Ant1	23.34	0	23.34	0.21577	30	Pass
NVNT	n40	2422	Ant2	22.27	0	22.27	0.16866	30	Pass
NVNT	n40	2422	Sum	NaN	NaN	25.85	0.38443	30	Pass
NVNT	n40	2442	Ant1	29.54	0	29.54	0.8995	30	Pass



NVNT	n40	2442	Ant2	28.86	0	28.86	0.76913	30	Pass
NVNT	n40	2442	Ant1	26.88	0	26.88	0.48753	30	Pass
NVNT	n40	2442	Ant2	25.89	0	25.89	0.38815	30	Pass
NVNT	n40	2442	Sum	NaN	NaN	29.42	0.87568	30	Pass
NVNT	n40	2462	Ant1	29.5	0	29.5	0.89125	30	Pass
NVNT	n40	2462	Ant2	28.99	0	28.99	0.7925	30	Pass
NVNT	n40	2462	Ant1	20.42	0	20.42	0.11015	30	Pass
NVNT	n40	2462	Ant2	19.47	0	19.47	0.08851	30	Pass
NVNT	n40	2462	Sum	NaN	NaN	22.98	0.19867	30	Pass
NVNT	ax20	2412	Ant1	29.24	0	29.24	0.83946	30	Pass
NVNT	ax20	2412	Ant2	28.7	0	28.7	0.74131	30	Pass
NVNT	ax20	2412	Ant1	27.06	0	27.06	0.50816	30	Pass
NVNT	ax20	2412	Ant2	26.04	0	26.04	0.40179	30	Pass
NVNT	ax20	2412	Sum	NaN	NaN	29.59	0.90995	30	Pass
NVNT	ax20	2442	Ant1	29.35	0	29.35	0.86099	30	Pass
NVNT	ax20	2442	Ant2	28.69	0	28.69	0.73961	30	Pass
NVNT	ax20	2442	Ant1	27.12	0	27.12	0.51523	30	Pass
NVNT	ax20	2442	Ant2	25.91	0	25.91	0.38994	30	Pass
NVNT	ax20	2442	Sum	NaN	NaN	29.57	0.90517	30	Pass
NVNT	ax20	2472	Ant1	29.42	0	29.42	0.87498	30	Pass
NVNT	ax20	2472	Ant2	28.14	0	28.14	0.65163	30	Pass
NVNT	ax20	2472	Ant1	18.72	0	18.72	0.07447	30	Pass
NVNT	ax20	2472	Ant2	17.41	0	17.41	0.05508	30	Pass
NVNT	ax20	2472	Sum	NaN	NaN	21.12	0.12955	30	Pass
NVNT	ax40	2422	Ant1	29.52	0	29.52	0.89536	30	Pass
NVNT	ax40	2422	Ant2	28.65	0	28.65	0.73282	30	Pass
NVNT	ax40	2422	Ant1	23.04	0	23.04	0.20137	30	Pass
NVNT	ax40	2422	Ant2	21.76	0	21.76	0.14997	30	Pass
NVNT	ax40	2422	Sum	NaN	NaN	25.46	0.35134	30	Pass
NVNT	ax40	2442	Ant1	29.51	0	29.51	0.89331	30	Pass
NVNT	ax40	2442	Ant2	28.46	0	28.46	0.70146	30	Pass
NVNT	ax40	2442	Ant1	27.07	0	27.07	0.50933	30	Pass
NVNT	ax40	2442	Ant2	26.02	0	26.02	0.39994	30	Pass
NVNT	ax40	2442	Sum	NaN	NaN	29.59	0.90928	30	Pass
NVNT	ax40	2462	Ant1	29.53	0	29.53	0.89743	30	Pass
NVNT	ax40	2462	Ant2	28.69	0	28.69	0.73961	30	Pass
NVNT	ax40	2462	Ant1	18.88	0	18.88	0.07727	30	Pass
NVNT	ax40	2462	Ant2	17.87	0	17.87	0.06124	30	Pass




REPORT No.: SZ23090108W01

NVNT	ax40	2462	Sum	NaN	NaN	21.41	0.1385	30	Pass
------	------	------	-----	-----	-----	-------	--------	----	------




Test Graphs

Peak Power NVNT b 2412MHz Ant1

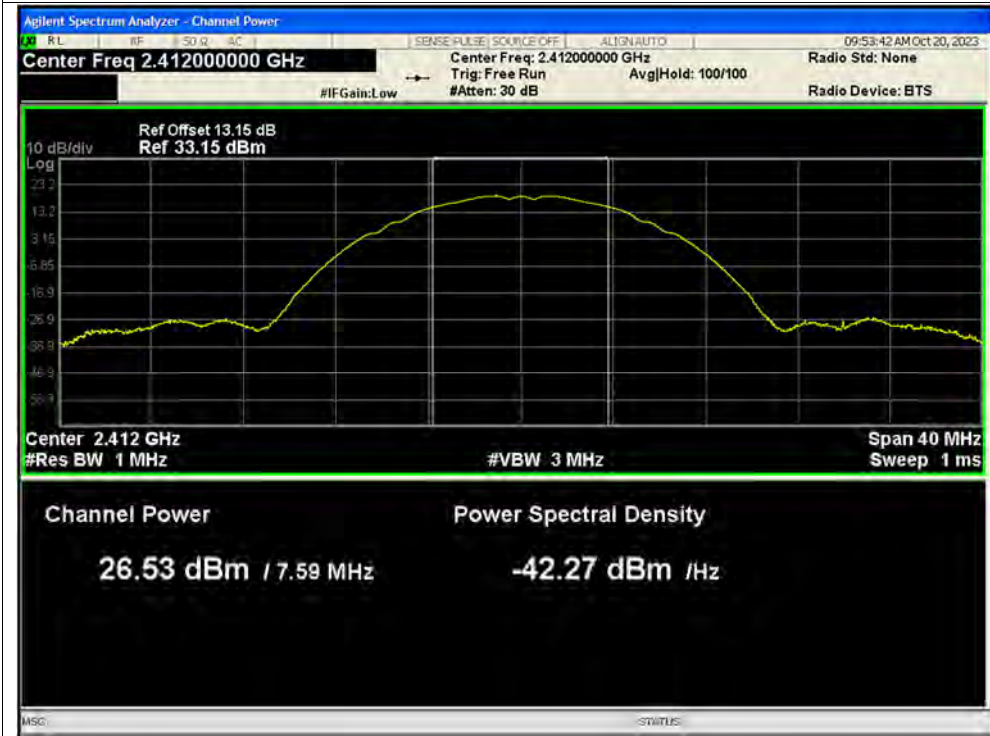


Peak Power NVNT b 2412MHz Ant2

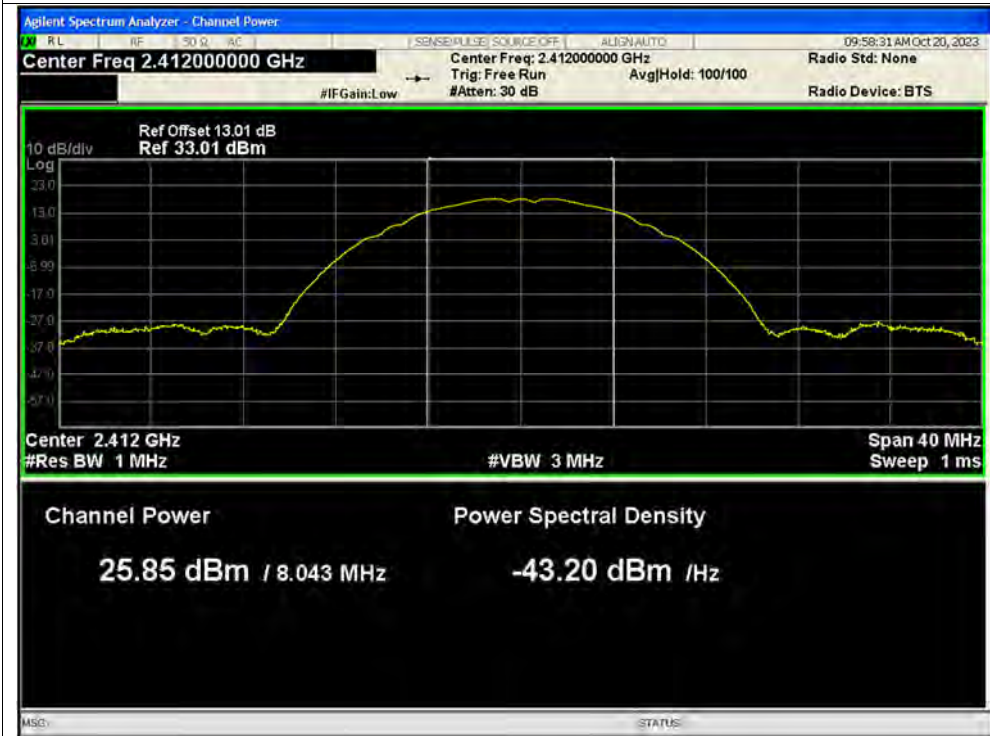




Peak Power NVNT b 2442MHz Ant1

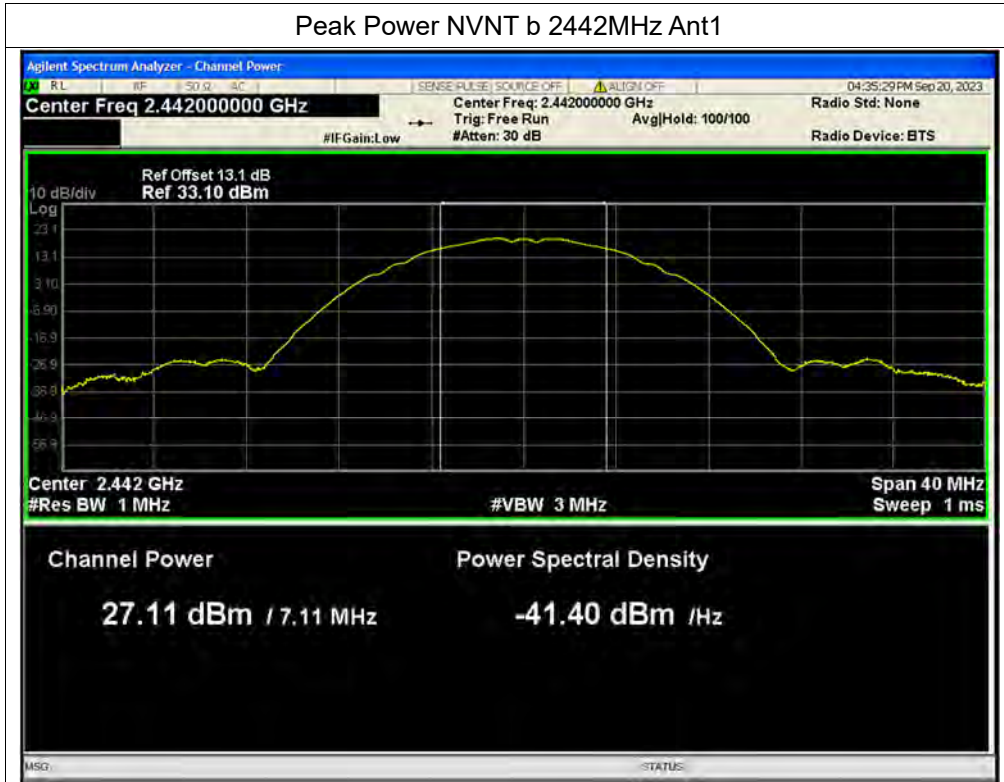


Peak Power NVNT b 2442MHz Ant2

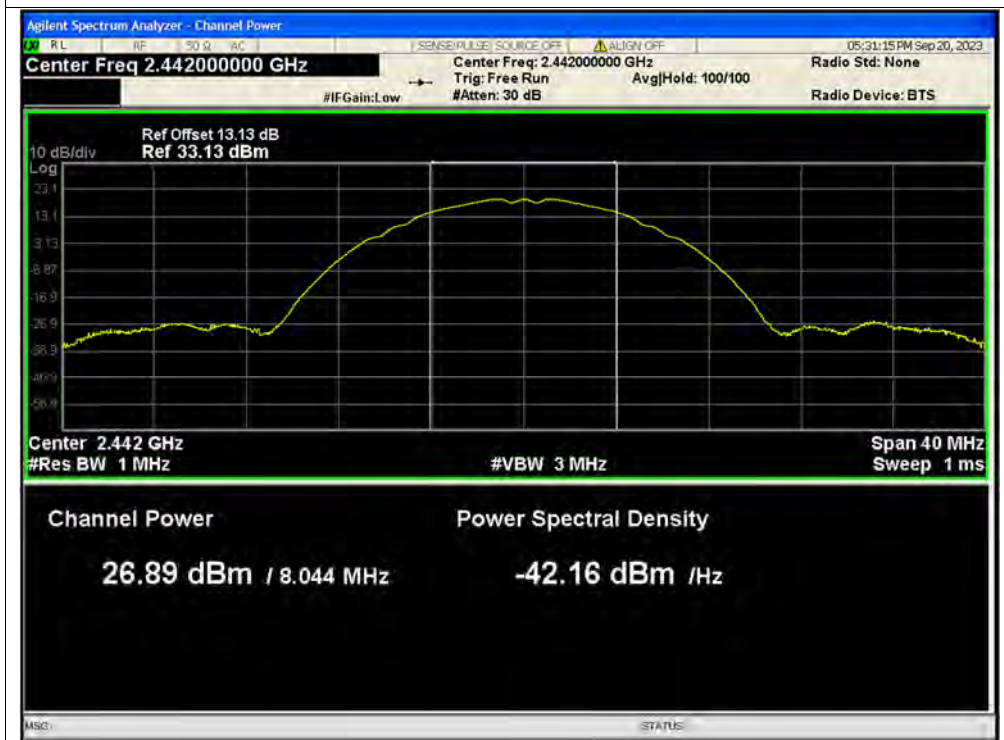




Peak Power NVNT b 2472MHz Ant1

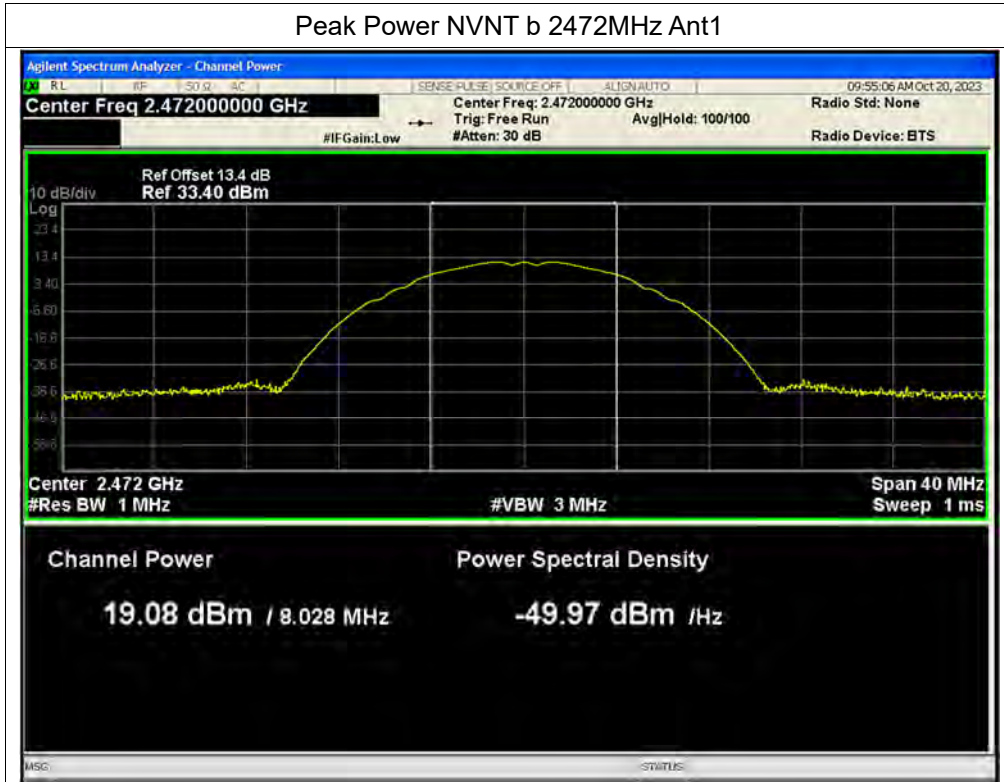


Peak Power NVNT b 2472MHz Ant2

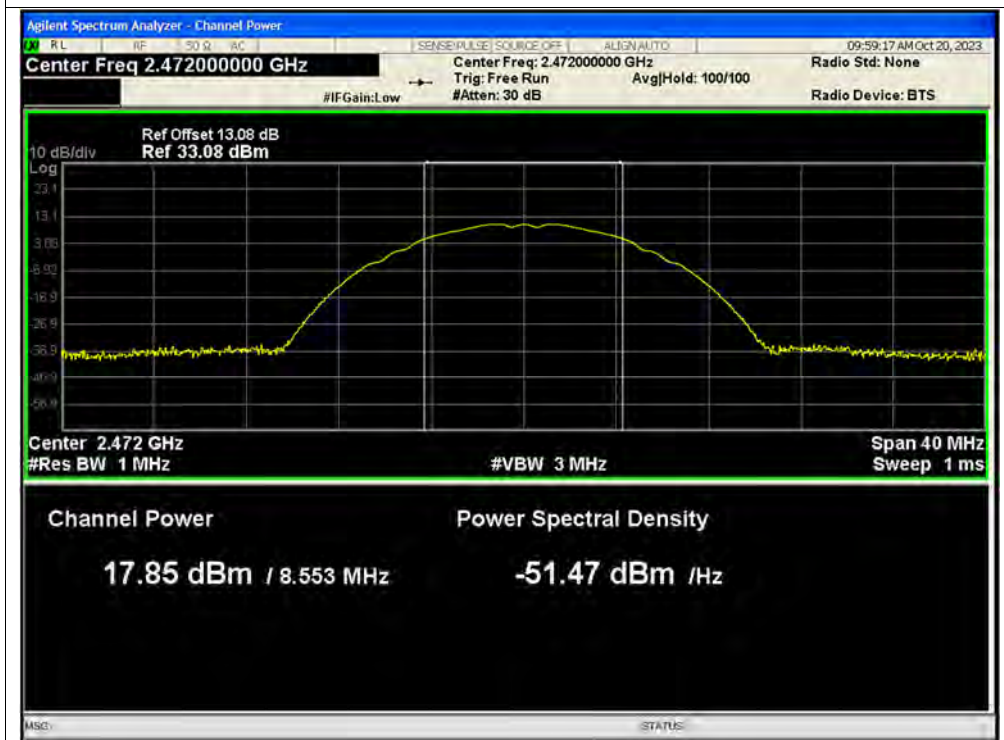




Peak Power NVNT g 2412MHz Ant1

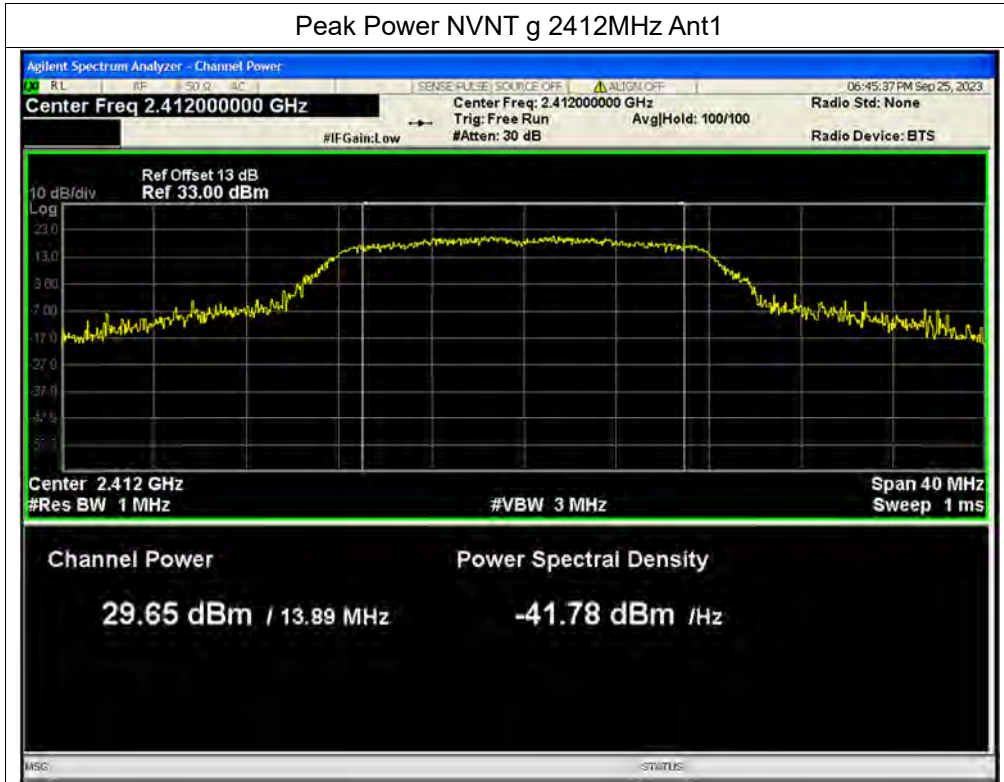


Peak Power NVNT g 2412MHz Ant2

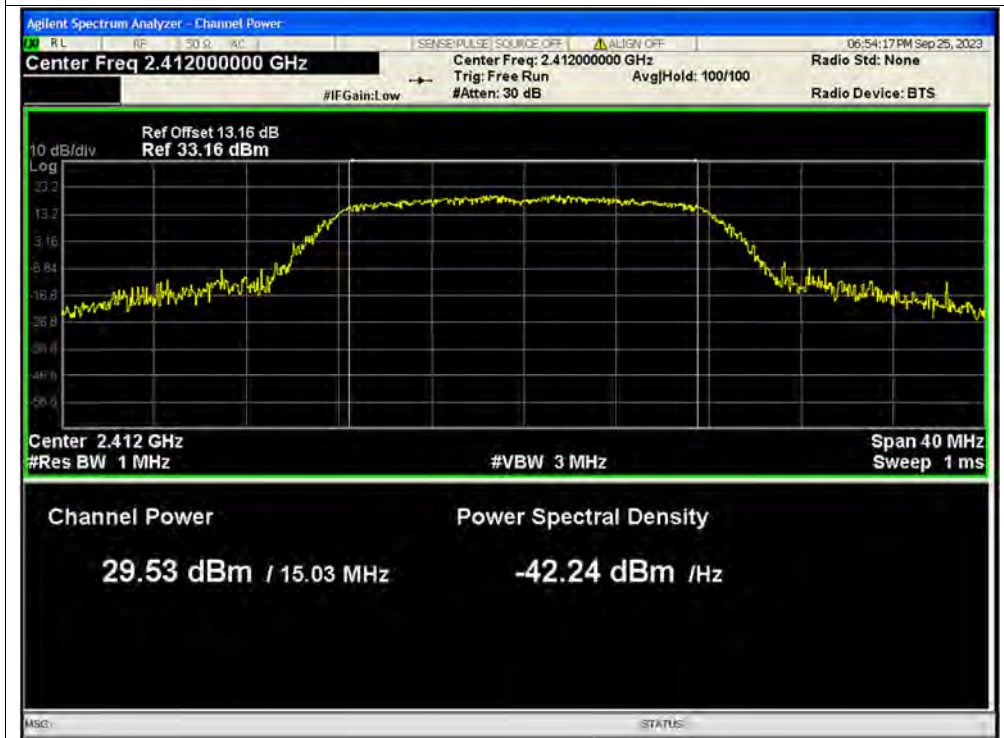




Peak Power NVNT g 2442MHz Ant1

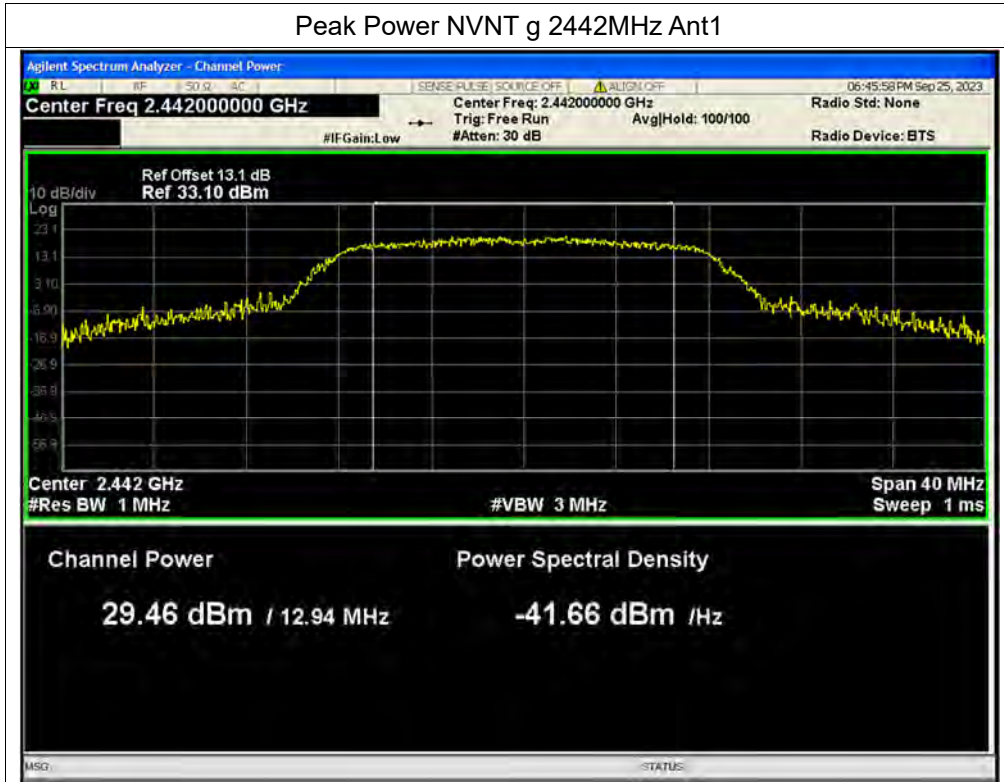


Peak Power NVNT g 2442MHz Ant2

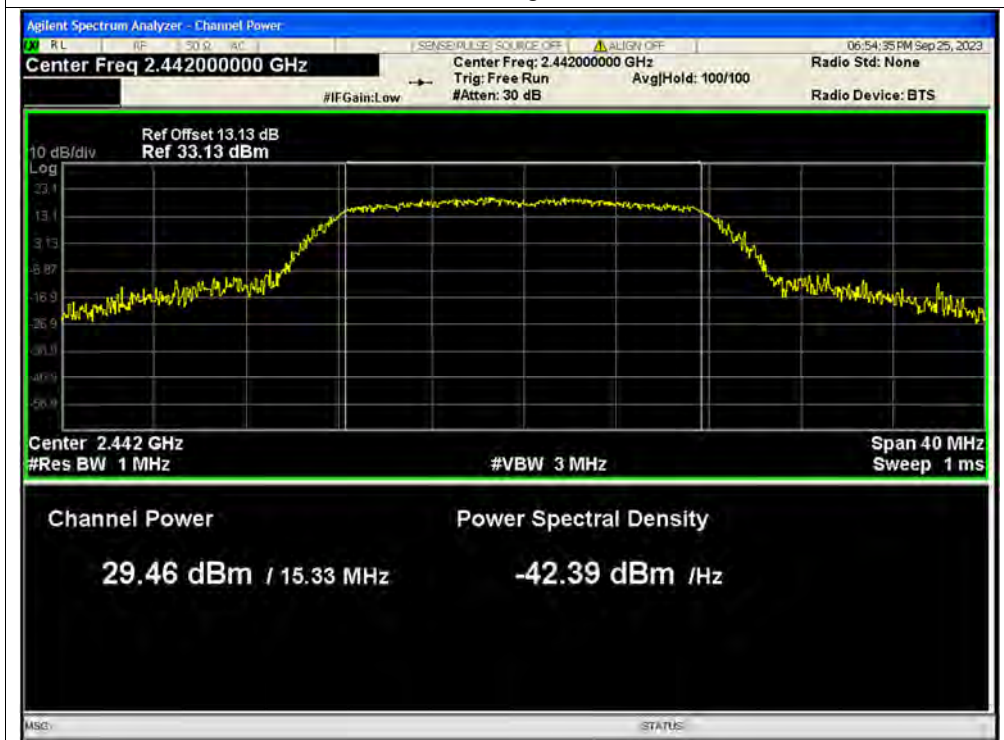




Peak Power NVNT g 2472MHz Ant1

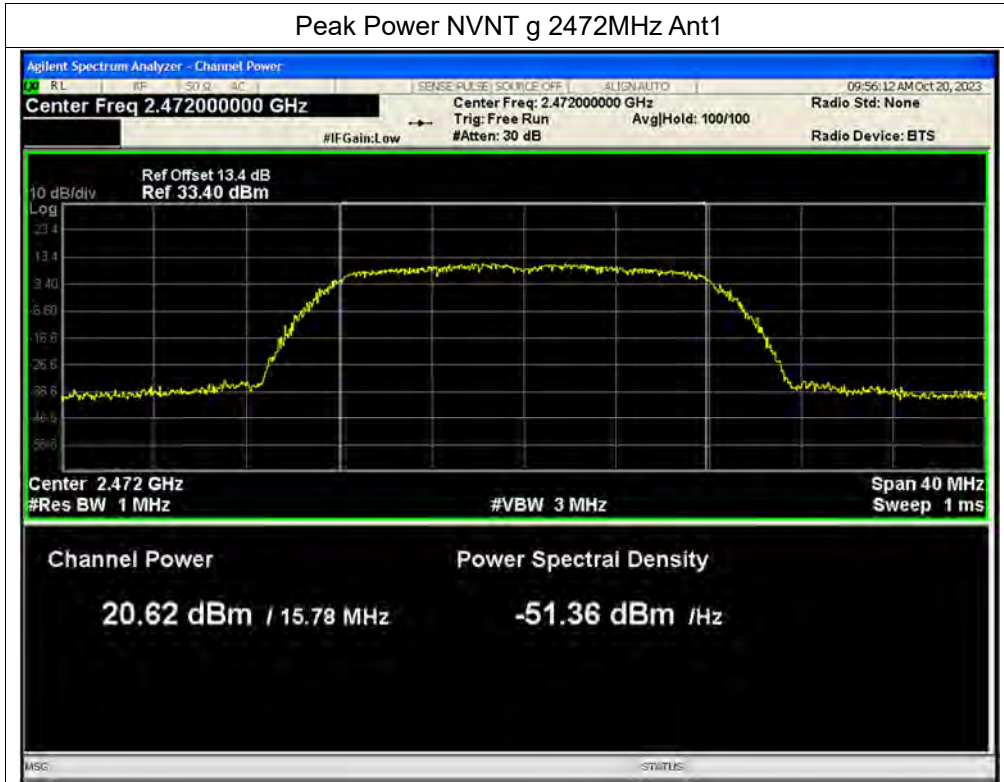


Peak Power NVNT g 2472MHz Ant2

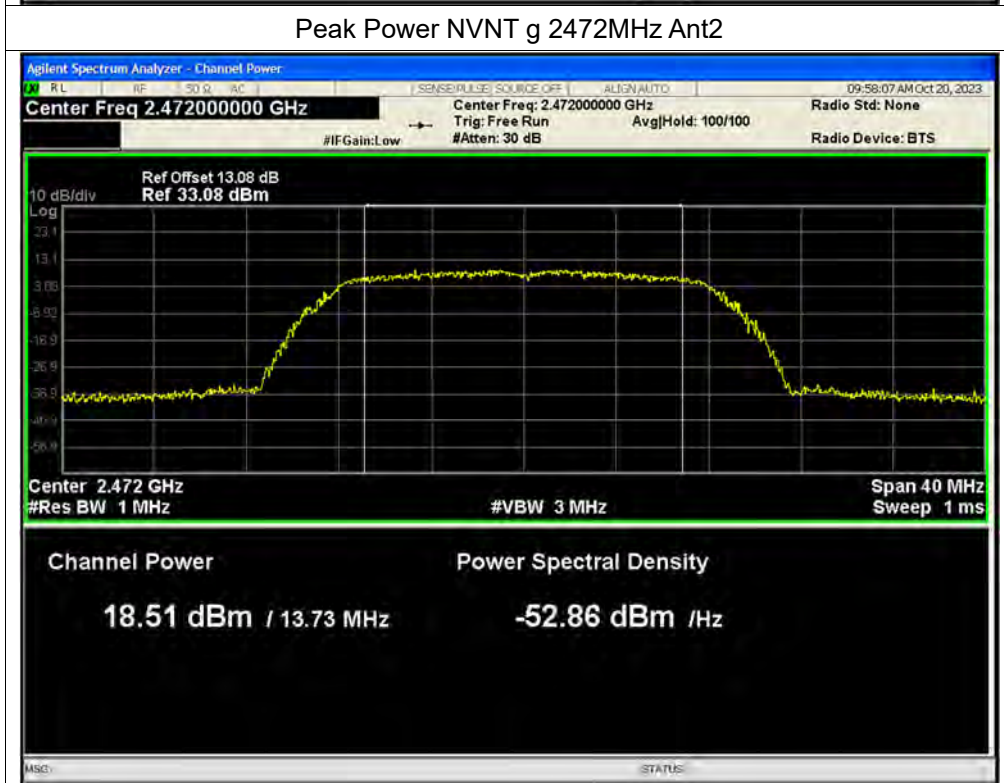




Peak Power NVNT n20 2412MHz Ant1

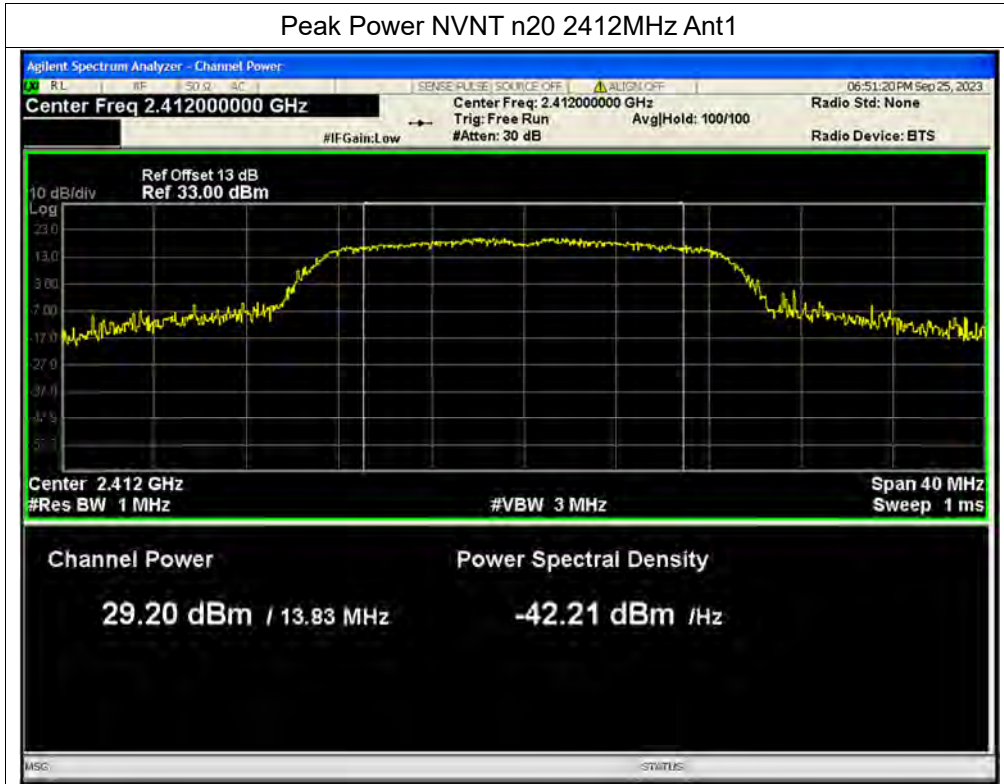


Peak Power NVNT n20 2412MHz Ant2

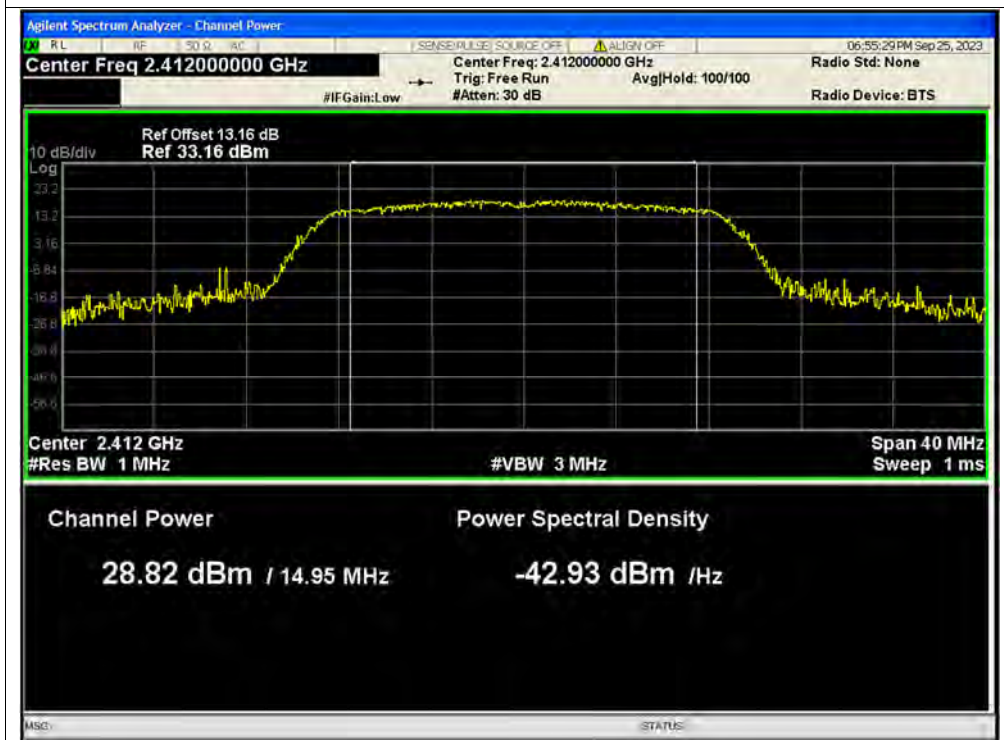




Peak Power NVNT n20 2412MHz Ant1

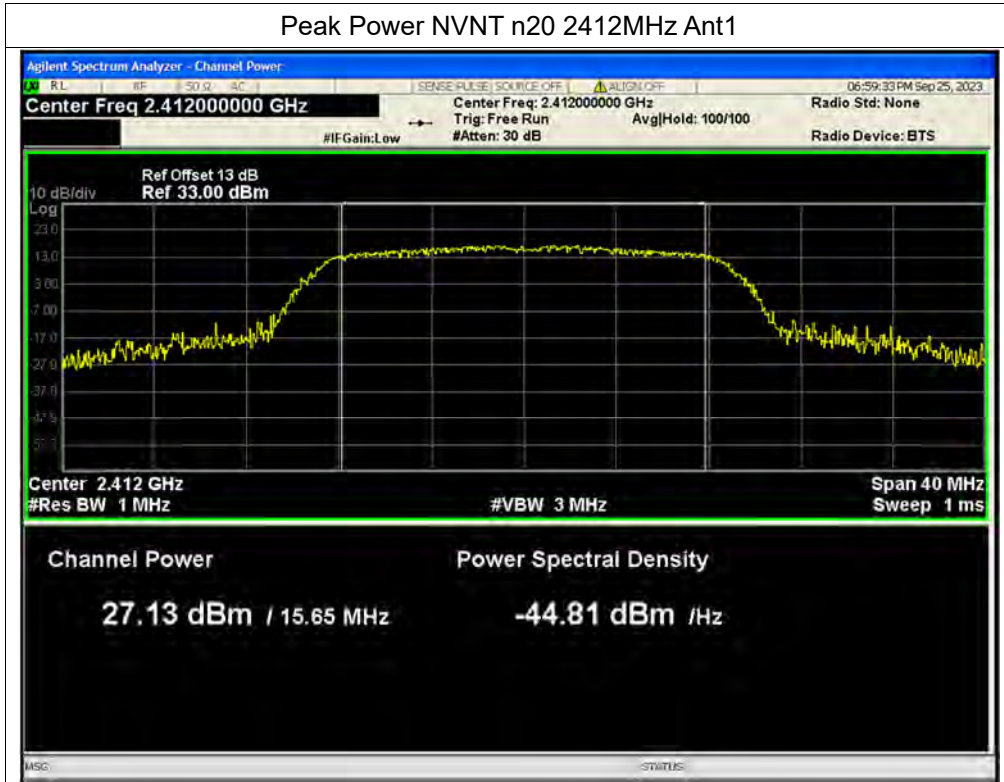


Peak Power NVNT n20 2412MHz Ant2

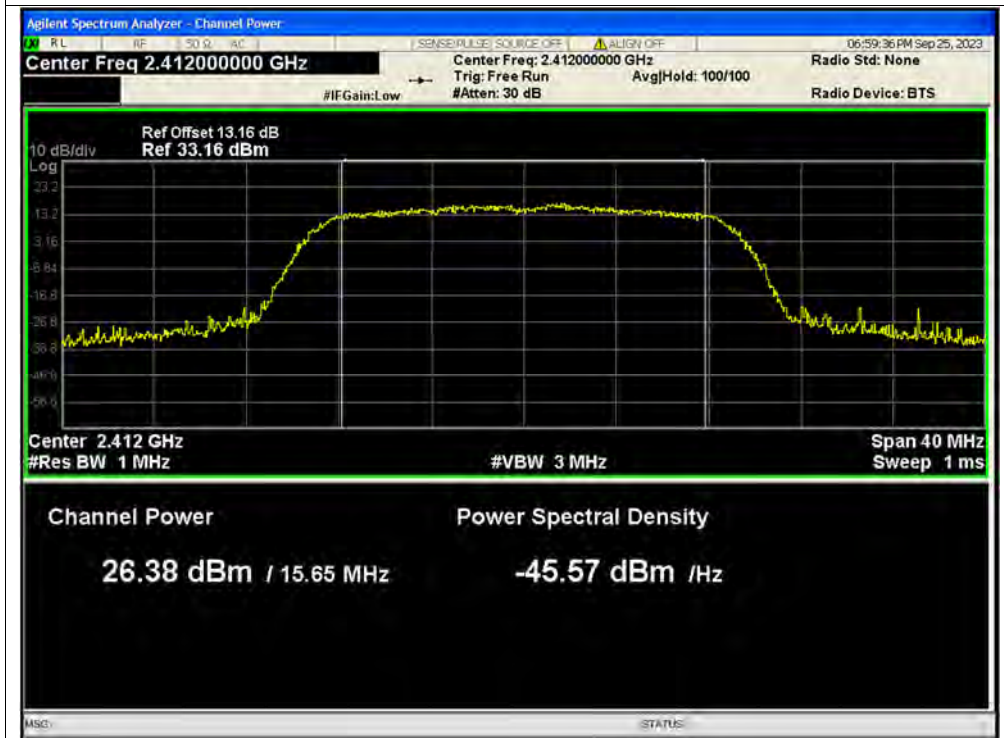




Peak Power NVNT n20 2442MHz Ant1

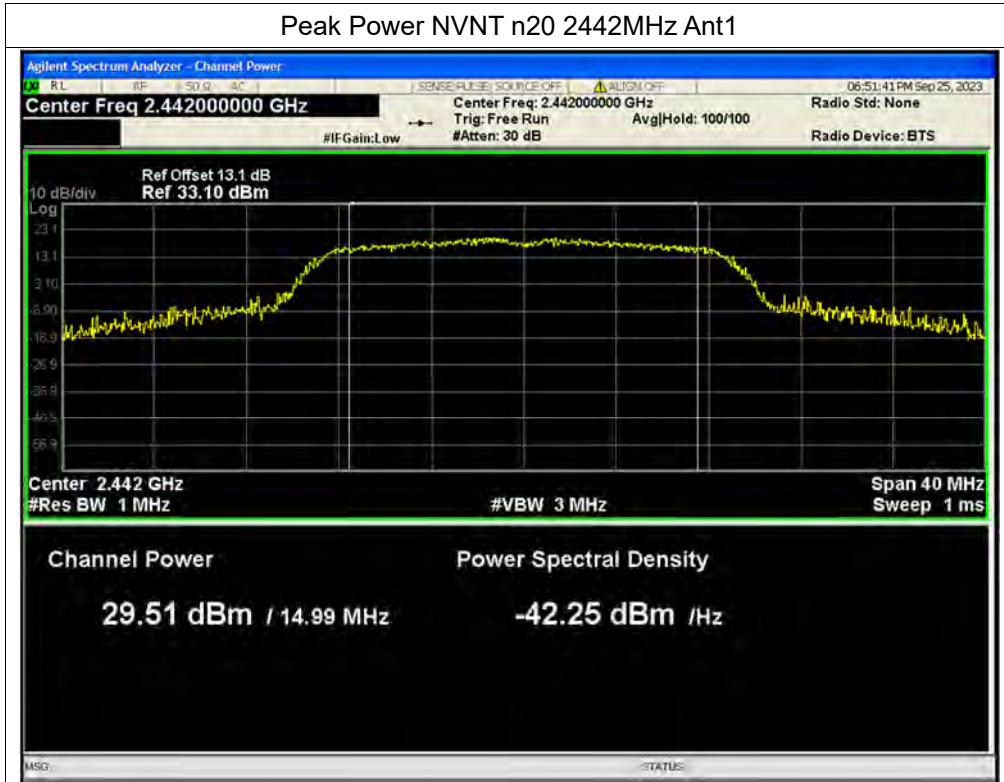


Peak Power NVNT n20 2442MHz Ant2

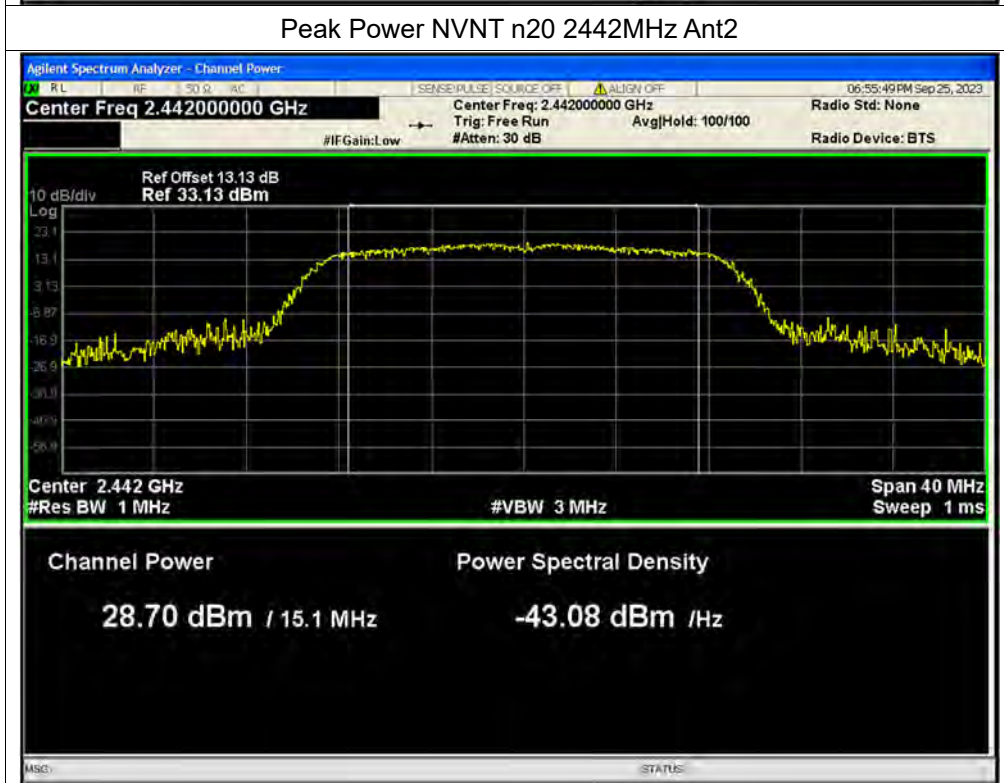




Peak Power NVNT n20 2442MHz Ant1

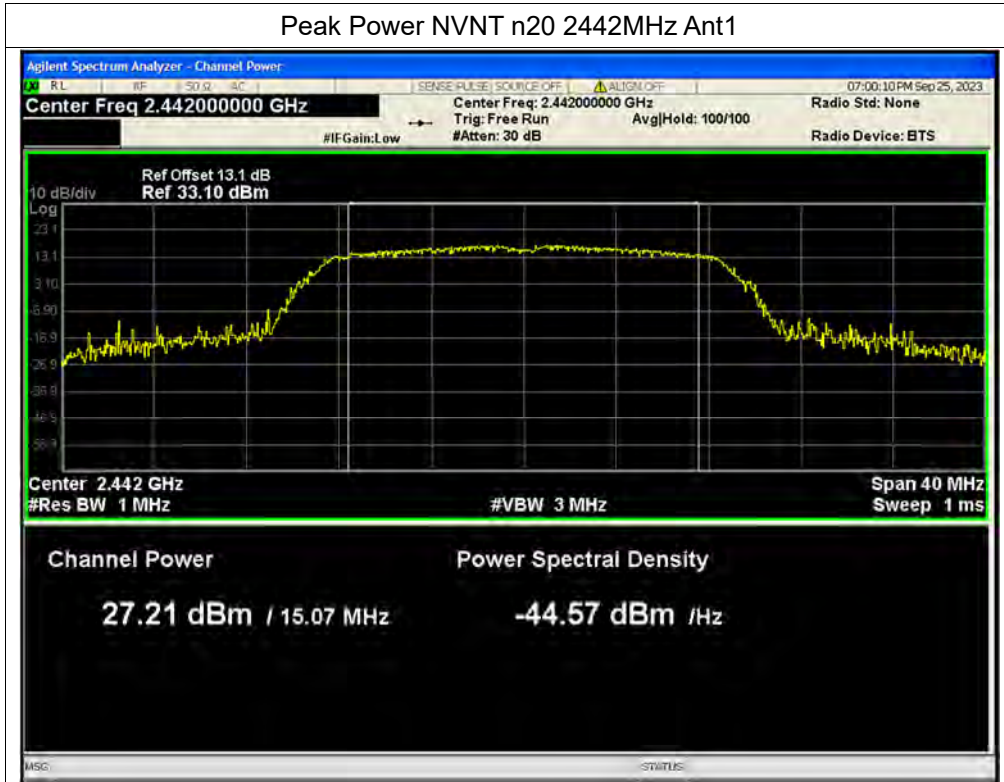


Peak Power NVNT n20 2442MHz Ant2

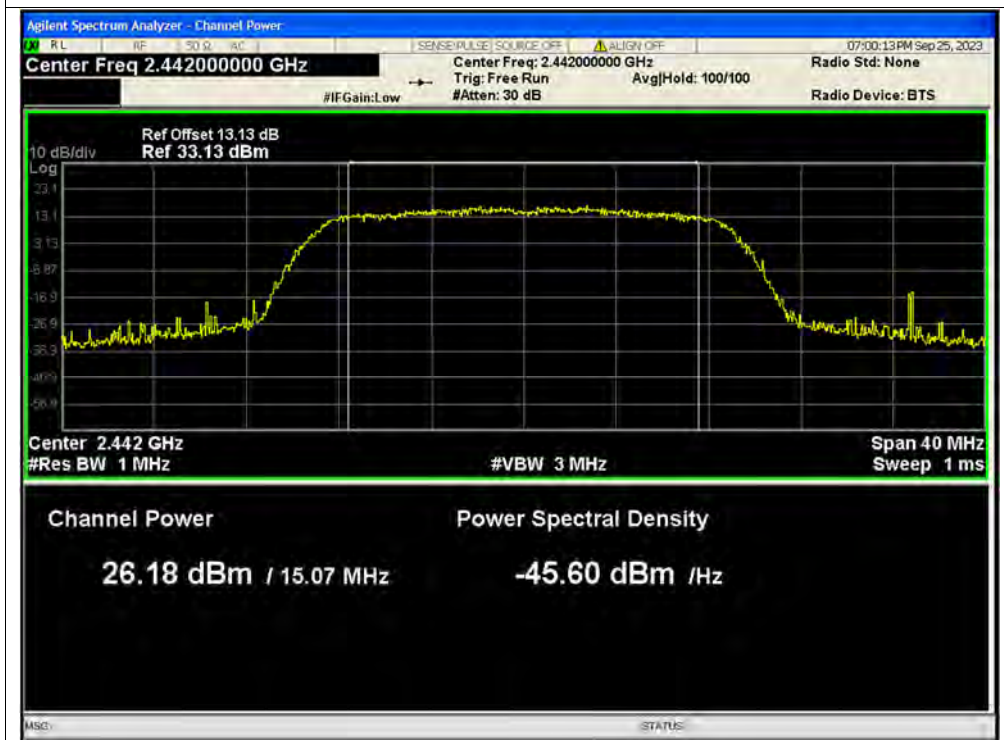




Peak Power NVNT n20 2472MHz Ant1

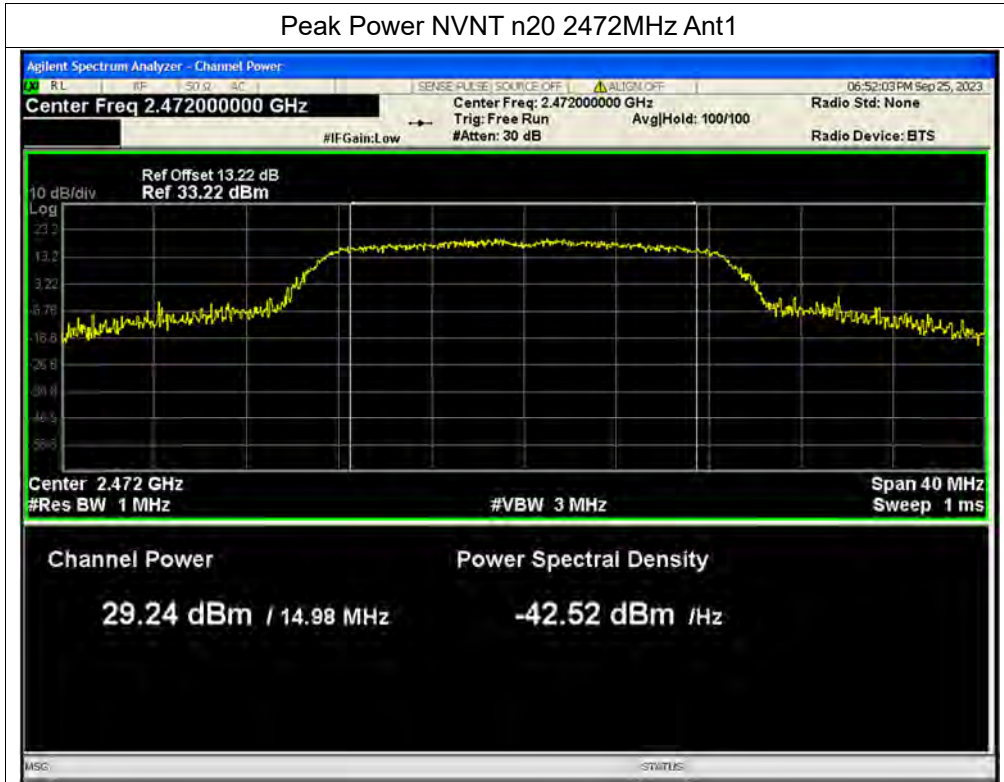


Peak Power NVNT n20 2472MHz Ant2

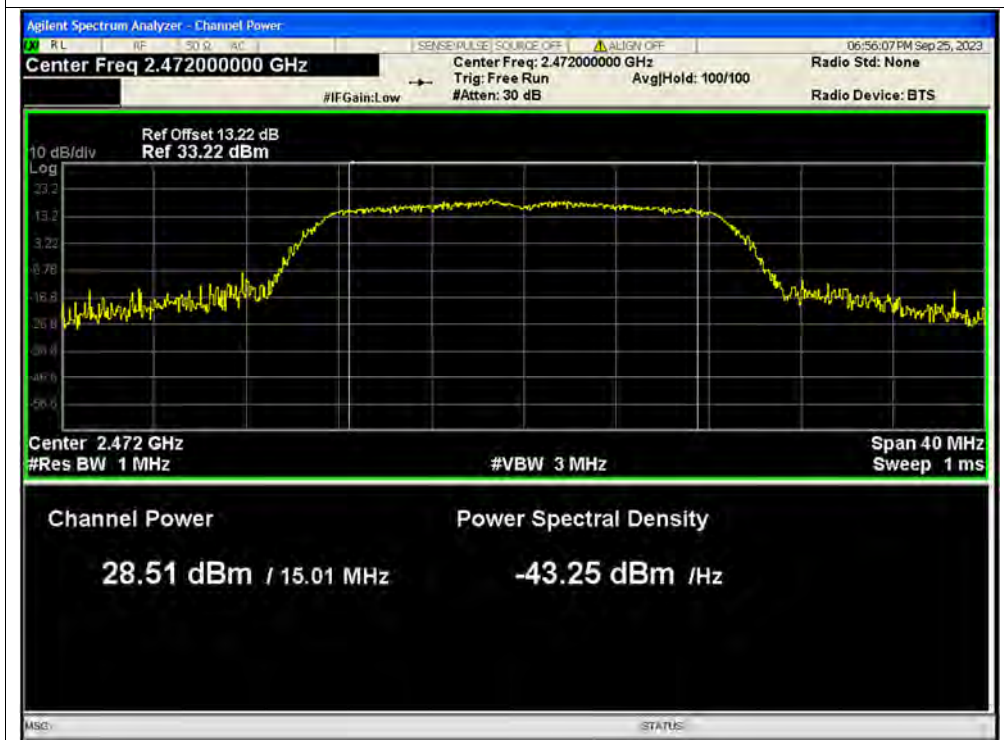




Peak Power NVNT n20 2472MHz Ant1

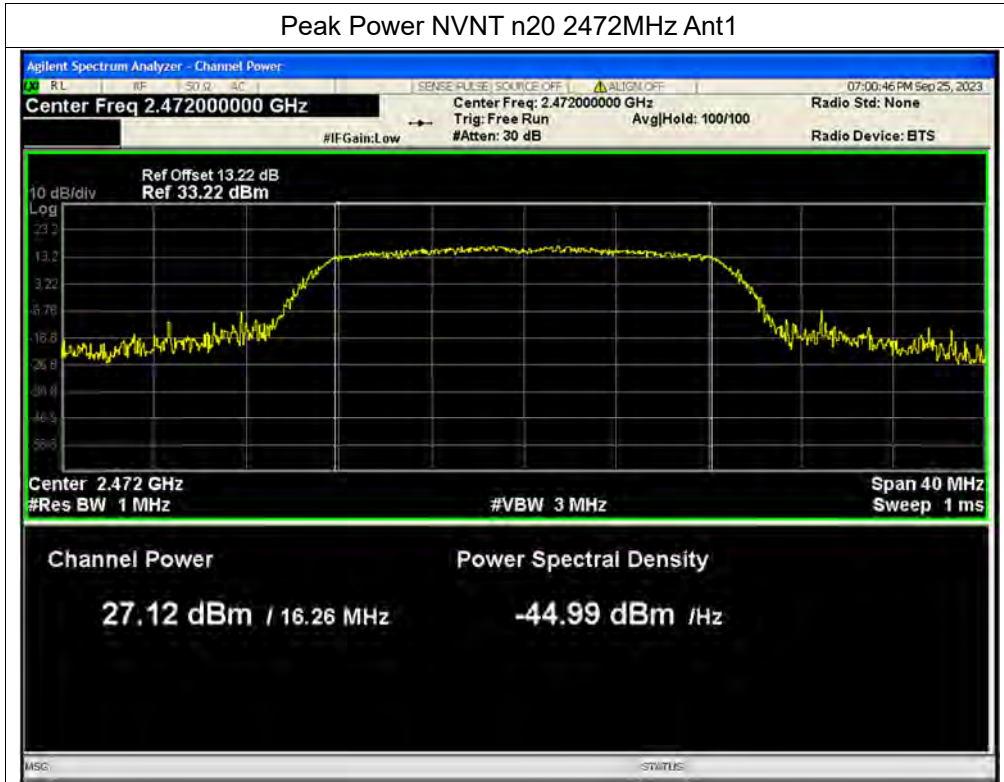


Peak Power NVNT n20 2472MHz Ant2

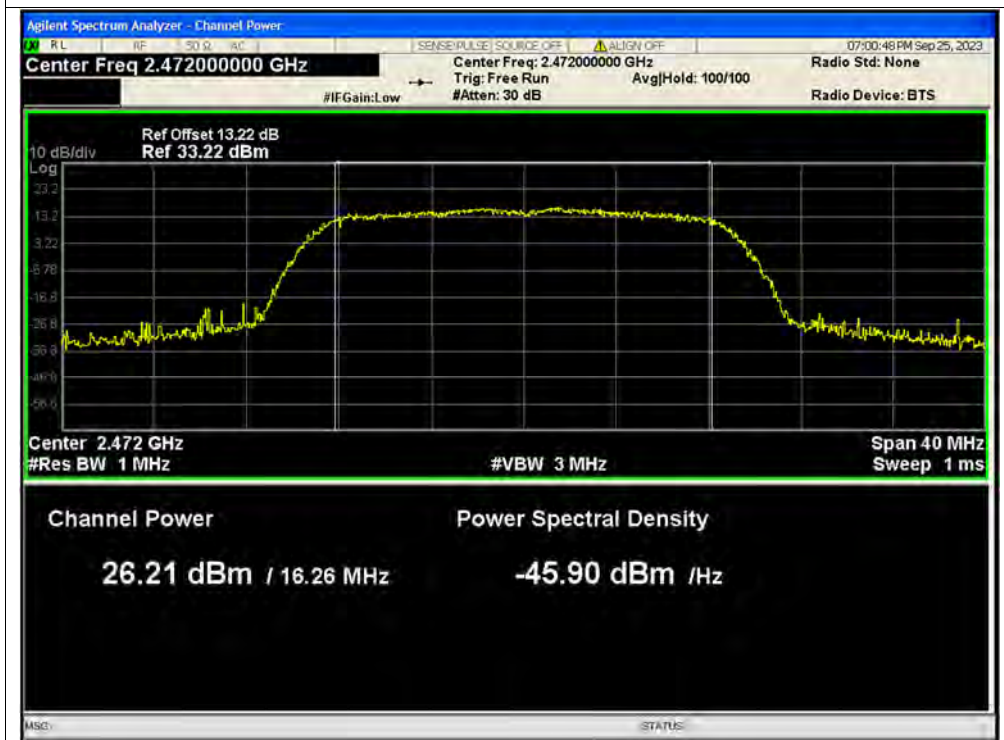




Peak Power NVNT n40 2422MHz Ant1

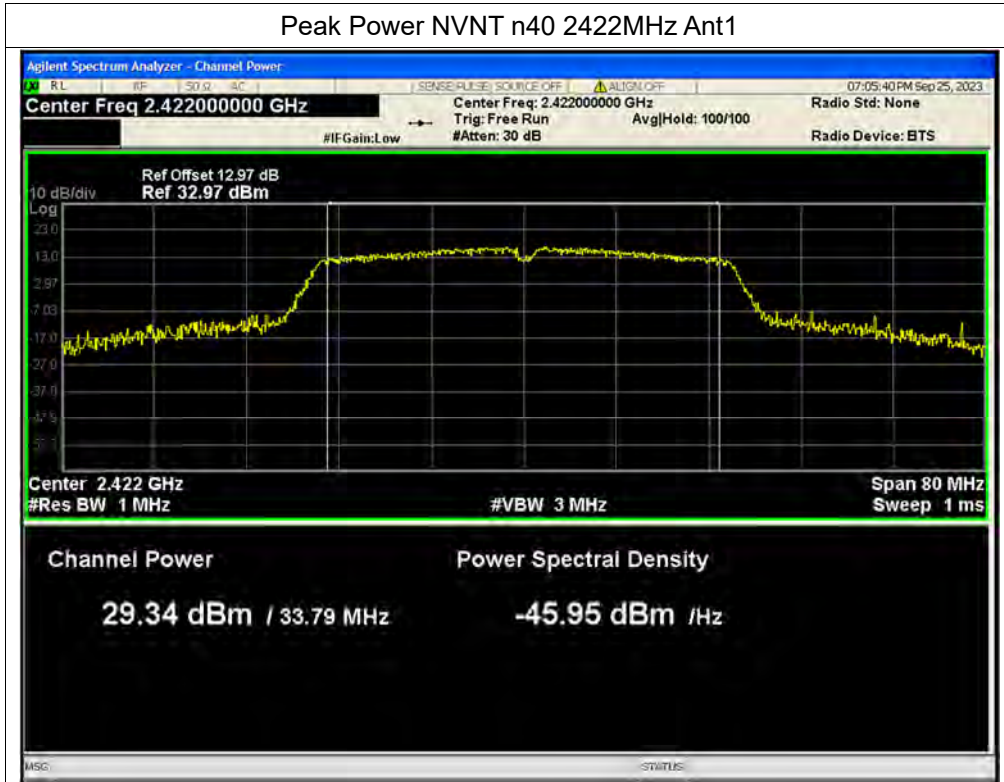


Peak Power NVNT n40 2422MHz Ant2

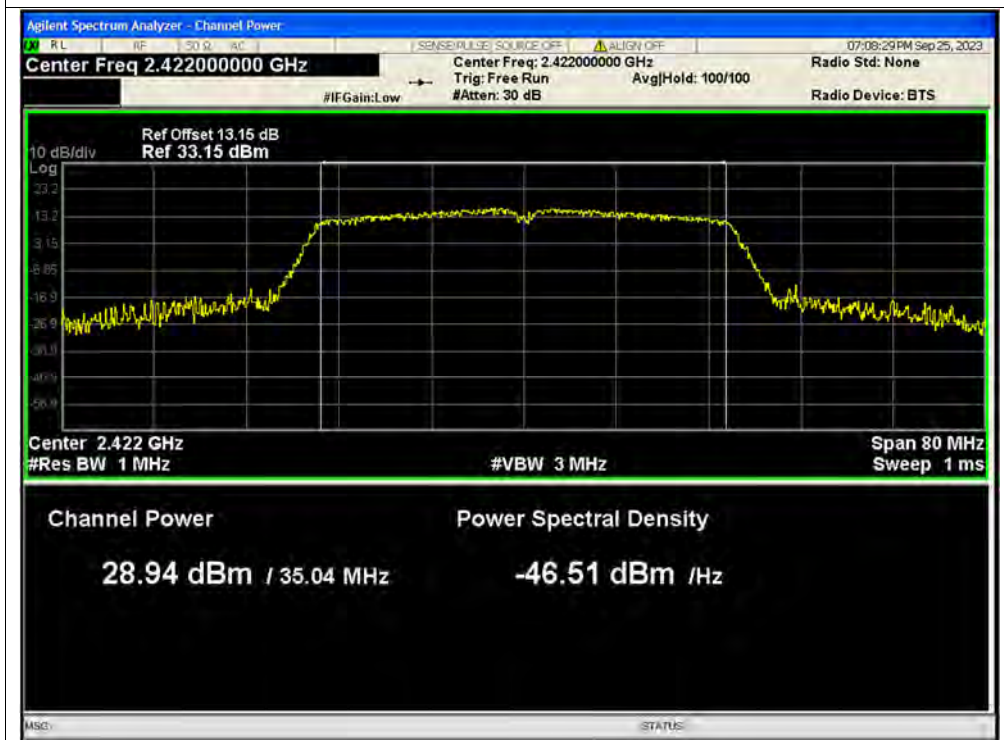




Peak Power NVNT n40 2422MHz Ant1

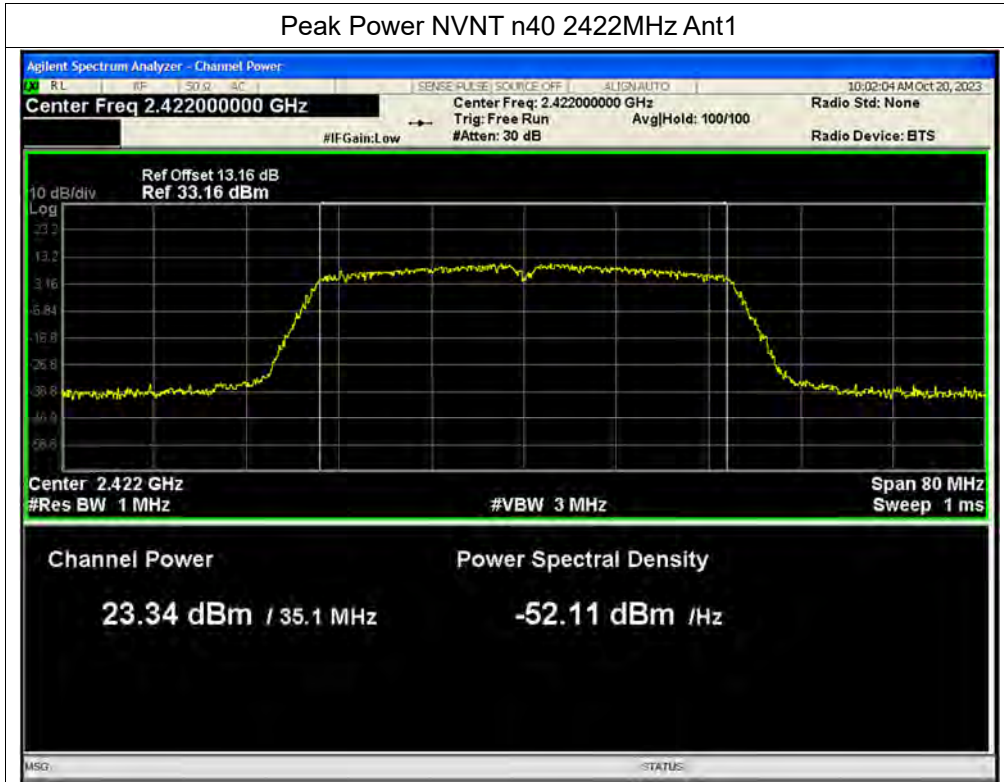


Peak Power NVNT n40 2422MHz Ant2

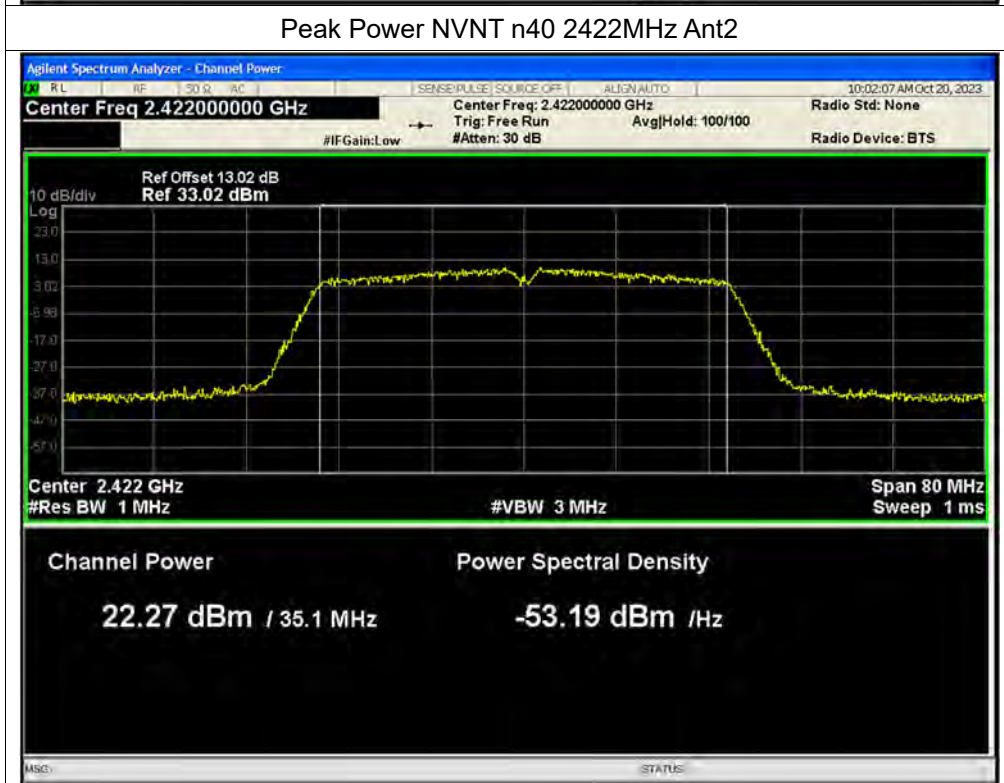




Peak Power NVNT n40 2442MHz Ant1

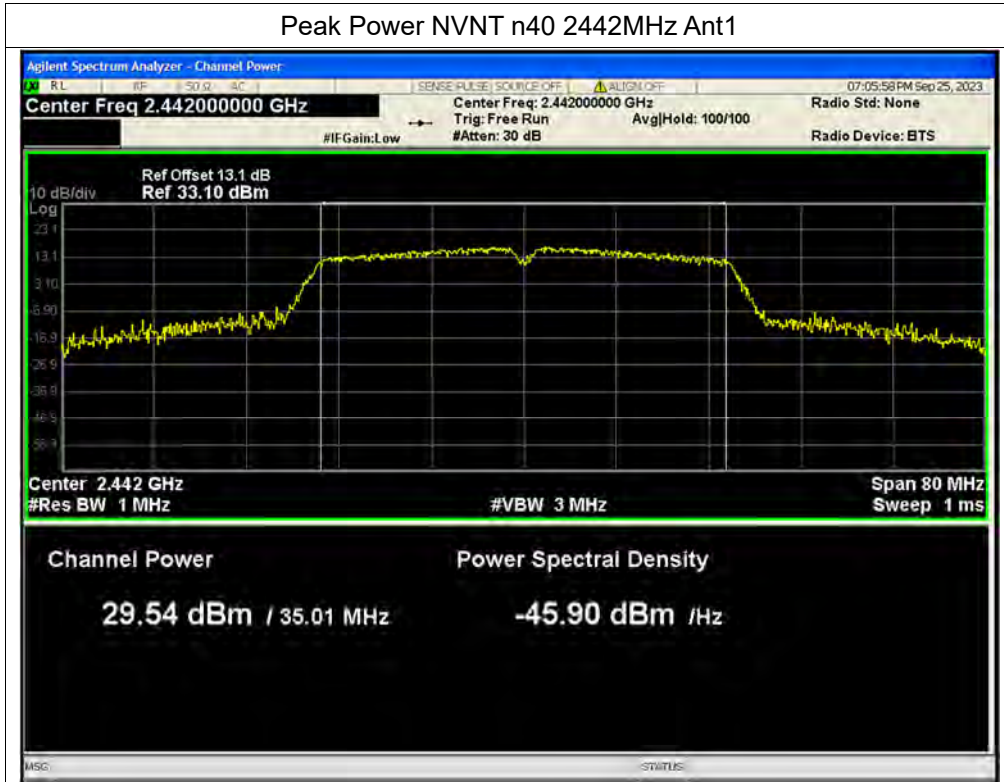


Peak Power NVNT n40 2442MHz Ant2

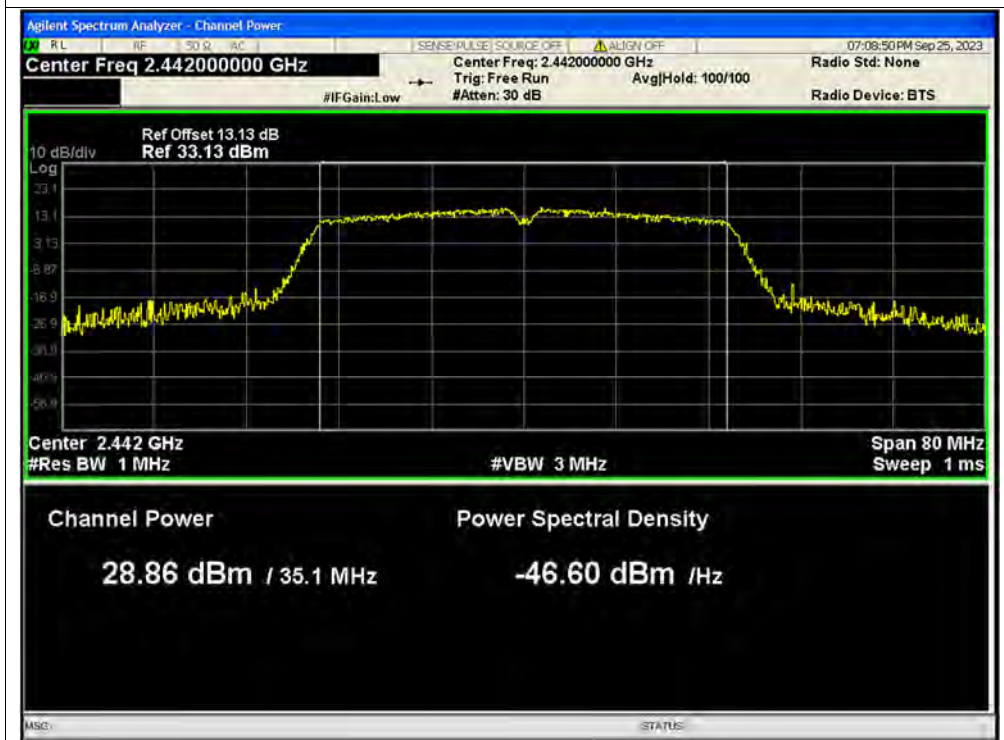




Peak Power NVNT n40 2442MHz Ant1

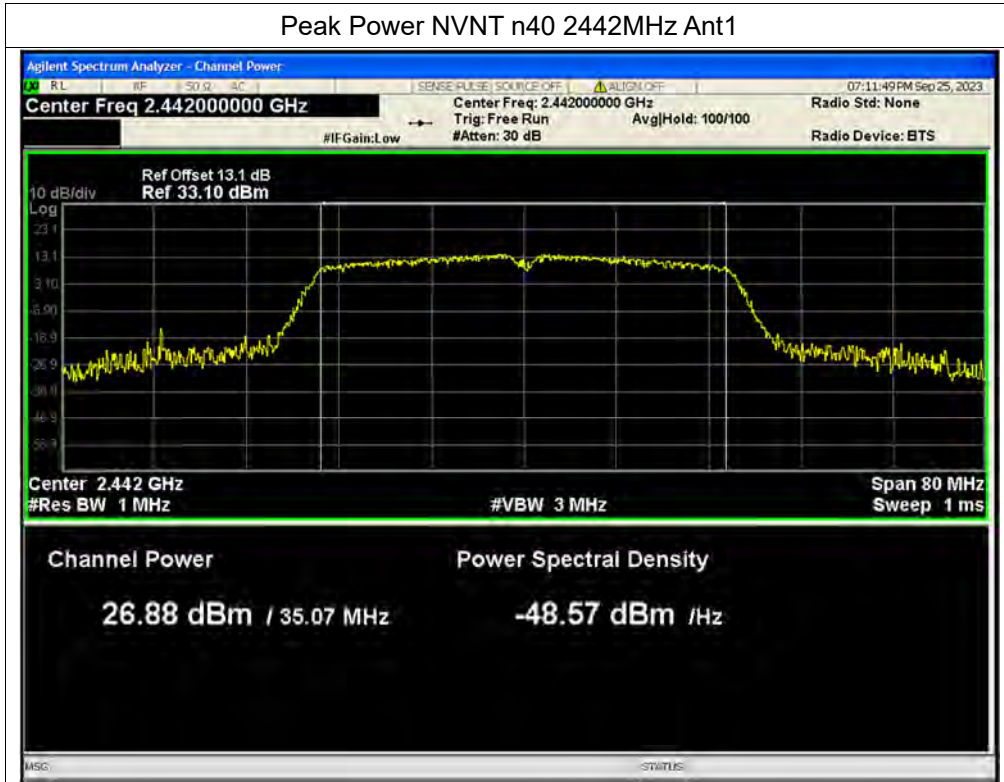


Peak Power NVNT n40 2442MHz Ant2

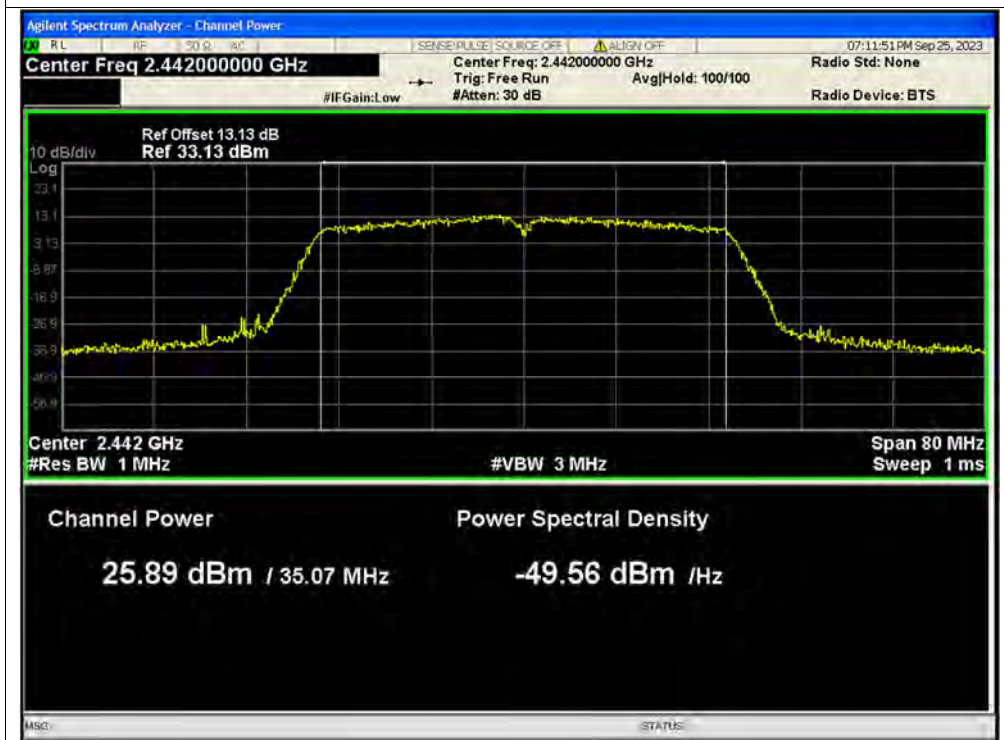



Peak Power NVNT n40 2462MHz Ant1

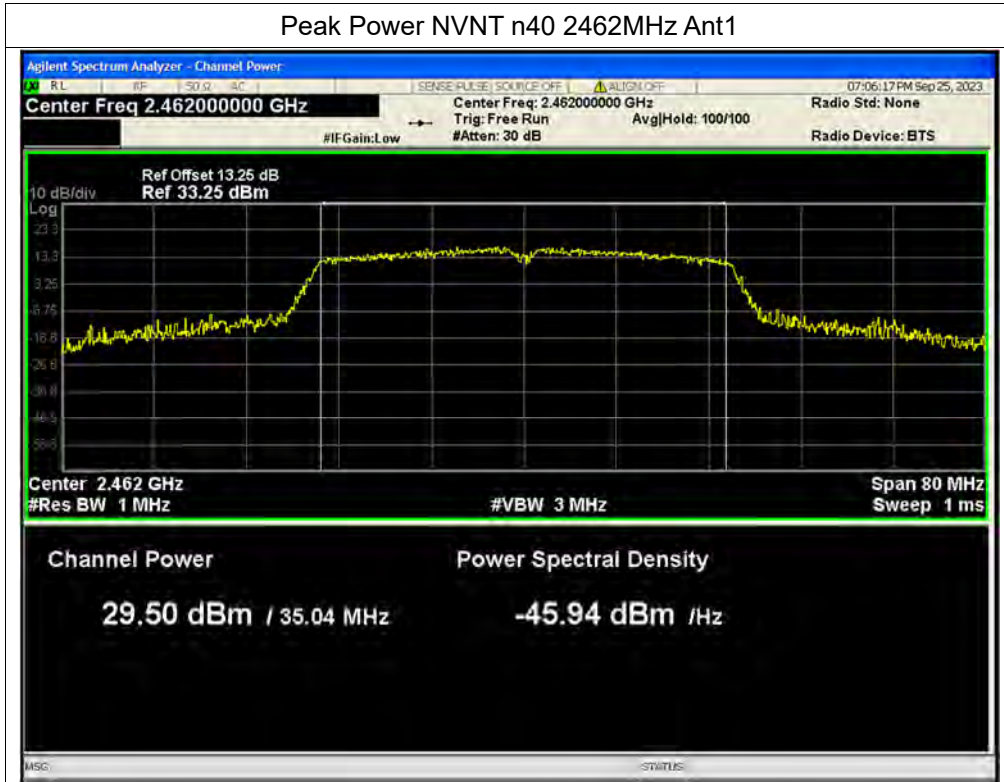


Peak Power NVNT n40 2462MHz Ant2






Peak Power NVNT n40 2462MHz Ant1

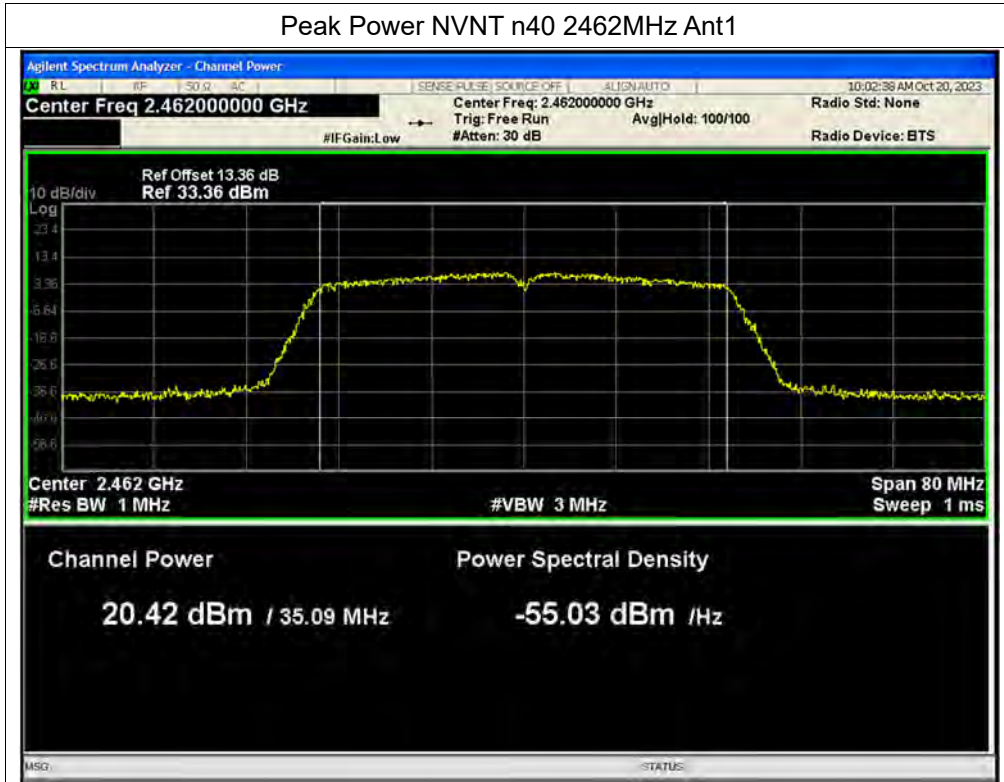


Peak Power NVNT n40 2462MHz Ant2

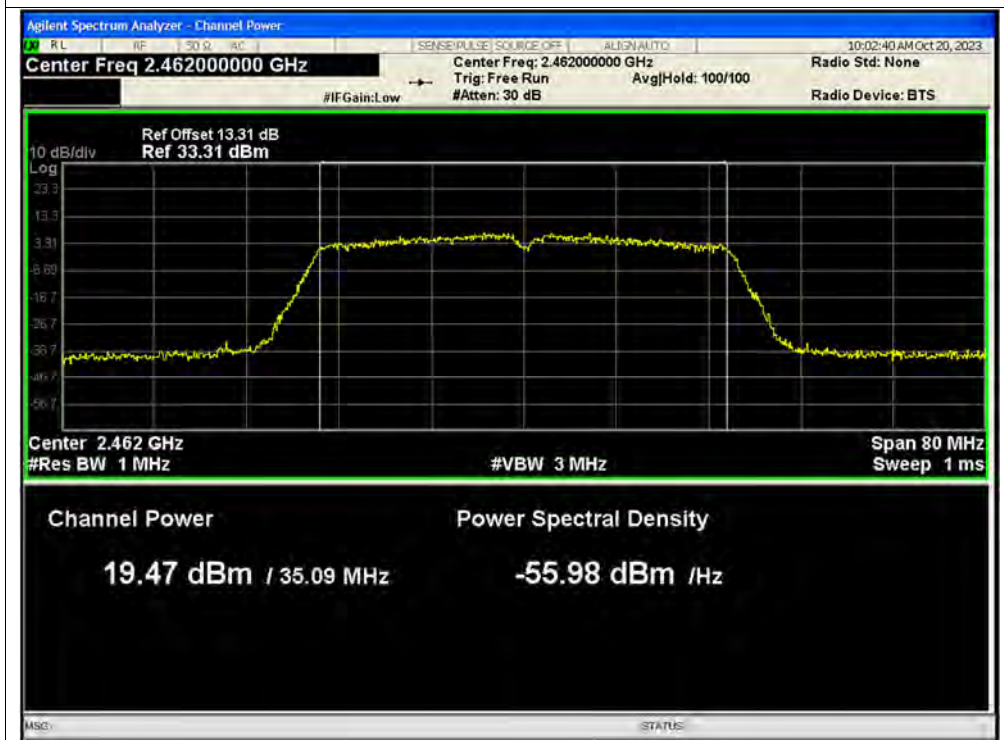




Peak Power NVNT ax20 2412MHz Ant1

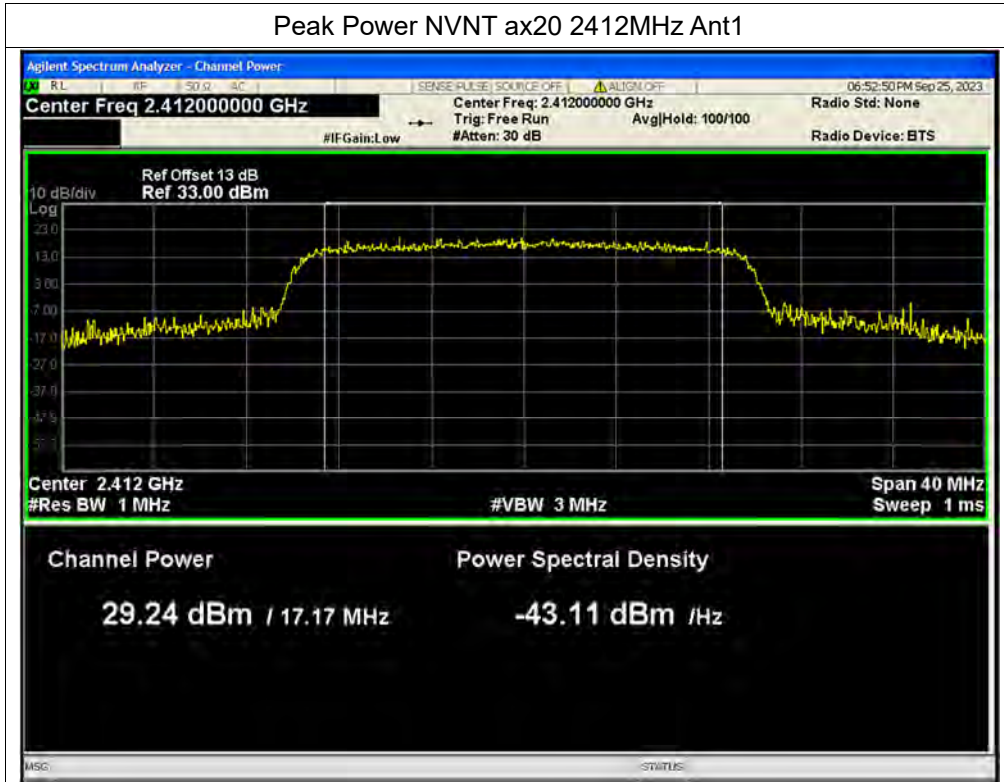


Peak Power NVNT ax20 2412MHz Ant2

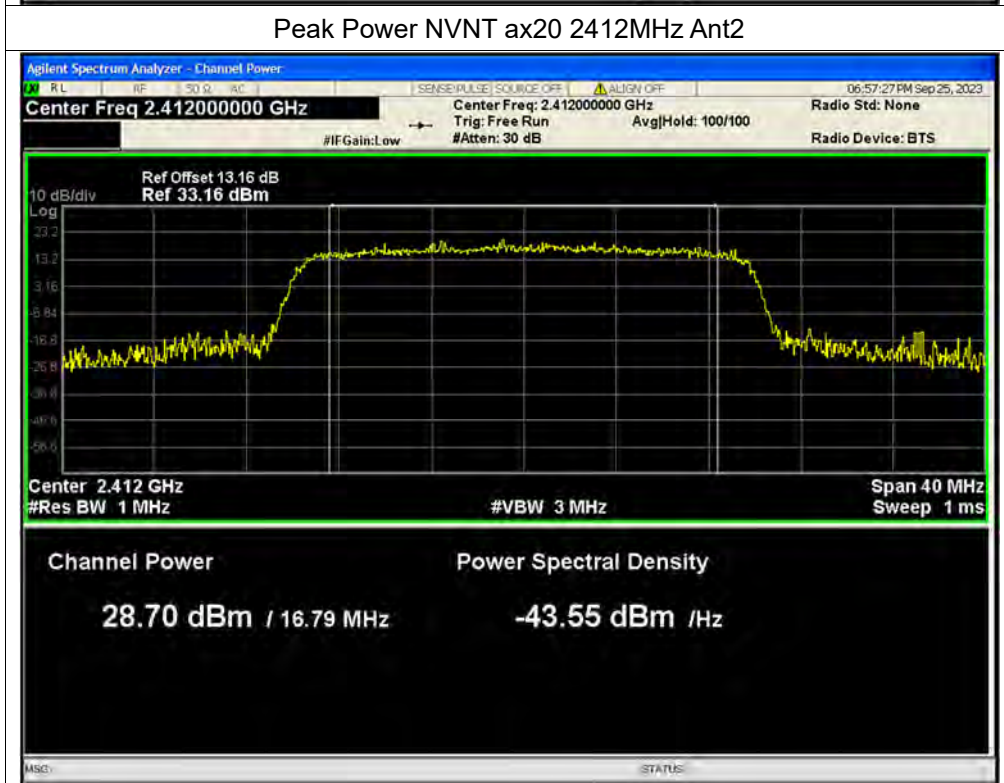




Peak Power NVNT ax20 2412MHz Ant1

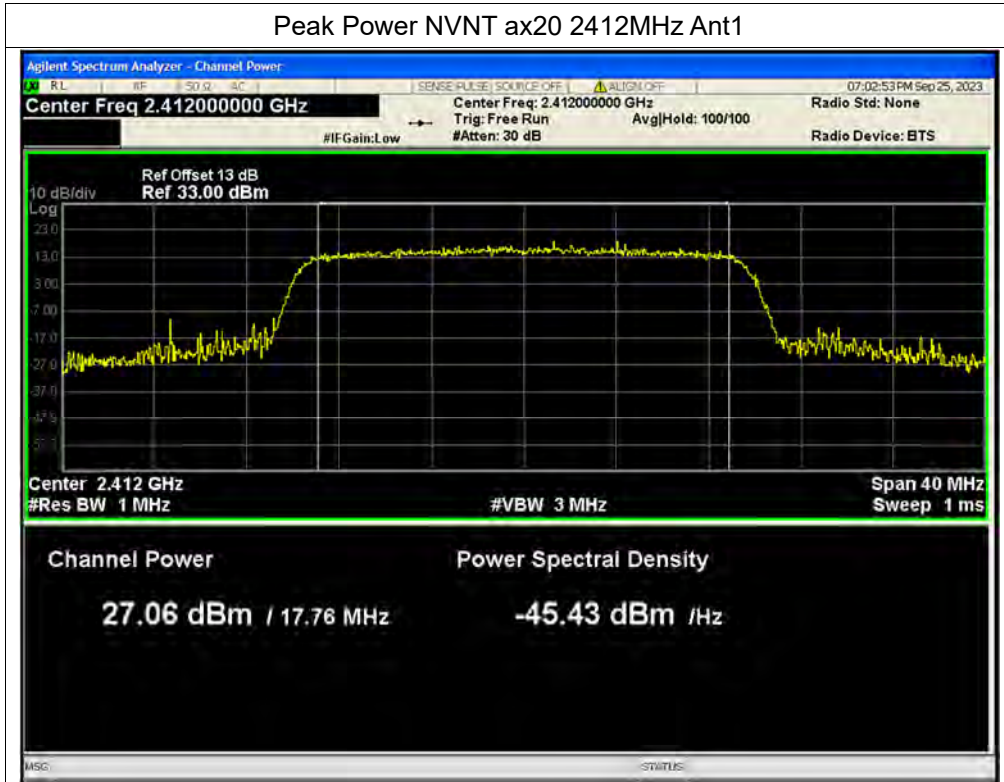


Peak Power NVNT ax20 2412MHz Ant2

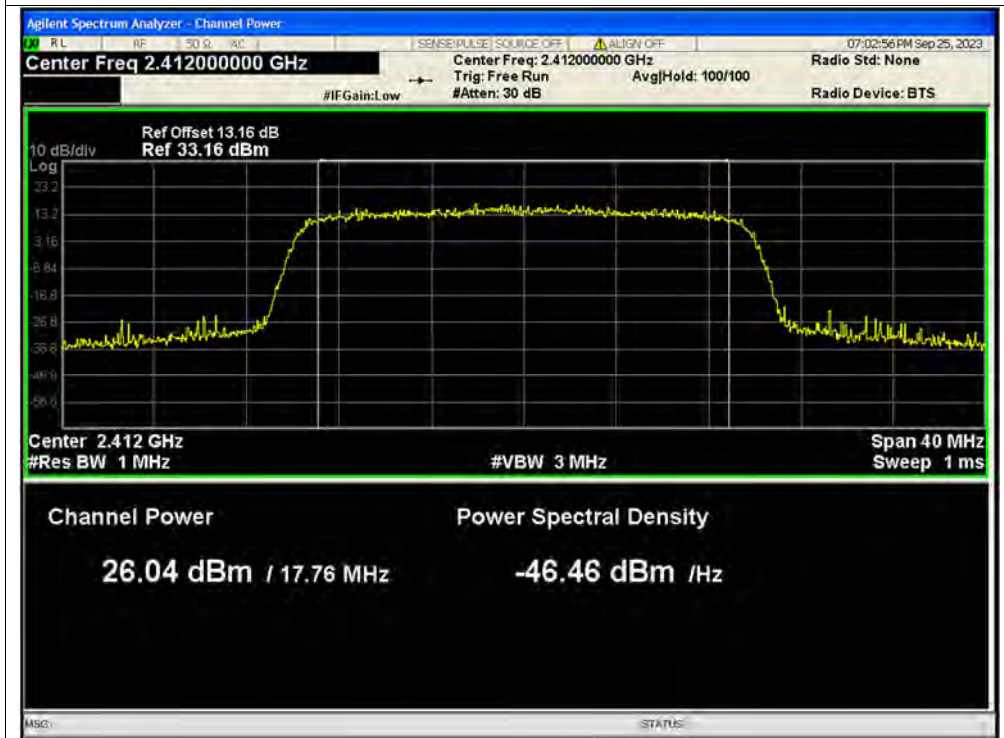




Peak Power NVNT ax20 2442MHz Ant1

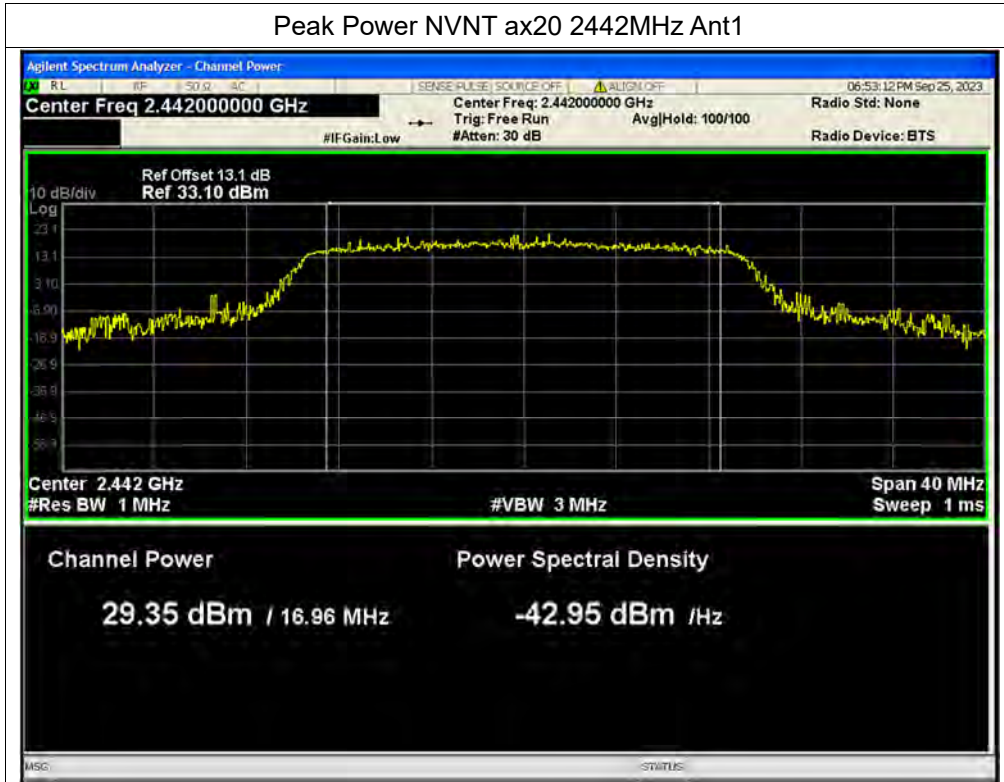


Peak Power NVNT ax20 2442MHz Ant2

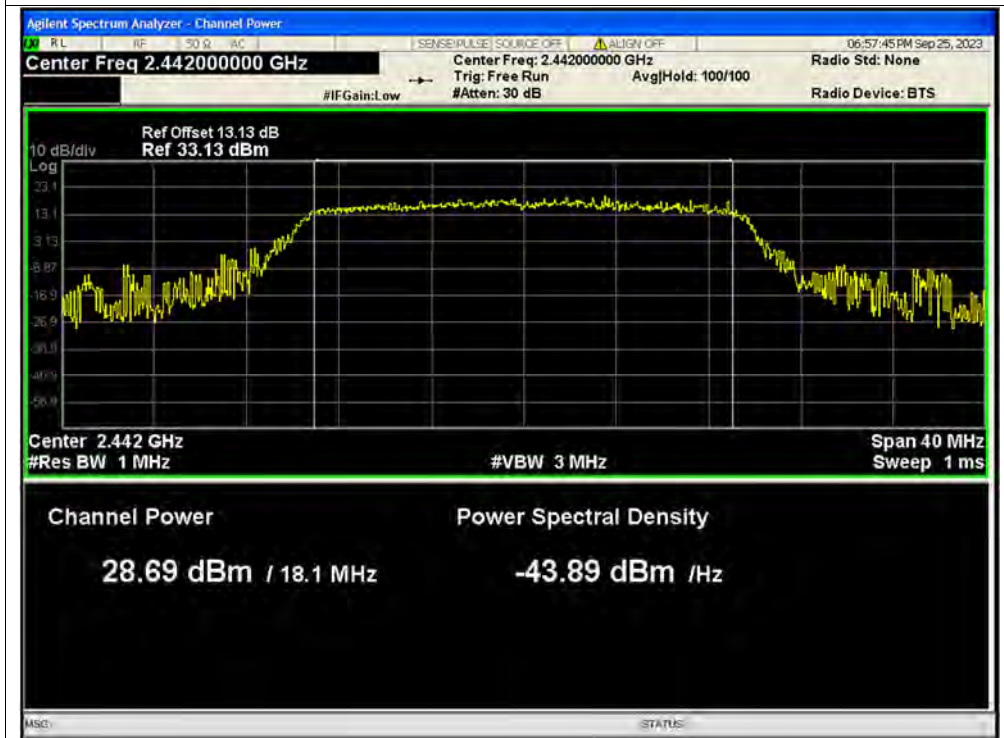




Peak Power NVNT ax20 2442MHz Ant1

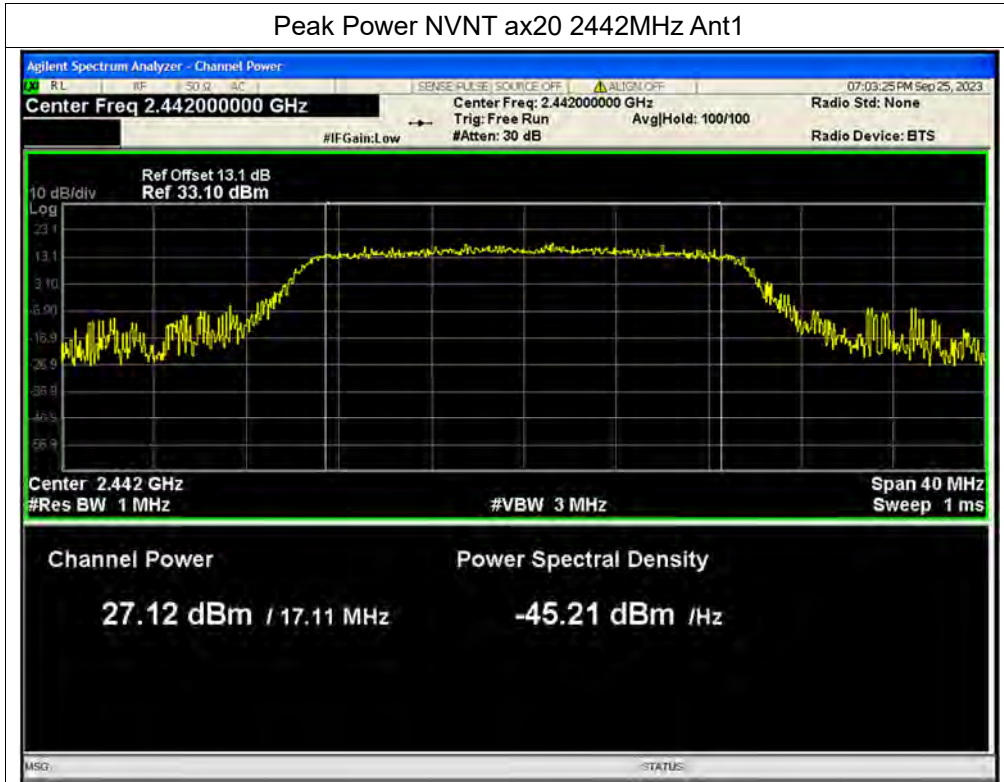


Peak Power NVNT ax20 2442MHz Ant2

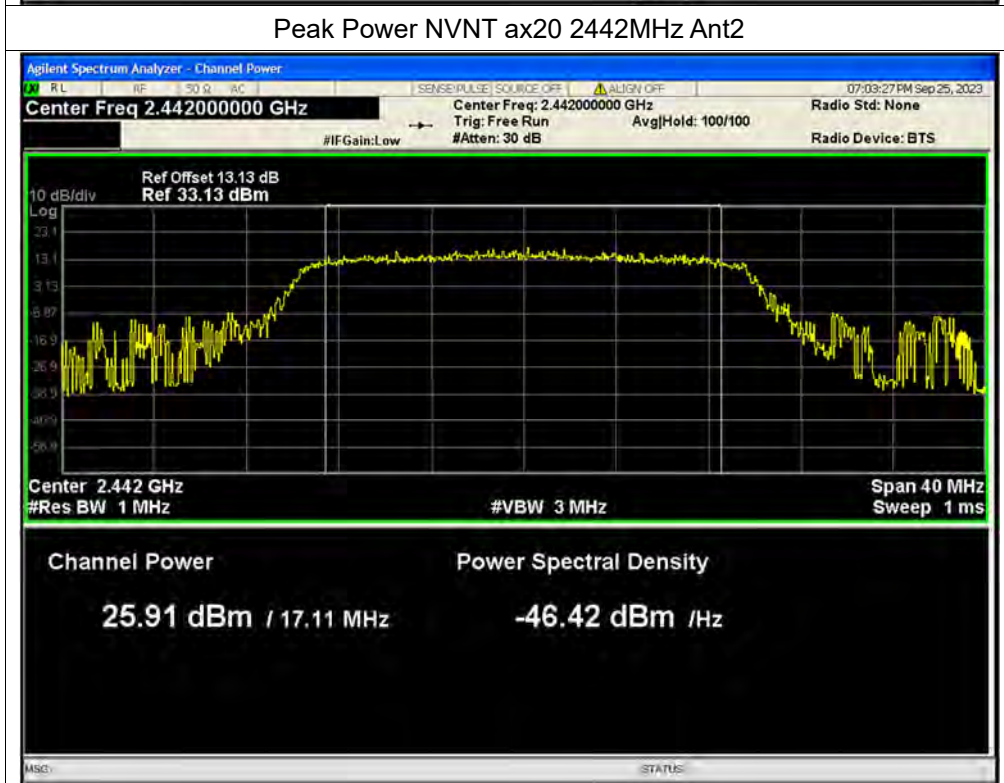




Peak Power NVNT ax20 2472MHz Ant1

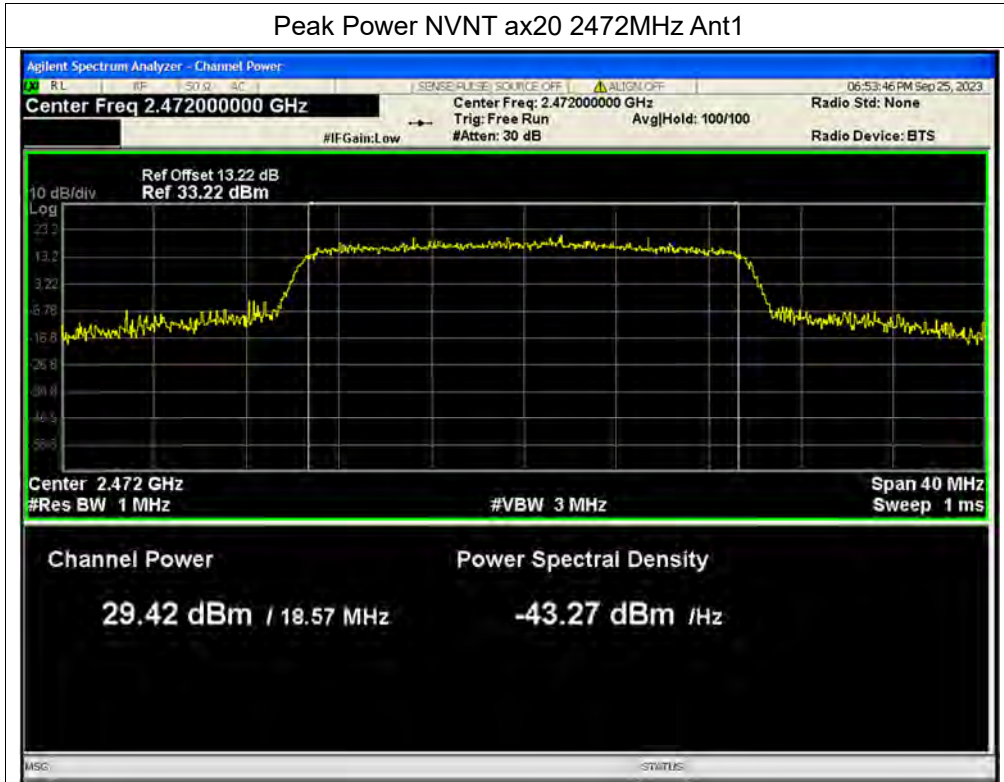


Peak Power NVNT ax20 2472MHz Ant2

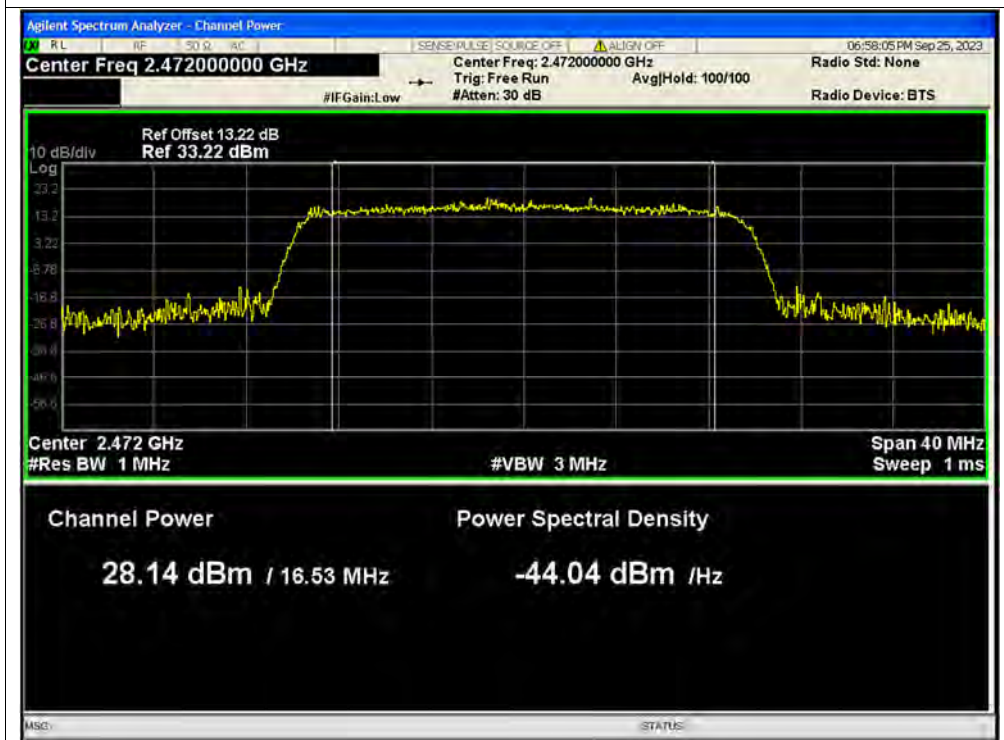




Peak Power NVNT ax20 2472MHz Ant1

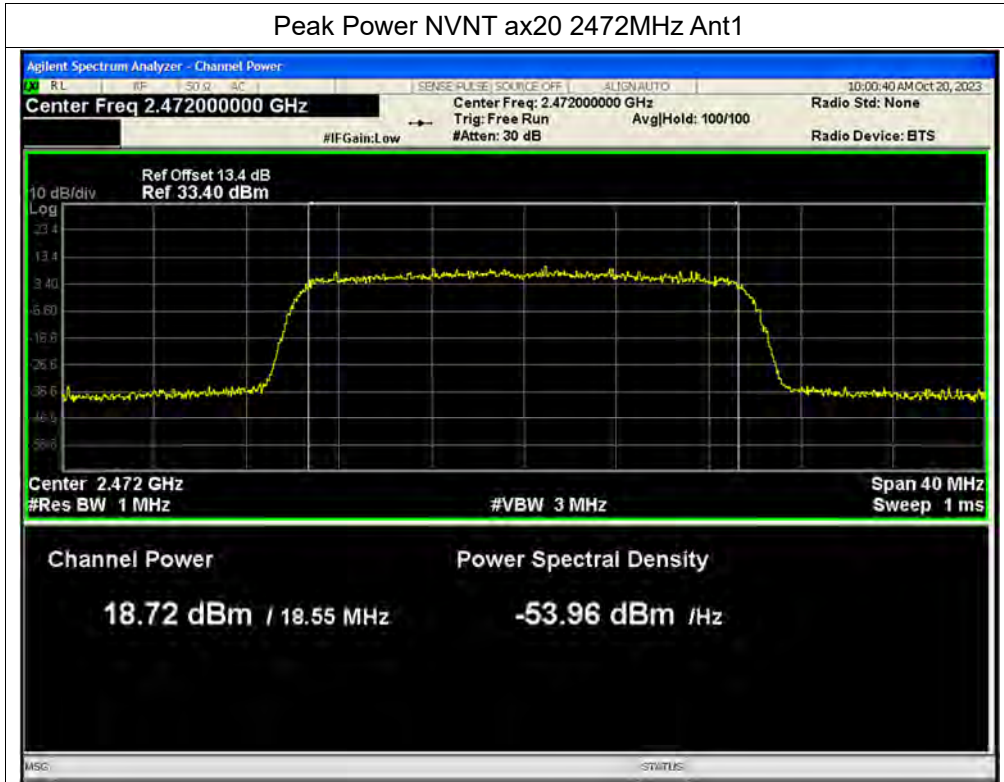


Peak Power NVNT ax20 2472MHz Ant2

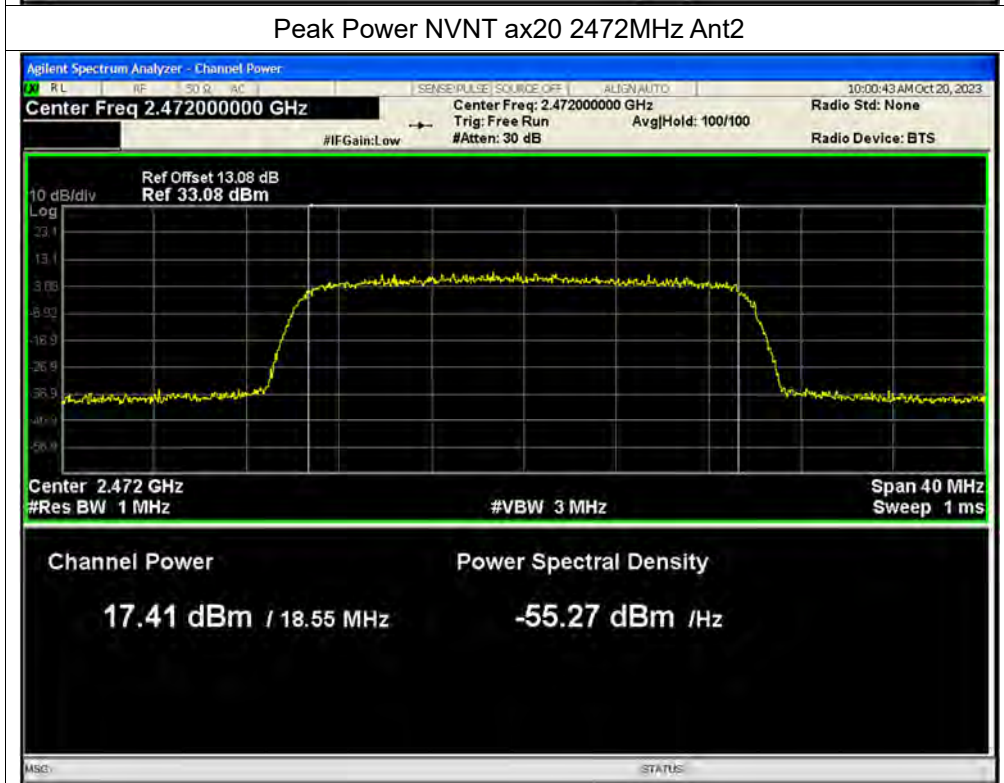




Peak Power NVNT ax40 2422MHz Ant1

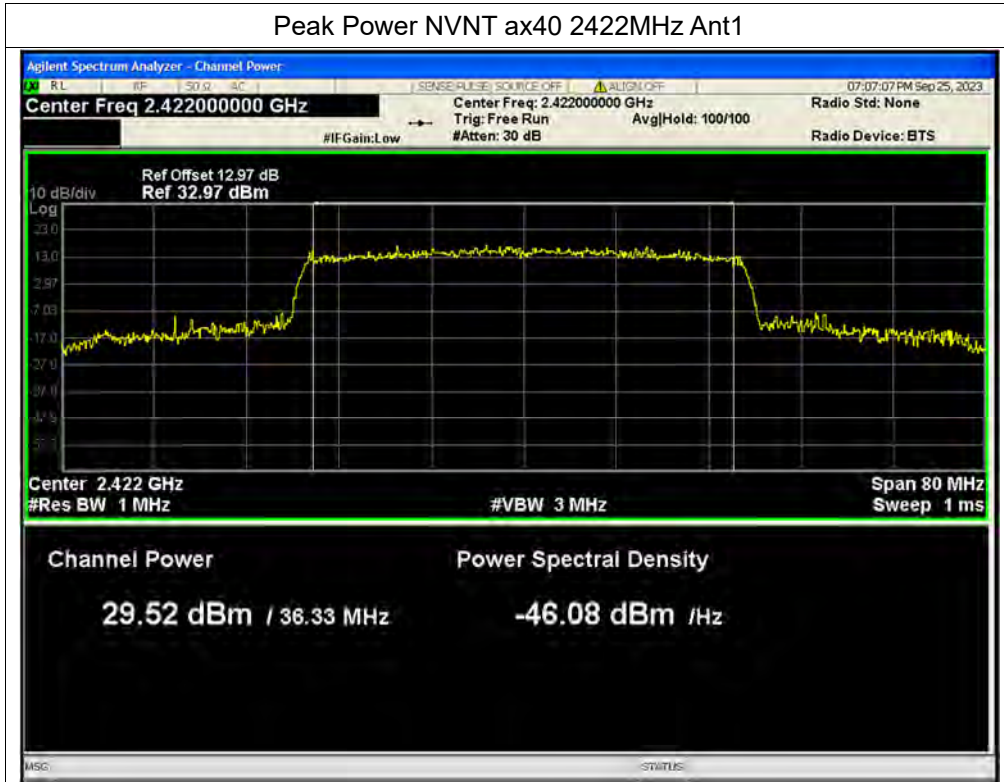


Peak Power NVNT ax40 2422MHz Ant2

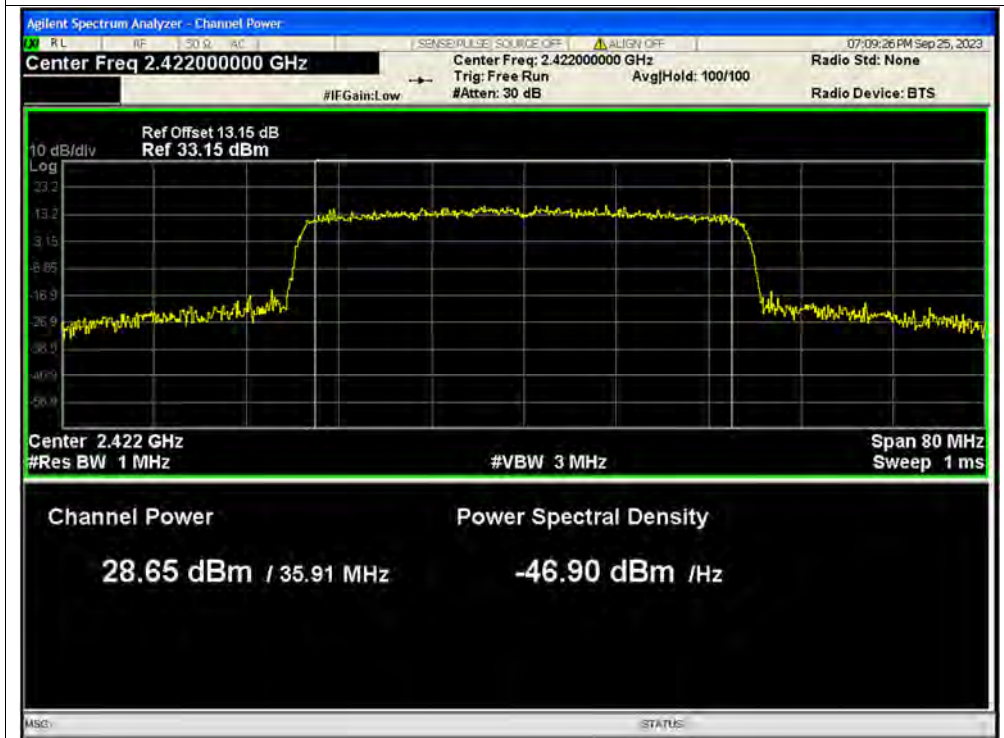




Peak Power NVNT ax40 2422MHz Ant1

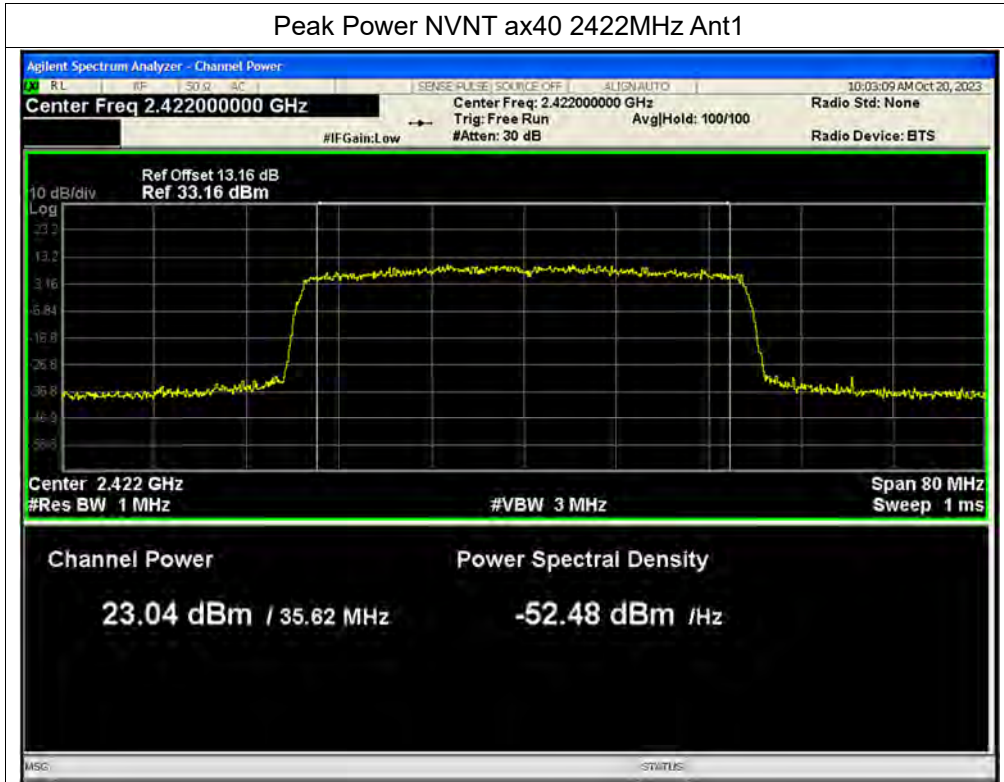


Peak Power NVNT ax40 2422MHz Ant2

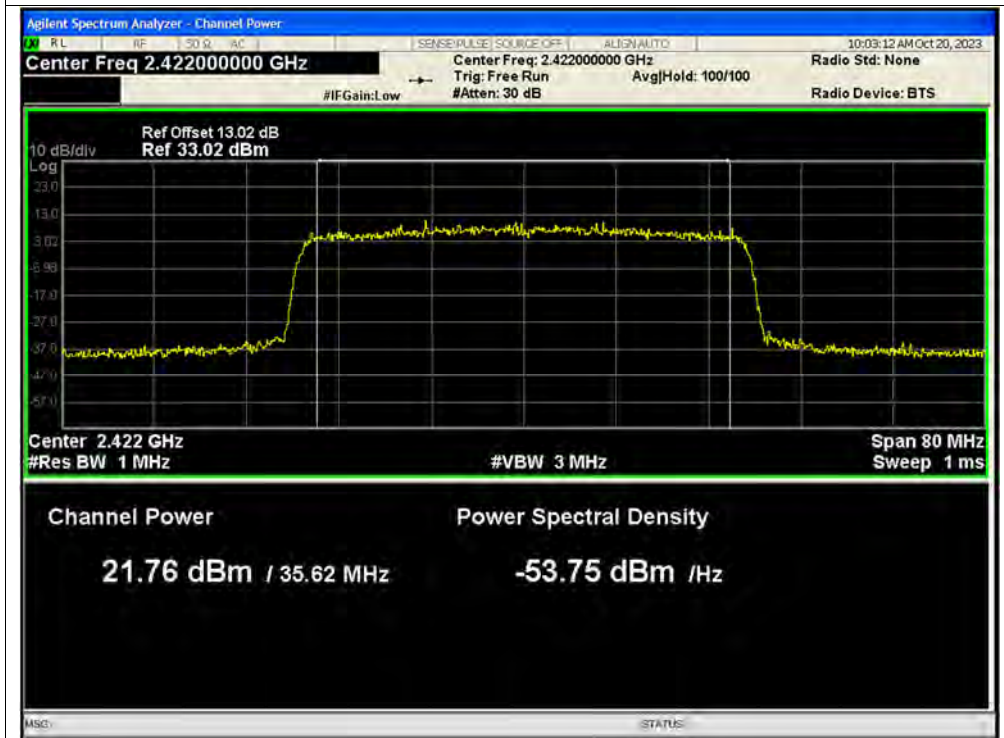




Peak Power NVNT ax40 2442MHz Ant1

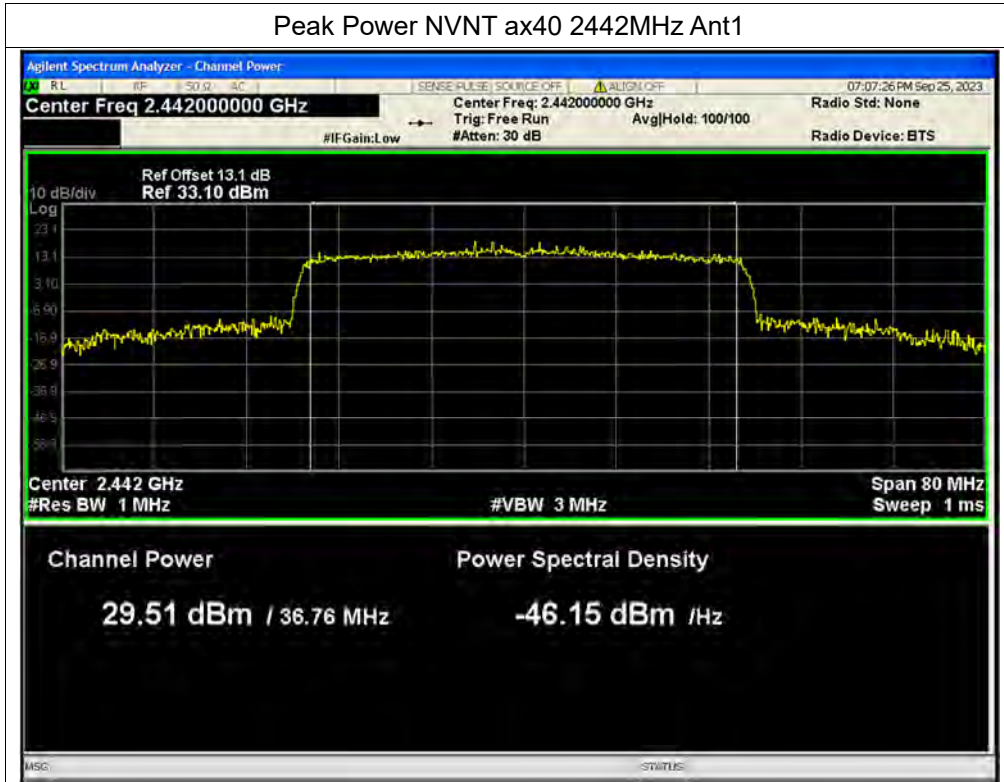


Peak Power NVNT ax40 2442MHz Ant2

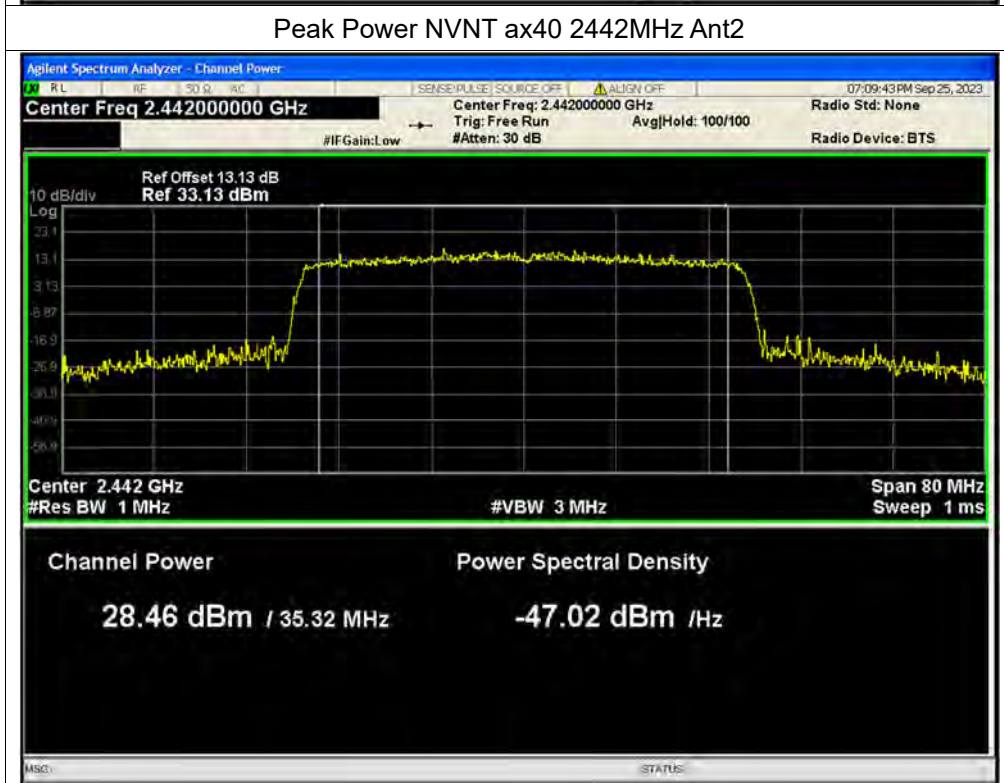




Peak Power NVNT ax40 2442MHz Ant1

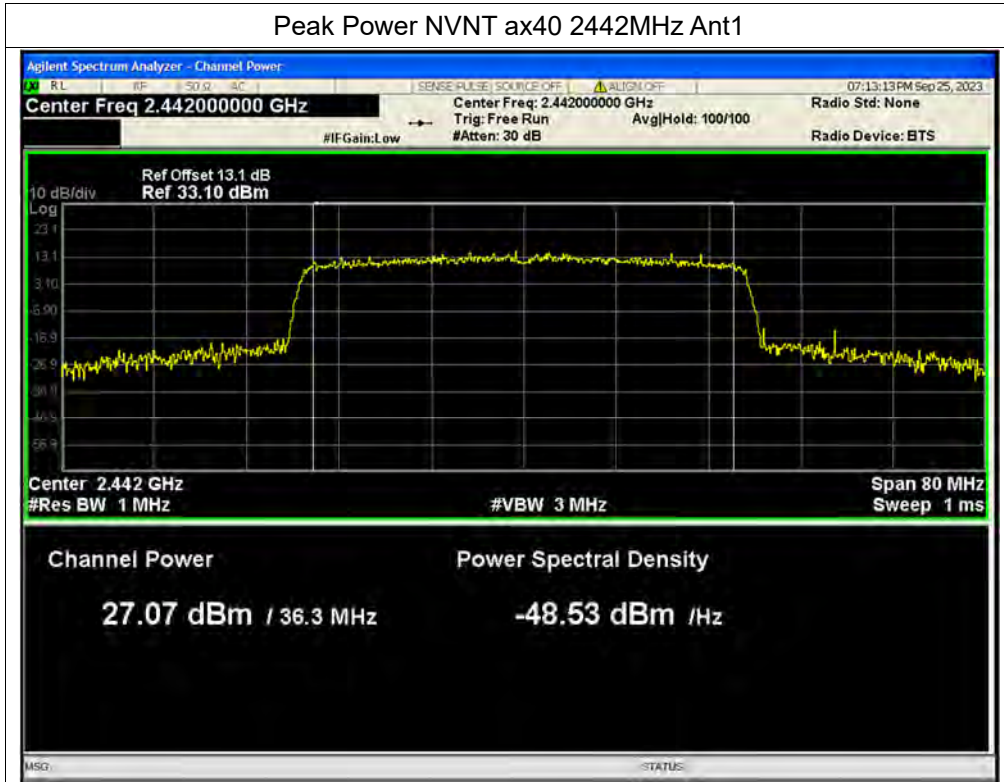


Peak Power NVNT ax40 2442MHz Ant2

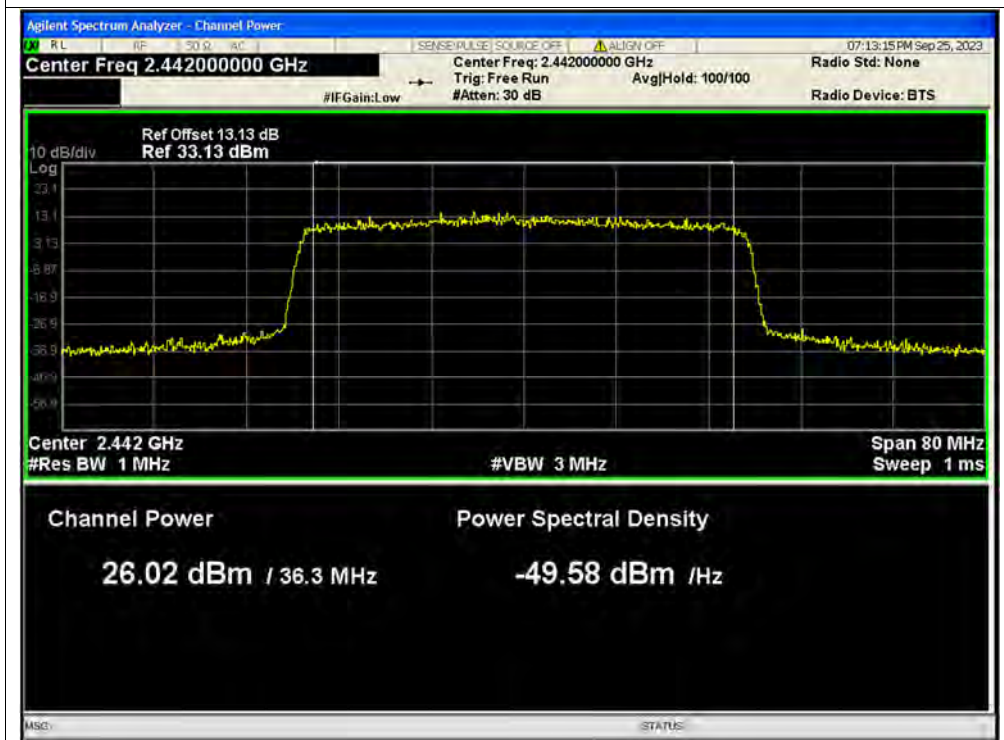




Peak Power NVNT ax40 2462MHz Ant1

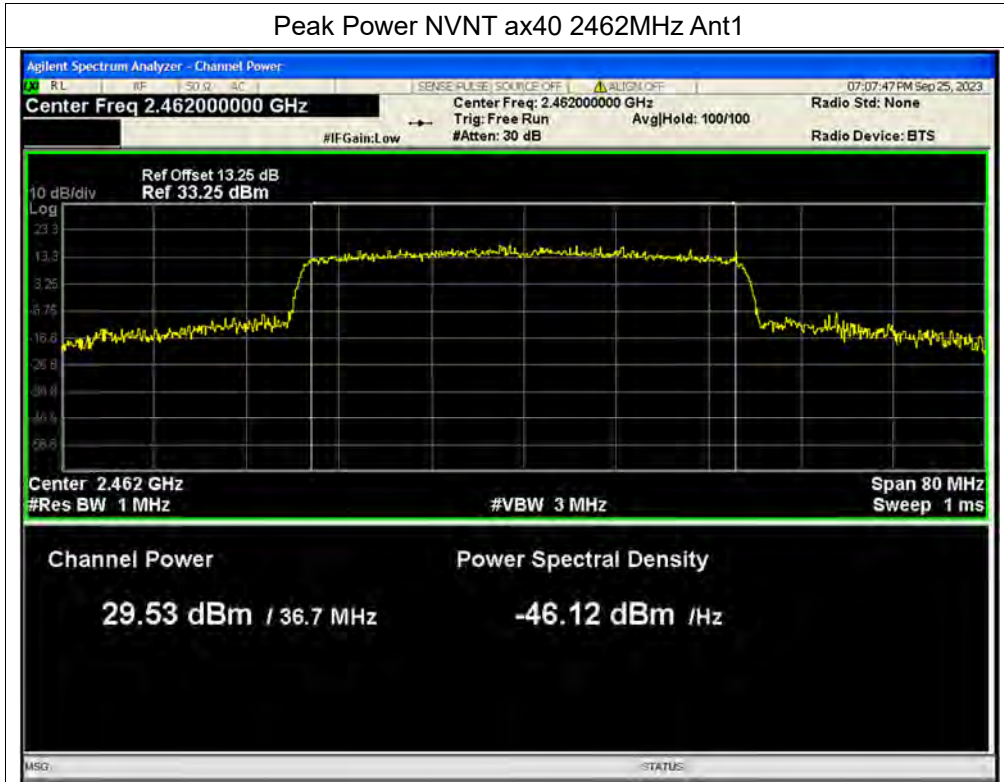


Peak Power NVNT ax40 2462MHz Ant2

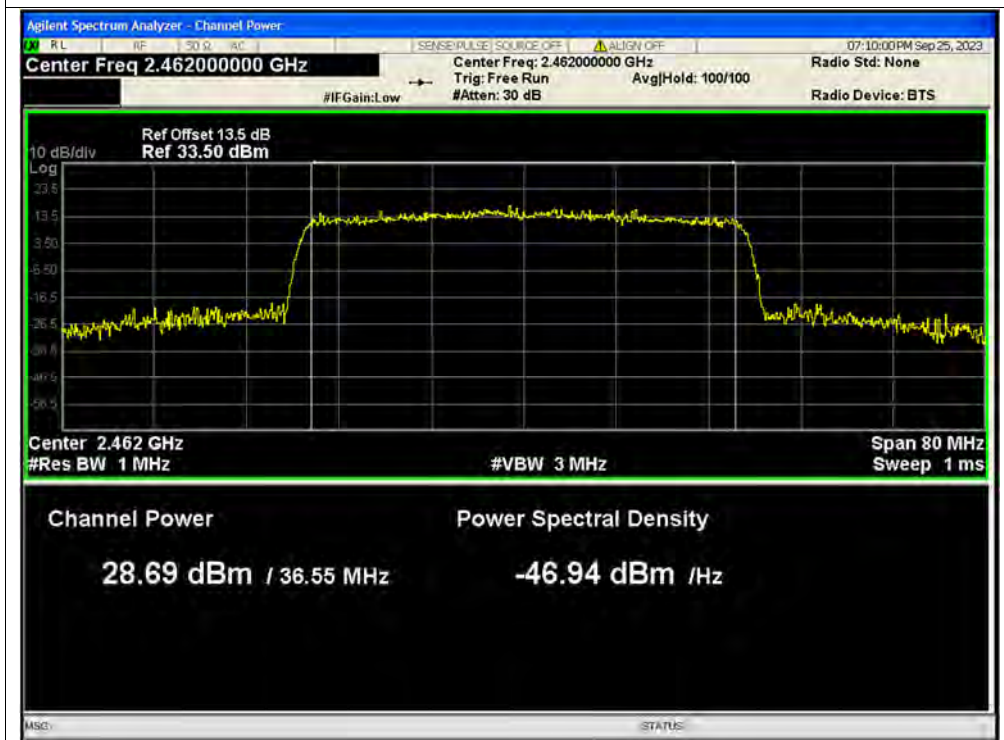




Peak Power NVNT ax40 2462MHz Ant1

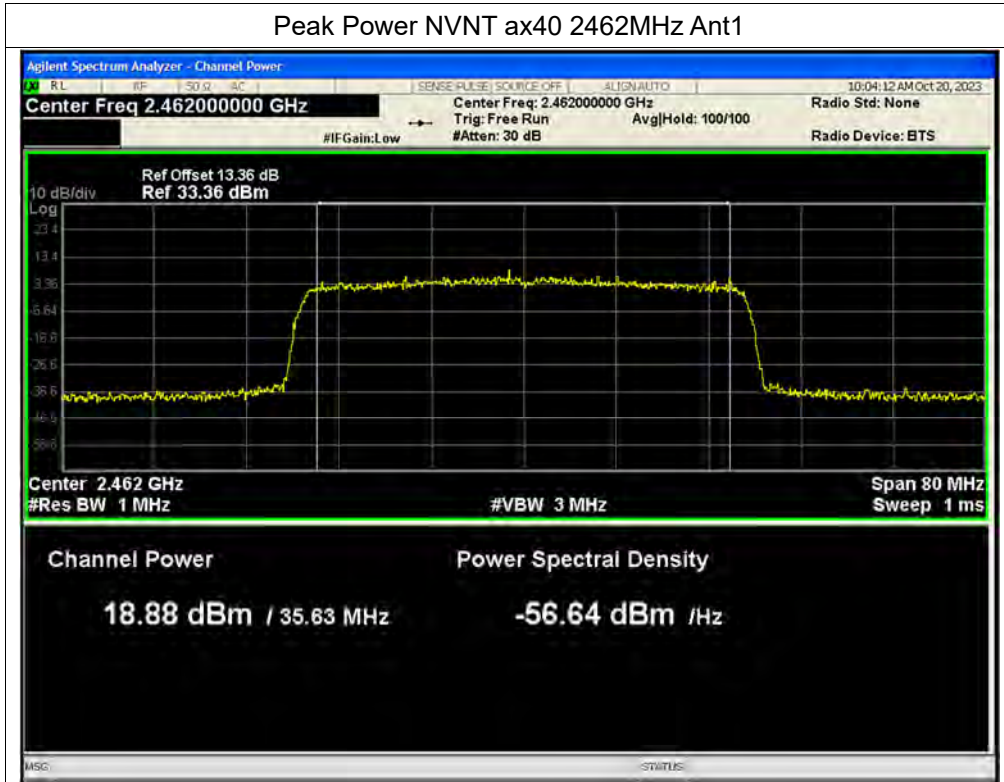

Peak Power NVNT ax40 2462MHz Ant2

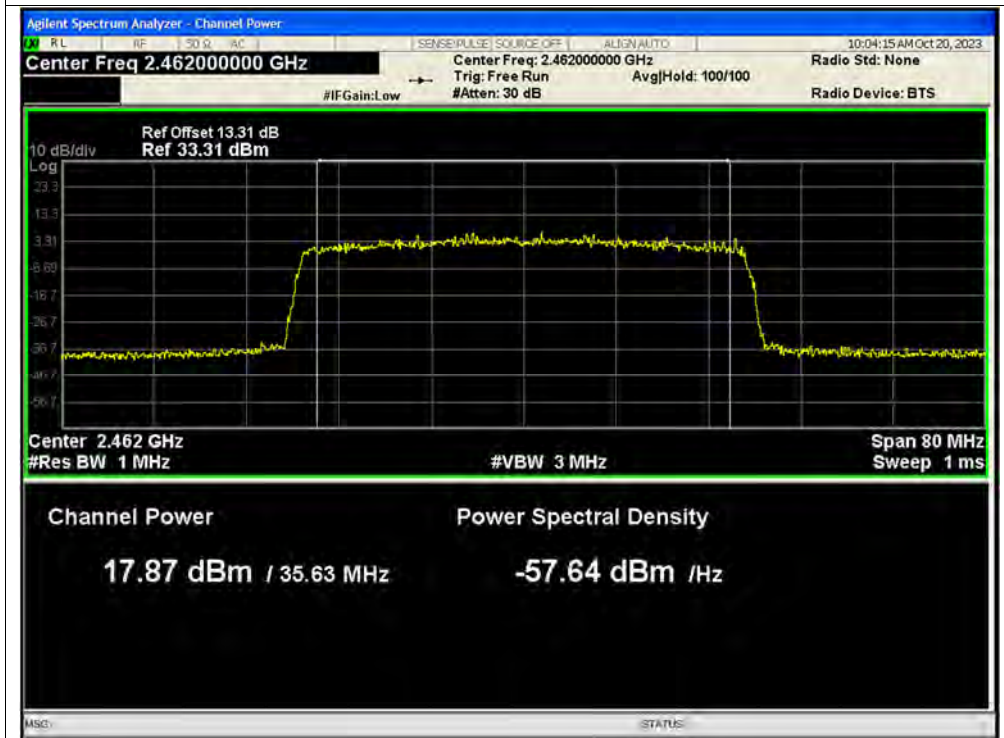



A.3. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	b	2412	Ant1	24.3	0.03	24.33	0.27102	30	Pass
NVNT	b	2412	Ant2	23.47	0.03	23.5	0.22387	30	Pass
NVNT	b	2442	Ant1	25.03	0.03	25.06	0.32063	30	Pass
NVNT	b	2442	Ant2	24.47	0.03	24.5	0.28184	30	Pass
NVNT	b	2472	Ant1	16.68	0.03	16.71	0.04688	30	Pass
NVNT	b	2472	Ant2	15.33	0.03	15.36	0.03436	30	Pass
NVNT	g	2412	Ant1	22.88	0.18	23.06	0.2023	30	Pass
NVNT	g	2412	Ant2	22.34	0.18	22.52	0.17865	30	Pass
NVNT	g	2442	Ant1	22.84	0.18	23.02	0.20045	30	Pass
NVNT	g	2442	Ant2	22.33	0.18	22.51	0.17824	30	Pass
NVNT	g	2472	Ant1	13.22	0.18	13.4	0.02188	30	Pass
NVNT	g	2472	Ant2	11.62	0.18	11.8	0.01514	30	Pass
NVNT	n20	2412	Ant1	22.49	0.19	22.68	0.18535	30	Pass
NVNT	n20	2412	Ant2	21.87	0.19	22.06	0.16069	30	Pass
NVNT	n20	2412	Ant1	20.07	0.19	20.26	0.10617	30	Pass
NVNT	n20	2412	Ant2	18.92	0.19	19.11	0.08147	30	Pass
NVNT	n20	2412	Sum	NaN	NaN	22.73	0.18764	30	Pass
NVNT	n20	2442	Ant1	22.09	0.19	22.28	0.16904	30	Pass
NVNT	n20	2442	Ant2	21.76	0.19	21.95	0.15668	30	Pass
NVNT	n20	2442	Ant1	20.18	0.19	20.37	0.10889	30	Pass
NVNT	n20	2442	Ant2	18.89	0.19	19.08	0.08091	30	Pass
NVNT	n20	2442	Sum	NaN	NaN	22.78	0.1898	30	Pass
NVNT	n20	2472	Ant1	21.99	0.19	22.18	0.1652	30	Pass
NVNT	n20	2472	Ant2	21.53	1.76	23.29	0.2133	30	Pass
NVNT	n20	2472	Ant1	19.98	0.19	20.17	0.10399	30	Pass
NVNT	n20	2472	Ant2	18.71	0.19	18.9	0.07762	30	Pass
NVNT	n20	2472	Sum	NaN	NaN	22.59	0.18162	30	Pass
NVNT	n40	2422	Ant1	21.91	0.37	22.28	0.16904	30	Pass
NVNT	n40	2422	Ant2	21.46	0.37	21.83	0.15241	30	Pass
NVNT	n40	2422	Ant1	15.96	0.37	16.33	0.04295	30	Pass
NVNT	n40	2422	Ant2	14.49	0.37	14.86	0.03062	30	Pass
NVNT	n40	2422	Sum	NaN	NaN	18.67	0.07357	30	Pass
NVNT	n40	2442	Ant1	22.04	0.37	22.41	0.17418	30	Pass



NVNT	n40	2442	Ant2	21.36	0.37	21.73	0.14894	30	Pass
NVNT	n40	2442	Ant1	19.39	0.37	19.76	0.09462	30	Pass
NVNT	n40	2442	Ant2	17.98	0.37	18.35	0.06839	30	Pass
NVNT	n40	2442	Sum	NaN	NaN	22.12	0.16301	30	Pass
NVNT	n40	2462	Ant1	22	0.37	22.37	0.17258	30	Pass
NVNT	n40	2462	Ant2	21.52	0.37	21.89	0.15453	30	Pass
NVNT	n40	2462	Ant1	12.95	0.37	13.32	0.02148	30	Pass
NVNT	n40	2462	Ant2	11.61	0.37	11.98	0.01578	30	Pass
NVNT	n40	2462	Sum	NaN	NaN	15.71	0.03725	30	Pass
NVNT	ax20	2412	Ant1	21.39	0.24	21.63	0.14555	30	Pass
NVNT	ax20	2412	Ant2	20.85	0.24	21.09	0.12853	30	Pass
NVNT	ax20	2412	Ant1	19.02	0.44	19.46	0.08831	30	Pass
NVNT	ax20	2412	Ant2	17.85	0.44	18.29	0.06745	30	Pass
NVNT	ax20	2412	Sum	NaN	NaN	21.92	0.15576	30	Pass
NVNT	ax20	2442	Ant1	21.46	0.24	21.7	0.14791	30	Pass
NVNT	ax20	2442	Ant2	20.48	0.24	20.72	0.11803	30	Pass
NVNT	ax20	2442	Ant1	19.09	0.44	19.53	0.08974	30	Pass
NVNT	ax20	2442	Ant2	17.77	0.44	18.21	0.06622	30	Pass
NVNT	ax20	2442	Sum	NaN	NaN	21.93	0.15596	30	Pass
NVNT	ax20	2472	Ant1	21.32	0.24	21.56	0.14322	30	Pass
NVNT	ax20	2472	Ant2	20.25	0.24	20.49	0.11194	30	Pass
NVNT	ax20	2472	Ant1	11.95	0.44	12.39	0.01734	30	Pass
NVNT	ax20	2472	Ant2	10.51	0.44	10.95	0.01245	30	Pass
NVNT	ax20	2472	Sum	NaN	NaN	14.74	0.02978	30	Pass
NVNT	ax40	2422	Ant1	21.14	0.44	21.58	0.14388	30	Pass
NVNT	ax40	2422	Ant2	20.29	0.77	21.06	0.12764	30	Pass
NVNT	ax40	2422	Ant1	14.74	0.77	15.51	0.03556	30	Pass
NVNT	ax40	2422	Ant2	13.33	0.77	14.1	0.0257	30	Pass
NVNT	ax40	2422	Sum	NaN	NaN	17.87	0.06127	30	Pass
NVNT	ax40	2442	Ant1	21.19	0.44	21.63	0.14555	30	Pass
NVNT	ax40	2442	Ant2	20.08	0.77	20.85	0.12162	30	Pass
NVNT	ax40	2442	Ant1	18.84	0.76	19.6	0.0912	30	Pass
NVNT	ax40	2442	Ant2	17.52	0.76	18.28	0.0673	30	Pass
NVNT	ax40	2442	Sum	NaN	NaN	22	0.1585	30	Pass
NVNT	ax40	2462	Ant1	21.17	0.44	21.61	0.14488	30	Pass
NVNT	ax40	2462	Ant2	20.23	0.77	21	0.12589	30	Pass
NVNT	ax40	2462	Ant1	10.62	0.76	11.38	0.01374	30	Pass
NVNT	ax40	2462	Ant2	9.31	0.76	10.07	0.01016	30	Pass




REPORT No.: SZ23090108W01

NVNT	ax40	2462	Sum	NaN	NaN	13.78	0.0239	30	Pass
------	------	------	-----	-----	-----	-------	--------	----	------




Test Graphs

Average Power NVNT b 2412MHz Ant1

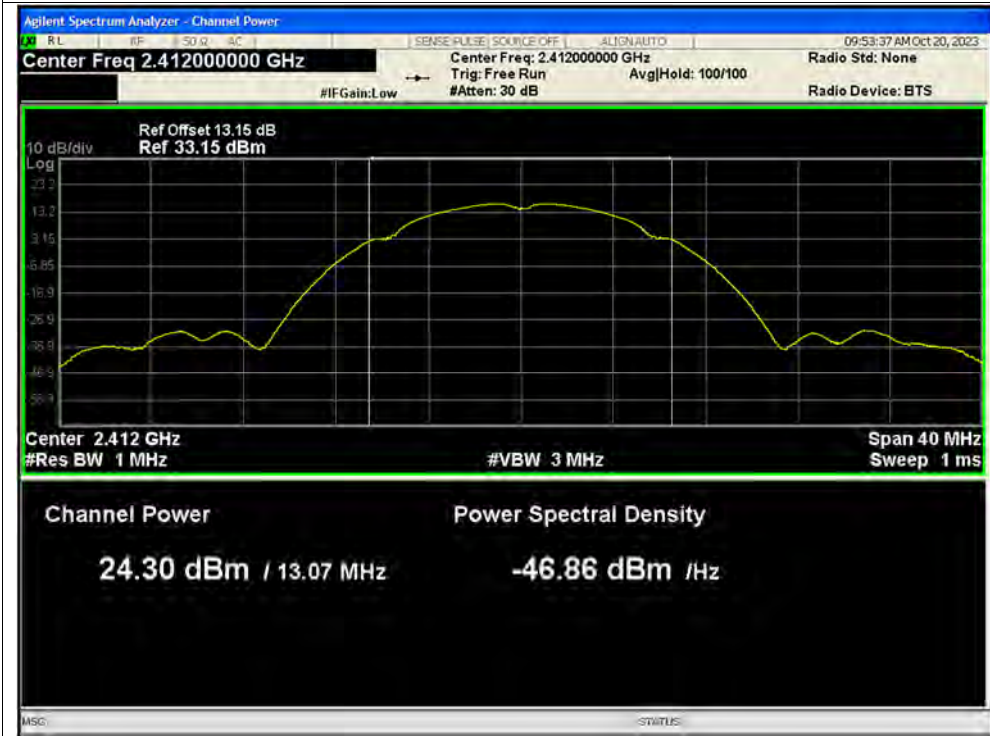


Average Power NVNT b 2412MHz Ant2

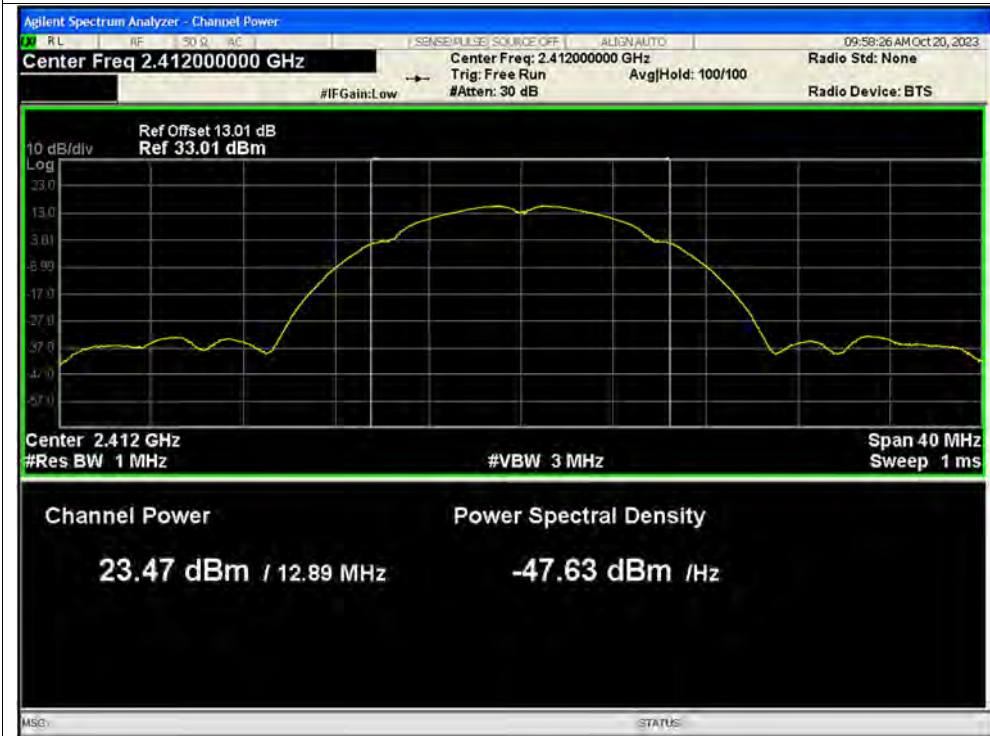




Average Power NVNT b 2442MHz Ant1

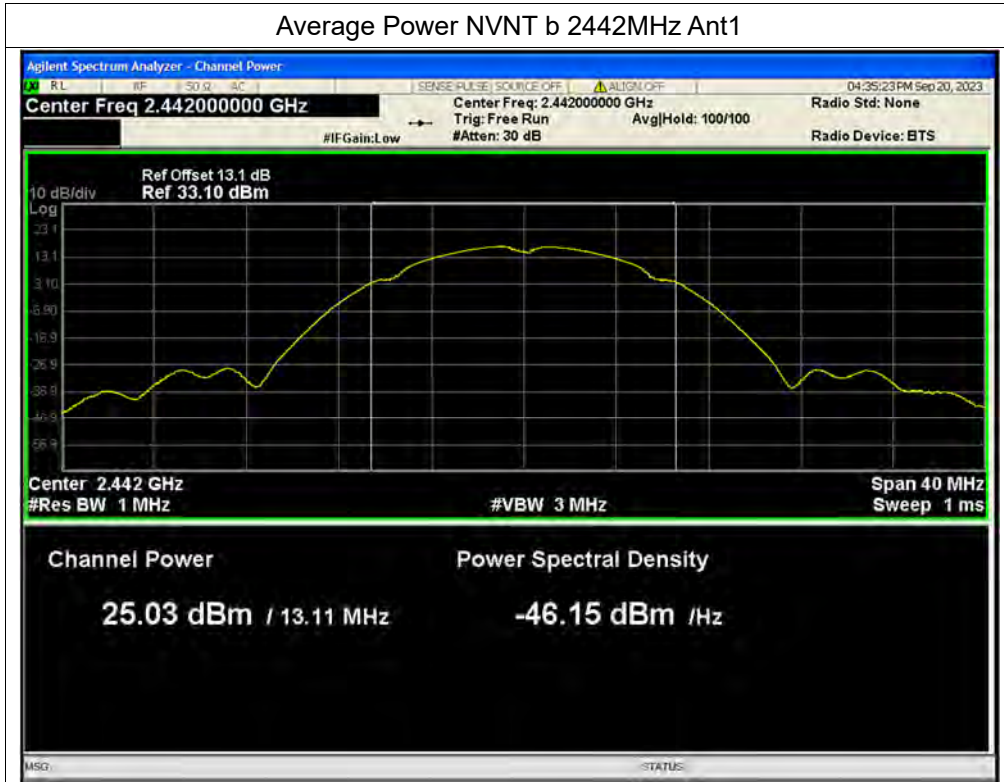


Average Power NVNT b 2442MHz Ant2

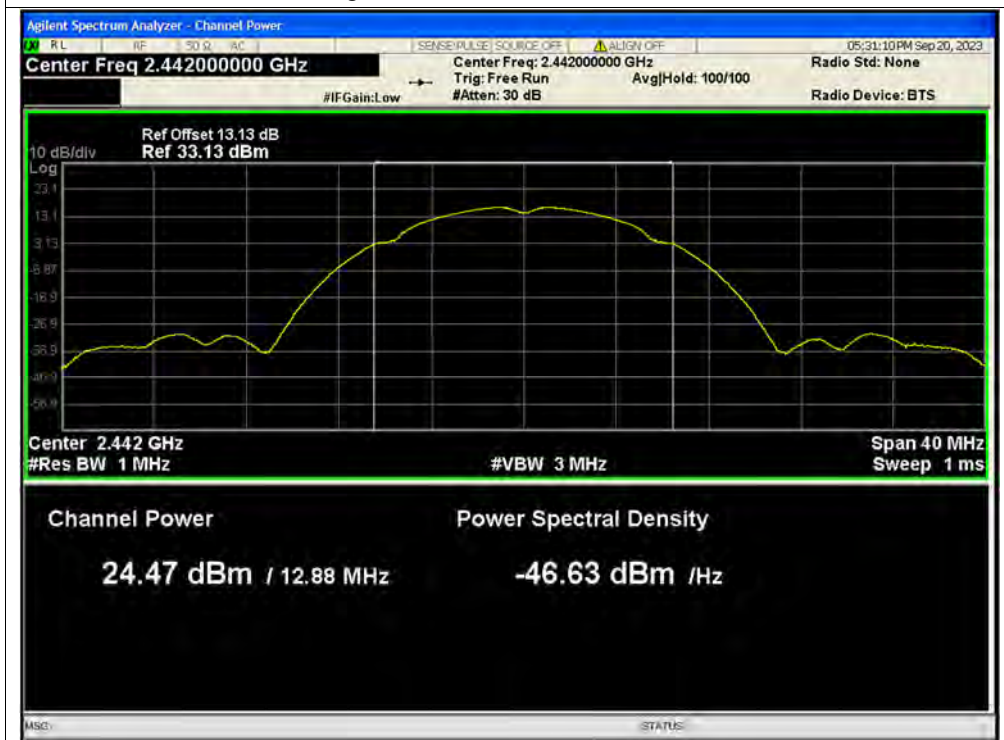




Average Power NVNT b 2472MHz Ant1

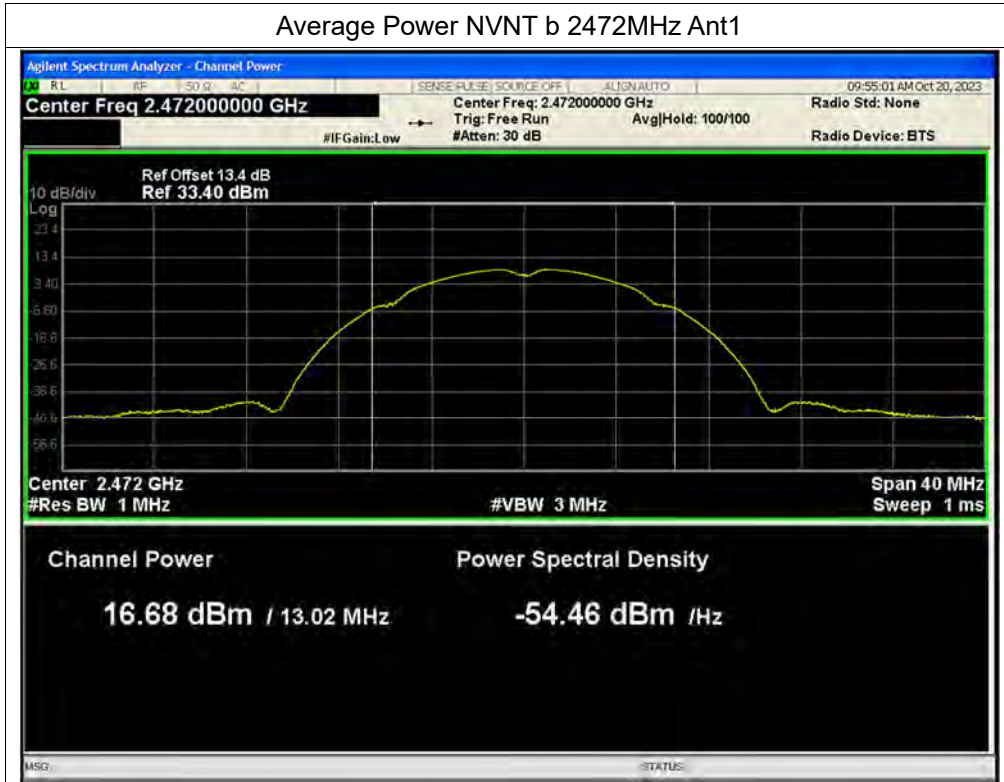


Average Power NVNT b 2472MHz Ant2

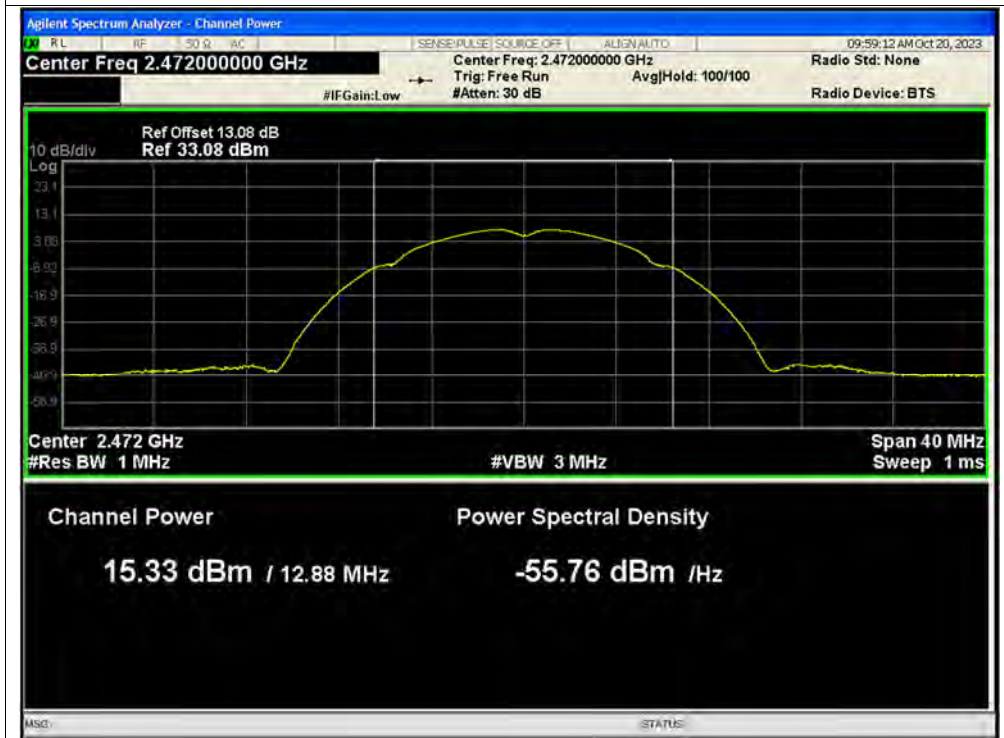




Average Power NVNT g 2412MHz Ant1

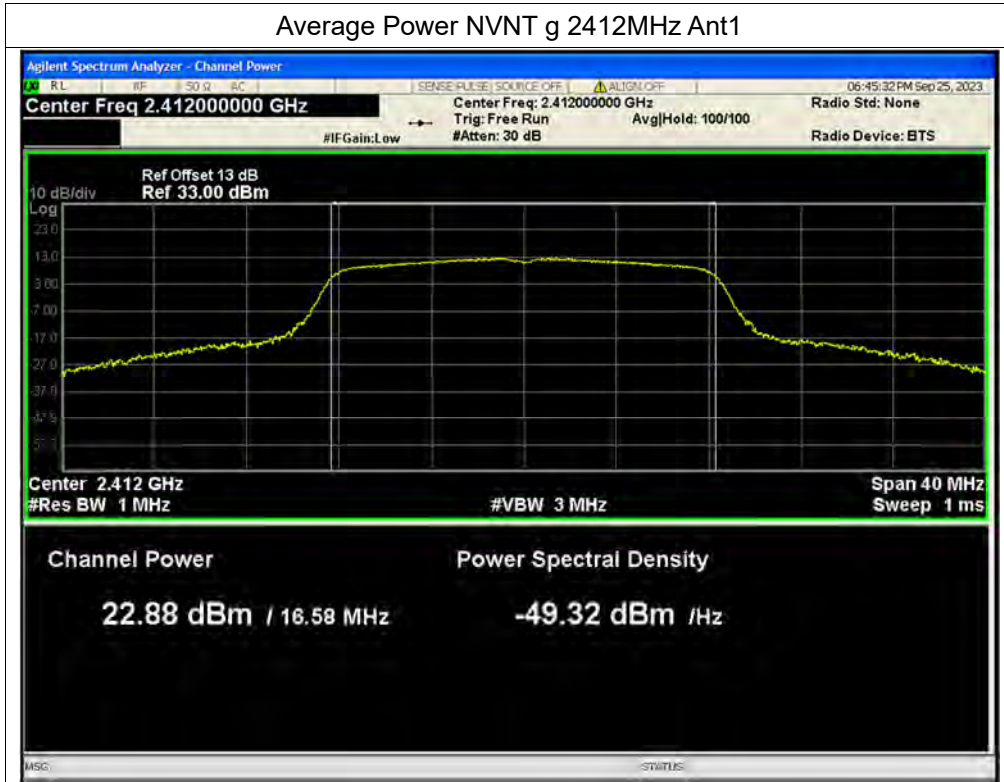


Average Power NVNT g 2412MHz Ant2

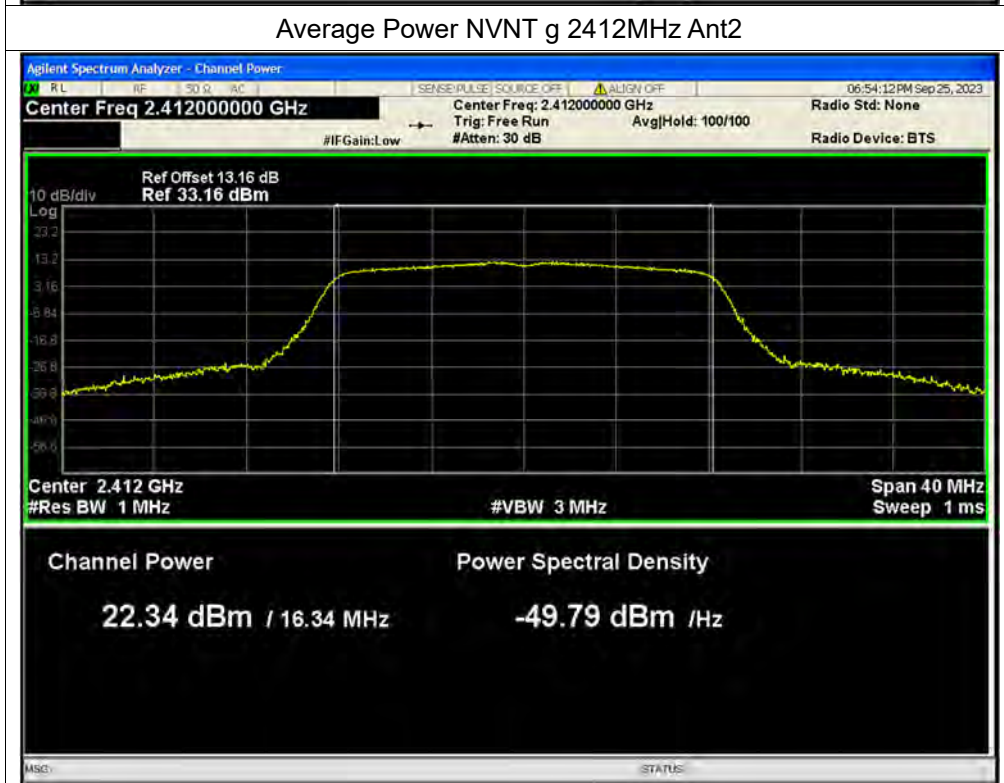




Average Power NVNT g 2442MHz Ant1

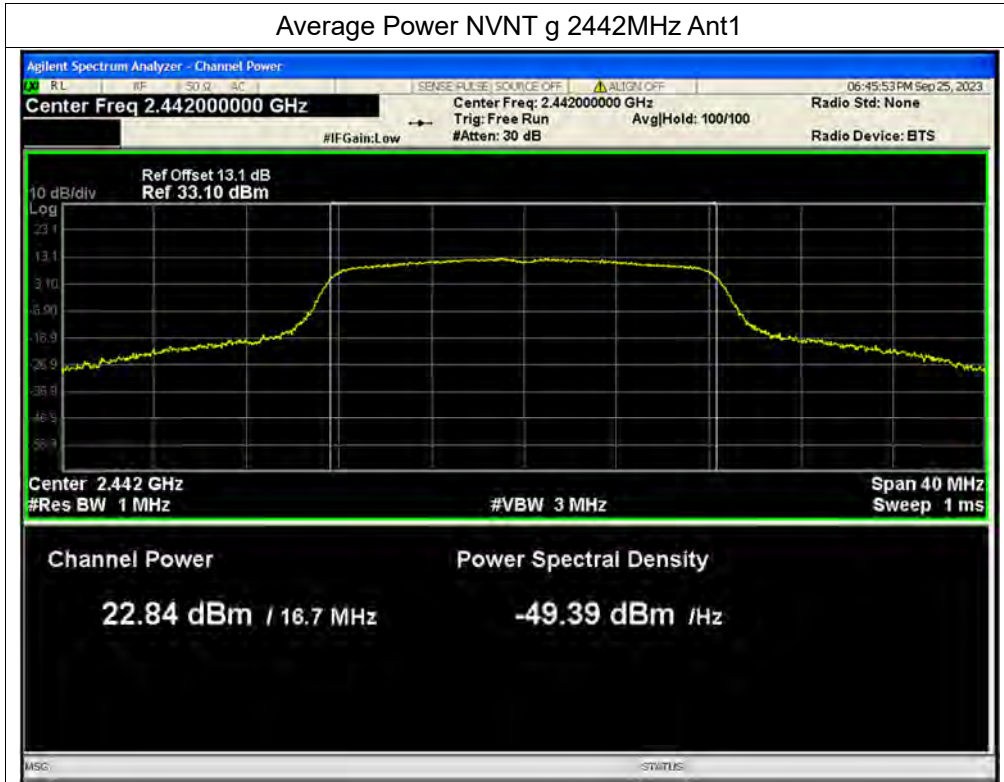


Average Power NVNT g 2442MHz Ant2

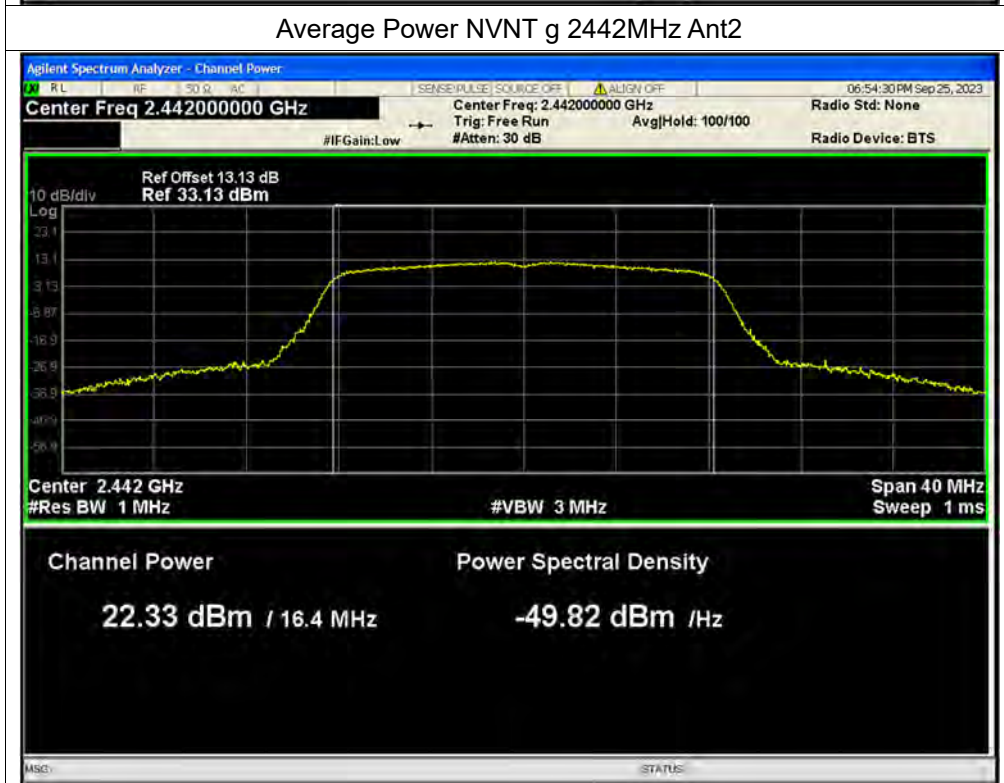




Average Power NVNT g 2472MHz Ant1

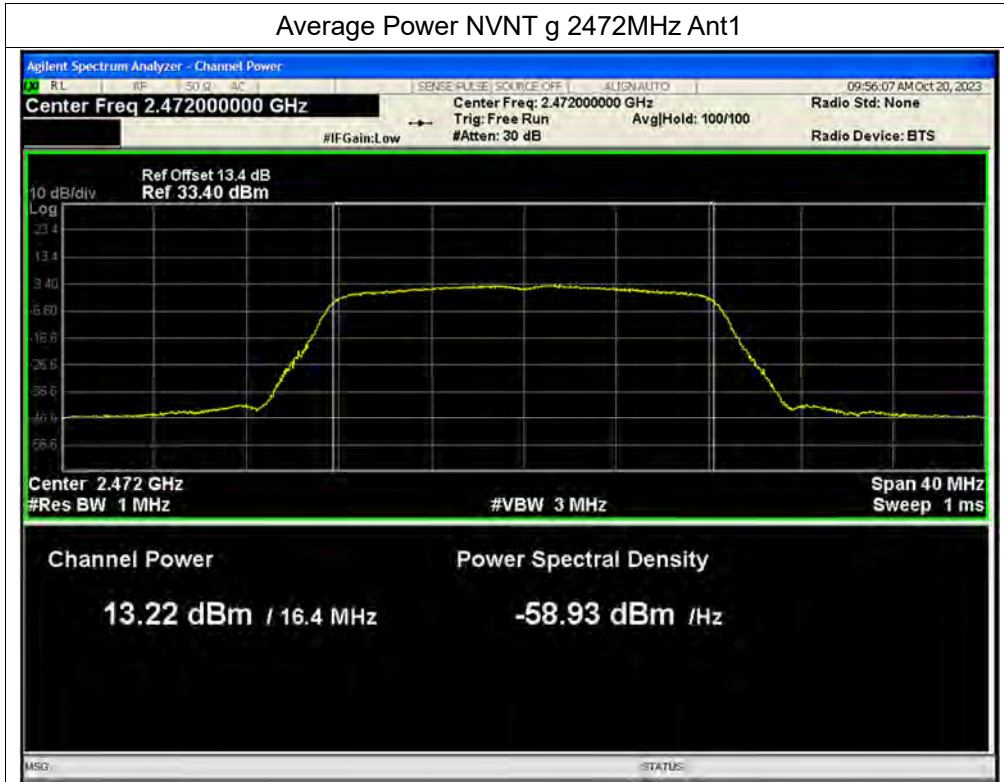


Average Power NVNT g 2472MHz Ant2

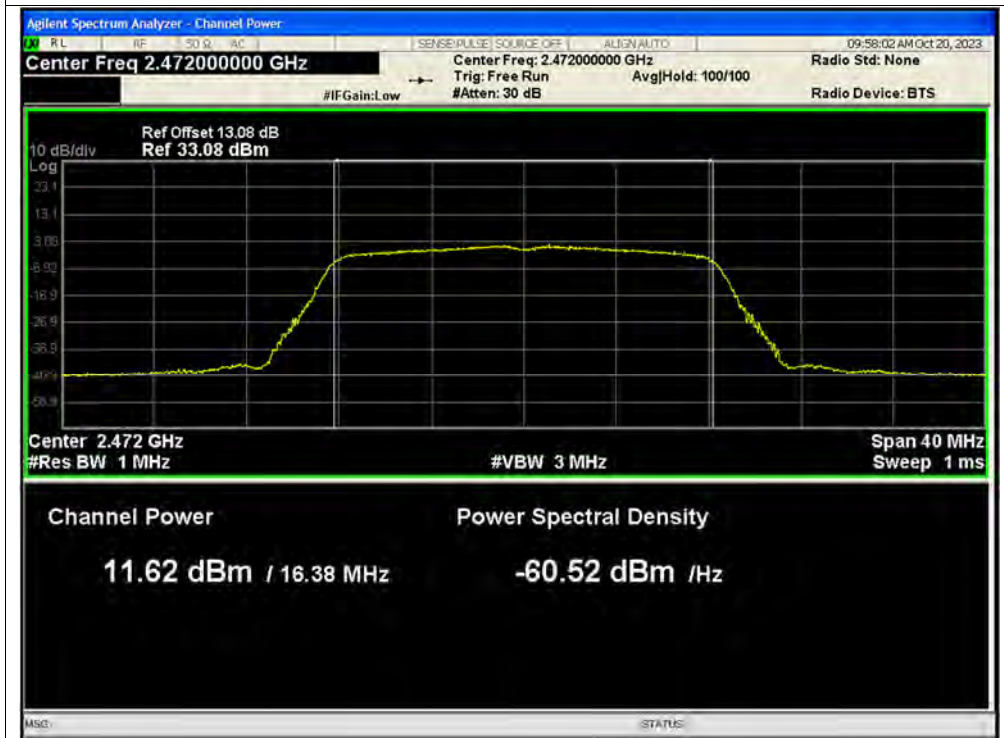




Average Power NVNT n20 2412MHz Ant1

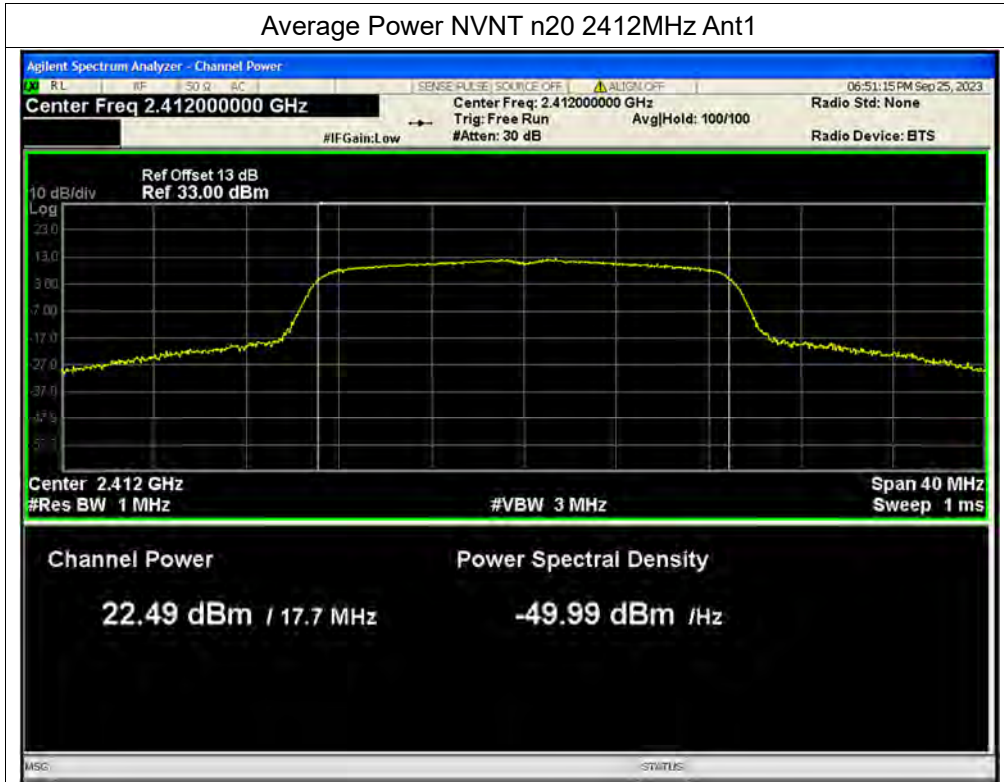


Average Power NVNT n20 2412MHz Ant2

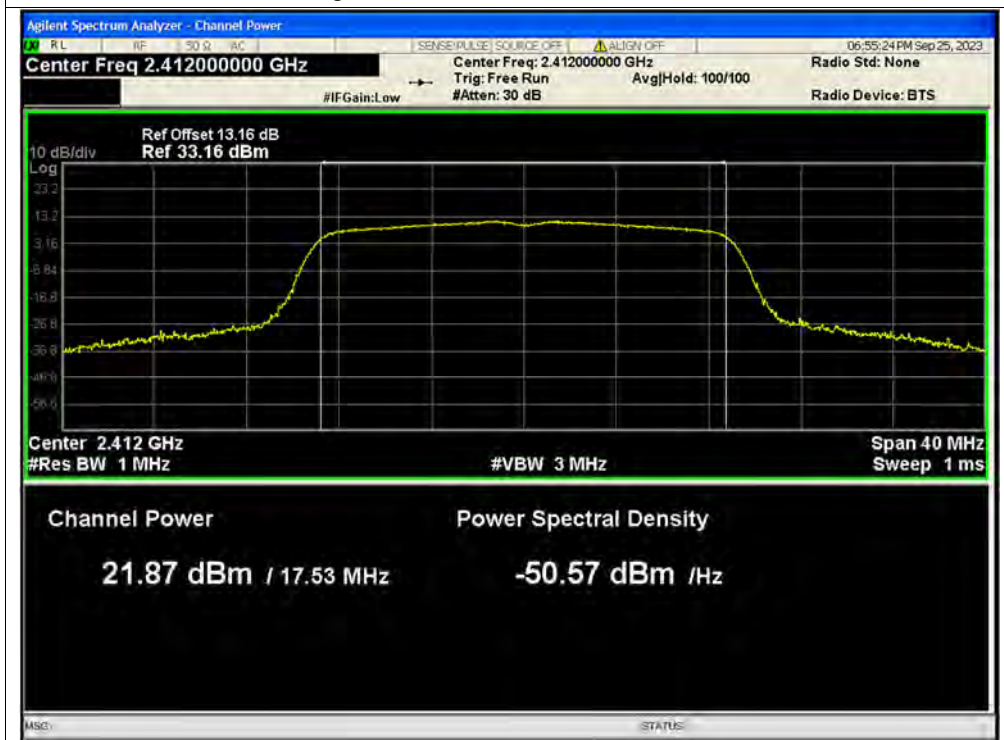




Average Power NVNT n20 2412MHz Ant1

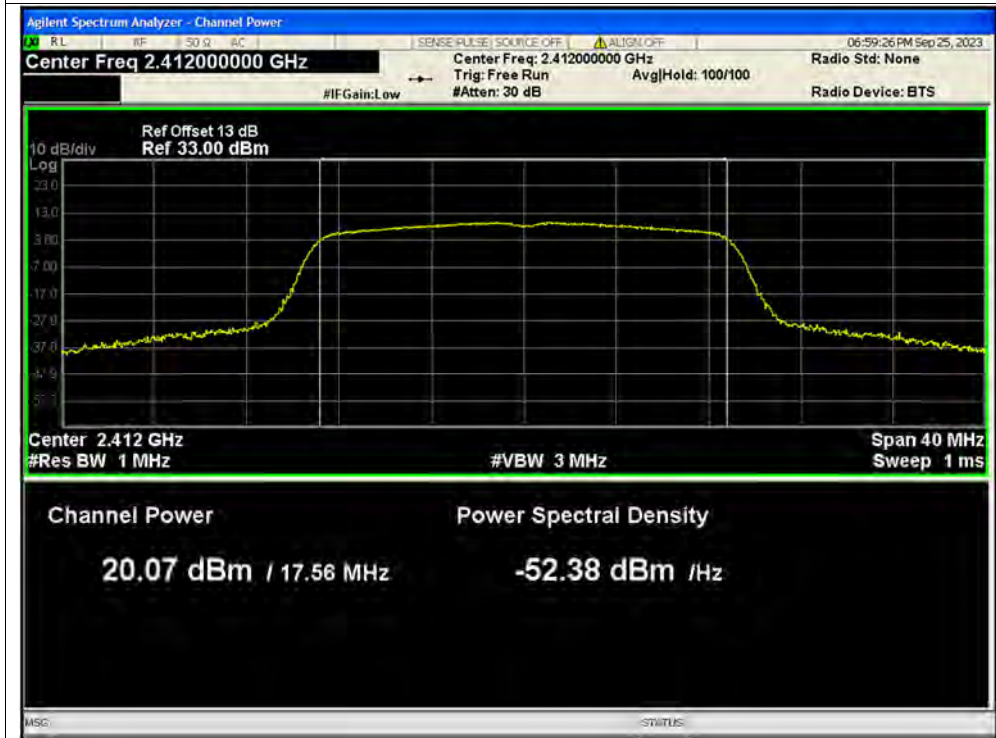


Average Power NVNT n20 2412MHz Ant2

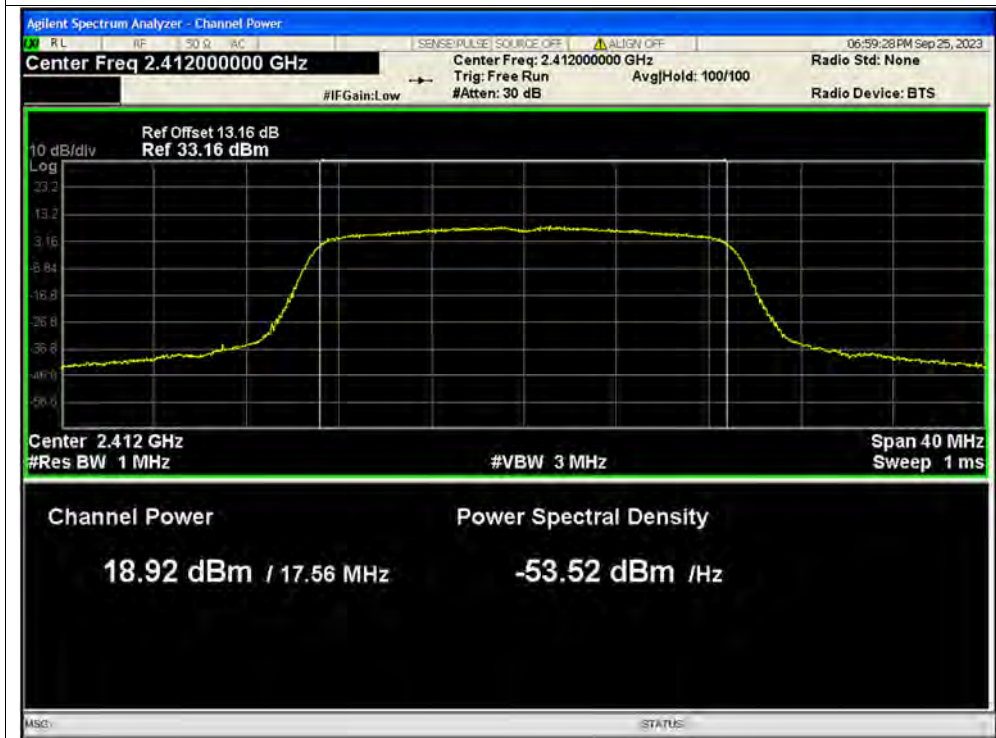




Average Power NVNT n20 2442MHz Ant1

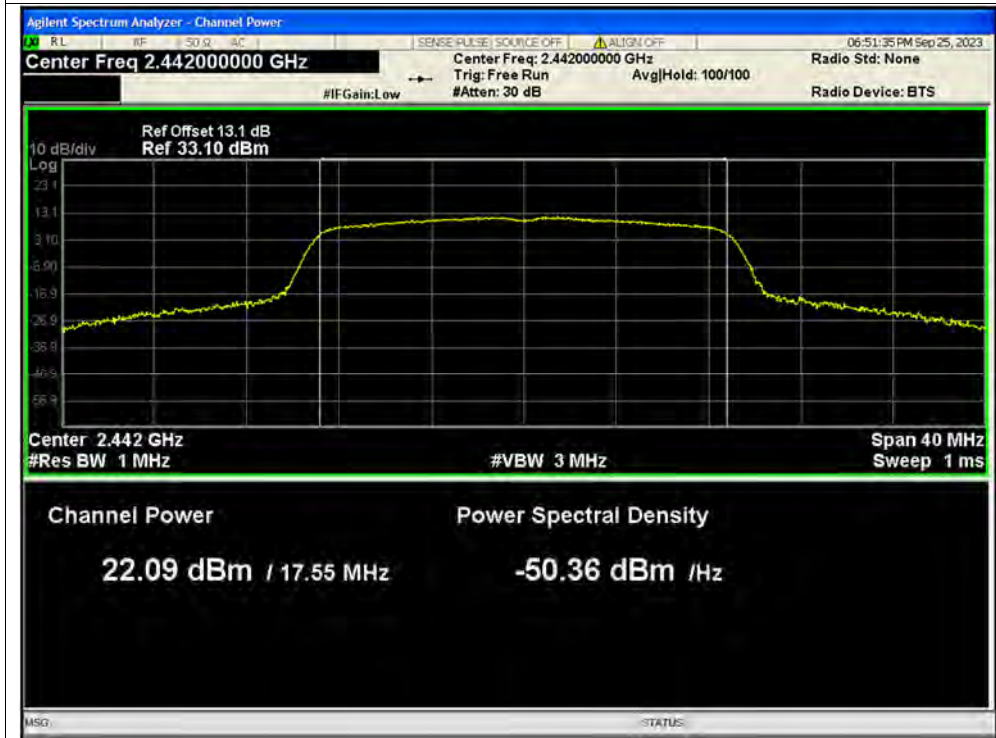


Average Power NVNT n20 2442MHz Ant2

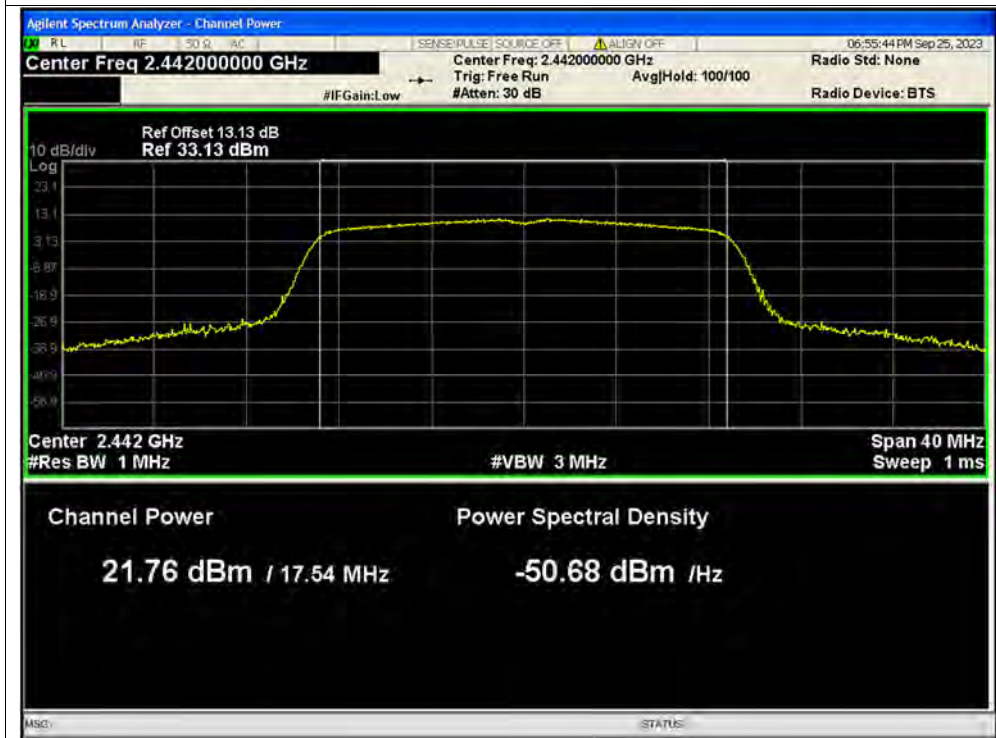




Average Power NVNT n20 2442MHz Ant1

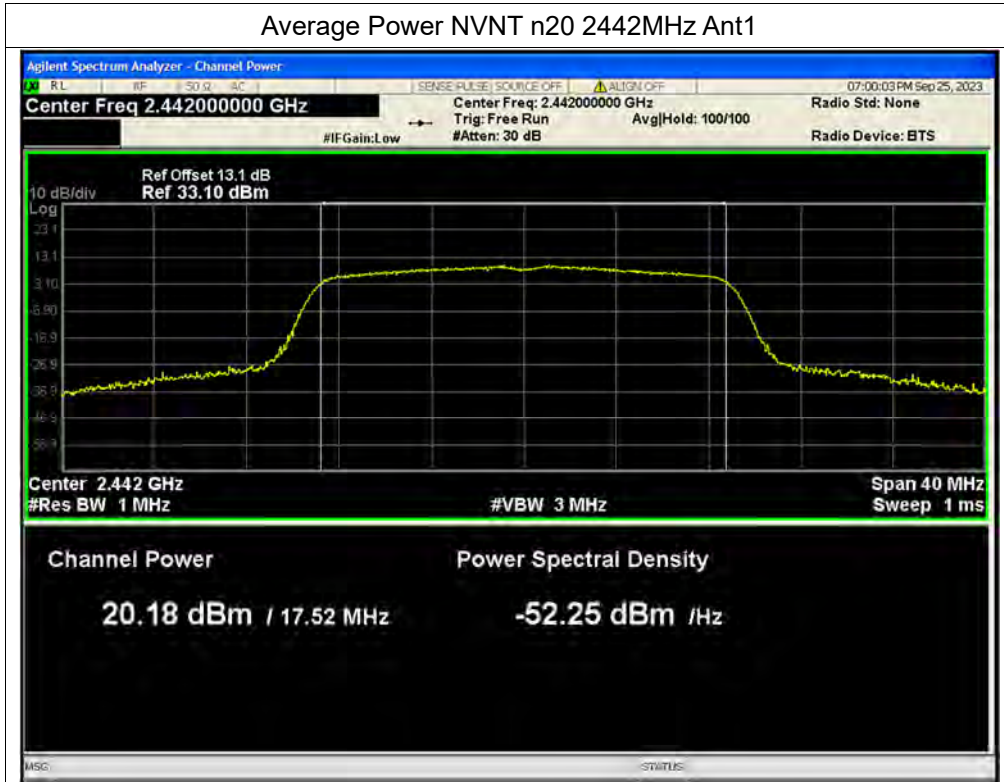


Average Power NVNT n20 2442MHz Ant2

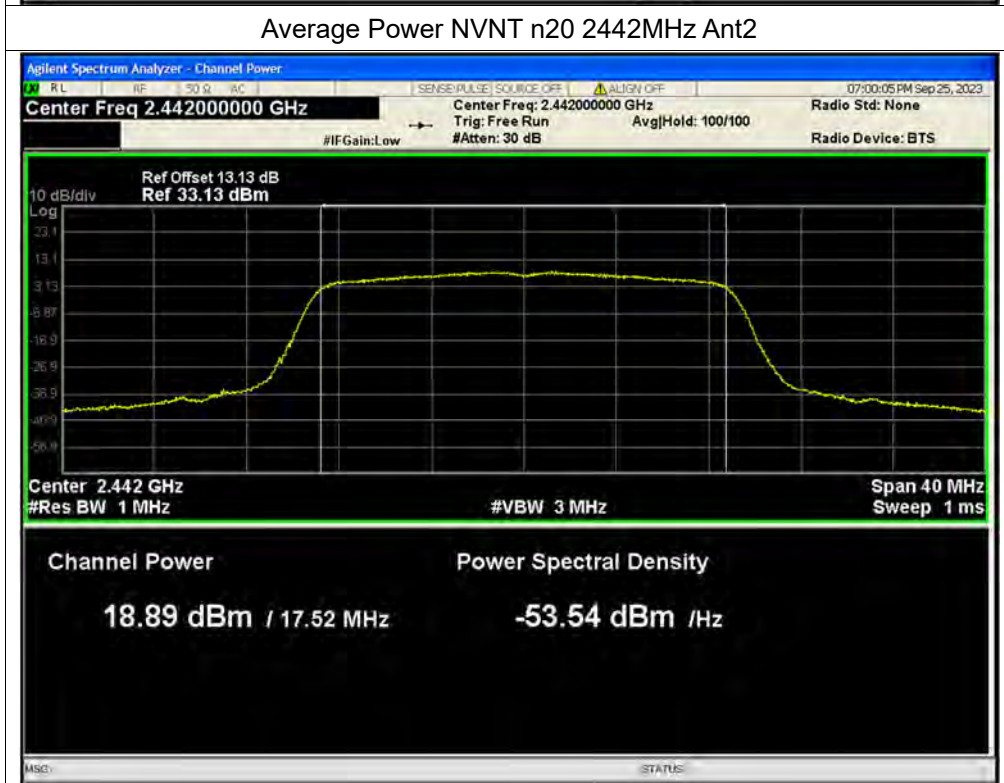




Average Power NVNT n20 2472MHz Ant1

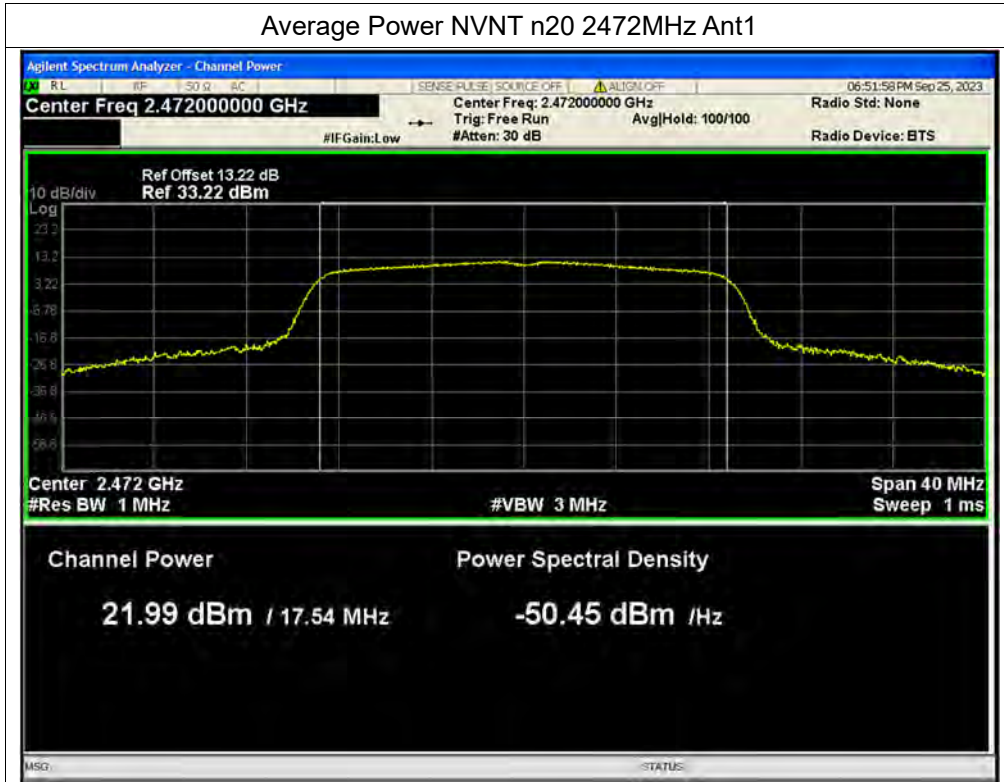


Average Power NVNT n20 2472MHz Ant2

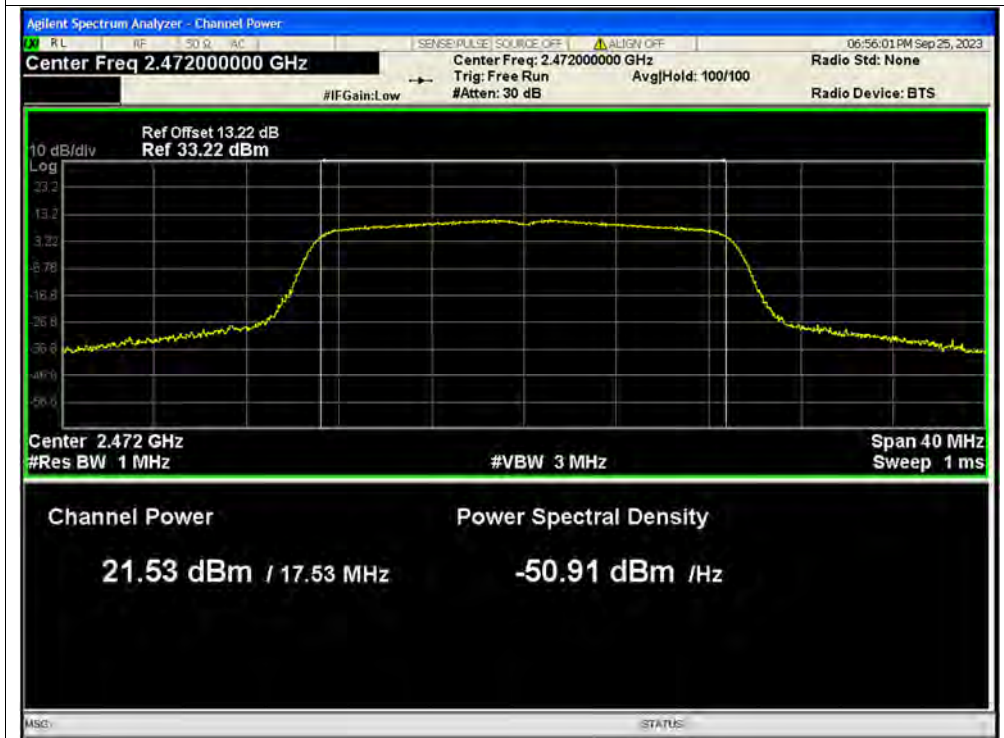




Average Power NVNT n20 2472MHz Ant1

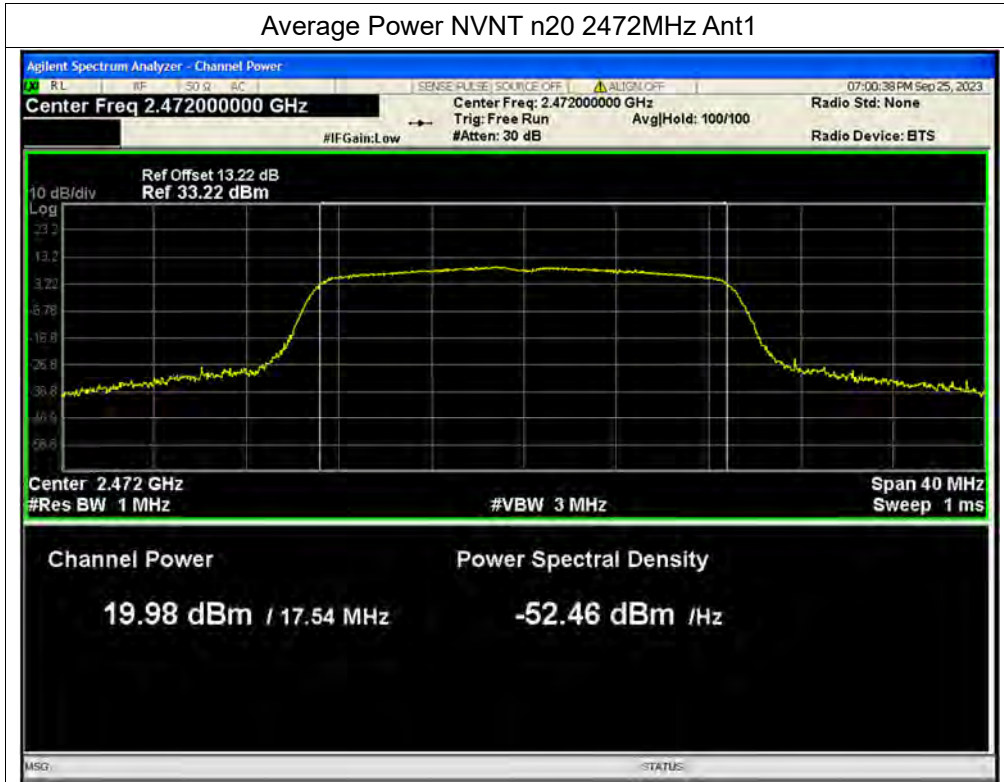


Average Power NVNT n20 2472MHz Ant2

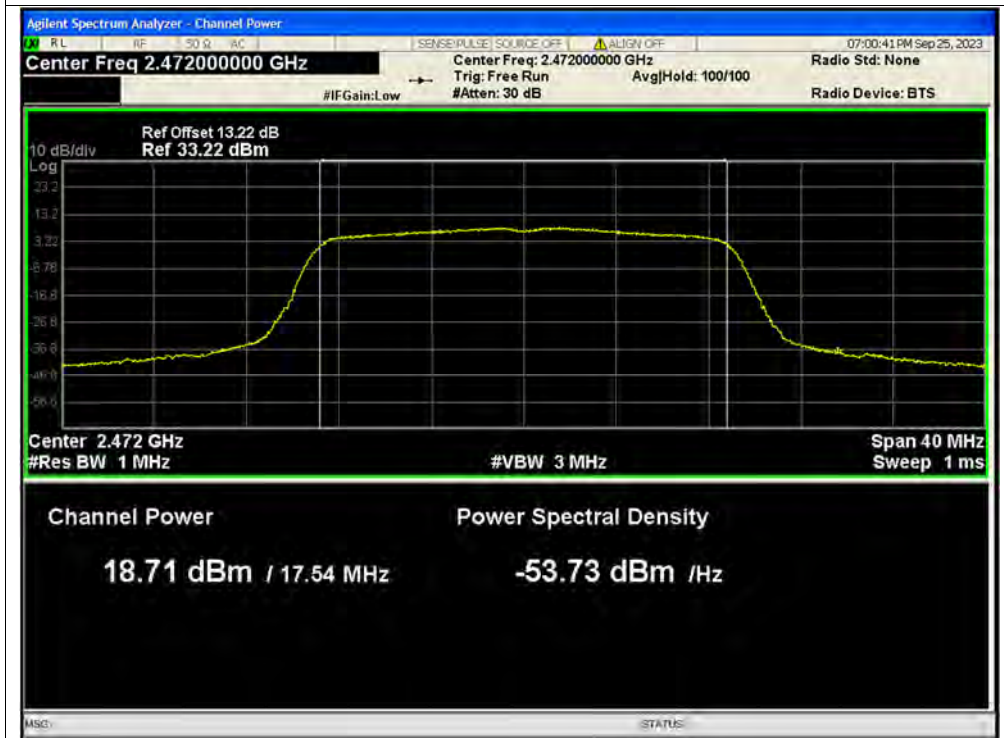




Average Power NVNT n40 2422MHz Ant1

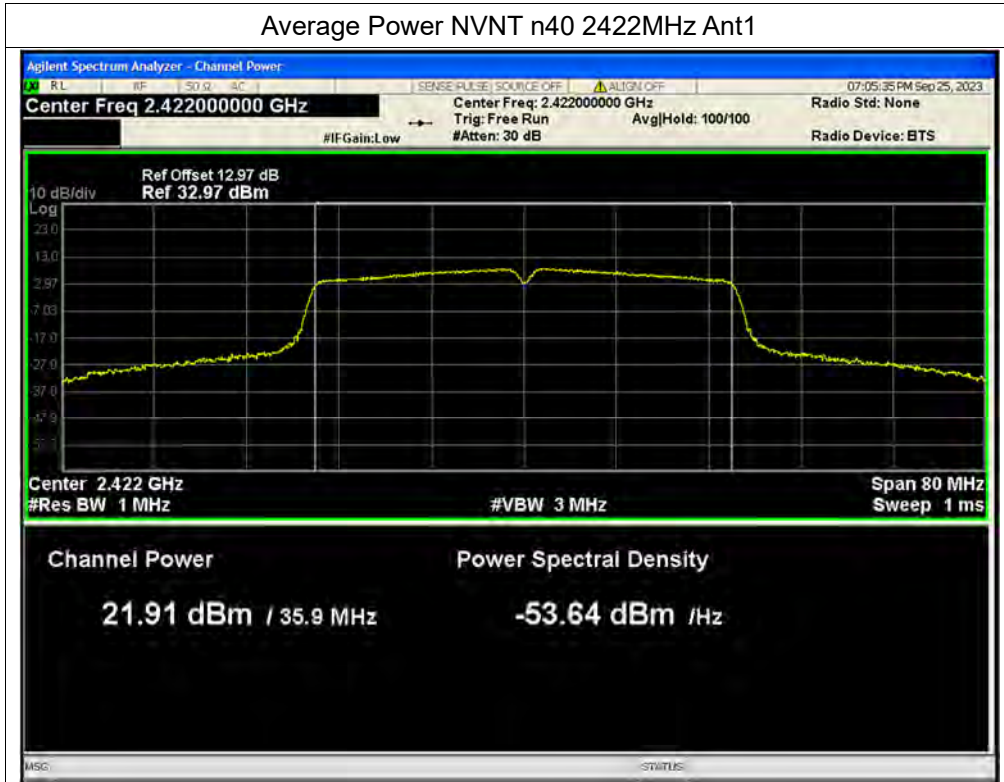


Average Power NVNT n40 2422MHz Ant2

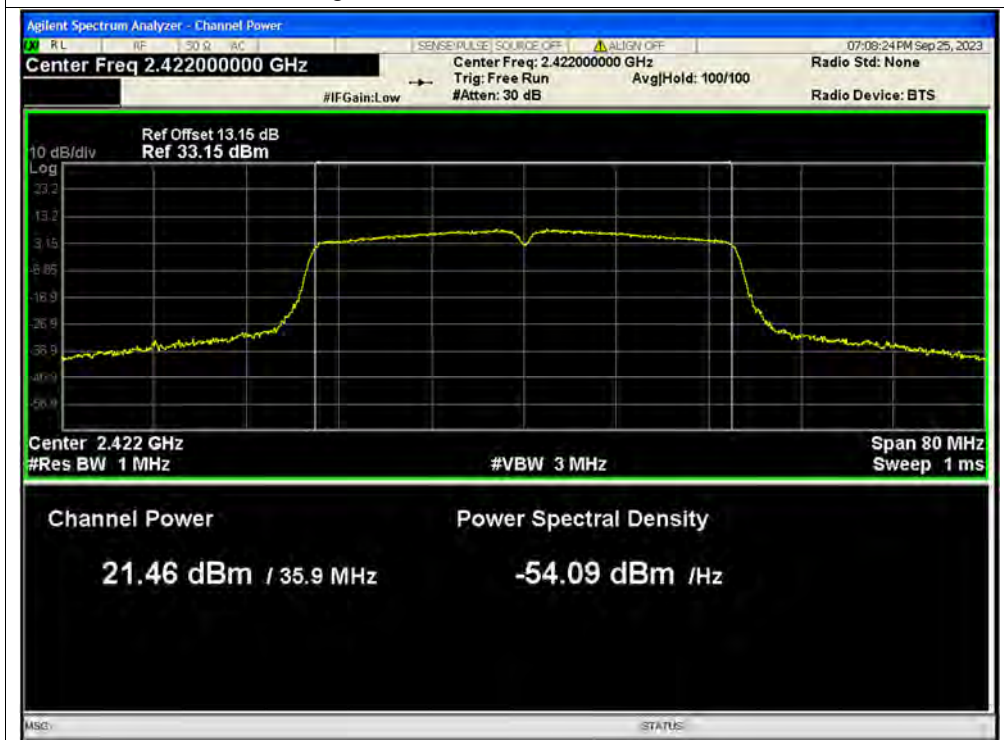




Average Power NVNT n40 2422MHz Ant1

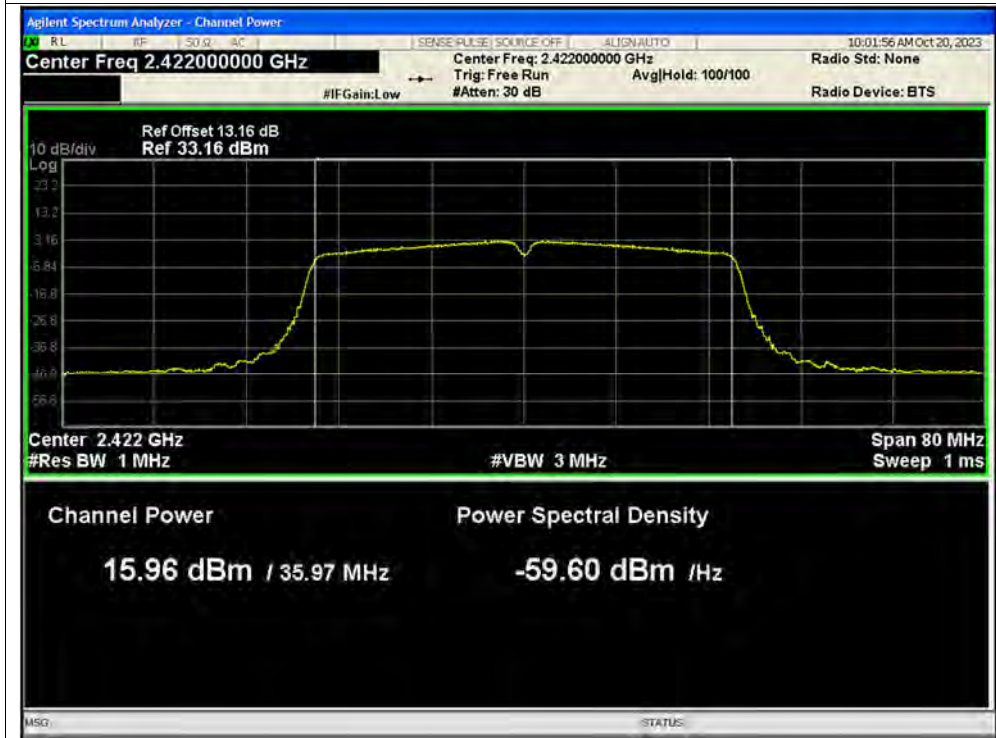


Average Power NVNT n40 2422MHz Ant2

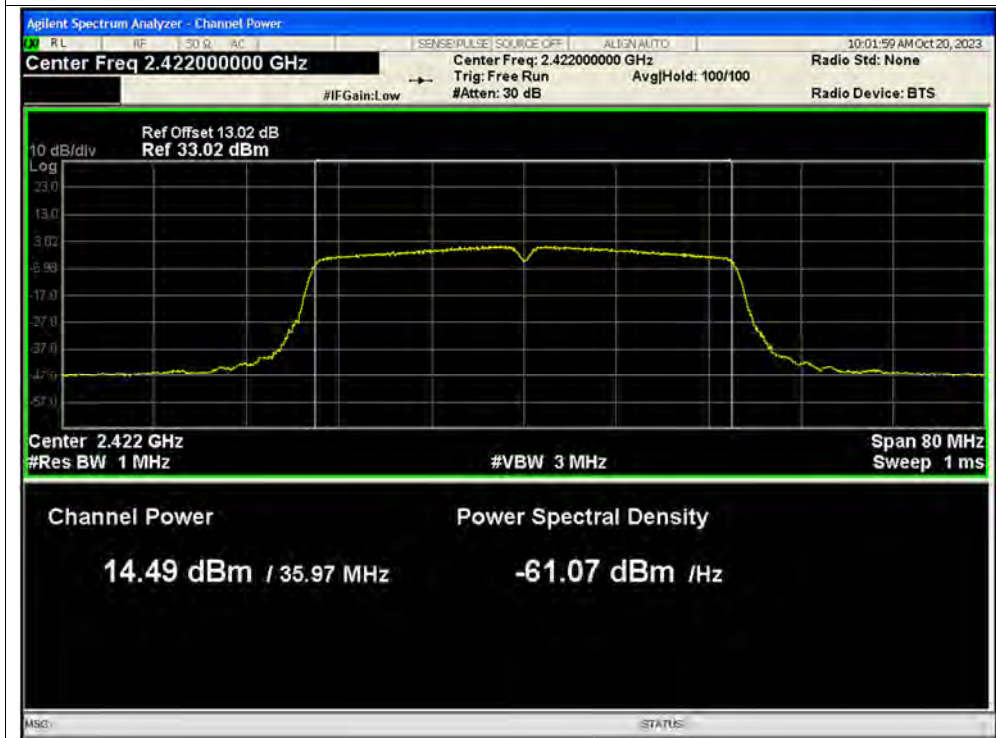




Average Power NVNT n40 2442MHz Ant1

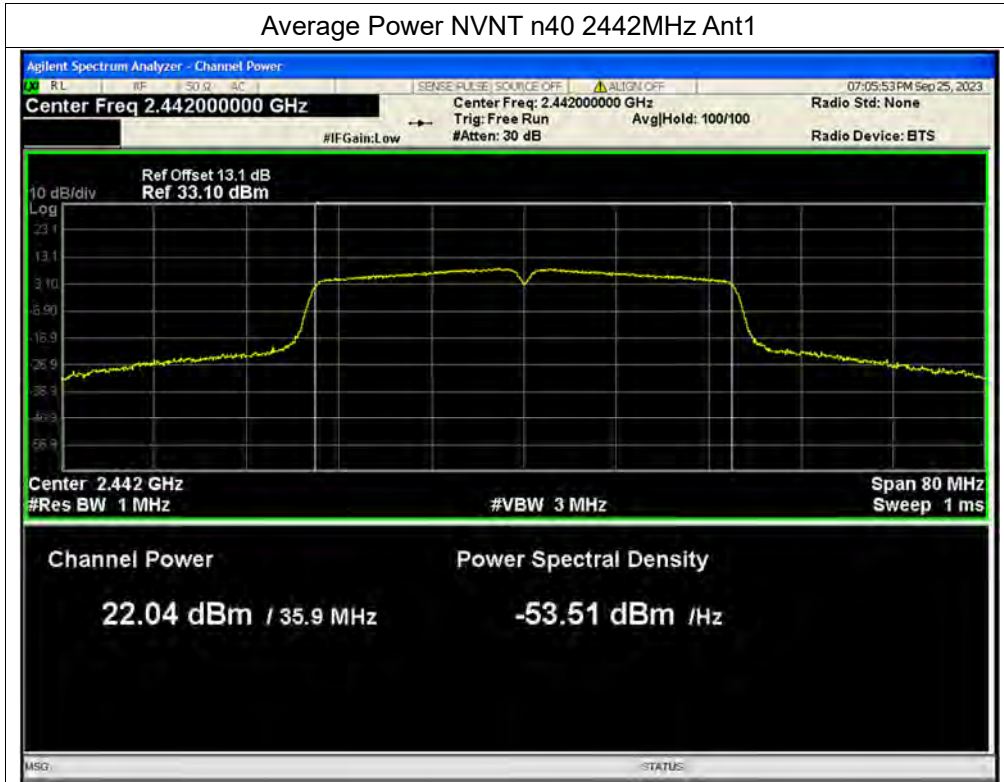


Average Power NVNT n40 2442MHz Ant2

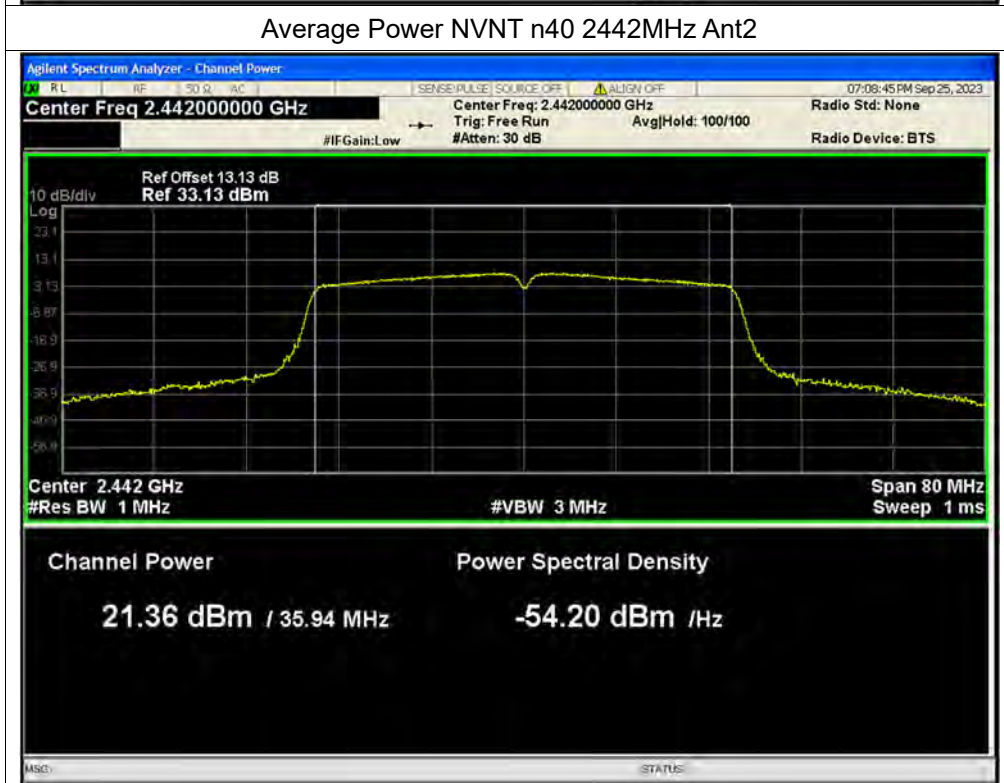




Average Power NVNT n40 2442MHz Ant1

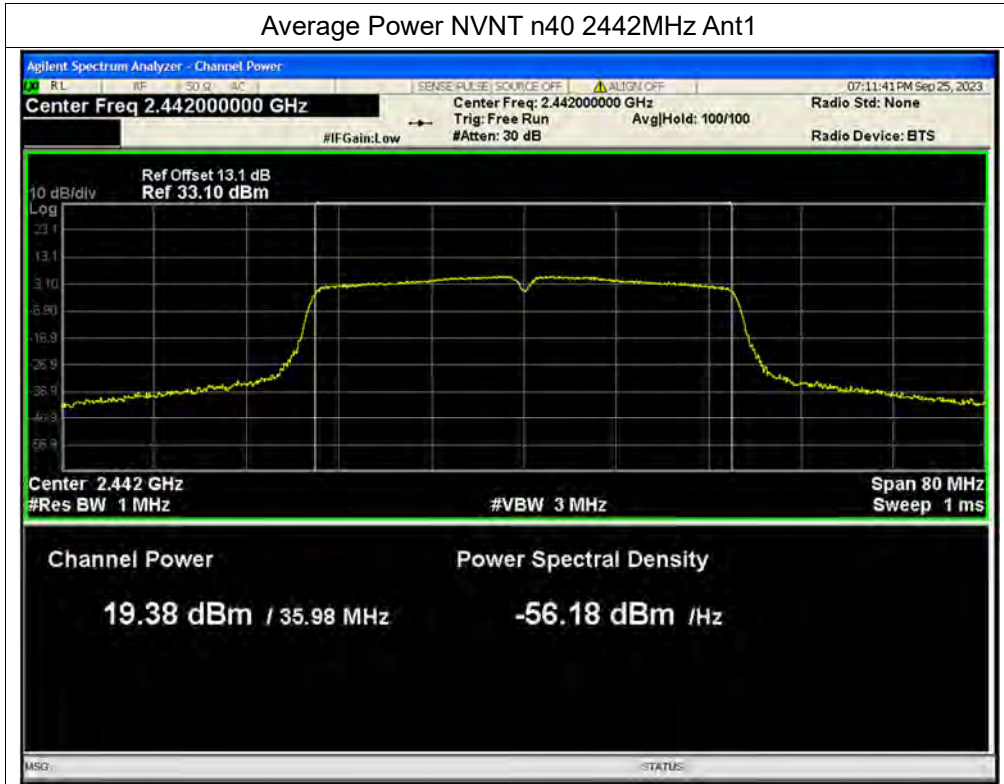


Average Power NVNT n40 2442MHz Ant2

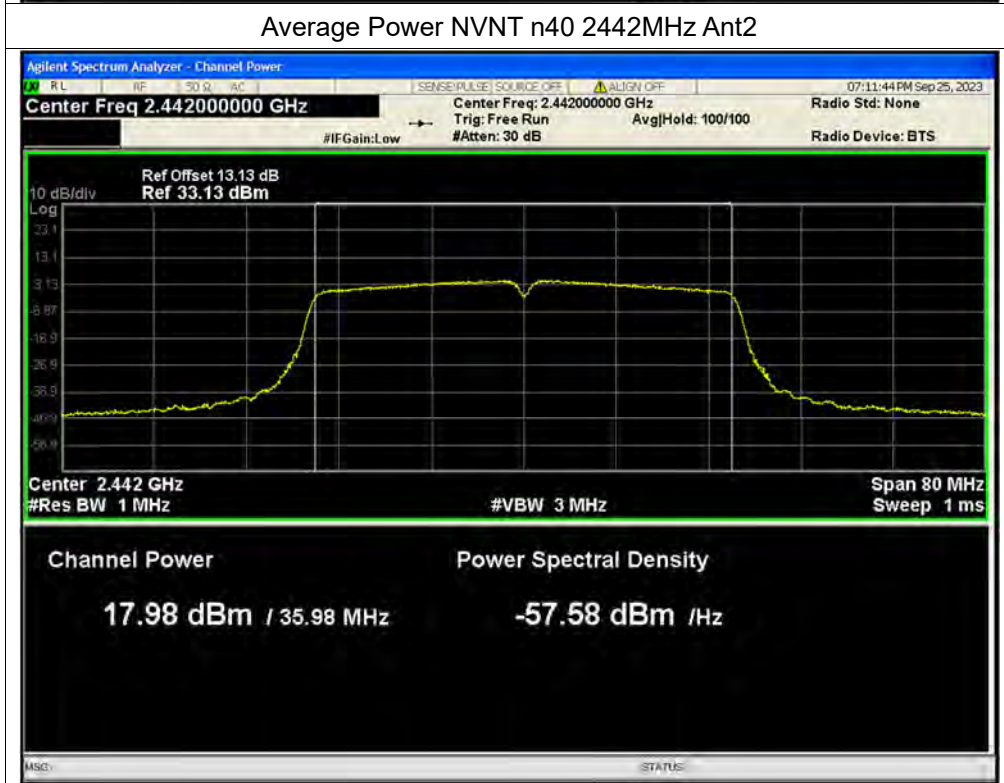




Average Power NVNT n40 2462MHz Ant1

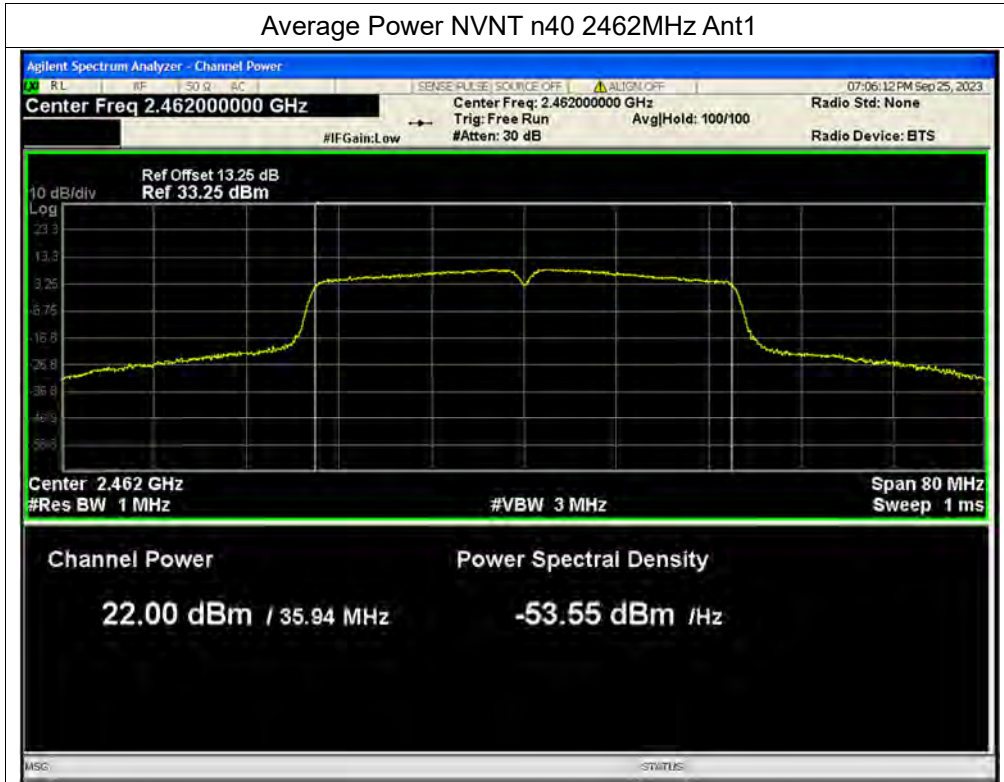


Average Power NVNT n40 2462MHz Ant2

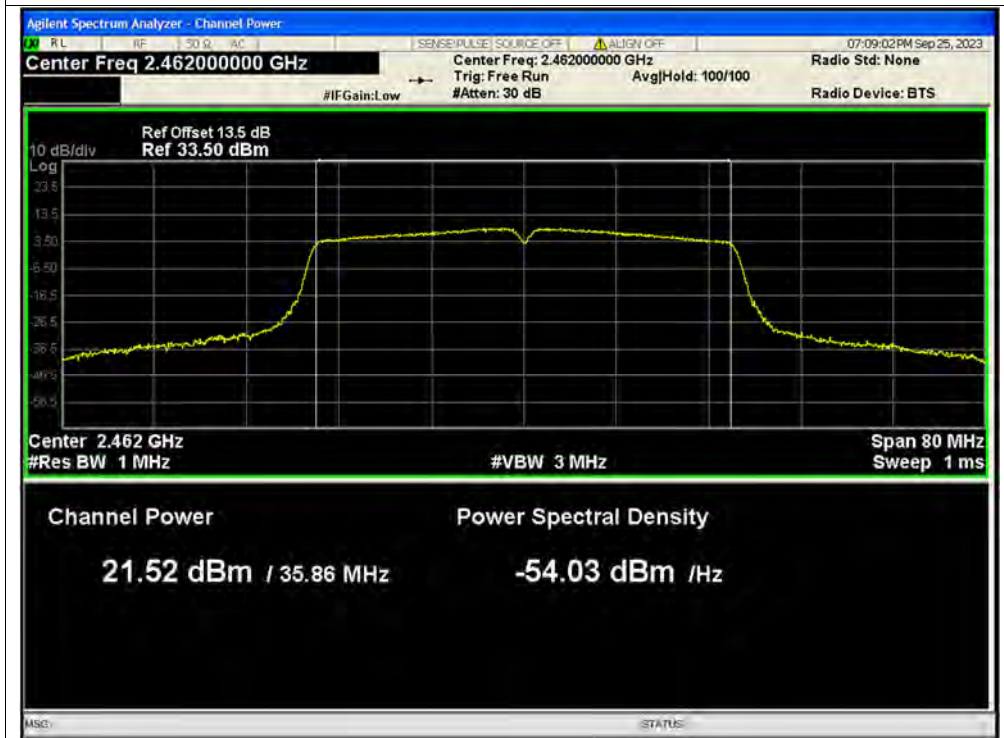





Average Power NVNT n40 2462MHz Ant1

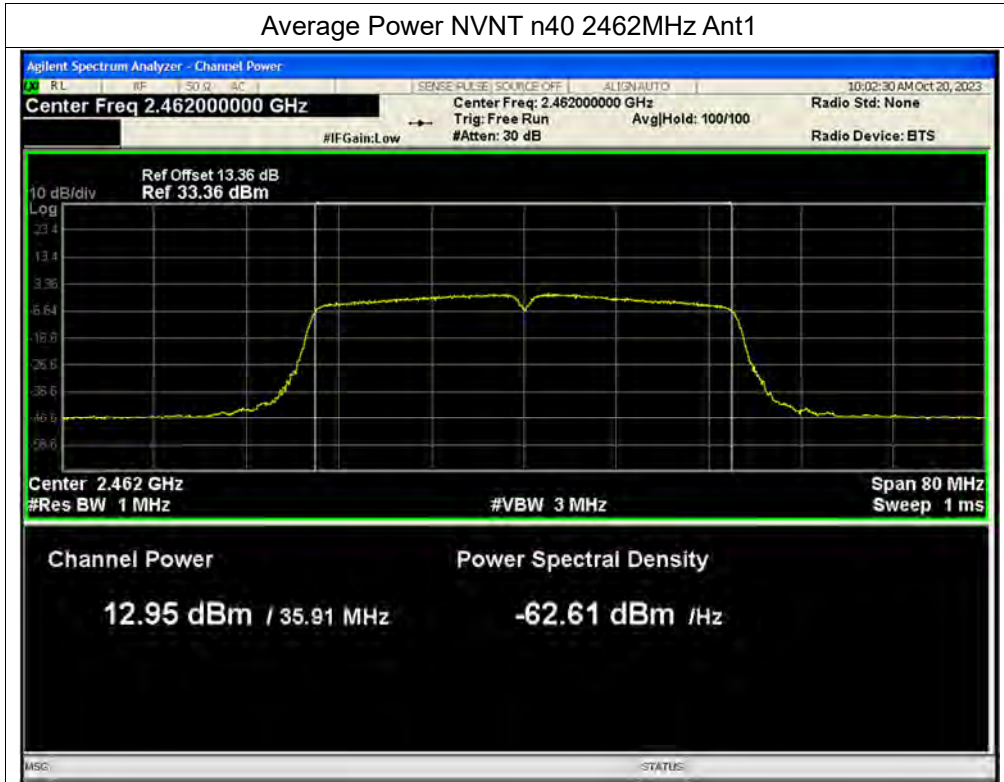


Average Power NVNT n40 2462MHz Ant2

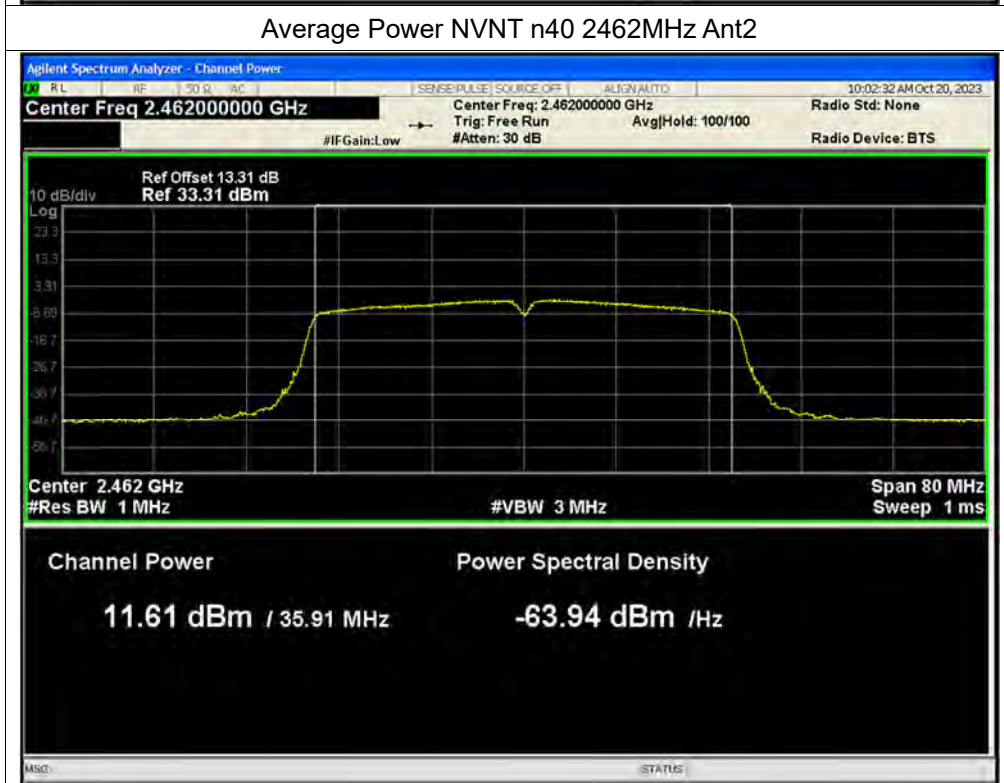

Average Power NVNT ax20 2412MHz Ant1

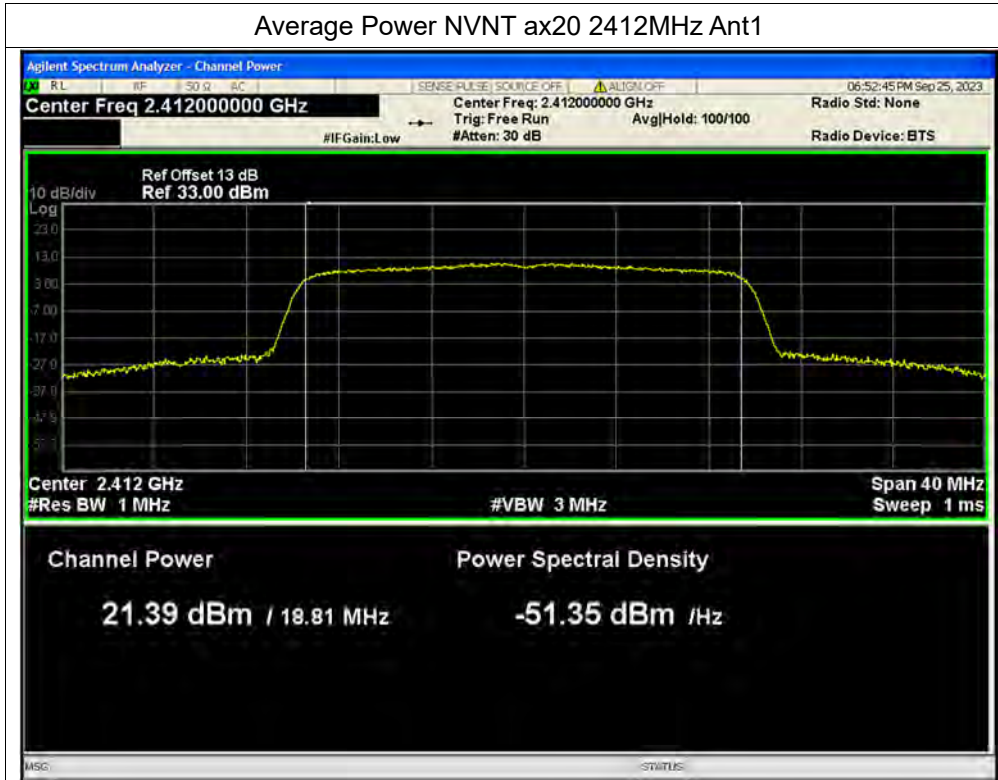


Average Power NVNT ax20 2412MHz Ant2

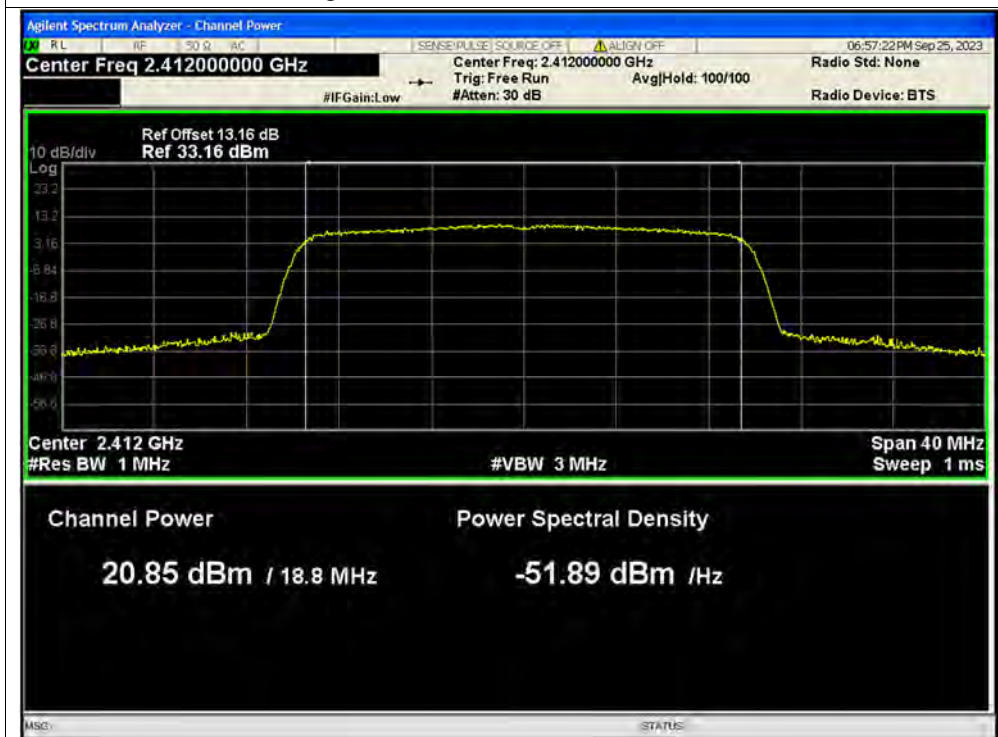




Average Power NVNT ax20 2412MHz Ant1

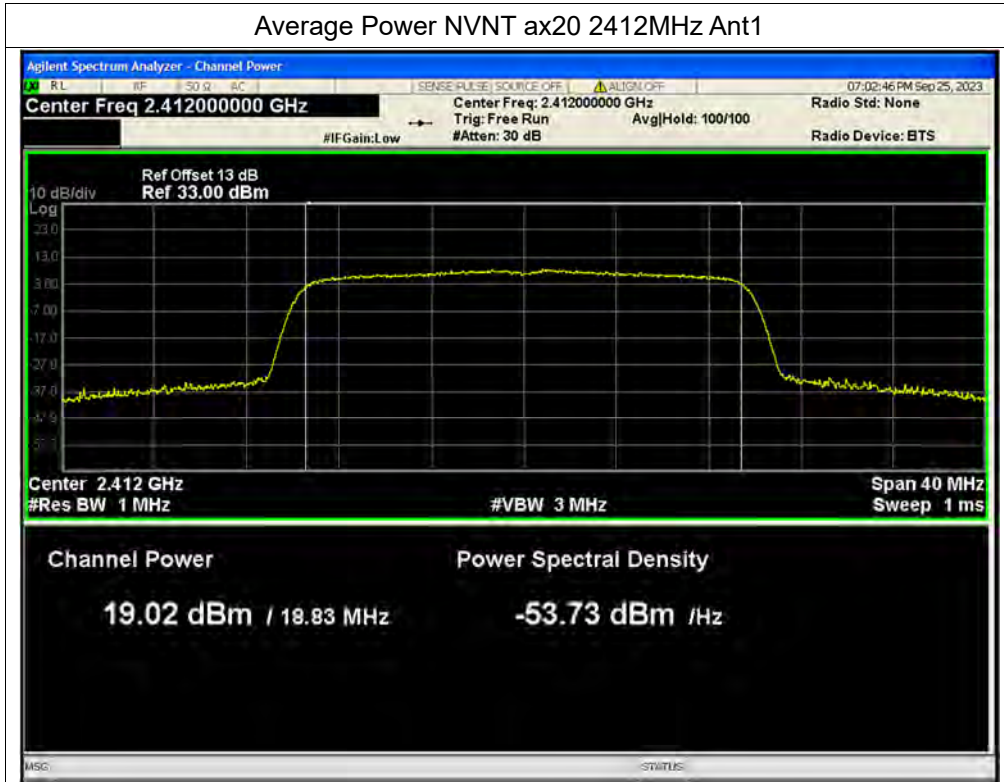


Average Power NVNT ax20 2412MHz Ant2

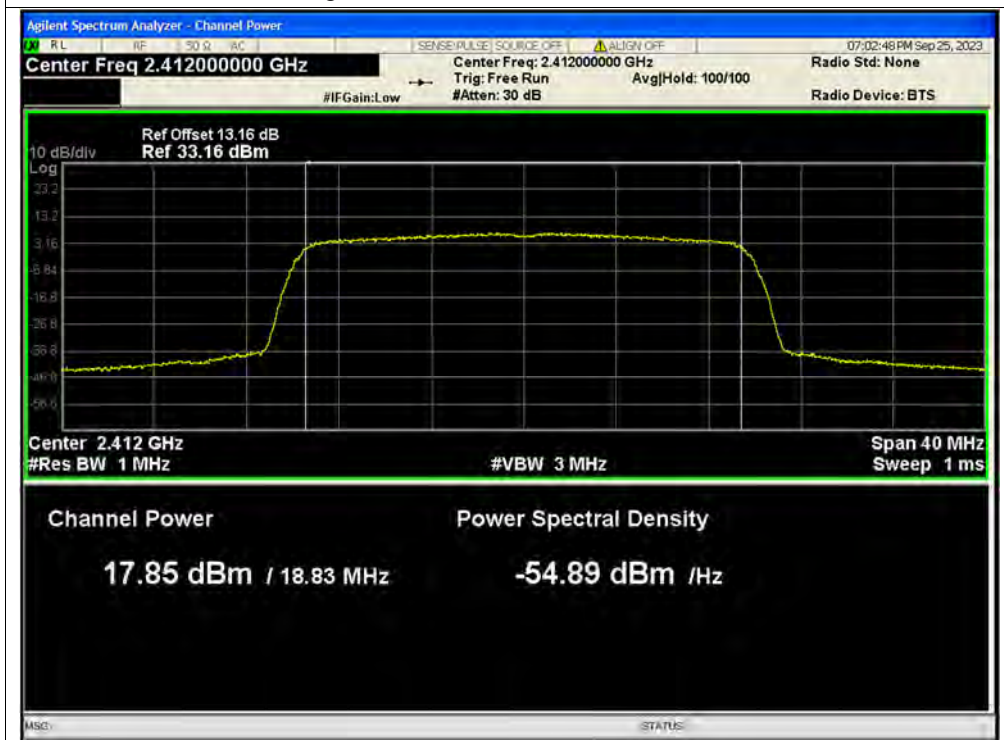




Average Power NVNT ax20 2442MHz Ant1

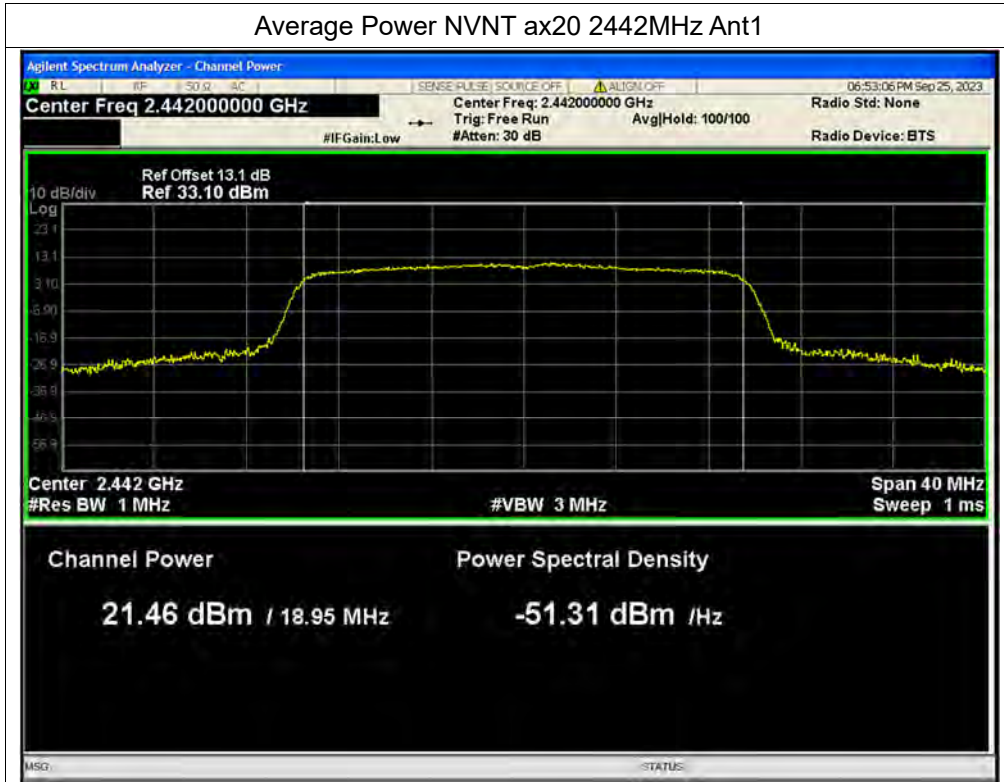


Average Power NVNT ax20 2442MHz Ant2

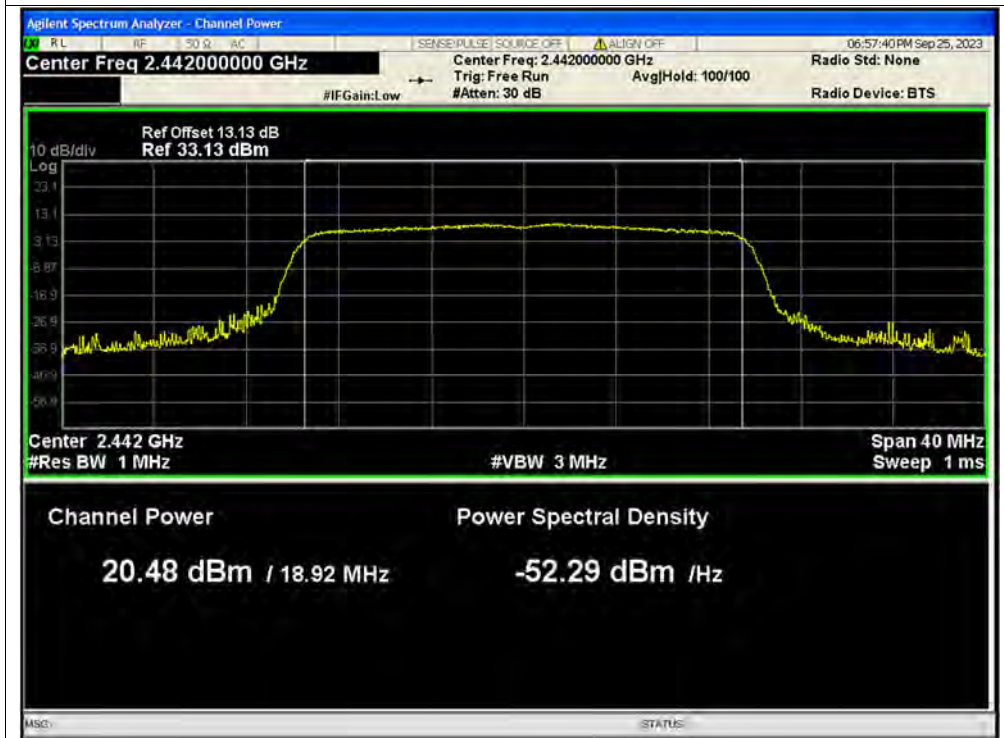




Average Power NVNT ax20 2442MHz Ant1

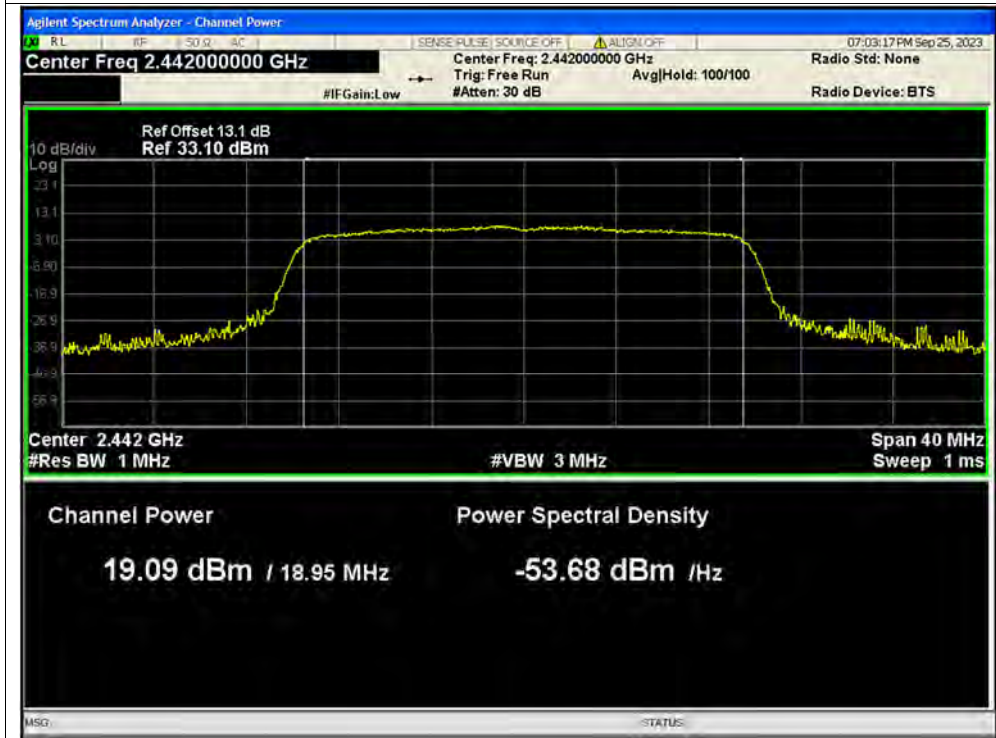


Average Power NVNT ax20 2442MHz Ant2

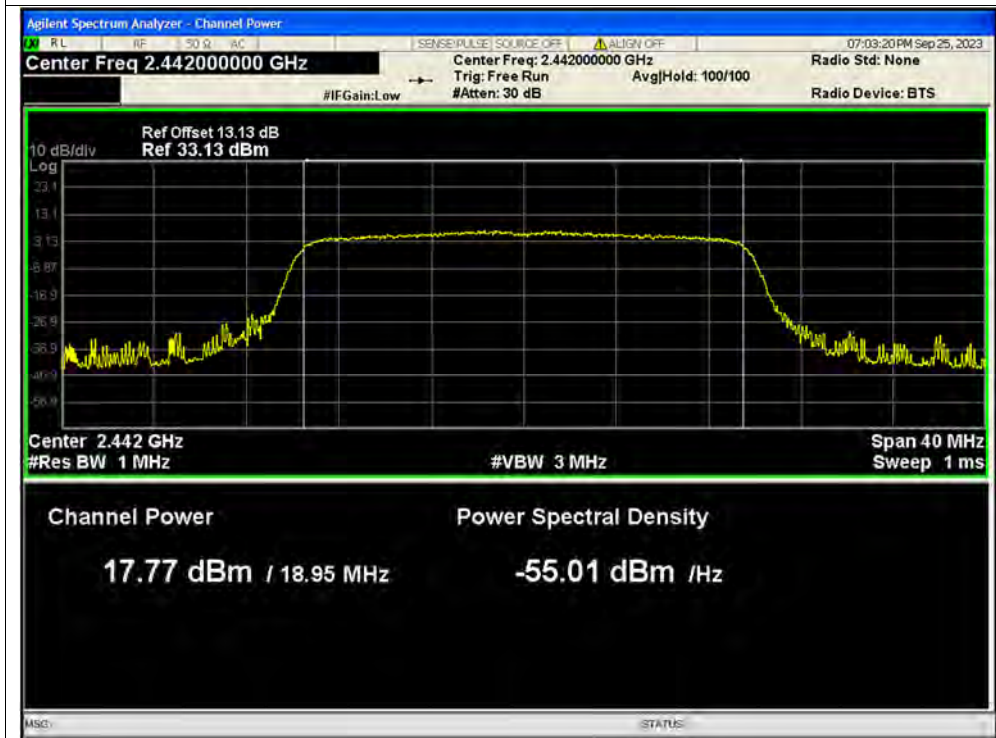



Average Power NVNT ax20 2472MHz Ant1

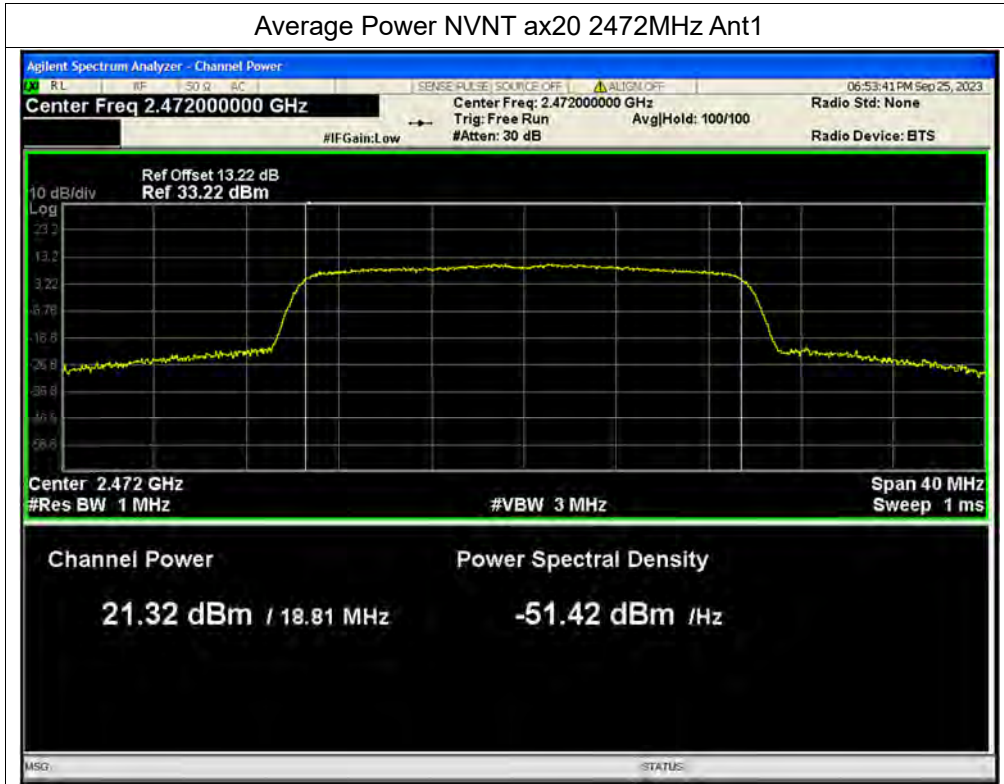

Average Power NVNT ax20 2472MHz Ant2

