


FLYAMAPIRIT

User Manual

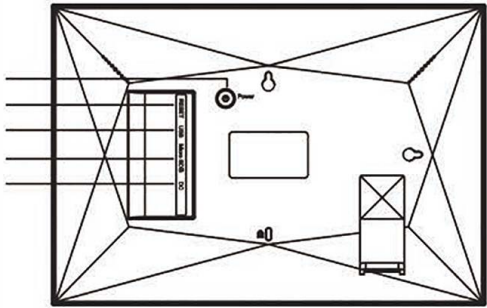

- 1. POWER  
After connecting power adapter, please press and hold power button for approximately 5 seconds (until screen turns on). When it is on, press and hold power button for approximately 3 seconds to access reboot or power off menu. Short press on power button will turn off/onscreen (but leave the photo frame in on position)
- 2. USB  
Connect a USB flash drive. USB is for service use only.
- 3. RESET  
Use a needle or paper clip to reset unit.
- 4. MicroSD card  
Load external max 32GB microSD memory card here.
- 5. DC  
Connect DC adapter to power on the device.

ENG-1

Contents	
Gettingstarted.....	3
frameo app.....	3
frameo quick setup.....	4
Start using frameo.....	4
Navigating your frameo.....	5
Settings.....	5
My frame.....	5
Manage photos.....	6
My Friends.....	6
Display and slideshow.....	7
Wi-Fi.....	7
Backup and Restore.....	7
About.....	8
Privacy.....	8
Warranty, Compliance, Support and Safety information.....	8

ENG-2

**Getting started**

Thank you for purchasing your very own frameo.

First, to set up your frame follow the ‘Quick start guide’ included in the package. If you are new to using frameo then start by following the frameo quick setup on page or follow the on screen guide when powering it on for the first time.

Once you have set up your Frameo frame, start connecting it to your friends and family.

**Frameo app**

To send photos to your frame, use the frameo app for iOS or Android



Find the frameo app on:  
[Google play](#) by searching for “frameo” or scan th s QR code



[App Store](#) by searching for frameo or scan this QR code

ENG-3

- Frameo quick setup**
- When starting your frame for the first time, you will need to setup the frame.
- First you start by selecting a language. This will be the language used throughout frameo.
  - Connect your frame to the internet by connecting it to a Wi-Fi. *If o newer version of the frameo software is available, then you will be prompted with on update dialog. It is recommended to update your frame immediately if prompted.*
  - Enter your name, and the location where you have placed your frame e.g. “Living room”, “Kitchen” or “Office” and finally set the timezone if not correct.

**Start using frameo**

Start by connecting with your friends and family by providing them with a unique code from your frame.

If you want to be able to send photos to the frame yourself, start by do wnloading the app for iOS or Android on [App Store](#) or [Google Play](#). Then use the code to connect your frame and app as described below.

- Connecting a new friend:**
- Make sure that your friend has downloaded and installed the frameo app
  - Click the add friend icon on your frame . A dialog will appear showing a unique code which is valid for 12 hours.
  - Now share this code in whatever fashion you prefer e.g. SMS, E-Mail, IM, phone call, to your friend
  - Once your friends have added the code in their frameo app, they will automatically appear on your frame and be able to send you photos.



ENG-4

**Remove person**

To remove a person from this list, thereby removing their permission to send you photos, tap the delete icon . You will then be asked to confirm the removal and if you would like to remove all photos received from this person.

To allow a new person to send you photos, simply tap the add friend button and share the presented code in whatever way you prefer.

**Add person**

Remove all data from your frame. This will permanently remove all your photos, friends/connections and settings.

**Reset frame**

To restore from a backup, you must first reset the frame. It is important to note that you cannot restore to a new Frameo frame and keep the old frame operational at the same time.

**Restore from backup**

Before you attempt to restore your frame, start by confirming that your backup is up-to-date.

ENG-7

**Automatic backup**

If checked, your frame will automatically take a backup within 30 hours of you receiving new photos or making changes on your frame.

**Backup and Restore**

Set which Wi-Fi the frame should be connected to. If you are connecting to a network with a captive portal a web browser icon should appear in top right corner of the screen. Use this to open a browser where you can enter credentials to access the network.

**Backup frame to max 32GB microSD card.**

Tap to make a backup of your photos, friends and settings. The time of latest successful backup will be displayed.

*Any existing backup on the SD card will be overridden!*

ENG-8

**Display and slideshow**

Define the duration a photo should be displayed.

**Show caption**

Set whether or not to display the captions that your friends have sent with the photo. Check to display captions. Uncheck to hide captions.

**Brightness level**

Adjust the brightness level of the screen.

**Wi-Fi!**

Set which Wi-Fi the frame should be connected to. If you are connecting to a network with a captive portal a web browser icon should appear in top right corner of the screen. Use this to open a browser where you can enter credentials to access the network.

**Automatic backup**

If checked, your frame will automatically take a backup within 30 hours of you receiving new photos or making changes on your frame.

**Restore from backup**

Before you attempt to restore your frame, start by confirming that your backup is up-to-date.

To restore from a backup, you must first reset the frame. It is important to note that you cannot restore to a new Frameo frame and keep the old frame operational at the same time.

**Reset frame**

Remove all data from your frame. This will permanently remove all your photos, friends/connections and settings.

ENG-5

**Manage photos**

Select which photos to hide by tapping the particular photos you wish to hide. Hidden photos will NOT be deleted from your frame, you can always select them to be shown again.

Use to hide or show all photos.

**Delete photos:**

Select photos that you want to permanently delete from your frame by tapping the photo. Use to select or deselect all and to delete the selected photos.

**Import photos:**

Set which Wi-Fi the frame should be connected to. If you are connecting to a network with a captive portal a web browser icon should appear in top right corner of the screen. Use this to open a browser where you can enter credentials to access the network.

Before you try to import photos from a SD card, make sure you have a SD card with photos on inserted into your frame.

Start by selecting the photos that you want to import onto your frame.

Once selected tap the import button to start the import process.

*It is currently not possible to add a caption or define the most important port of the photo when using the import function. Alternatively add yourself to your friend list and send them using the app.*

**My Friends**

This list contains all the people that are allowed to send photos to your frame.

ENG-6

**Set time zone**

Sets the timezone that should be used on your frame.

**Sleep mode:**

Frameo offers a sleep mode which turns off the screen to reduce power consumption while you e.g. are sleeping. Its default setting is to turn off the screen at 23:00 and turn on the screen again at 07:00. To change this just set the sleep mode start/end time.

*Your frame is not powered down or in standby, so you will still be able to receive photos during sleep mode.*

ENG-5

**My frame**

Changes the name of your frame. This is also the name the connected friends and family will see in their list of connected frames.

**Frame location:**

Changes the location of your frame. This is the location displayed on your friends' and family's list of connected frames which can help to distinguish frames from each other.

**Set language:**

Sets the language throughout your frame.

**Settings**

Through settings, you can personalize your frame to your needs.

**Frame location:**

Changes the location of your frame. This is the location displayed on your friends' and family's list of connected frames which can help to distinguish frames from each other.

**Set language:**

Sets the language throughout your frame.

**My frame**

Changes the name of your frame. This is also the name the connected friends and family will see in their list of connected frames.

**Frame location:**

Changes the location of your frame. This is the location displayed on your friends' and family's list of connected frames which can help to distinguish frames from each other.

**Set time zone**

Frameo offers a sleep mode which turns off the screen to reduce power consumption while you e.g. are sleeping. Its default setting is to turn off the screen at 23:00 and turn on the screen again at 07:00. To change this just set the sleep mode start/end time.

*Your frame is not powered down or in standby, so you will still be able to receive photos during sleep mode.*

**FCC Caution:**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device must accept any interference, including and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio and television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body. Use only the supplied antenna.

ENG-8