


## Label



### ROMOSS | X Series

ROMOSS Portable Power Station Model: RX1000  
Battery Type : LiFePO<sub>4</sub> Battery  
Cell Capacity : 1008Wh (45Ah/22.4V)  
AC Input : 110-130V~60Hz , 11A Max  
Solar Panel Input ( Anderson Port ) : 12-60V = 12A (400W Max)  
Car Charger Input ( Anderson Port ) : 12V = 8.5A Max  
AC Output (x2) : 120V~60Hz, 8.3A , 1000W total (2000W Peak)  
DC5525 Output (x2) : 12V = 10A (120W Max)  
Car Charger Output(x1) : 12V = 10A (120W Max)  
USB-A Output (x2) : 5V = 3A 9V = 2A 12V = 1.5A ( Dual-Port 36W Max)  
USB-C1 Output (x1) : 5V = 3A 9V = 3A 12V = 3A 15V = 3A 20V = 3A (60W Max)  
USB-C2 Output (x1) : 5V = 3A 9V = 3A 12V = 3A 15V = 3A 20V = 5A (100W Max)  
Wireless Charging Output : 15W      LED light : 2W      Flashlight : 2W  
Total Output: 1000W  
Expansion Battery Port : 19-25V , 50A Max  
Parallel Port : 120V~60Hz , 8.3A (1000W)  
Charging Temperature : 32°F-104°F / 0°C-40°C  
Discharging Temperature : 14°F-104°F / -10°C-40°C  
Manufacturer : Jiangmen Romoss Technology Co., Ltd.  
Made in China    XRX10001B2G1AXX    FCC ID: 2A6QM-RX1000

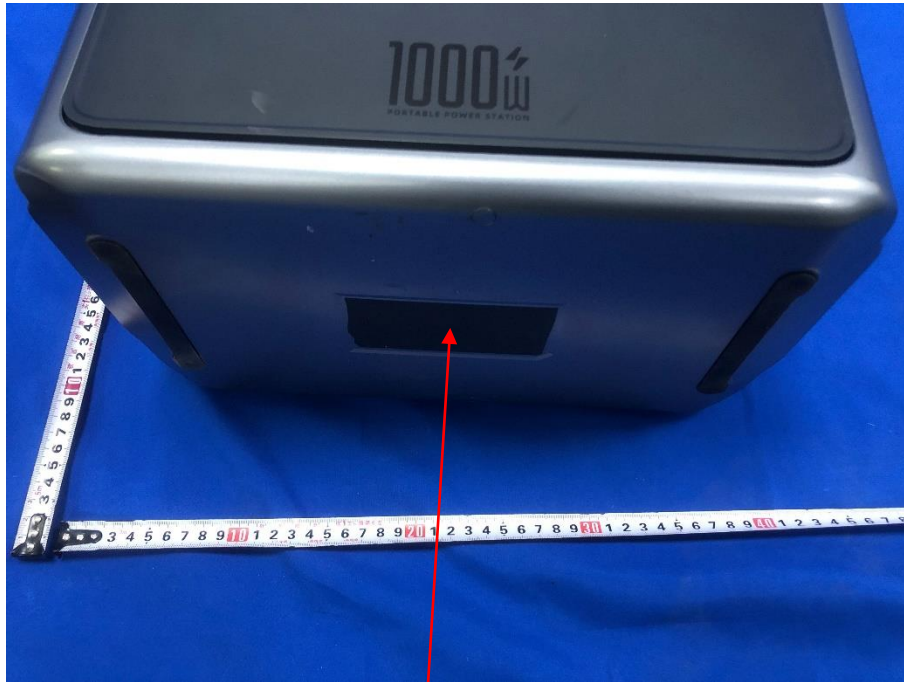

**Warning**  
Please fully charge the product before using and storing it. Ensure keeping RX1000 away from flames, heat, and moisture environment.  
Please use the product following the instruction, or could cause serious damage or injury.