

RF Exposure Evaluation

Client Information:

Applicant: Shenzhen Romoss Technology Co.,Ltd
Room1601, BLOCK B, Building 7,Shenzhen International Innovation Valley,
Applicant add.: Dashi 1st Road Xili community, Xili Street, Nanshan , Shenzhen › Guangdong,
P.R.China
Manufacturer: Jiangmen Romoss Technology Co., Ltd.
Manufacturer add.: Room 01-2, First floor, Building 8, No. 80, Renhe Road, Tangxia Town,
Pengjiang District, Jiangmen City

Product Information:

Product Name: Wireless Power Bank
Model No.: WMO10-121
Brand Name: ROMOSS

FCC ID: 2A6QM-WMO10-121

Applicable standards: FCC CFR 47 PART 1, § 1.1310
KDB 680106 D01 Wireless Power Transfer v04

Prepared By:

Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District,
Shenzhen, Guangdong, China

Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

Date of Receipt: Apr. 24, 2024 Date of Test: Apr. 24, 2024 ~ Apr. 30, 2024

Date of Issue: Apr. 30, 2024 Test Result: Pass

This device described above has been tested by Guangdong Asia Hongke Test Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited, this document may be altered or revised by Guangdong Asia Hongke Test Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by:



Sean She

Approved by:



Eder Zhan



TABLE OF CONTENTS

1	TEST FACILITY	4
1.1	Deviation from standard	4
1.2	Abnormalities from standard conditions	4
1.3	Test Location	4
2	GENERAL INFORMATION	5
2.1	Measuring Standard	6
2.2	Requirements	6
2.3	Test Setup	7
2.4	Test Procedure	7
3	Equipment Approval Considerations	8
3.1	Description of the test mode	9
3.2	Peripheral List	9
3.3	Test Instruments list	9
3.4	Compliance Location: Center vs Tip-Surface of the Probe	10
3.5	Test Result	12
4	Test Setup photo	24



Revision History

Revision	Issue Date	Revisions	Revised By
00	Apr. 30, 2024	Initial Issue	Eder Zhan

1 TEST FACILITY

The test facility is recognized, certified or accredited by the following organizations:

FCC-Registration No.: 251906 Designation Number: CN1376

Guangdong Asia Hongke Test Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

IC —Registration No.: 31737 CAB identifier: CN0165

The 3m Semi-anechoic chamber of Guangdong Asia Hongke Test Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 31737

A2LA-Lab Cert. No.: 7133.01

Guangdong Asia Hongke Test Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

1.1 Deviation from standard

None

1.2 Abnormalities from standard conditions

None

1.3 Test Location

Guangdong Asia Hongke Test Technology Limited

Address: B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

2 GENERAL INFORMATION

EUT Name:	Wireless Power Bank
Model No:	WMO10-121
Serial Model:	N/A
Test sample(s) ID:	AITSZ24042403001
Sample(s) Status:	Engineer sample
Operation frequency:	115kHz-205kHz
Modulation Technology:	ASK
Antenna Type:	loop coil Antenna
Antenna gain:	0dBi
Hardware version.:	WMO10-A V1.0-20231221
Software version.:	MCU/FT61E14F-MRB/CS=0XB489/MSOP10/WMO10
Power supply:	Input: 5V=2A/9V=2A(Lightning1) Input: 5V=3A/9V=2A (Lightning/Type-C) Output: 5V=3A/9V=2.22A/12V=1.67A (Lightning/LType-C) Wireless Output: 5W, 7W, 10W, 15W Total Output: Type-C /Lightning+ Wireless Output: 5V=3A
Model different:	N/A
Note:	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.1 Measuring Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines. According to §1.1310 and §2.1091 RF exposure is calculated. According KDB680106 D01: KDB 680106 D01 Wireless Power Transfer v04.

2.2 Requirements

According to the item 3 of KDB 680106 D01v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- (1) Mobile Device and Portable Device Configurations
- (2) Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz
- (3) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the top surface.

Limits

The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE)


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30
F=frequency in MHz * =Plane-wave equivalent power density RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).				

Note 1: f = frequency in MHz; *Plane-wave equivalent power density

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

2.3 Test Setup

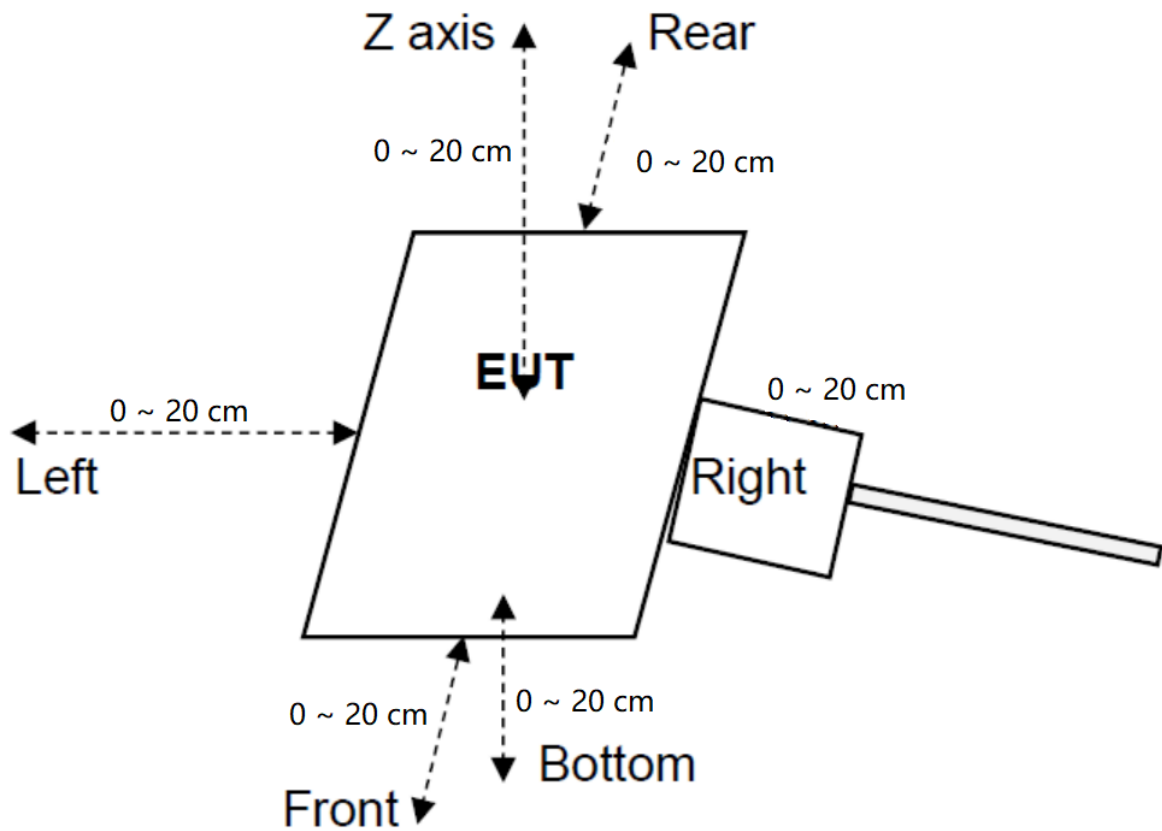

2.4 Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at test distance (2cm increments from 0 ~ 20 cm for all sides) which is between the edge of the charger and the geometric edge of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.

Remark: The EUT's test position A, B, C, D, E and F is valid for the E and H field measurements.

3 Equipment Approval Considerations

The EUT does comply with KDB 680106 D01 as follow table.

Requirements of section 3 of KDB 680106 D01	Yes / No	Description
Mobile Device and Portable Device Configurations	Yes	Portable Device
Equipment Authorization Procedures for Devices Operating at Frequencies Below 4 MHz	Yes	The device operate in the frequency range 115kHz-205kHz
RF Exposure compliance may be ensured only for a minimum separation distance that is greater than 20 cm, while use conditions at smaller distances can still be considered unlikely.	No	The EUT H-field and E-field strengths at 0 cm surrounding the device.

3.1 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

Test Mode	Description	
Mode 1	Adapter + EUT + Wireless charger receiver+ phone	Record
Mode 2	Test the EUT in idle mode.	Pre-tested

Note: All test modes were pre-tested, but we only recorded the worst case in this report.

3.2 Peripheral List

No.	Equipment	Manufacturer	Model No.	Serial No.	Power cord	signal cable
1	Smart phone	Apple	iphone 14 pro max	N/A	N/A	N/A

3.3 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal. Date (cm-dd-yy)	Cal. Due date (cm-dd-yy)
Magnetic Amplitude and Gradient Probe System	SPEAG	MAGPy-8H3D+E3D V2 & MAGPy-DAS V2	3107 & 3097	03.15.2024	03.14.2025

Parameter	Specs
PROBE DESIGN	
Diameter	60 mm
8 isotropic <i>H</i> -field sensors	concentric loops of 1 cm ² arranged at the corner of a cube of 22 mm side length
1 isotropic <i>E</i> -field sensor	orthogonal dipole/monopole (arm length: 50 mm)
Measurement center	18.5 mm from the probe tip
Temperature range	0–40 °C
Dimensions	110 × 635 × 35 mm (MAGPy-8H3D+E3D V2 & MAGPy-DAS V2)
<i>H</i>-FIELD SPECIFICATION	
Frequency range	3 kHz–10 MHz
Measurement range	0.1–3200 A/m, 0.12 μT–4 mT
Gradient range	0–80 T/m/T
<i>E</i>-FIELD SPECIFICATION	
Frequency range	3 kHz–10 MHz
Measurement range	0.08–2000 V/m

3.4 Compliance Location: Center vs Tip-Surface of the Probe

The following information is from the equipment manual:



Figure 2.1: MAGPy-8H3D+E3D V2 probe, without the casing

In the MAGPy V2.0 implementation, the H -field is evaluated at the center of the probe (which is 18.5mm above the surface of its tip) and also at the surface of its tip.

In the MAGPy V2.0 implementation, the H -field is evaluated at the center of the probe (which is 18.5mm above the surface of its tip) and also at the surface of its tip.

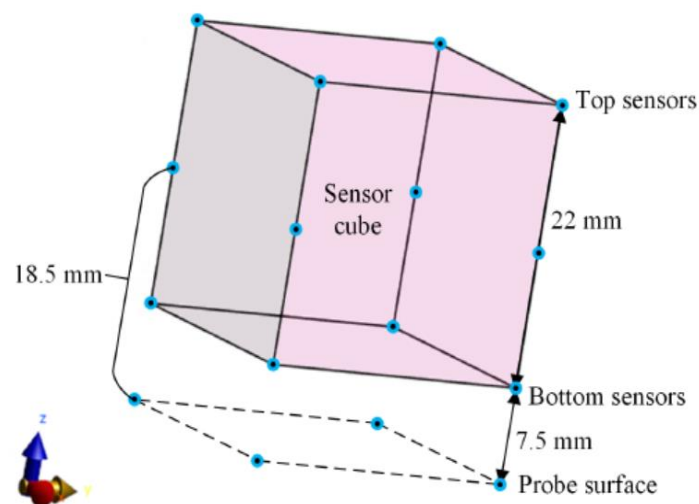


Figure 2.5: Extrapolation of the total H -field at the probe surface is made at each pair of sensors (i.e., bottom and top sensors) around the sensor cube

The total H -field at the tip-surface $H_{tip-surface}$ can be extrapolated using the total H -field measured at the top and bottom sensors (Figure 2.5), H_{top} and H_{bottom} , as well as the normalized H -field gradient G_n . The field extrapolation formula is a polynomial function of G_n ($\Delta d = 18.5$ mm) [7].

$$H_{tip-surface} = \frac{H_{bottom} + H_{top}}{2} \sum_{i=0}^7 c_i (G_n \Delta d)^i \quad (1.6)$$

The polynomial coefficients c_i are given in Table 2.2. They have been determined from simulations of 70 coils covering normalized gradients up to 80 for the 97.5th percentile (Figure 2.6). This provides a conservative estimate of the total H -field at the tip-surface without large overestimation.

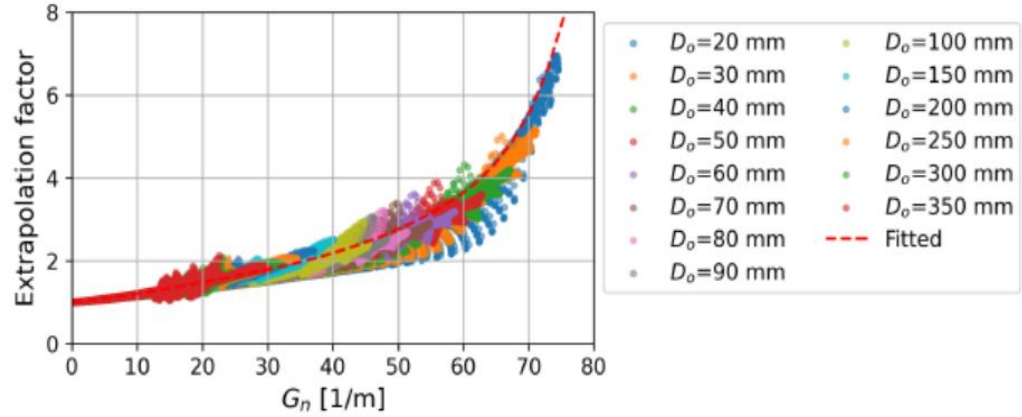


Figure 2.6: Extrapolation factors (i.e., ratios between the simulated results of $H_{tip-surface}$ and $\frac{H_{bottom} + H_{top}}{2}$) plotted as a function of the normalized H -field gradient. The data are from simulations of 70 coils with varying outer diameters D_o and filling ratios (0.1–0.9). The prediction of the polynomial function $\sum_{i=0}^7 c_i (G_n \Delta d)^i$ with coefficients fitted for 97.5th percentile (i.e., the red dashed line) is also shown.

Coefficient	Value
c_0	1.00
c_1	1.00
c_2	-1.01
c_3	15.9
c_4	-50.8
c_5	74.7
c_6	-51.4
c_7	13.7

Table 2.2: Coefficients of the polynomial function for the H -field extrapolation to the tip-surface of the probe, determined with 0.975 quantile regression (i.e., the 97.5th percentile)

3.5 Test Result

MPE				
Evaluate distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
0cm	< 1%	Top	11.77	1.29
0cm	< 1%	Bottom	11.77	1.40
0cm	< 1%	Left	11.92	1.45
0cm	< 1%	Right	11.77	1.48
0cm	< 1%	Front	11.68	1.48
0cm	< 1%	Rear	11.81	1.66
Limit			614	1.63
Margin Limit (%)			1.94%	101.56%

MPE				
Evaluate distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
0cm	< 50%	Top	11.79	0.94
0cm	< 50%	Bottom	11.73	1.23
0cm	< 50%	Left	11.85	1.34
0cm	< 50%	Right	11.45	1.73
0cm	< 50%	Front	11.94	1.28
0cm	< 50%	Rear	11.86	1.47
Limit			614	1.63
Margin Limit (%)			1.94%	106.40%

MPE				
Evaluate distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
0cm	< 99%	Top	11.70	1.21
0cm	< 99%	Bottom	11.68	1.14
0cm	< 99%	Left	11.57	1.39
0cm	< 99%	Right	11.64	1.79
0cm	< 99%	Front	11.96	1.37
0cm	< 99%	Rear	11.81	1.41
Limit			614	1.63
Margin Limit (%)			1.95%	110.06%

Note: The distance at 0mm cannot be measured directly and is derived from the following extrapolation formula:

$$\text{Estimated value (0cm)} = \text{Measured value(2cm)} * \text{Measured value(4cm)} / \text{Measured value(6cm)}$$

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
2cm	< 1%	Top	11.56	1.21
2cm	< 1%	Bottom	11.47	1.21
2cm	< 1%	Left	11.64	1.24
2cm	< 1%	Right	11.50	1.27
2cm	< 1%	Front	11.40	1.30
2cm	< 1%	Rear	11.53	1.33
Limit			614	1.63
Margin Limit (%)			1.90%	81.60%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
2cm	< 50%	Top	11.65	1.09
2cm	< 50%	Bottom	11.43	1.12
2cm	< 50%	Left	11.68	1.22
2cm	< 50%	Right	11.36	1.19
2cm	< 50%	Front	11.54	1.17
2cm	< 50%	Rear	11.44	1.41
Limit			614	1.63
Margin Limit (%)			1.90%	86.50%

614 1.63

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
2cm	< 99%	Top	11.54	1.12
2cm	< 99%	Bottom	11.52	1.02
2cm	< 99%	Left	11.54	1.35
2cm	< 99%	Right	11.35	1.24
2cm	< 99%	Front	11.46	1.31
2cm	< 99%	Rear	11.49	1.59
Limit			614	1.63
Margin Limit (%)			1.88%	97.55%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
4cm	< 1%	Top	11.25	1.12
4cm	< 1%	Bottom	11.33	1.20
4cm	< 1%	Left	11.39	1.19
4cm	< 1%	Right	11.39	1.18
4cm	< 1%	Front	11.42	1.15
4cm	< 1%	Rear	11.40	1.17
Limit			614	1.63
Margin Limit (%)			1.86%	73.62%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
4cm	< 50%	Top	11.14	0.95
4cm	< 50%	Bottom	11.32	1.05
4cm	< 50%	Left	11.36	1.22
4cm	< 50%	Right	11.41	1.37
4cm	< 50%	Front	11.38	1.17
4cm	< 50%	Rear	11.45	1.05
Limit			614	1.63
Margin Limit (%)			1.86%	84.05%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
4cm	< 99%	Top	11.10	1.06
4cm	< 99%	Bottom	11.20	1.04
4cm	< 99%	Left	11.29	1.26
4cm	< 99%	Right	11.53	1.36
4cm	< 99%	Front	11.38	1.16
4cm	< 99%	Rear	11.43	0.99
Limit			614	1.63
Margin Limit (%)			1.88%	83.44%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
6cm	< 1%	Top	11.13	1.01
6cm	< 1%	Bottom	11.04	1.04
6cm	< 1%	Left	11.12	1.02
6cm	< 1%	Right	11.13	1.01
6cm	< 1%	Front	11.15	1.01
6cm	< 1%	Rear	11.13	0.94
Limit			614	1.63
Margin Limit (%)			1.82%	64.42%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
6cm	< 50%	Top	11.01	1.10
6cm	< 50%	Bottom	11.03	0.96
6cm	< 50%	Left	11.20	1.11
6cm	< 50%	Right	11.32	0.94
6cm	< 50%	Front	11.00	1.07
6cm	< 50%	Rear	11.04	1.01
Limit			614	1.63
Margin Limit (%)			1.84%	68.10%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
6cm	< 99%	Top	10.95	0.98
6cm	< 99%	Bottom	11.05	0.93
6cm	< 99%	Left	11.26	1.22
6cm	< 99%	Right	11.24	0.94
6cm	< 99%	Front	10.90	1.11
6cm	< 99%	Rear	11.12	1.12
Limit			614	1.63
Margin Limit (%)			1.83%	74.85%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
8cm	< 1%	Top	10.73	0.96
8cm	< 1%	Bottom	10.87	1.03
8cm	< 1%	Left	10.91	1.05
8cm	< 1%	Right	10.92	0.99
8cm	< 1%	Front	10.73	1.05
8cm	< 1%	Rear	10.84	1.10
Limit			614	1.63
Margin Limit (%)			1.78%	67.48%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
8cm	< 50%	Top	10.62	0.92
8cm	< 50%	Bottom	11.02	1.15
8cm	< 50%	Left	10.91	1.08
8cm	< 50%	Right	10.92	1.08
8cm	< 50%	Front	10.84	1.12
8cm	< 50%	Rear	10.73	1.04
Limit			614	1.63
Margin Limit (%)			1.79%	70.55%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
8cm	< 99%	Top	10.55	0.84
8cm	< 99%	Bottom	11.05	1.16
8cm	< 99%	Left	11.00	1.21
8cm	< 99%	Right	11.04	0.97
8cm	< 99%	Front	10.76	1.11
8cm	< 99%	Rear	10.70	0.95
Limit			614	1.63
Margin Limit (%)			1.80%	74.23%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
10cm	< 1%	Top	10.59	0.87
10cm	< 1%	Bottom	10.58	0.81
10cm	< 1%	Left	10.66	0.76
10cm	< 1%	Right	10.75	0.69
10cm	< 1%	Front	10.57	0.66
10cm	< 1%	Rear	10.53	0.64
Limit			614	1.63
Margin Limit (%)			1.75%	53.37%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
10cm	< 50%	Top	10.43	0.83
10cm	< 50%	Bottom	10.44	0.78
10cm	< 50%	Left	10.53	0.82
10cm	< 50%	Right	10.76	0.62
10cm	< 50%	Front	10.46	0.69
10cm	< 50%	Rear	10.48	0.57
Limit			614	1.63
Margin Limit (%)			1.75%	50.92%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
10cm	< 99%	Top	10.25	0.89
10cm	< 99%	Bottom	10.36	0.81
10cm	< 99%	Left	10.46	0.94
10cm	< 99%	Right	10.70	0.65
10cm	< 99%	Front	10.37	0.72
10cm	< 99%	Rear	10.37	0.59
Limit			614	1.63
Margin Limit (%)			1.74%	57.67%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
12cm	< 1%	Top	10.35	0.73
12cm	< 1%	Bottom	10.33	0.74
12cm	< 1%	Left	10.36	0.76
12cm	< 1%	Right	10.26	0.79
12cm	< 1%	Front	10.24	0.78
12cm	< 1%	Rear	10.31	0.72
Limit			614	1.63
Margin Limit (%)			1.69%	48.47%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
12cm	< 50%	Top	10.27	0.61
12cm	< 50%	Bottom	10.38	0.77
12cm	< 50%	Left	10.45	0.95
12cm	< 50%	Right	10.30	0.74
12cm	< 50%	Front	10.38	0.83
12cm	< 50%	Rear	10.36	0.65
Limit			614	1.63
Margin Limit (%)			1.70%	58.28%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
12cm	< 99%	Top	10.28	0.61
12cm	< 99%	Bottom	10.40	0.86
12cm	< 99%	Left	10.39	1.01
12cm	< 99%	Right	10.30	0.83
12cm	< 99%	Front	10.51	0.92
12cm	< 99%	Rear	10.30	0.71
Limit			614	1.63
Margin Limit (%)			1.71%	61.96%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
14cm	< 1%	Top	10.14	0.62
14cm	< 1%	Bottom	10.30	0.57
14cm	< 1%	Left	10.47	0.63
14cm	< 1%	Right	10.53	0.65
14cm	< 1%	Front	10.54	0.62
14cm	< 1%	Rear	10.59	0.61
Limit			614	1.63
Margin Limit (%)			1.72%	39.88%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
14cm	< 50%	Top	10.24	0.53
14cm	< 50%	Bottom	10.25	0.63
14cm	< 50%	Left	10.43	0.67
14cm	< 50%	Right	10.59	0.74
14cm	< 50%	Front	10.49	0.68
14cm	< 50%	Rear	10.45	0.71
Limit			614	1.63
Margin Limit (%)			1.72%	45.40%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
14cm	< 99%	Top	10.26	0.44
14cm	< 99%	Bottom	10.21	0.81
14cm	< 99%	Left	10.30	0.55
14cm	< 99%	Right	10.59	0.76
14cm	< 99%	Front	10.44	0.70
14cm	< 99%	Rear	10.47	0.65
Limit			614	1.63
Margin Limit (%)			1.72%	49.69%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
16cm	< 1%	Top	9.91	0.53
16cm	< 1%	Bottom	9.92	0.56
16cm	< 1%	Left	9.92	0.54
16cm	< 1%	Right	9.88	0.52
16cm	< 1%	Front	9.98	0.50
16cm	< 1%	Rear	10.01	0.47
Limit			614	1.63
Margin Limit (%)			1.63%	34.36%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
16cm	< 50%	Top	9.96	0.58
16cm	< 50%	Bottom	9.87	0.69
16cm	< 50%	Left	9.75	0.64
16cm	< 50%	Right	9.88	0.51
16cm	< 50%	Front	10.11	0.49
16cm	< 50%	Rear	9.94	0.54
Limit			614	1.63
Margin Limit (%)			1.65%	42.33%

614
1.63

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
16cm	< 99%	Top	9.90	0.62
16cm	< 99%	Bottom	9.92	0.72
16cm	< 99%	Left	9.65	0.61
16cm	< 99%	Right	9.86	0.48
16cm	< 99%	Front	10.12	0.43
16cm	< 99%	Rear	9.79	0.53
Limit			614	1.63
Margin Limit (%)			1.65%	44.17%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
18cm	< 1%	Top	9.72	0.45
18cm	< 1%	Bottom	9.69	0.49
18cm	< 1%	Left	9.64	0.56
18cm	< 1%	Right	9.56	0.56
18cm	< 1%	Front	9.52	0.57
18cm	< 1%	Rear	9.51	0.53
Limit			614	1.63
Margin Limit (%)			1.58%	34.97%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
18cm	< 50%	Top	9.56	0.33
18cm	< 50%	Bottom	9.66	0.54
18cm	< 50%	Left	9.79	0.60
18cm	< 50%	Right	9.66	0.48
18cm	< 50%	Front	9.47	0.52
18cm	< 50%	Rear	9.51	0.44
Limit			614	1.63
Margin Limit (%)			1.59%	36.81%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
18cm	< 99%	Top	9.48	0.39
18cm	< 99%	Bottom	9.75	0.36
18cm	< 99%	Left	9.92	0.67
18cm	< 99%	Right	9.54	0.43
18cm	< 99%	Front	9.49	0.53
18cm	< 99%	Rear	9.38	0.39
Limit			614	1.63
Margin Limit (%)			1.62%	41.10%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
20cm	< 1%	Top	9.51	0.37
20cm	< 1%	Bottom	9.38	0.41
20cm	< 1%	Left	9.30	0.36
20cm	< 1%	Right	9.22	0.40
20cm	< 1%	Front	9.16	0.42
20cm	< 1%	Rear	9.19	0.41
Limit			614	1.63
Margin Limit (%)			1.55%	25.77%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
20cm	< 50%	Top	9.60	0.28
20cm	< 50%	Bottom	9.31	0.40
20cm	< 50%	Left	9.31	0.40
20cm	< 50%	Right	9.20	0.34
20cm	< 50%	Front	9.06	0.34
20cm	< 50%	Rear	9.28	0.39
Limit			614	1.63
Margin Limit (%)			1.56%	24.54%

MPE				
Test distance	Battery levels	Probe from EUT Side	E-field (V/m)	H-field (A/m)
20cm	< 99%	Top	9.61	0.36
20cm	< 99%	Bottom	9.32	0.41
20cm	< 99%	Left	9.18	0.42
20cm	< 99%	Right	9.17	0.32
20cm	< 99%	Front	9.02	0.23
20cm	< 99%	Rear	9.31	0.40
Limit			614	1.63
Margin Limit (%)			1.57%	25.77%

E-field (V/m):

According to the following table, when we backward derivation 0cm, it should be 11.70(V/m), with a deviation from the actual test value of 1.45%.

E-field (V/m)			
0cm	2cm	4cm	6cm
11.87	11.54	11.1	10.95

Note:

1. Estimated value (0cm) / Measured value(4cm) = Measured value(2cm) / Measured value(6cm)
2. Deviation = [Measured value(0cm) - Estimated value (0cm)] / Measured value(0cm)
3. Estimated value (0cm) = $11.54 \times 11.1 / 10.95 = 11.70(\text{V/m})$
4. Deviation = $(11.87 - 11.70) / 11.87 = 1.45\%$

H-field (A/m):

According to the following table, when we backward derivation 0cm, it should be 1.34(A/m), with a deviation from the actual test value of 4.01%.

H-field (A/m)			
0cm	2cm	4cm	6cm
1.29	1.21	1.12	1.01

Note:


1. Estimated value (0cm) / Measured value(4cm) = Measured value(2cm) / Measured value(6cm)
2. Deviation = [Measured value(0cm) - Estimated value (0cm)] / Measured value(0cm)
3. Estimated value (0cm) = $1.21 \times 1.12 / 1.01 = 1.34(\text{A/m})$
4. Deviation = $(1.29 - 1.34) / 1.29 = 4.01\%$

4 Test Setup photo

Botton



Front

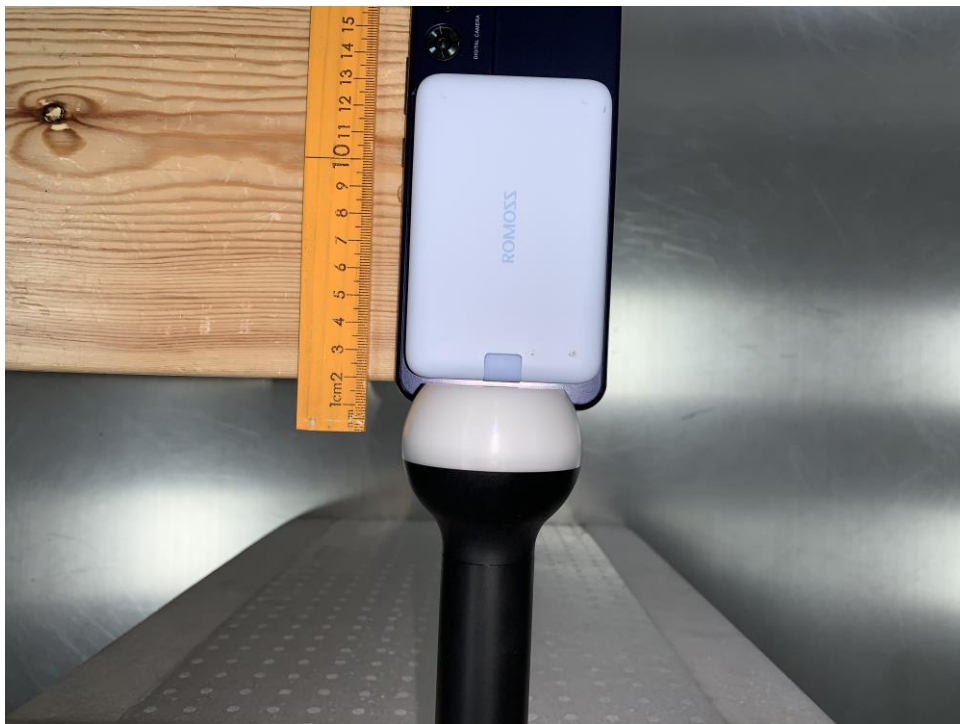

Left



Rear



Right



Top



End of report