

FCC Test Report

Applicant : **Guangdong Titecsson Industrial Co.,Ltd**

Address : **Building 4,Xingxing industrial Zone,Dashi Street,Panyu District,Guangzhou,China**

Product Name : **Magnetic wireless charging power bank**

Report Date : **Jun. 06, 2024**

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	5
1.1. Client Information	5
1.2. Description of Device (EUT)	5
1.3. Auxiliary Equipment Used During Test	6
1.4. Test Equipment List	6
1.5. Measurement Uncertainty	6
1.6. Description of Test Facility	6
2. Measurement and Result	7
2.1. Requirements	7
2.2. Test Setup	8
2.3. Test Procedure	9
2.4. Test Result	9
APPENDIX I -- TEST SETUP PHOTOGRAPH	15
APPENDIX II -- EXTERNAL PHOTOGRAPH	15
APPENDIX III -- INTERNAL PHOTOGRAPH	15



TEST REPORT

Applicant : Guangdong Titecsson Industrial Co.,Ltd
Manufacturer : Guangdong Titecsson Industrial Co.,Ltd
Product Name : Magnetic wireless charging power bank
Test Model No. : M16C
Reference Model No. : M17C, M18C, M19C, M20C, M21C, M22C, M23C, M24C, M25C, M26C, M27C, M28C
Trade Mark : N/A
Rating(s) : TYPE-C Input: 5V== 2.5A, 9V== 2A, 12V== 1.5A, MAX 22.5W
TYPE-C Output: 5V== 2.4A, 9V== 2.22A, 12V== 1.67A
Wireless Output: 15W
Battery: DC 4.2V, 5000mAh battery inside

Test Standard(s) : FCC Part 1.1310, 1.1307(b)

**Test Method(s) : KDB680106 D01 RF Exposure Wireless Charging Apps v04
October 25, 2023 TCB Workshop**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 1.1307 & KDB680106 D01 & TCB Workshop, October 25, 2023 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Mar. 28, 2024

Date of Test

Mar. 28, 2024~Apr. 09, 2024

Prepared By

Ella Liang

(Ella Liang)

Approved & Authorized Signer

Edward Pan

(Edward Pan)



Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Jun. 06, 2024



1. General Information

1.1. Client Information

Applicant	:	Guangdong Titecssion Industrial Co.,Ltd
Address	:	Building 4,Xingxing industrial Zone,Dashi Street,Panyu District,Guangzhou,China
Manufacturer	:	Guangdong Titecssion Industrial Co.,Ltd
Address	:	Building 4,Xingxing industrial Zone,Dashi Street,Panyu District,Guangzhou,China
Factory	:	Guangdong Titecssion Industrial Co.,Ltd
Address	:	Building 4,Xingxing industrial Zone,Dashi Street,Panyu District,Guangzhou,China

1.2. Description of Device (EUT)

Product Name	:	Magnetic wireless charging power bank
Test Model No.	:	M16C
Reference Model No.	:	M17C, M18C, M19C, M20C, M21C, M22C, M23C, M24C, M25C, M26C, M27C, M28C (Note: All samples are the same except the model number, so we prepare "M16C" for test only.)
Trade Mark	:	N/A
Test Power Supply	:	DC 4.2V battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Frequency	:	110.1-205kHz
Modulation Type	:	ASK
Antenna Type	:	Inductive loop coil Antenna
Antenna Gain(Peak)	:	0 dBi
Remark: 1) All of the RF specification are provided by customer. 2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
Apple Phone	iPhone 13
Adapter	Model: MDY-11-EX Input: 100-240V-0.7A, 50-60Hz USB-A output: 5V $\overline{=}$ 3A, 9V $\overline{=}$ 3A, 12V $\overline{=}$ 2.25A, 20V $\overline{=}$ 1.35A, 11V $\overline{=}$ 3A

1.4. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Electric and Magnetic field Analyzer	NARDA	EHP-200A	180ZX10202	Oct. 16, 2023	1 Year

1.5. Measurement Uncertainty

Parameter	Uncertainty
Magnetic Field Reading(A/m)	+/-0.04282(A/m)
Electric Field Reading(V/m)	+/-0.03679(V/m)

1.6. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 434132

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.



2. Measurement and Result

2.1. Requirements

According to the item 5.b) of KDB 680106 D01v04:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.

- (1) The power transfer frequency is below 1 MHz.
- (2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.
- (3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)
- (4) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).
- (5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.
- (6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.



Limits For Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 *=Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

2.2. Test Setup

1) H-field data are taken along all three axes the device, from 0 cm to 20 cm, in 2 cm minimum increment measured from the edge of the device, with one axis coincident with the axis of the main coil.

2) "Large size" probes may prevent the measurement of E- and/or H-fields near the surface of the radiating structure (e.g., a WPT source coil), as in the example shown in Figure 1.

If the center of the probe sensing element is located more than 5 mm from the probe outer surface, the field strengths need to be estimated through modeling for those positions that are not reachable. The estimates may be done either via numerical calculation, or via analytic model: e.g., approximated formulas for circular coils, dipoles, etc., may be acceptable if it is shown that the model is applicable for the design parameters considered. A typical example is the use of a quasi-static approximation formula for a low-frequency magnetic field source.

These estimates shall include points spaced no more than 2 cm from each other. Thus, in the example of Figure 1, at least the estimates at 0 cm² and 2 cm are required, while only one point would not be sufficient. In addition, the model needs to be validated through the probe measurements for the two closest points to the device surface, and with 2-cm increments, as indicated in Figure 1. In that example, the same model must also be applied to the 4 cm and 6 cm positions, and then compared with the measured data, for validation purposes. The validation is considered sufficient if a 30% agreement



between the model and the (E- and/or H-field) probe measurements is demonstrated. If such a level of agreement cannot be shown, a more accurate model (and/or a smaller probe) shall be used.

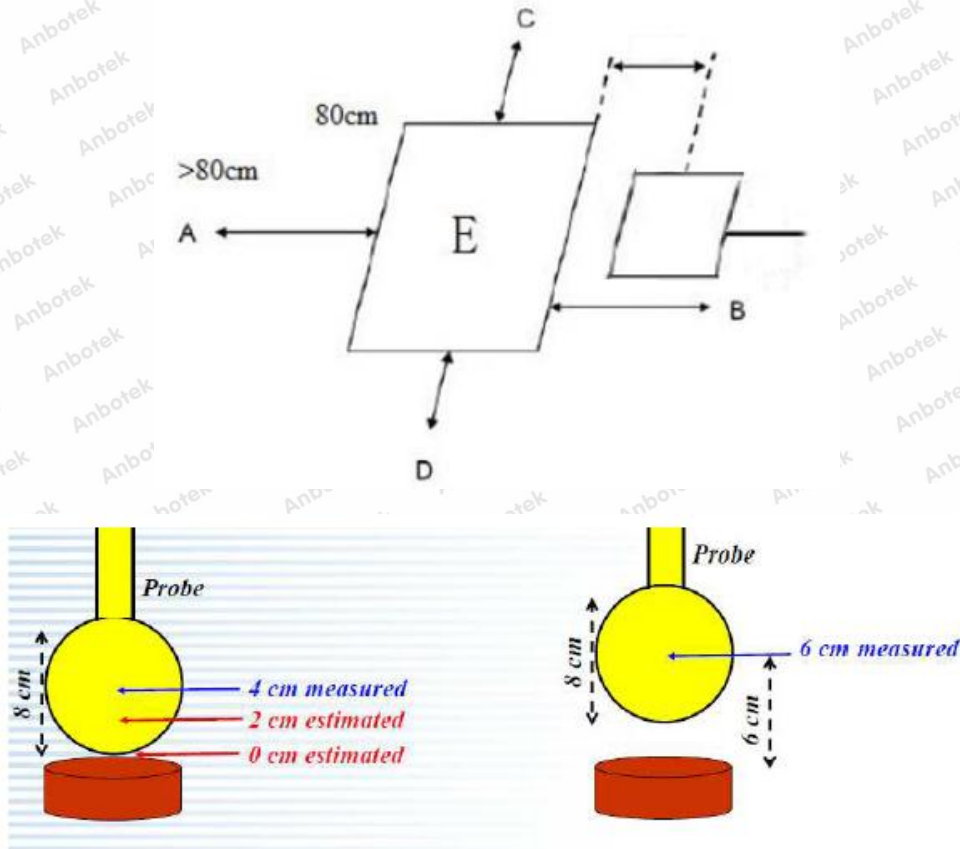


Figure 1

2.3. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at required test distance (from 0 cm to 20 cm, in 2 cm minimum increment) which is between the edge/top surface of the charger and the center of the probe. and the measurement probe was placed at required test distance 15cm and 20cm which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed. (A is the right, B is the back, C is the left, D is the front, and E is the top side.)
- 4) The EUT was measured according to the dictates of TCB Workshop, October 25, 2023 and KDB 680106 D01 v04.

Remark;

The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

2.4. Test Result

2.4.1. Equipment Approval Considerations item 5.b of KDB 680106 D01 v04.

Shenzhen Anbotek Compliance Laboratory Limited

Code:AB-RF-05-b

Address:1/F.,Building D,Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel:(86) 0755-26066440 Fax:(86) 0755-26014772 Email:service@anbotek.com



Hotline

400-003-0500

www.anbotek.com.cn



- (1) The power transfer frequency is below 1 MHz.
 - The device operate in the frequency range 110.1-205kHz.
- (2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.
 - The maximum output power of the primary coil is 15W.
- (3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)
 - The surfaces of the transmitter and client device enclosures is in physical contact.
- (4) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).
 - The EUT is a portable exposure conditions
- (5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.
 - Conducted the measurement with the required distance and the test results please refer to the section 2.4.
- (6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.
 - The EUT is one radiating structure.



2.4.2. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

Temperature:	25.4°C	Relative Humidity:	51.2%
Pressure:	101 kPa	Test Voltage:	DC 4.2V battery inside

Between the edge/top surface of the charger and the center of probe

E-Field Strength									
Test distance	Battery power	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	Reference Limit (V/m)	Limits Test (V/m)
EUT Base support input + Standby									
0cm	1%	0.460	0.550	0.480	0.470	0.580	0.622	307	614
	50%	1.483	1.963	1.423	1.583	1.743	1.735	307	614
	99%	2.526	2.976	2.556	2.516	3.016	2.907	307	614
EUT Base support input + iPhone 13 operating (10% electric quantity worst case)									
0,2,4cm	1%	0.497	0.577	0.497	0.487	0.607	0.567	307	614
	50%	1.455	1.885	1.565	1.575	1.675	1.623	307	614
	99%	2.462	2.922	2.462	2.442	2.952	2.896	307	614
6cm	1%	0.413	0.483	0.413	0.393	0.513	0.597	307	614
	50%	1.455	1.895	1.565	1.565	1.645	1.642	307	614
	99%	2.352	2.812	2.352	2.332	2.822	2.842	307	614
8cm	1%	0.470	0.530	0.480	0.450	0.580	0.563	307	614
	50%	1.325	1.775	1.445	1.445	1.535	1.562	307	614
	99%	2.377	2.827	2.377	2.357	2.857	2.816	307	614
10cm	1%	0.367	0.457	0.407	0.347	0.487	0.567	307	614
	50%	1.335	1.755	1.455	1.455	1.535	1.541	307	614
	99%	2.375	2.805	2.365	2.345	2.835	2.823	307	614
12cm	1%	0.335	0.435	0.395	0.335	0.455	0.456	307	614
	50%	1.344	1.764	1.444	1.434	1.544	1.541	307	614
	99%	2.335	2.765	2.295	2.295	2.785	2.809	307	614



E-Field Strength									
Test distance	Battery power	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	Reference Limit (V/m)	Limits Test (V/m)
14cm	1%	0.356	0.456	0.416	0.356	0.486	0.538	307	614
	50%	1.346	1.756	1.436	1.436	1.536	1.653	307	614
	99%	2.322	2.742	2.282	2.292	2.752	2.971	307	614
16cm	1%	0.358	0.458	0.418	0.358	0.478	0.542	307	614
	50%	1.273	1.673	1.353	1.363	1.443	1.619	307	614
	99%	2.342	2.762	2.312	2.302	2.782	2.904	307	614
18cm	1%	0.336	0.436	0.396	0.326	0.456	0.507	307	614
	50%	1.255	1.665	1.355	1.365	1.445	1.624	307	614
	99%	2.367	2.797	2.347	2.327	2.817	2.882	307	614
20cm	1%	0.330	0.340	0.400	0.330	0.460	0.562	307	614
	50%	1.260	1.650	1.340	1.350	1.450	1.567	307	614
	99%	2.306	2.746	2.296	2.276	2.766	2.813	307	614



H-Field Strength									
Test distance	Battery power	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	Reference Limit (A/m)	Limits Test (A/m)
EUT Base support input + Standby									
0cm	1%	0.029	0.048	0.051	0.039	0.047	0.049	0.815	1.63
	50%	0.426	0.496	0.406	0.386	0.616	0.565	0.815	1.63
	99%	0.521	0.701	0.591	0.391	0.411	0.424	0.815	1.63
EUT Base support input + iPhone 13 operating (10% electric quantity worst case)									
0,2,4cm	1%	0.076	0.095	0.097	0.084	0.098	0.087	0.815	1.63
	50%	0.386	0.456	0.376	0.376	0.586	0.603	0.815	1.63
	99%	0.511	0.691	0.591	0.401	0.401	0.341	0.815	1.63
6cm	1%	0.094	0.115	0.117	0.104	0.118	0.086	0.815	1.63
	50%	0.408	0.458	0.378	0.398	0.608	0.572	0.815	1.63
	99%	0.415	0.555	0.485	0.275	0.305	0.325	0.815	1.63
8cm	1%	0.006	0.026	0.027	0.015	0.027	0.109	0.815	1.63
	50%	0.304	0.404	0.324	0.334	0.554	0.534	0.815	1.63
	99%	0.381	0.551	0.471	0.271	0.291	0.355	0.815	1.63
10cm	1%	0.057	0.077	0.076	0.066	0.076	0.121	0.815	1.63
	50%	0.254	0.344	0.254	0.254	0.484	0.516	0.815	1.63
	99%	0.426	0.616	0.536	0.346	0.336	0.308	0.815	1.63
12cm	1%	0.027	0.047	0.045	0.036	0.047	0.040	0.815	1.63
	50%	0.280	0.380	0.280	0.280	0.530	0.509	0.815	1.63
	99%	0.370	0.560	0.490	0.310	0.300	0.236	0.815	1.63



H-Field Strength									
Test distance	Battery power	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	Reference Limit (A/m)	Limits Test (A/m)
14cm	1%	0.023	0.042	0.041	0.032	0.042	0.107	0.815	1.63
	50%	0.204	0.304	0.194	0.184	0.424	0.475	0.815	1.63
	99%	0.313	0.493	0.433	0.253	0.243	0.301	0.815	1.63
16cm	1%	-0.003	0.016	0.015	0.004	0.013	0.031	0.815	1.63
	50%	0.176	0.256	0.156	0.146	0.396	0.480	0.815	1.63
	99%	0.315	0.515	0.445	0.275	0.265	0.293	0.815	1.63
18cm	1%	0.076	0.094	0.092	0.083	0.090	0.080	0.815	1.63
	50%	0.165	0.255	0.145	0.135	0.385	0.429	0.815	1.63
	99%	0.303	0.483	0.423	0.273	0.263	0.186	0.815	1.63
20cm	1%	0.053	0.071	0.069	0.060	0.067	0.053	0.815	1.63
	50%	0.250	0.330	0.230	0.220	0.460	0.449	0.815	1.63
	99%	0.314	0.494	0.424	0.284	0.274	0.258	0.815	1.63

Note:

- (1) Position E is top side.
- (2) All the situation (full load, half load and empty load) has been tested, only the worst situation (full load 15W) was recorded in the report.
- (3) All three axes the device has been tested, only the worst results reported.
- (4) All positions have been tested, only display photos of Position E and A in the report.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_MPE

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

