

# momcozy

## BM01



Video Baby Monitor ( Camera )

Video Baby Monitor ( Monitor )



# USER GUIDE

5 " HD LCD



→ ENGLISH

# CONTENTS


<b>SAFETY INSTRUCTIONS</b>	03
<b>CAUTION</b>	03
<b>PACKAGE CONTENTS</b>	04
<b>PRODUCT OVERVIEW</b>	05
<b>GETTING STARTED</b>	08
1. Charging & Powering Baby Monitor	08
2. Powering Camera	08
3. Pairing the Baby Monitor & the Camera	08
4. Placing the Camera	09
5. Wall Mounting Camera	10
<b>FUNCTIONS &amp; OPERATIONS</b>	11
Status Icons	11
1. Volume Adjustment	12
2. Selecting a Camera & Scanning Cameras	12
3. Digital Zoom	12
4. Lullaby	13
5. Talk Back	13
6. Brightness	13
7. Screen Sleep	14
8. Add A New Camera	14
9. Split Screen	15
10. Selecting a Camera & Scanning Cameras	16
11. Deleting A Camera	16
12. Speaker Volume	17
13. Alarm Volume	17
14. VOX	18
15. Alarm Clock	18
16. Time	19
17. Date	19
18. Temperature	20
19. Display Mode	20



20. Language .....	21
21. Lullabies .....	21
22. Refresh Rate .....	21
23. Factory Settings .....	22
24. Contact Us .....	22
<b>SPECIFICATIONS .....</b>	<b>23</b>
<b>TROUBLESHOOTING .....</b>	<b>24</b>
<b>WARRANTY &amp; CUSTOMER SERVICE .....</b>	<b>25</b>
<b>FCC COMPLIANCE(Camera) .....</b>	<b>25</b>
<b>FCC COMPLIANCE(Monitor) .....</b>	<b>26</b>
<b>WEEE COMPLIANCE .....</b>	<b>27</b>
<b>IC CAUTION(Camera) .....</b>	<b>27</b>
<b>IC CAUTION(Monitor) .....</b>	<b>28</b>

# SAFETY INSTRUCTIONS

- Strangulation Hazard—Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3 ft (0.9 m) away). Do not remove this tag.

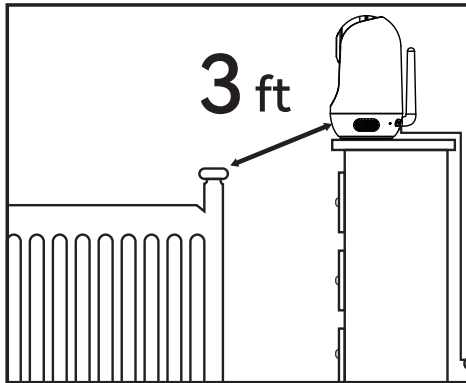


- NEVER place the camera or cord in or near the crib or playpen.
- NEVER mount the camera directly above the crib or playpen to avoid the risk of injury.
- Only use the AC adapters provided.
- Never use the unit near water, including near a bathtub, sink, laundry machine tube, wet basement, etc.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other devices that produce heat.
- Only use attachments and accessories specified by the manufacturer.
- Unplug this device when unused for long periods of time.

## CAUTION


- NOT toys. Do not allow children to play with them.
- This product is NOT intended to replace the proper supervision of children. You MUST check your child's activity regularly.
- This product is not intended for use as a medical camera and its use should not replace adult supervision.
- Unplug the product during lightning storms.
- Please check the operating range and condition of the camera carefully at the initial installation, and on a regular basis after that.

- Check the reception regularly. Test the camera before use and after changing the camera's location.
- For indoor use only.
- Clean the camera with a dry cloth only.
- Do not block any ventilation openings.
- Microphone feedback might occur when the monitor is too close to the camera. Please keep them at least 1.5 m / 4.9ft apart.


# PACKAGE CONTENTS




Camera

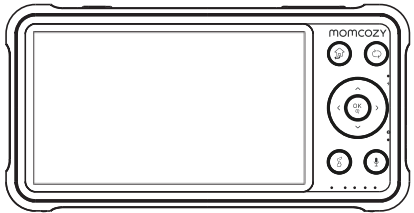


Baby Monitor



Wall Mount Bracket




Power Cable

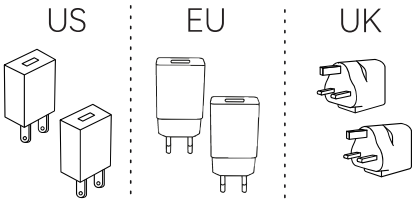

Adapter





User Guide











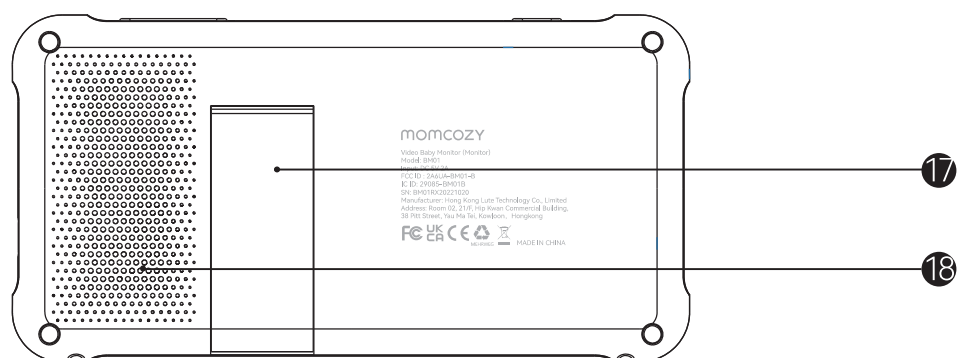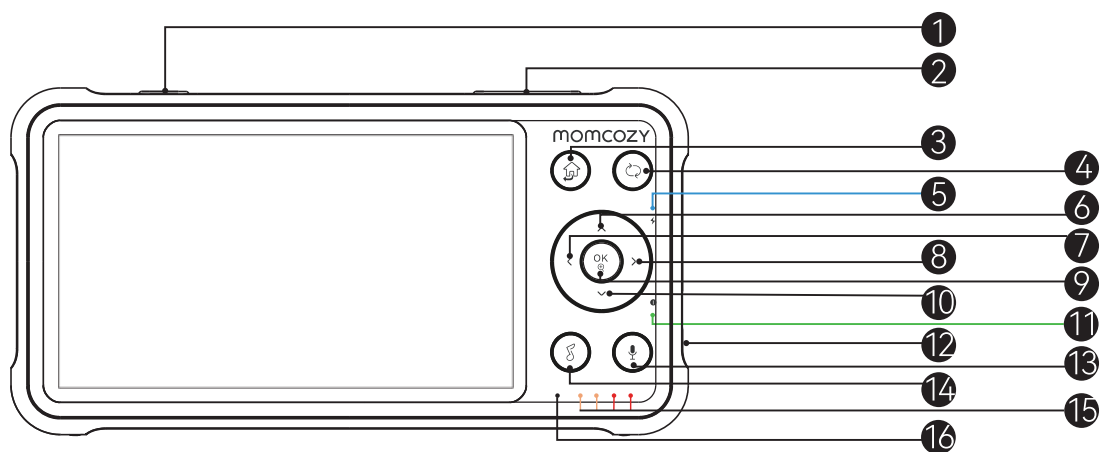
Mount Kit


# PRODUCT OVERVIEW

## Monitor





- ① Power On/Off & LCD On/Off: Press and hold for 3 seconds to turn on/off the monitor. Short press: Turn on/off the LCD screen. When the screen is turned on, press and hold for 8 seconds to reset the system.
- ② Volume adjustment: Press the left button to reduce the speaker volume, and press the right button to increase the speaker volume. (On the lullaby page, you can adjust the lullaby volume of the camera.)
- ③ Menu: Press  to enter/exit the menu.
- ④ Camera Switch: Press  to switch to another camera if connected with two or more cameras.
- ⑤ Charging Indicator: Solid blue during charging, and goes out when fully charged; Blinking red when the monitor is in a low power state.
- ⑥ Up Button: Press  to move the camera upward or to change your selection upward.
- ⑦ Left Button: Press  to move the camera leftward or to change your selection leftward.
- ⑧ Right Button: Press  to move the camera rightward or change your selection rightward.
- ⑨ Confirm/Zoom Button: Press  to zoom in/out to confirm your selection.
- ⑩ Down Button: Press  to move the camera downward or change your selection downward.
- ⑪ Monitoring Status Indicator: Green. When the camera is disconnected, it flashes slowly; when the camera enters pairing mode, it flashes quickly; when the camera is turned on, it remains steady.
- ⑫ Charging Port.
- ⑬ Talk: Press  to talk to your baby.
- ⑭ Lullaby: Press  to select your desired lullaby song.
- ⑮ Indicator: 1. The louder the sound is received by the monitor, the more indicator is on. 2. Signal indicator (temperature alarm/off-connection alarm/feeding alarm).
- ⑯ Microphone.
- ⑰ Stand.
- ⑱ Speaker.

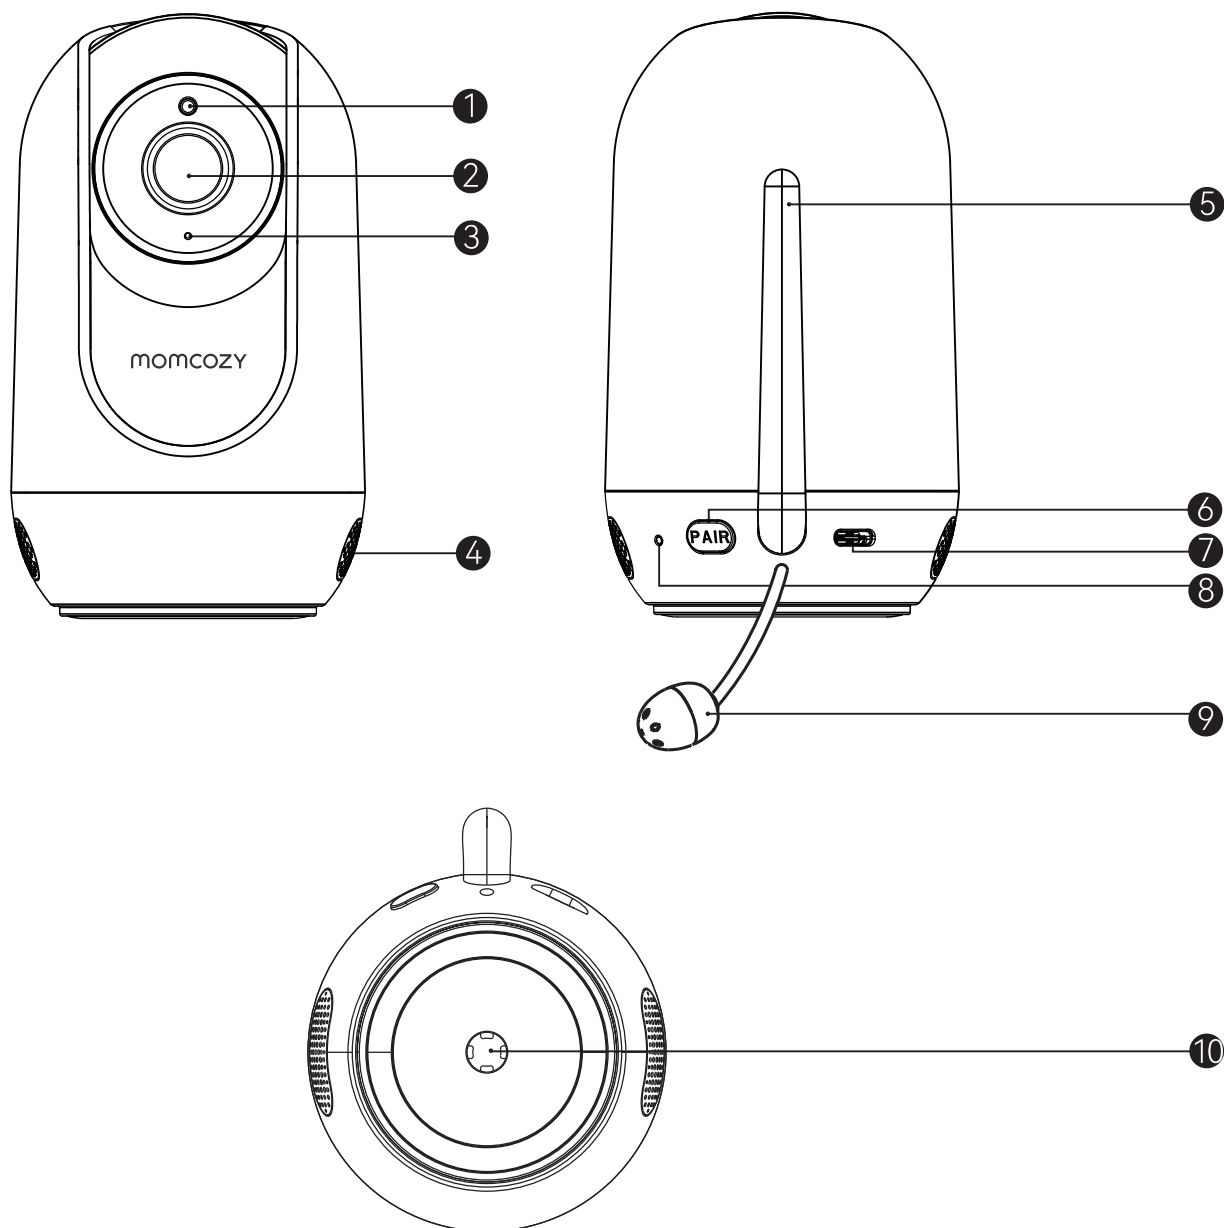

- ① Night Vision Sensor
- ② Camera Lens
- ③ Microphone
- ④ Speaker
- ⑤ Antenna

- ⑥ Pair Button
- ⑦ Charging Port
- ⑧ Pairing Status Indicator
- ⑨ Temperature Sensor
- ⑩ Threaded Socket

# GETTING STARTED

## 1. Charging & Powering Baby Monitor

- 1) Connect the monitor adapter to the monitor and a power outlet.
- 2) Unplug the unit when its power indicator turns off, indicating a full charge.  
Unplug the unit after fully charging the monitor, which can prolong the lifespan of the device.

## 2. Powering Camera

- 1) Connect the camera to power source via the USB Type-C cable and camera adapter.



- Only use the power adapters provided.
- Do not place the camera and power cord within the reach of your baby.

## 3. Pairing the Baby Monitor & the Camera

Based on default setting, one camera is paired with the monitor. When you power on the monitor and camera, the two will automatically pair.


### Adding a new camera to the baby monitor

#### Step 1:


1. Press to enter menu page.
2. Choose → button.

#### Step 2:


1. Select through **Add** → → button.

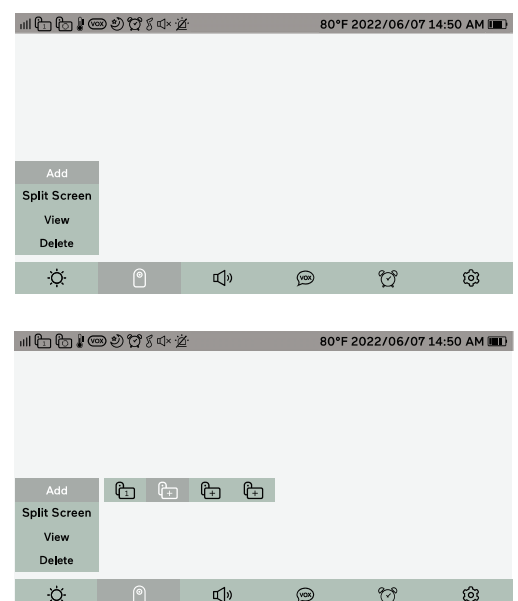

**Step 3:**


1. Press  PAIR button on the rear of the camera.
2. Then the monitor will auto-pair with the camera.



- Once they're paired successfully, The camera list  will appear on the screen.
- It is recommended to pair in the baby's room, or wherever you intend to place the camera.
- High-pitched noises might occur when the monitor is too close to the camera. Please keep them at least 1.5 m / 4.9ft apart.
- The monitor can connect up to 4 cameras at once.







**4. Placing the Camera**

For safety concerns and better vision in night vision mode, if the camera is placed on a 0.75 m / 2.5ft table top, the distance from the baby is at least 1.5 m / 4.9ft. ( The baby monitor has an infrared night vision capacity up to 6 m / 19.7ft ). Most importantly, make sure that the camera power cord is out of your baby's reach.

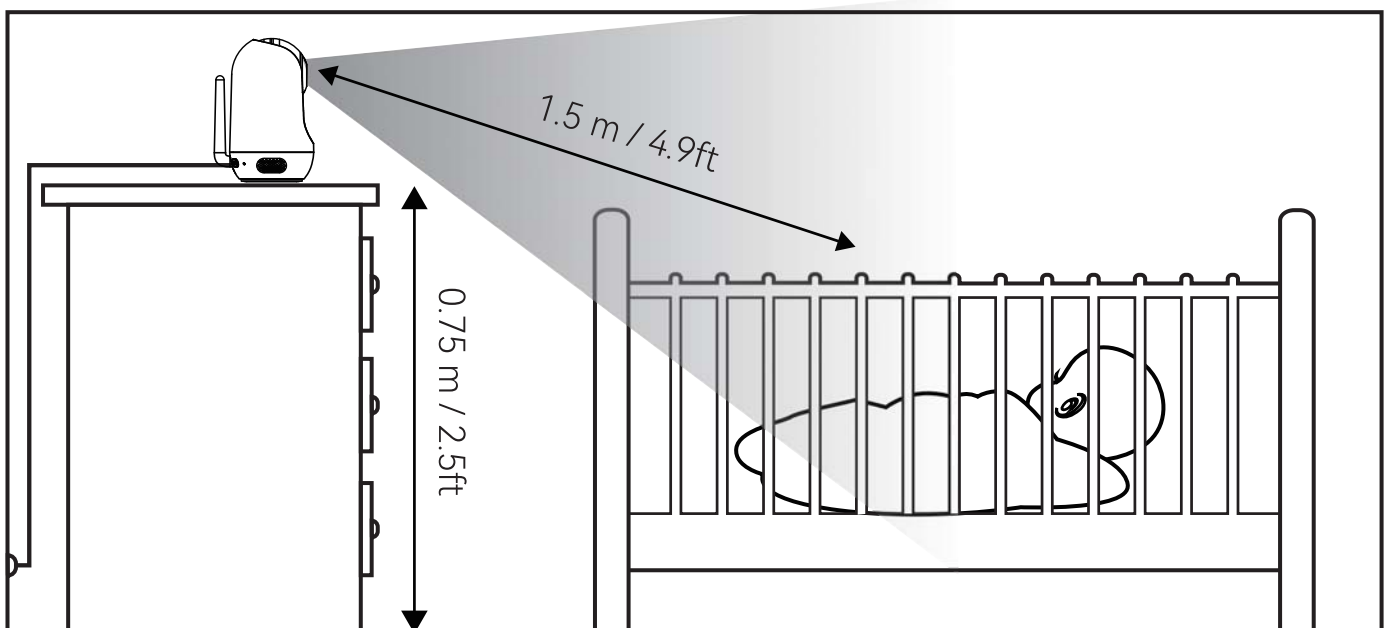

## 5. Wall Mounting Camera



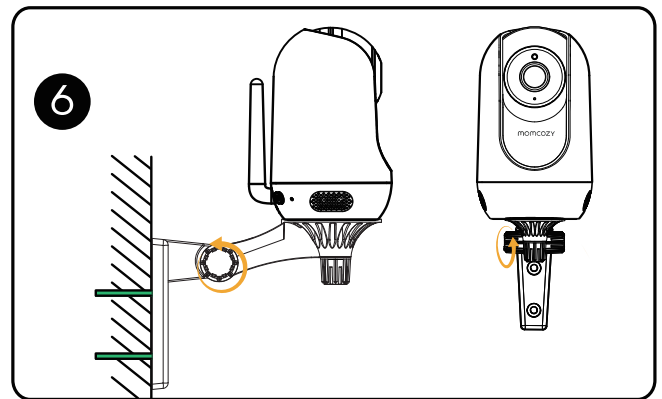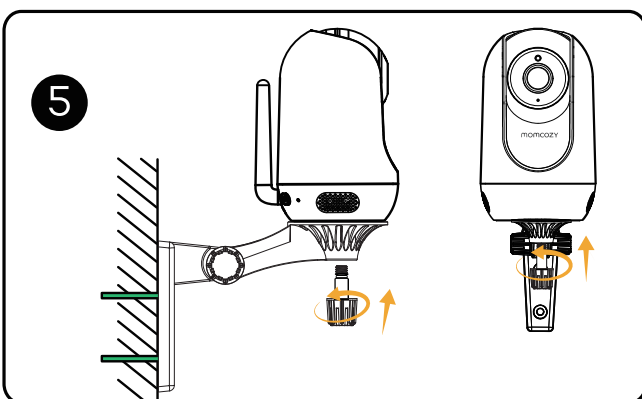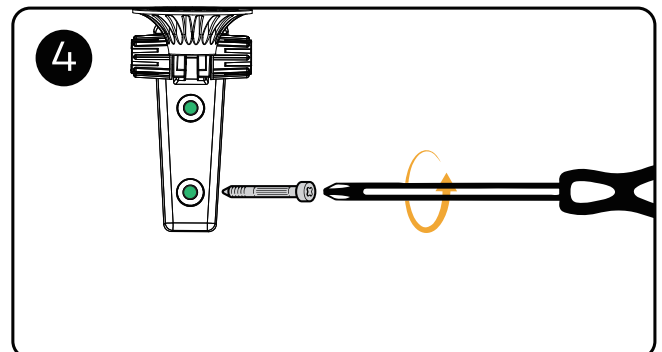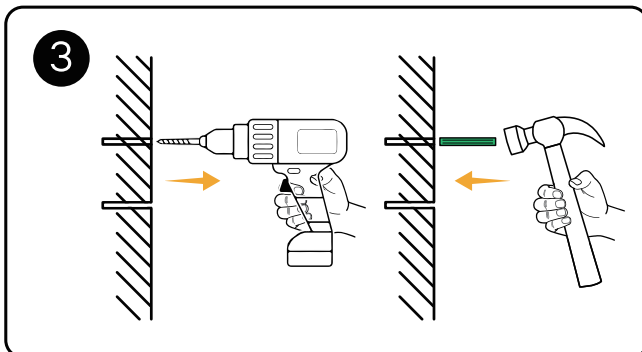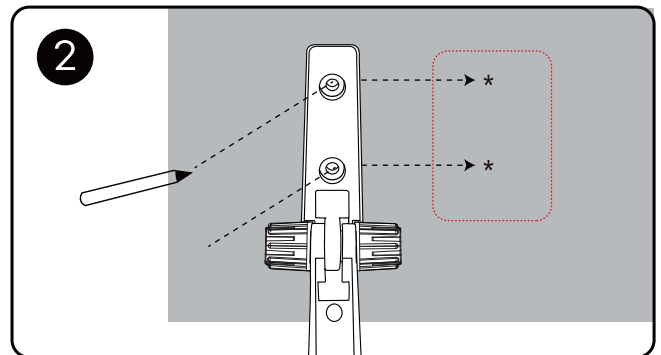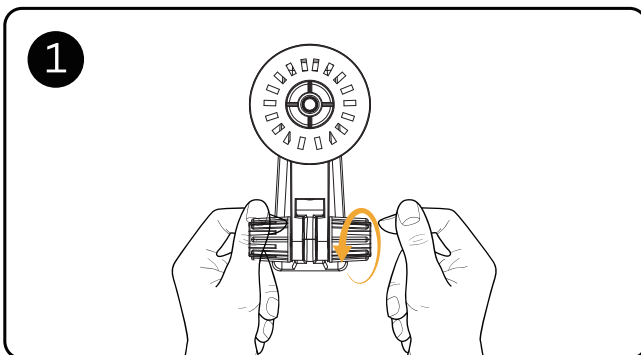












- 1) Rotate the knob in anticlockwise direction to adjust the wall mount bracket, then fasten the joint and secure the angle.
- 2) Mark the upper and lower holes with a pencil.
- 3) Drill holes in the wall (17/64 inch drill bit ) and insert wall anchors into holes with a hammer.
- 4) Fasten the wall mount bracket with screws.
- 5) Place the camera on the wall mount bracket. Tighten the screw into the threaded socket at the bottom to secure the camera.
- 6) You can maximize your camera unit's viewing angles by tilting the wall mount bracket. Tilt your camera up or down to adjust to your preferred angle.





· Don't release the camera until it is firmly mounted.

# FUNCTIONS & OPERATIONS

## Status Icons

	No Signal
	Signal Strength
	Cycle Cameras Enabled ( rotate every 10 seconds)
	The First Connected Camera
	The Second Connected Camera
	The Third Connected Camera
	The Fourth Connected Camera
12:08	Current Time
	Lullabies Enabled
	VOX Function on
	Temperature Alarm
	Feeding Reminder
	Volume Mute
	Night Vision Mode
°C / °F	Current Room Temperature
	Battery Level
	Alarm Mute




- You can use the auto-scan function by short pressing the  button until you see  on the screen. Then the camera view cycles through the list of connected cameras every 10 seconds. And if there is an alarm, the auto-scan function will pause temporarily.

## 1. Volume Adjustment

### Use Shortcut Button:

Press Button → Left/Right button to quickly adjust the volume.

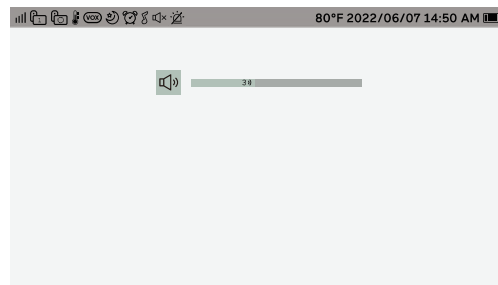

· To adjust system sound, navigate to Monitor → → Alarm volume.

## 2. Selecting a Camera & Scanning Cameras


### Note:

This function requires more than two cameras to be turned on.  
Multiple cameras are powered on and within the monitor connection range.

### Selecting a Camera

#### Step 1:


Check the camera icons, click to switch to the next camera view.

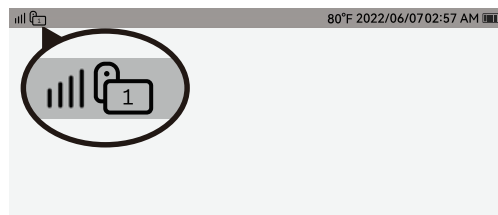

### Scanning Cameras

#### Step 2:

After switching all camera views, click the button again. Then the camera view transits from one to other connected cameras every 10 seconds, displaying a loop icon at the top left of the screen.

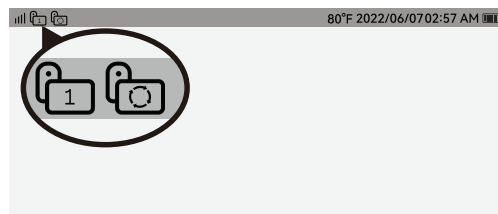

#### Step 3:







Click again to stop scanning. Then the camera will switch to single camera view.


## 3. Digital Zoom

Press button to zoom in the screen to 2X and 4X respectively in camera viewing mode. Press button for the third time to adjust the zoom setting back to default.


## 4. Lullaby

### Use Shortcut Button:



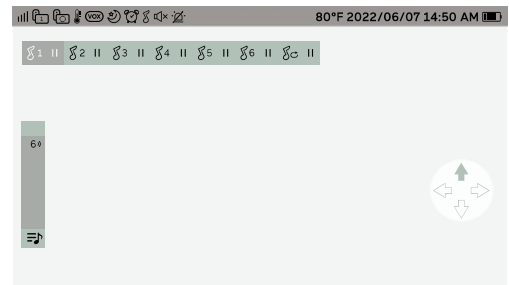
Press  to enter the lullaby page. Press  &  buttons to select the lullaby song, press  &  buttons to adjust the volume of the lullaby, and press  to turn on or off the lullaby.



## 5. Talk Back

Press and hold  Button to talk to your baby, release it to exit the talking mode.






- When you are in the monitoring mode, press and hold the  button to enter the intercom mode, and the  icon will be displayed on the monitor. When you enter the menu, the intercom function can still be used.
- When it's mute or the speaker volume is too low, you may not be able to hear the baby.
- When you're pressing the  Button, the camera will not transfer the sound to the monitor. Please release the button to listen to your baby.

## 6. Brightness

### Explanation:


This function is used to adjust the screen brightness of the monitor.

#### Step 1:

1. Press  to enter menu page.
2. Choose  → .

#### Step 2:

1. Select the **Brightness** setting to change the monitor screen brightness.

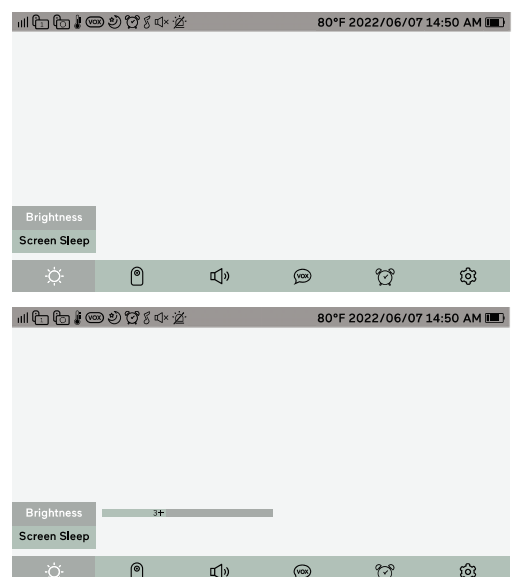






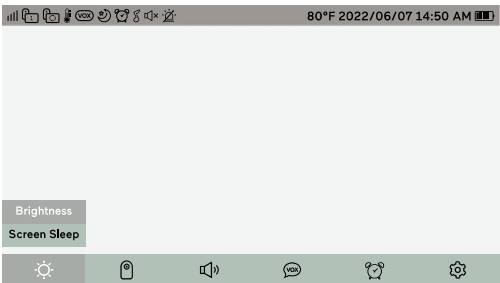
# 7. Screen Sleep

## Explanation:

This function is to set the monitor screen to sleep without powering off the monitor.

### Step 1:

1. Press  to enter menu page.
2. Choose  →  button.



### Step 2:




1. Select the **Screen Sleep** and select the time you want.



- Click **+** to enter the page for customizing the resting time. The resting time ranges from 1 to 60 minutes.
- The screen will automatically light up if there is a VOX or a temperature alert.
- When VOX is turned off, the screen will not automatically wake up and light up.
- When the Screen Sleep is set to " **OFF** ", the monitor screen will not be off.

# 8. Add A New Camera

### Step 1:


1. Press  to enter menu page.
2. Choose  →  button.




**Step 2:**

1. Select through **Add** →  →  button.

**Step 3:**

1. Press  PAIR button on the rear of the camera.
2. Then the monitor shows the camera is paired successfully.

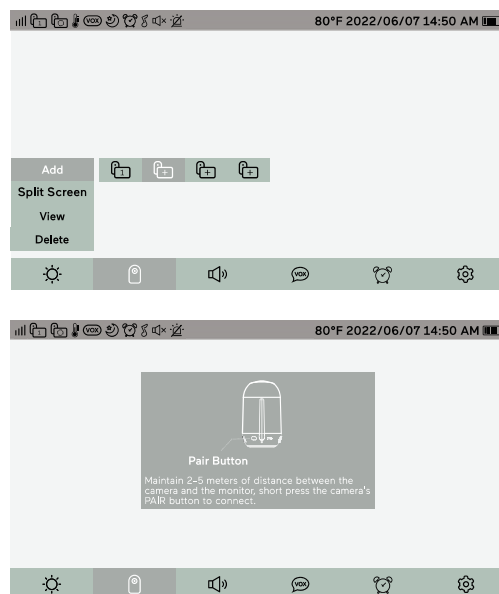




• The monitor can connect up to 4 cameras at once.


**9. Split Screen****Explanation:**


This function is to display two camera views on a single screen.


**Step 1:**

1. Press  to enter menu page.
2. Select through  → **Split Screen** →  button.

**Step 2:**

1. Select another camera that needs a split screen and press . Then the monitor will give you a split screen view.

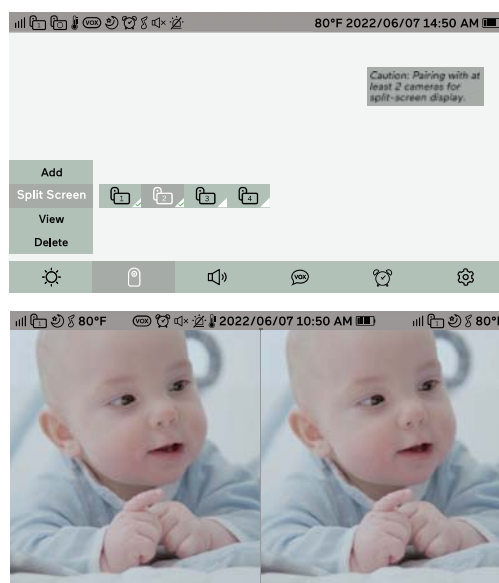

• Select the camera on the split screen and press . If the camera is not selected, the monitor will exit the split screen mode.




## 10. Selecting a Camera & Scanning Cameras

### Note:


This function requires more than two cameras to be turned on.

Multiple cameras are powered on and within the monitor connection range.



### Step 1:


1. Press  to enter menu page.
2. Select through  → **View** →  button.

### Step 2:

1. Select the camera you want to switch and press  button.




### Step 3:

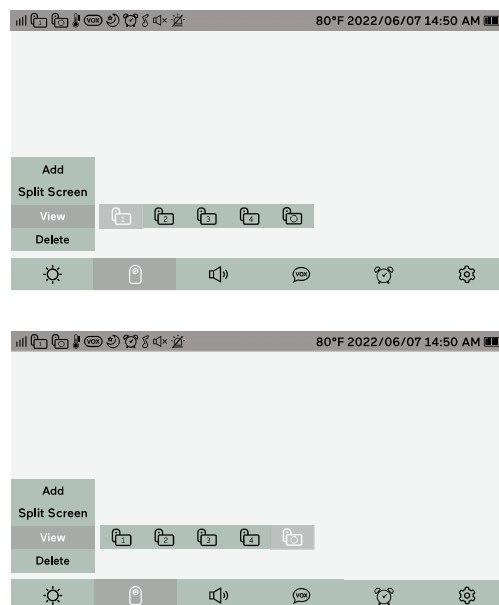1. If you need to cycle multiple camera views. Select  →  button.




## 11. Deleting A Camera

### Step 1:



1. Press  to enter menu page.
2. Select through  → **Delete** →  button.

### Step 2:

1. Select the camera you want to delete and press  button.

### Step 3:

1. Select **YES**. The camera is deleted successfully.

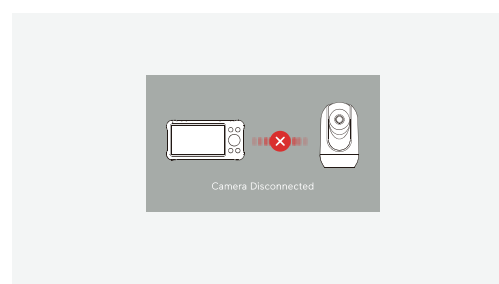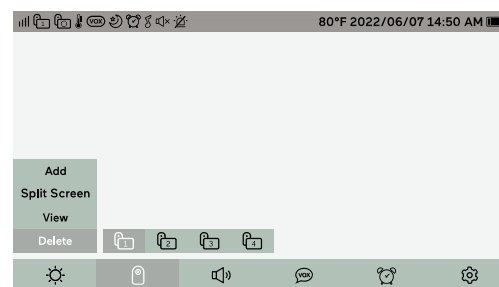



- The monitor is paired with one camera by default, you should keep at least one camera connected.

## 12. Speaker Volume

### Explanation:

This function is used to adjust the speaker volume of the monitor.

#### Step 1:

1. Press to enter menu page.
2. Choose → button  
→ **Speaker Volume** → Left / Right  
button to decrease/increase the volume.



## 13. Alarm Volume

### Explanation:

This function is to adjust the monitor system sound.

#### Step 1:

1. Press to enter menu page.
2. Select through → **Alarm Volume**  
→ button.



#### Step 2:



1. Select the preferred alarm sound level. Press button.


## 14. VOX

### Explanation:


1. This function is used to wake up the monitor screen and light up. There are three wake-up levels (low/medium/high). When the sound detected by the camera reaches 75dB/65dB/60dB or more, the monitor will wake up and the LED indicator will flash.
2. Caution: The screen will not wake up automatically if VOX is turned off.


### Step 1:

1. Press  to enter menu page.
2. Choose  → **Status** to turn on the VOX function.

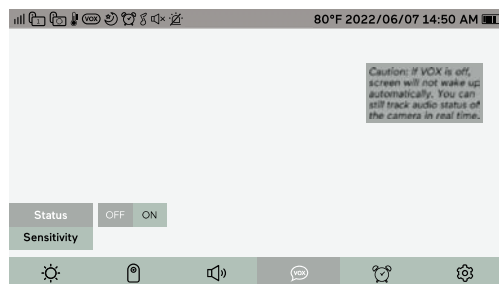

### Step 2:

1. Select the option you want in **Sensitivity**. Then press the  button.

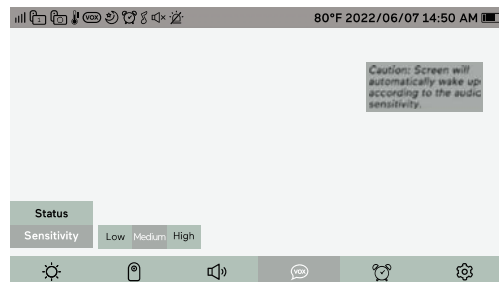




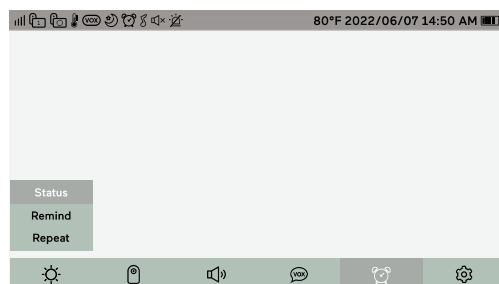
## 15. Alarm Clock

### Explanation:



This function is to remind you of feeding your baby. OFF means you turn off the function; 2 hours mean it reminds you every 2 hours and so on for the other options.

### Step 1:

1. Press  to enter menu page.
2. Choose  →  button.




### Step 2:

1. Select **Remind** and set the time you want. The  and  buttons can adjust the value.





### Step 3:

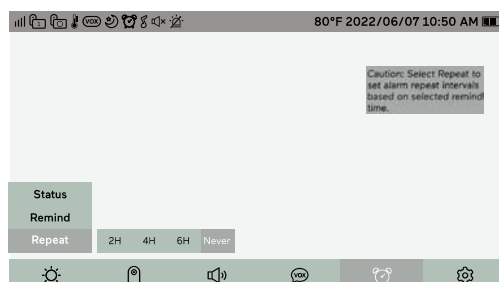
1. Select **Repeat** to create a recurring alarm and choose the scheduled time you want your alarm to repeat.



## 16. Time

### Step 1:

1. Press  to enter menu page.
2. Choose  → **Time** →  button.

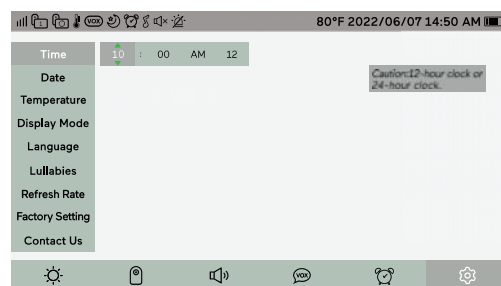


### Step 2:

1. Press  and  to adjust the value, and press  to save the Settings.

## 17. Date

### Step 1:

1. Press  to enter menu page.
2. Choose  → **Date** →  button.

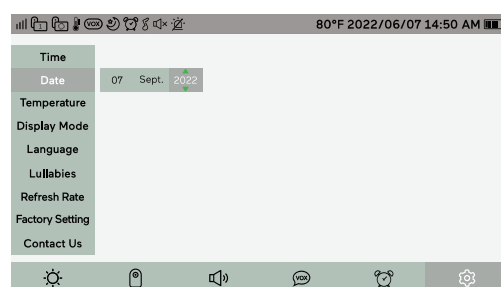

### Step 2:

1. Press  and  to adjust the value, and press  to save the Settings.


## 18. Temperature

### Explanation:

you can set the maximum/minimum temperature and turn on the temperature alert, so that the baby monitor beeps whenever the room temperature falls outside the desired temperature range. You can also choose to display the temperature in Fahrenheit (°F) or Celsius (°C) on your monitor.

#### Step 1:

1. Press to enter menu page.
2. Choose → **Temperature**  
→ button.

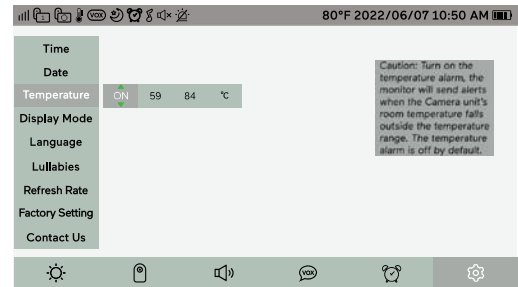

#### Step 2:

1. Press and to adjust the value, and press to save the Settings.



· A temperature alarm can be temporarily turned off by pressing any button on the monitor.


## 19. Display Mode

### Explanation:

In Auto Mode, the camera displays color images during the day, during night time the camera displays black and white images.

#### Step 1:

1. Press to enter menu page.
2. Choose → **Display Mode**  
→ button.

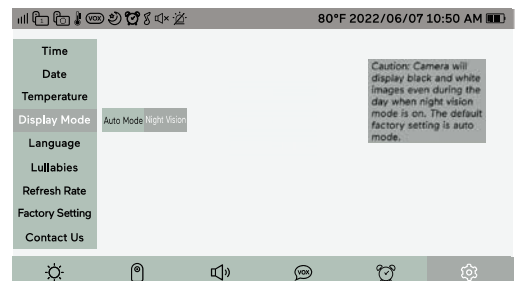

#### Step 2:

1. Select the mode you want.






· When the camera is set to night vision mode, the monitor will display black and white images both day and night.

## 20. Language

### Explanation:

There are five languages available in your device, you can choose your language here.

### Step 1:

1. Press  to enter menu page.
2. Choose  → **Language**  
→  button.



### Step 2:




1. Select the desired language and press  button.


## 21. Lullabies

### Explanation:



This function is to comfort baby with soothing lullabies.


### Step 1:

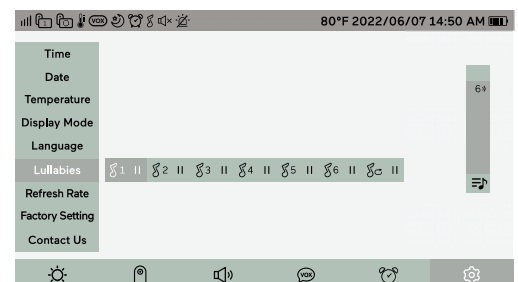1. Press  to enter menu page.
2. Choose  → **Lullabies**  
→  button.



### Step 2:

1. Select your desired lullaby and press  to turn it on/off. Press up/down button to increase or decrease the lullaby sound. Select  to play the lullaby on a loop.

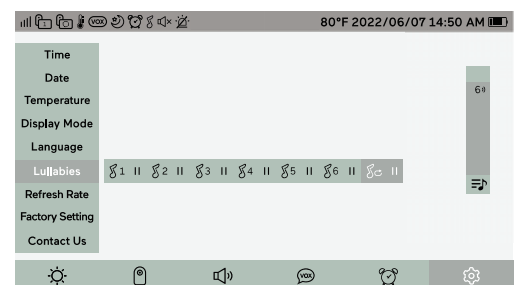




## 22. Refresh Rate


### Explanation:

You can change the image refresh frequency of the camera to ensure that the camera works normally.



## Step 1:

1. Press  to enter menu page.
2. Choose  → **Refresh Rate** →  button.

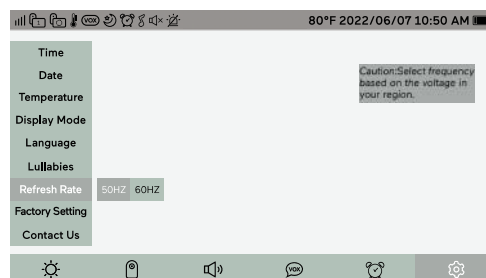

## Step 2:




1. Set the refresh frequency based on use in your region.


# 23. Factory Settings

## Explanation:


System will be restored to default Settings.


## Step 1:

1. Press  to enter menu page.
2. Choose  → **Factory Setting** →  button.

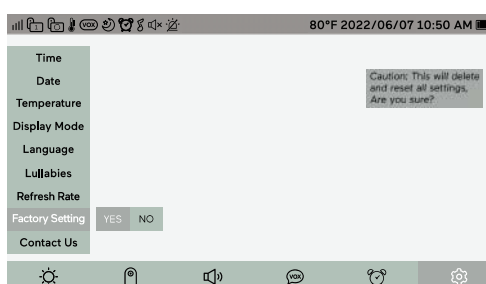

## Step 2:

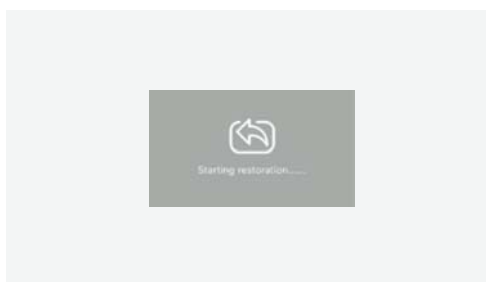


1. Choose **YES** →  button to start restoring factory settings.




• If the monitor is unresponsive or if there are problems with the display, press the power button for 8 seconds to reset the monitor.

# 24. Contact Us

## Step 1:

1. Press  to enter menu page.
2. Choose  → **Contact Us** →  button.

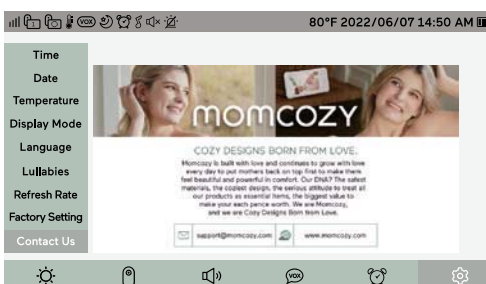

## Step 2:

1. Press  return to menu page.

## Monitor

Connectivity	2.4GHz ISM Band
Operating Range	960ft (line of sight, no obstructions)
Temperature Alert	Yes
Volume Control	9 levels
Brightness	8 levels
Input	5V $\equiv$ 2A
Zoom	Zoom In (2X) Zoom In (4X)
Two-Way Talk	Yes
Multi-Camera	Max. 4 cameras
Storage Temperature	-20 °C to 70 °C / -4 °F to 158 °F
Operation Temperature	0 °C to 40 °C / 32 °F to 104 °F

## Camera

Connectivity	2.4GHz ISM Band
Input	5V $\equiv$ 2A
Pan-n-Tilt	90° Tilt 350° Pan
Zoom	Zoom In (2X) Zoom In (4X)
Night Vision	Black & White image
IR LED	Non-visible IR LED with wave length 940nm
Light Sensor	Yes
Two-Way Talk	Yes
Storage Temperature	-20 °C to 70 °C / -4 °F to 158 °F
Operation Temperature	0 °C to 40 °C / 32 °F to 104 °F

# TROUBLESHOOTING

Product not powering on?	<ul style="list-style-type: none"> <li>• Check that the camera and monitor are turned on.</li> <li>• Check the camera and make sure it is well plugged into the outlet.</li> <li>• Check that the monitor is of enough battery (When the battery icon flashes red, the monitor will automatically shut off after 5 minutes).</li> </ul>
Baby monitor can't connect with the camera?	<ul style="list-style-type: none"> <li>• Check whether the camera is near the monitor (recommended to keep distance within 1.5-2 m / 4.9-6.6ft).</li> <li>• Check whether the monitor is of low battery. Charge it in time to keep a good connection.</li> <li>• Check whether the camera is well-connected to power.</li> <li>• Check whether there are any large metallic objects including doors, refrigerators, etc., placed between the camera and monitor thus blocking the radio signals.</li> <li>• Check, whether there's any other 2.4GHz product, is used nearby like Wi-Fi routers, and microwave ovens, which may interfere with the connection.</li> <li>• If nothing above is involved, please try to pair again.</li> </ul>
Nothing shown when I view a camera?	<ul style="list-style-type: none"> <li>• Check all connections to the camera (power cable plugging and pairing).</li> <li>• Check whether the screen is in sleep mode. Press any button to wake it.</li> <li>• Check whether the camera is within monitor connection range.</li> </ul>

No sound from the monitor?	<ul style="list-style-type: none"> <li>• Check whether the speaker volume or alarm volume is set mute.</li> </ul>
Black and white pictures?	<ul style="list-style-type: none"> <li>• Night vision LED may be ON. Please turn on the room lights to force it out of the night vision mode.</li> <li>• In the menu function page, switch camera display mode to "Auto Mode".</li> </ul>
Choppy videos?	<ul style="list-style-type: none"> <li>• Check whether the camera is near the monitor and that there're no obstacles between them.</li> </ul>
Too much noise?	<ul style="list-style-type: none"> <li>• Volume may set too high. Press volume shortcut button to lower the volume.</li> <li>• The camera and monitor may be too close; keep them at least 1.5 m / 4.9ft apart.</li> </ul>

## WARRANTY & CUSTOMER SERVICE

12 months guarantee (contact information can be found on the monitor or on the cover of this user manual)

# WARNING

## Video Baby Monitor(Camera)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Note:** The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. To maintain compliance with FCC's RF exposure guidelines, the distance must be at least 20 cm between the radiator and your body, and fully supported by the operating and installation.

## IC Warning

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device has been evaluated to meet general RF exposure requirement. To maintain compliance with RSS-102 — Radio Frequency (RF) Exposure guidelines, this equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

le dispositif de a été évalué à répondre général rf exposition exigence.pour maintenir la conformité avec les directives d'exposition du RSS-102-Radio Fréquence (RF). ce matériel doit être installé et exploité à une distance minimale de 20 cm entre le radiateur et votre corps.

CANICES-003(B)/NMB-003(B)

## Video Baby Monitor(Monitor)

### FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the

instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Note:** The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. The SAR limit of USA(FCC) is 1.6 W/kg averaged over one gram of tissue. Device types Video Baby Monitor(Monitor) with BM01 (FCC ID: 2A6UA-BM01JX-B) has also been tested against this SAR limit. The highest reported SAR values for body is 1.471W/kg. This device was tested for typical body operations with the back of the handset kept 0mm from the body. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

## IC Warning

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.



The device has been evaluated to meet general RF exposure requirement. To maintain compliance with RSS-102 — Radio Frequency (RF) Exposure guidelines. The SAR limit of IC is 1.6 W/kg averaged over one gram of tissue. Device types Video Baby Monitor(Monitor) with BM01 (IC : 29085-BM01JXB) has also been tested against this SAR limit. The highest reported SAR values for body-worn is 1.471W/kg. This equipment should be installed and operated with a minimum distance of 0mm between the radiator and your body.

L'appareil a été évalué pour répondre aux exigences générales d'exposition aux RF. Maintenir la conformité aux directives RSS-102 — Exposition aux radiofréquences (RF). La limite DAS de la CI est de 1,6 W/kg en moyenne sur un gramme de tissu. Les types d'appareils avec BM01 (IC : 29085-BM01JXB) ont également été testés par rapport à cette limite SAR. Les valeurs DAS les plus élevées signalées pour les appareils portés sur le corps sont de 1.471 W/kg. Cet équipement doit être installé et utilisé avec une distance minimale de 0 mm entre le radiateur et votre corps.

## Video Baby Monitor ( Camera)

### IC Warning

Cet émetteur radio IC : 29085-BM01JXA a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci-dessous, avec le gain maximal admissible indiqué. Les types d'antenne non inclus dans cette liste qui ont un gain supérieur au gain maximum indiqué pour tout type répertorié sont strictement interdits pour une utilisation avec cet appareil.

The radio transmitter IC: 29085-BM01JXA has been approved by The Ministry of Innovation, Science and Economic Development of Canada to use the following antenna types with the specified maximum allowed gain. Antenna types not included in this list, whose gain is higher than the maximum gain of any type listed, are strictly prohibited from use with this device.

Type of antenna	External antenna
Antenna Gain	2400-2500MHz(2.24dBi)
Impedance	50hm
Manufacture	Shenzhen Guandetong Electronic Limited





# WEEE COMPLIANCE

DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS “ ” This symbol indicates DC voltage

This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. The user has the choice to give their product to a competent recycling organization or to the retailer when they buy a new electrical or electronic equipment.

**EU Compliance Statement:** Hong Kong Lute Technology Co., Limited hereby declares that this device is in compliance with the essential requirements and other relevant provisions of the Directive 2014/53/EU.

# momcozy

Manufacturer: Hong Kong Lute Technology Co., Limited  
Address: Room 02, 21/F, Hip Kwan Commercial Building, 38 Pitt Street,  
Yau Ma Tei, Kowloon, Hongkong

US Importer:  
Company: SHARE INFO INC.  
Address: 3557 158th St Flushing, NY 11358 USA

Email: [support@momcozy.com](mailto:support@momcozy.com)  
Website: [www.momcozy.com](http://www.momcozy.com)

图档名称	momcozy BM01五国说明书（一拖一）			版本号	B1	日期	2024-04-16
规格尺寸	105*140 (h) mm	印刷颜色	CMYK	设计师	刘诗琪（优化）		
材质工艺	封面200克铜板纸， 内页105克哑粉纸， 压边8mm/胶装						
项目负责人	夏婷婷	文案编写/审核人	夏婷婷	设计审核人	Kewen		
备注	出血线为2mm； 黑色线为刀模， 请勿印刷； 图档版权归深圳市路特佳成网络科技有限公司所有， 私自泄露、修改、使用文档所产生的一切责任后果我司将追究到底。						

R∞T路特