

# FCC PART 15.247

## TEST REPORT

For

### Jiangsu Yuyue Medical Equipment & Supply Co., Ltd.

No.1 Baisheng Road Development Zone, Danyang, Jiangsu province, 212300 China

**FCC ID: 2A2JJYE650ARS**

<b>Report Type:</b> Original Report	<b>Product Name:</b> Electronic Blood Pressure Monitor
<b>Report Number:</b>	RKSA240319002-00B
<b>Report Date:</b>	2024-04-24
<b>Reviewed By:</b>	Jenny Yang <i>Jenny Yang</i>
<b>Approves By:</b>	Kyle Xu <i>Kyle Xu</i>
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.

## TABLE OF CONTENTS

<b>REPORT REVISION HISTORY.....</b>	<b>4</b>
<b>GENERAL INFORMATION.....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
OBJECTIVE .....	5
TEST METHODOLOGY .....	5
MEASUREMENT UNCERTAINTY .....	6
TEST FACILITY .....	6
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>7</b>
DESCRIPTION OF TEST CONFIGURATION .....	7
EUT EXERCISE SOFTWARE .....	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS .....	7
SUPPORT EQUIPMENT LIST AND DETAILS .....	9
EXTERNAL I/O CABLE.....	9
BLOCK DIAGRAM OF TEST SETUP .....	9
<b>TEST EQUIPMENT LIST .....</b>	<b>11</b>
<b>SUMMARY OF TEST RESULTS .....</b>	<b>12</b>
<b>FCC §15.203 – ANTENNA REQUIREMENT.....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
ANTENNA CONNECTOR CONSTRUCTION .....	13
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
TEST SYSTEM SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE .....	15
TEST RESULTS SUMMARY.....	15
TEST DATA: SEE APPENDIX .....	15
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
TEST SYSTEM SETUP.....	16
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE .....	17
TEST RESULTS SUMMARY.....	18
TEST DATA: SEE APPENDIX .....	18
<b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....</b>	<b>19</b>
APPLICABLE STANDARD .....	19
TEST PROCEDURE .....	19
TEST DATA: SEE APPENDIX .....	19
<b>FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>20</b>
APPLICABLE STANDARD .....	20
TEST PROCEDURE .....	20
TEST DATA: SEE APPENDIX .....	20
<b>FCC §15.247(d) – BAND EDGE.....</b>	<b>21</b>
APPLICABLE STANDARD .....	21
TEST PROCEDURE .....	21
TEST DATA: SEE APPENDIX .....	21

**FCC §15.247(e) - POWER SPECTRAL DENSITY .....22**  
    APPLICABLE STANDARD .....22  
    TEST PROCEDURE .....22  
    TEST DATA: SEE APPENDIX .....22

**EUT PHOTOGRAPHS .....23**

**TEST SETUP PHOTOGRAPHS .....24**

**Appendix - TEST DATA.....25**  
    ENVIRONMENTAL CONDITIONS & TEST INFORMATION .....25  
    AC LINE CONDUCTED EMISSIONS .....26  
    SPURIOUS EMISSIONS.....28  
    6 DB EMISSION BANDWIDTH .....37  
    MAXIMUM CONDUCTED OUTPUT POWER.....39  
    BAND EDGE .....41  
    POWER SPECTRAL DENSITY .....43

---

## REPORT REVISION HISTORY

---

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSA240319002-00B	R1V1	2024-04-24	Initial Release

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant:	Jiangsu Yuyue Medical Equipment & Supply Co., Ltd.
Tested Model:	YE650ARS
Product Name:	Electronic Blood Pressure Monitor
Power Supply:	DC 3.7V from battery or DC 5V charging by adapter
RF Function:	BLE (1Mbps)
Maximum Output Power:	6.17 dBm
Operating Band/Frequency:	2402-2480MHz
Channel Number:	40
Channel Separation:	2 MHz
Modulation Type	GFSK
Antenna Type:	PCB Antenna
★Maximum Antenna Gain:	3.09 dBi

*Adapter Information:*

*Model: HT-C38B-0510WW*

*Input: 100-240V-50/60Hz, 0.35A Max*

*Output: 5V, 1000mA*

*Note: The maximum antenna gain was declared by the manufacturer.*

*All measurement and test data in this report was gathered from production sample serial number: RKSA240319002-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2024-03-19.)*

### Objective

This report is prepared for *Jiangsu Yuyue Medical Equipment & Supply Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communications Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emissions	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN5055.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

Channel List for BLE mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	...	...
...	...	...	...
...	...	...	...
18	2438	38	2478
19	2440	39	2480

EUT was tested with channel 0, 19 and 39.

### EUT Exercise Software

RF Test Tool: RTL8762C\_RFTTestTool\_v1.0.1.4

★Power level: Default

Note: The power level was declared by the applicant.

### Special Accessories


No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

**Duty Cycle:**

**BLE (1Mbps): Middle Channel**

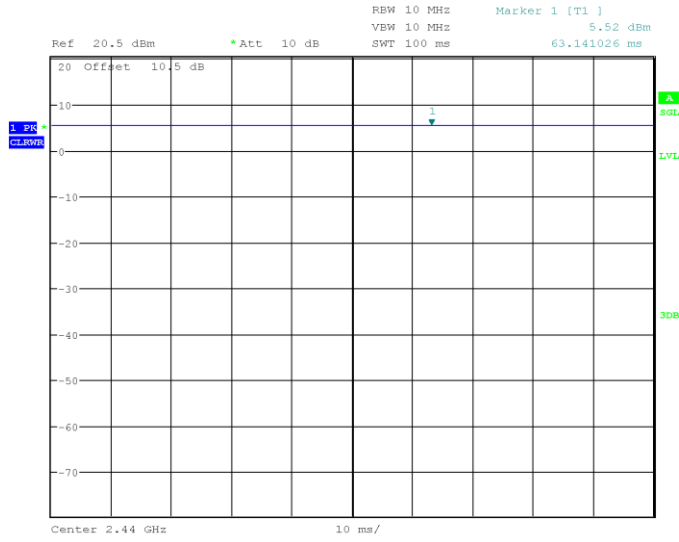

ProjectNo.:RKSA240319002    Tester:Hardy Huang  
 Date: 19.MAR.2024    22:02:35

Mode	Duty Cycle (%)	T <sub>on</sub> (ms)	T <sub>on+off</sub> (ms)	10log(1/x)
BLE (1Mbps)	100	100	100	0

**Note:** “x” means the Duty Cycle.



### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	Debug board	Unknown	Unknown
Dell	Notebook	E6410	3094742521

### External I/O Cable


Cable Description	Length (m)	From Port	To
Power Cable 1	1.0	LISN/AC Source	Adapter
USB Cable	1.2	Adapter	EUT
Data Cable	0.1	EUT	Debug board
Rubber tubing	0.8	Cuff	EUT

### Block Diagram of Test Setup


For Conducted Emissions:

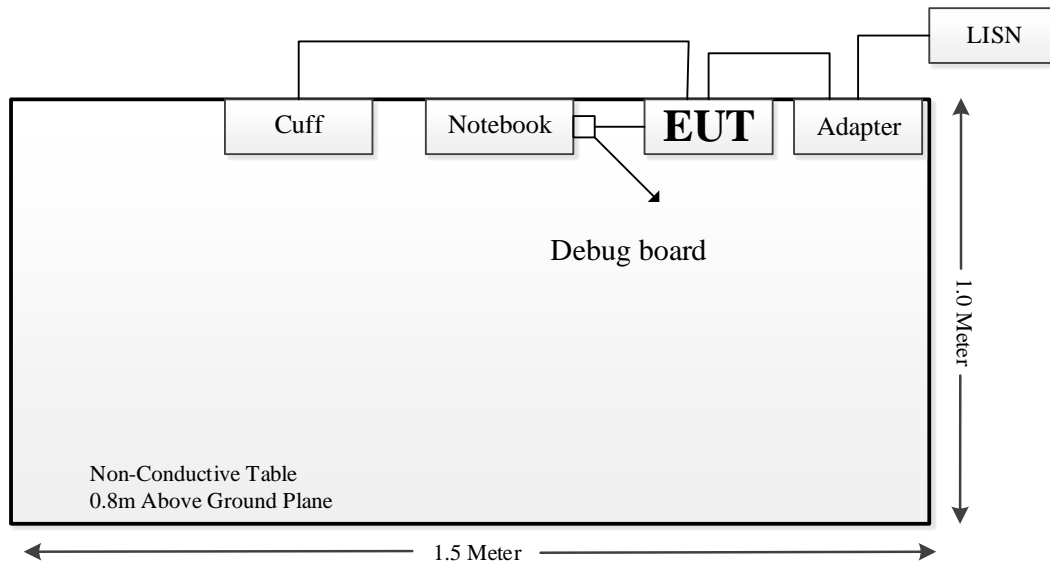

For Radiated Emissions(Below 1GHz):

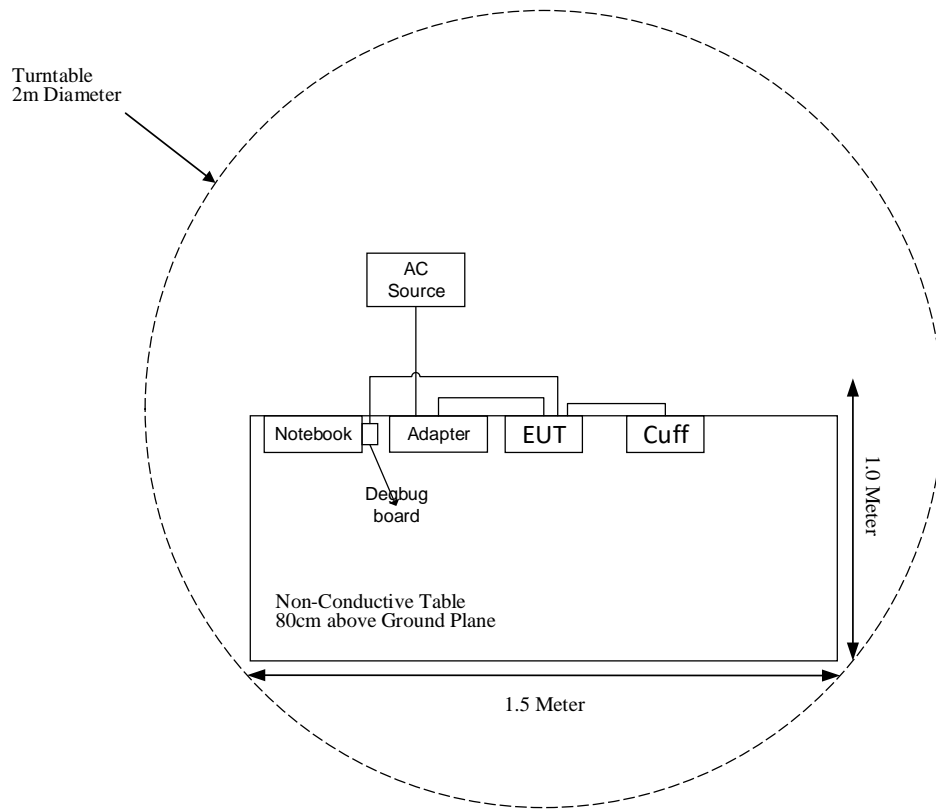

For Radiated Emissions(Above 1GHz):

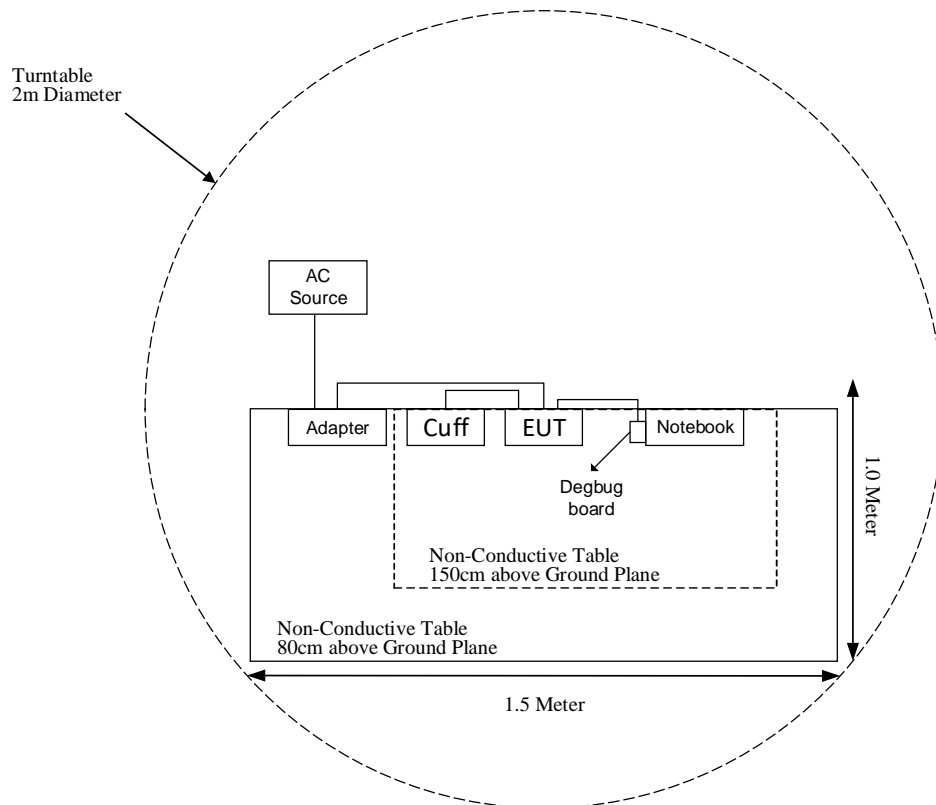

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test (Chamber #1)</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2023-05-23	2024-05-22
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2023-11-11	2024-11-10
ETS-LINDGREN	Loop Antenna	6512	108100	2023-11-09	2024-11-08
Narda	6 dB Attenuator	773-6	10690812-2-1	2023-11-11	2024-11-10
Sonoma Instrument	Pre-amplifier	310N	171205	2023-05-23	2024-05-22
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-9	009	2023-05-23	2024-05-22
<b>Radiated Emission Test (Chamber #2)</b>					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2023-05-19	2024-05-18
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2023-12-02	2024-12-01
ETS-LINDGREN	Horn Antenna	3116	2516	2023-12-08	2024-12-07
A.H.Systems,inc	Amplifier	PAM-0118P	512	2023-05-23	2024-05-22
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2023-08-05	2024-08-04
Narda	Attenuator	10dB	010	2023-08-15	2024-08-14
SELECTOR	Amplifier	EM18G40G	60726	2023-05-23	2024-05-22
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-11	011	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-12	012	2023-05-23	2024-05-22
<b>RF Conducted Test</b>					
Rohde & Schwarz	Spectrum Analyzer	FSIQ26	100048	2023-05-23	2024-05-22
Narda	Attenuator	10dB	010	2023-08-15	2024-08-14
XHFDZ	RG178 Coaxial Cable	SMA-178	XHF-1102	Each time	N/A
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESR	101746	2023-05-23	2024-05-22
Rohde & Schwarz	LISN	ENV216	101115	2023-05-23	2024-05-22
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse Limiter	ESH3-Z2	0357.8810.54	2023-05-23	2024-05-22
MICRO-COAX	Coaxial Cable	Cable-15	015	2023-05-23	2024-05-22

**Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

---

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has a PCB antenna for BLE, and the antenna gain is 3.09 dBi, which is permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### Test System Setup

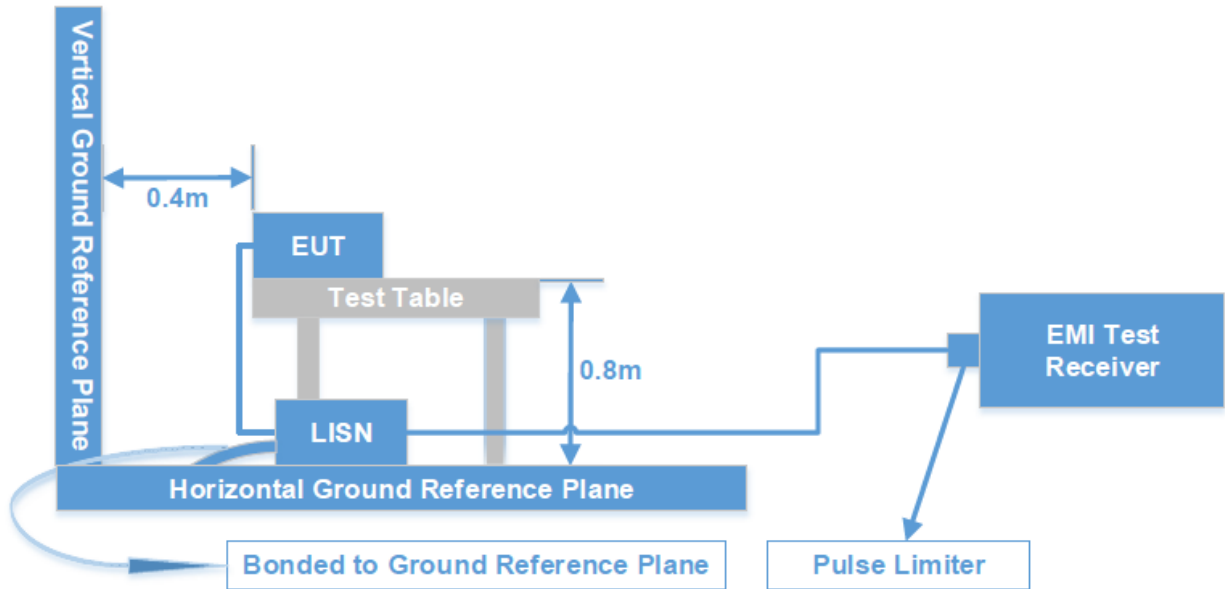

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW
150 kHz – 30 MHz	9 kHz	30 kHz

## Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

## Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

Level (dB $\mu$ V) = Read level (dB $\mu$ V) + Factor (dB)

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

Over Limit (dB) = Level (dB $\mu$ V) - Limit (dB $\mu$ V)

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

**Test Data: See Appendix**


## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

### Test System Setup

9k-30MHz:

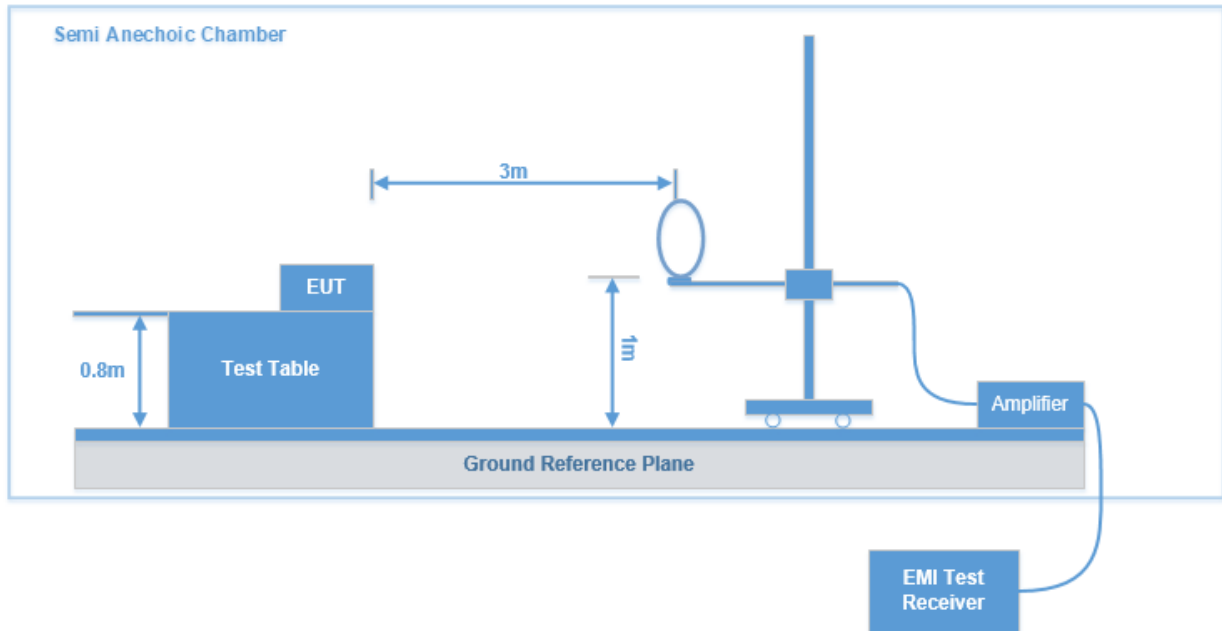


30 MHz- 1 GHz:

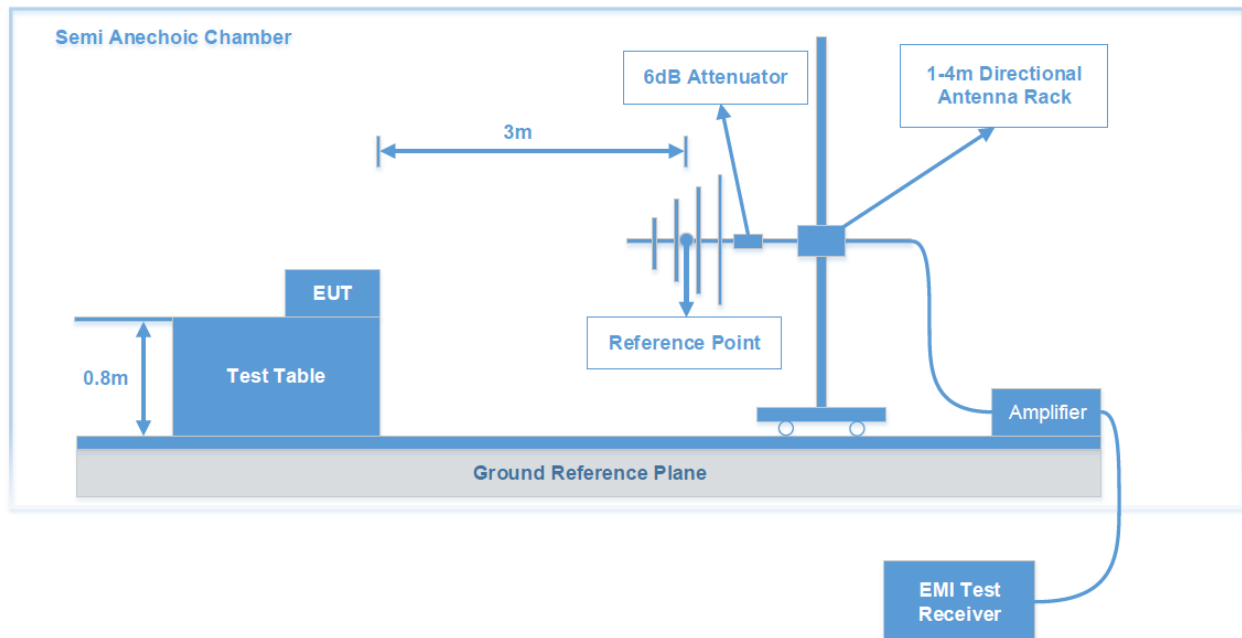



**Above 1GHz:**

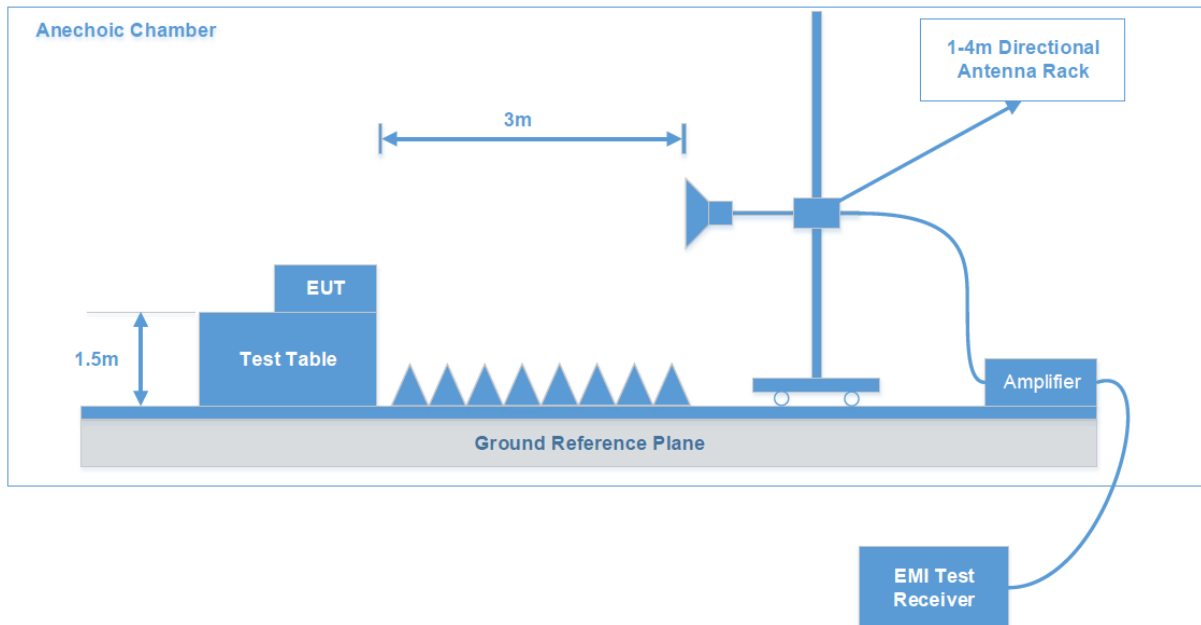

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

**EMI Test Receiver Setup**

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Detector
9 kHz – 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz – 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average
30 MHz – 1000 MHz	100 kHz	300 kHz	/	Peak
Above 1GHz	/	/	120 kHz	QP
	1MHz	3 MHz	/	Peak

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Note: The QuasiPeak (dB $\mu$ V/m), MaxPeak (dB $\mu$ V/m), Average (dB $\mu$ V/m) which shown in the data table are all Corrected Amplitude.

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

**Test Data: See Appendix**

## **FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH**


### **Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### **Test Procedure**

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 * \text{RBW}$ .
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



**Test Data: See Appendix**

## **FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER**

### **Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### **Test Procedure**

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW  $\geq$  DTS bandwidth.
2. Set VBW  $\geq 3 * RBW$ .
3. Set span  $\geq 3 * RBW$
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



**Test Data: See Appendix**

## FCC §15.247(d) – BAND EDGE


### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



**Test Data: See Appendix**

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
2. Set the VBW  $\geq 3 * \text{RBW}$ .
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



**Test Data: See Appendix**

## **EUT PHOTOGRAPHS**

---

Please refer to the attachment EXHIBIT A-EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B\_EUT INTERNAL PHOTOGRAPHS.

## **TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment EXHIBIT C-TEST SETUP PHOTOGRAPHS.



## Appendix - TEST DATA

### Environmental Conditions & Test Information


Test Item:	AC LINE CONDUCTED EMISSIONS	SPURIOUS EMISSIONS		
		9kHz - 1GHz	1 GHz - 18 GHz	18 GHz - 25 GHz
Test Date:	2024-04-11	2024-04-07	2024-04-15	2024-04-20
Temperature:	19.6 °C	17.3 °C	20.3 °C	19.8 °C
Relative Humidity:	62 %	58 %	52 %	58 %
ATM Pressure:	101.8 kPa	101.8 kPa	101.4 kPa	101.5 kPa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Frank Liu	Leah Li	Peter Wang	Peter Wang

Test Item:	6 DB EMISSION BANDWIDTH	MAXIMUM CONDUCTED OUTPUT POWER	BAND EDGE	POWER SPECTRAL DENSITY
Test Date:	2024-03-19	2024-03-19	2024-03-19	2024-03-19
Temperature:	16.7 °C	16.7 °C	16.7 °C	16.7 °C
Relative Humidity:	55 %	55 %	55 %	55 %
ATM Pressure:	101.7kPa	101.7kPa	101.7kPa	101.7kPa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Hardy Huang	Hardy Huang	Hardy Huang	Hardy Huang

### AC LINE CONDUCTED EMISSIONS

EUT operation mode: Transmitting in low channel (maximum output power)

#### AC 120V/60 Hz, Line

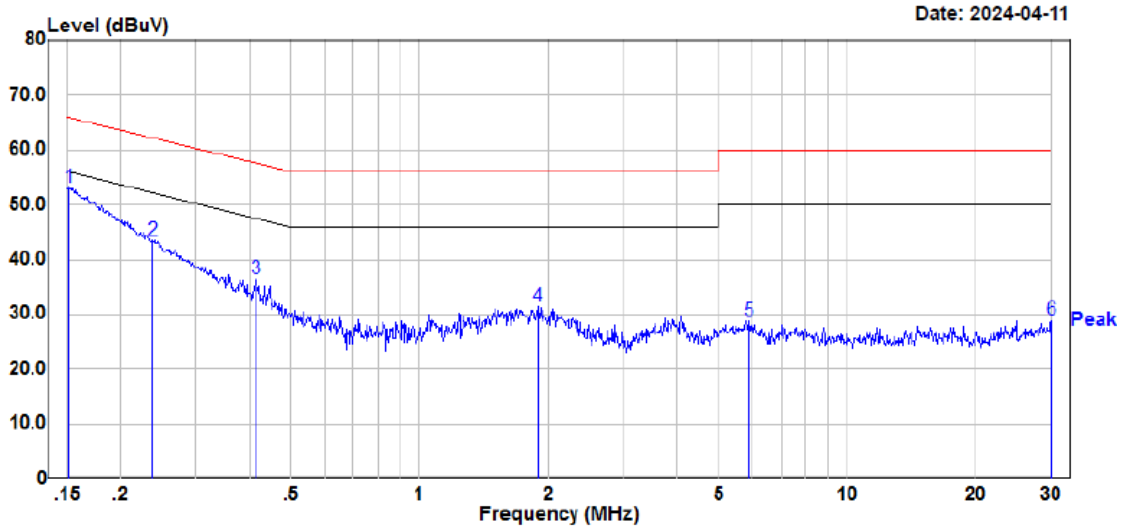


Site : CE  
 Condition : FCC Part 15.207  
 : DET:Peak  
 Project No. : RKSA240319002  
 Phase : L  
 Voltage : 120V/60Hz  
 Mode : Transmitting  
 Test Engineer: Frank Liu

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	33.27	19.99	53.26	65.92	-12.66	Peak
2	0.237	23.57	20.04	43.61	62.19	-18.58	Peak
3	0.415	16.59	20.01	36.60	57.55	-20.95	Peak
4	1.887	11.46	19.99	31.45	56.00	-24.55	Peak
5	5.879	8.78	20.11	28.89	60.00	-31.11	Peak
6	30.000	8.91	20.04	28.95	60.00	-31.05	Peak

AC 120V/60 Hz, Neutral

Date: 2024-04-11

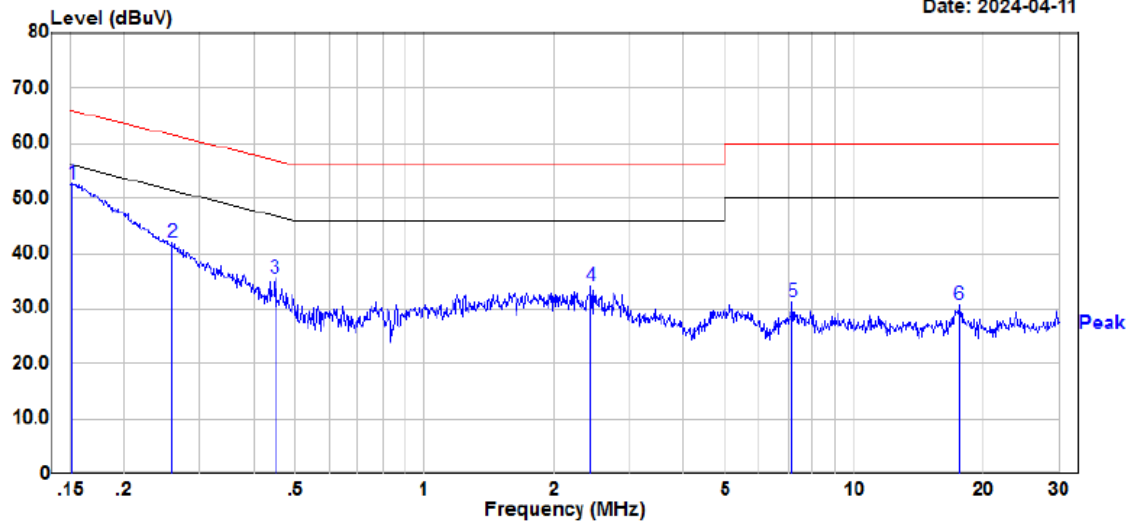

Site : CE  
 Condition : FCC Part 15.207  
 : DET:Peak  
 Project No. : RKSA240319002  
 Phase : N  
 Voltage : 120V/60Hz  
 Mode : Transmitting  
 Test Engineer: Frank Liu

	Read Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	32.68	19.99	52.67	65.92	-13.25	Peak
2	0.258	21.93	20.04	41.97	61.49	-19.52	Peak
3	0.449	15.59	20.00	35.59	56.89	-21.30	Peak
4	2.433	14.02	20.05	34.07	56.00	-21.93	Peak
5	7.176	11.20	20.05	31.25	60.00	-28.75	Peak
6	17.512	11.02	19.70	30.72	60.00	-29.28	Peak

### SPURIOUS EMISSIONS

**Test Result:** Compliant.

*EUT operation mode: Transmitting*

*After pre-scan in the X, Y and Z axes of orientation, the worst case in the X axes of orientation is below:*

**9 kHz-30 MHz:** ( *Transmitting in maximum output power low channel*)


*The amplitude of spurious emissions attenuated more than 20 dB below the limit was not be recorded.*

**30 MHz - 1 GHz:**

**Low Channel: 2402 MHz**

### Common Information

Project No:	RKSA240319002
Test Mode:	Transmitting
Standard:	FCC Part 15.247 & FCC Part 15.205 & Part 15.209
Test Engineer:	Leah Li
Test Date:	2024/4/7

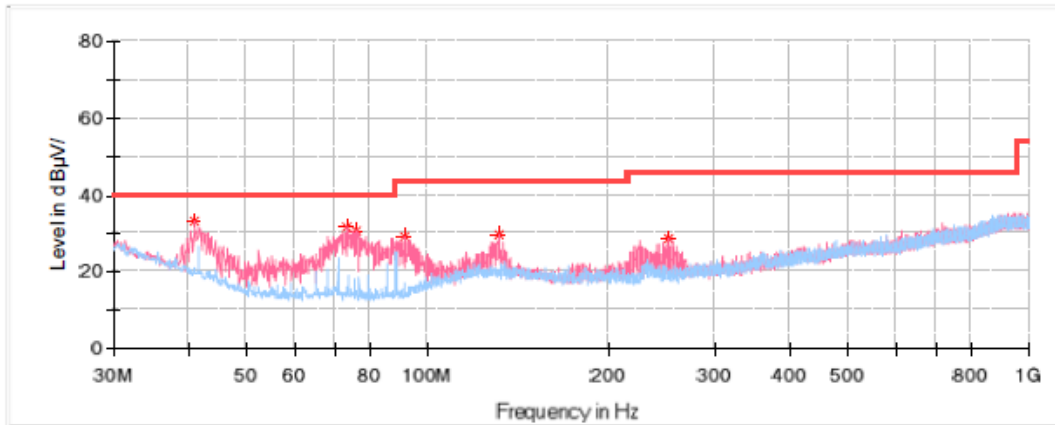


### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Pol	Corr. (dB/m)
40.912500	33.39	40.00	6.61	V	-11.8
73.528750	31.67	40.00	8.33	V	-17.1
76.317500	30.55	40.00	9.45	V	-17.3
91.716250	28.96	43.50	14.54	V	-16.7
131.001250	29.69	43.50	13.81	V	-11.4
252.008750	28.43	46.00	17.57	V	-12.6

**Middle Channel: 2440 MHz**

**Common Information**

Project No: RKSA240319002  
 Test Mode: Transmitting  
 Standard: FCC Part 15.247 & FCC Part 15.205 & Part 15.209  
 Test Engineer: Leah Li  
 Test Date: 2024/4/7

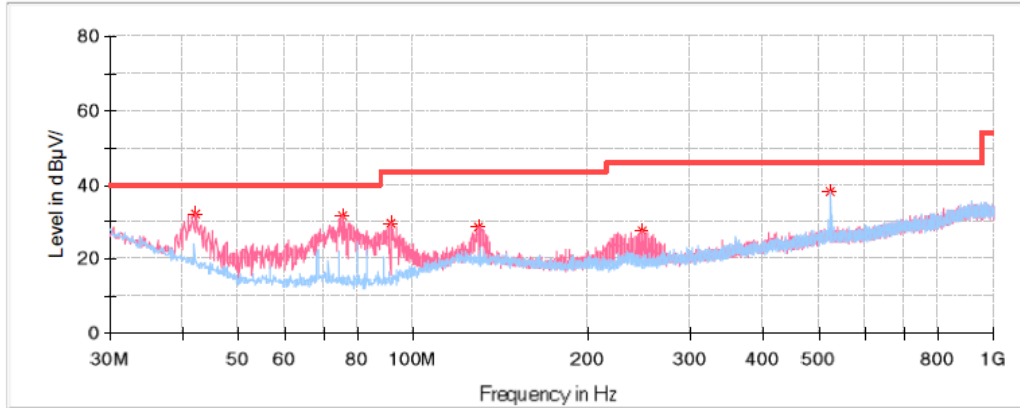


**Critical Freqs**

Frequency (MHz)	MaxPeak (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Pol	Corr. (dB/m)
42.246250	32.07	40.00	7.93	V	-12.5
75.590000	31.46	40.00	8.54	V	-17.2
91.595000	29.52	43.50	13.98	V	-16.7
129.667500	28.56	43.50	14.94	V	-11.4
247.522500	27.90	46.00	18.10	V	-12.7
523.972500	38.07	46.00	7.93	H	-5.5

**High Channel:2480 MHz**

**Common Information**

Project No: RKSA240319002  
 Test Mode: Transmitting  
 Standard: FCC Part 15.247 & FCC Part 15.205 & Part 15.209  
 Test Engineer: Leah Li  
 Test Date: 2024/4/7

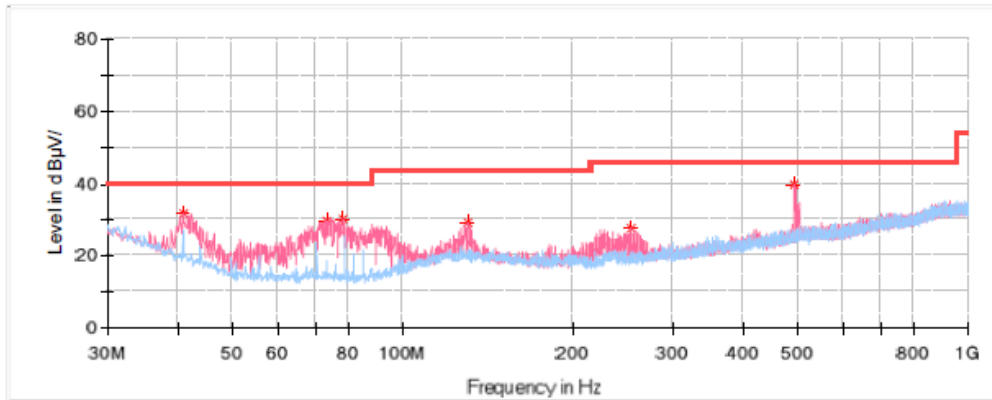

**Critical\_Freqs**


Frequency (MHz)	MaxPeak (dBµ V/m)	Limit (dBµ V/m)	Margin (dB)	Pol	Corr. (dB/m)
40.791250	31.55	40.00	8.45	V	-11.7
73.528750	29.84	40.00	10.16	V	-17.1
78.257500	30.24	40.00	9.76	V	-17.4
130.273750	29.15	43.50	14.35	V	-11.4
252.857500	27.57	46.00	18.43	V	-12.6
494.023750	39.56	46.00	6.44	V	-5.9

**1GHz-18GHz:**

**Low Channel: 2402 MHz**

**Common Information**

Project No.:	RKSA240319002
Test Mode:	BLE 1M
Standard:	FCC Part 15.247 & FCC Part 15.205 & Part 15.209
Test Engineer:	Peter Wang

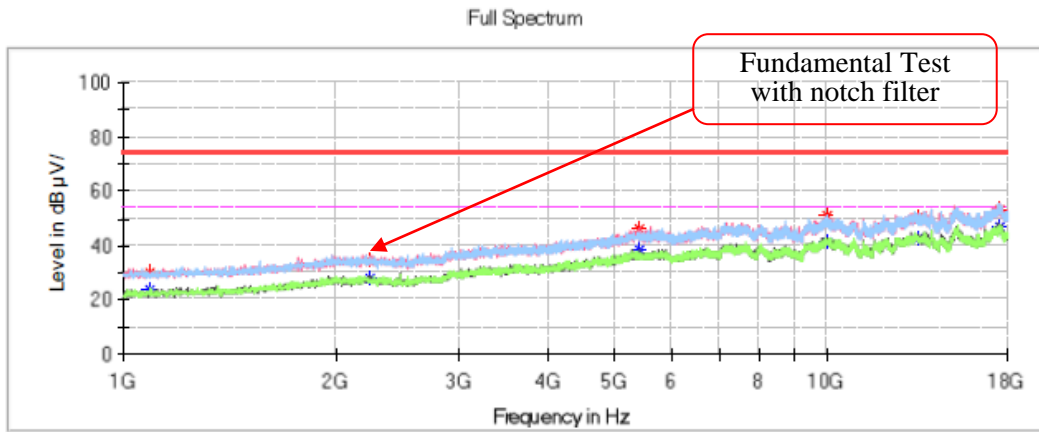


**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1088.400000	---	23.59	54.00	30.41	V	-15.2
1088.400000	30.40	---	74.00	43.60	V	-15.2
2234.200000	---	28.09	54.00	25.91	V	-10.2
2234.200000	34.59	---	74.00	39.41	V	-10.2
5391.100000	---	38.19	54.00	15.81	V	0.4
5391.100000	46.22	---	74.00	27.78	V	0.4
9964.100000	---	41.52	54.00	12.48	V	7.7
9964.100000	51.24	---	74.00	22.76	V	7.7
13444.000000	---	42.97	54.00	11.03	H	10.8
13444.000000	50.67	---	74.00	23.33	H	10.8
17520.600000	---	47.07	54.00	6.93	V	13.5
17520.600000	53.30	---	74.00	20.70	V	13.5

**Middle Channel: 2440 MHz**

**Common Information**

Project No.: RKSA240319002  
 Test Mode: BLE 1M  
 Standard: FCC Part 15.247 & FCC Part 15.205 & Part 15.209  
 Test Engineer: Peter Wang

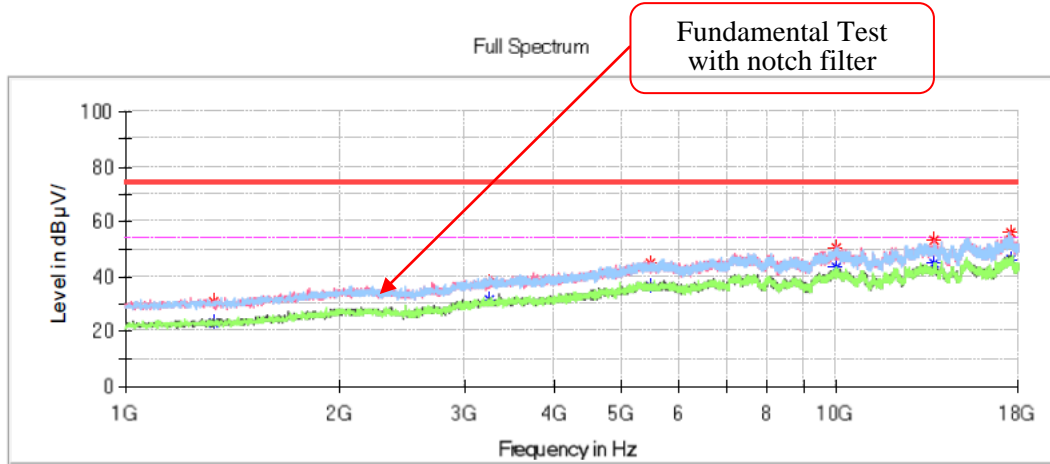

**Critical\_Freqs**


Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1331.500000	---	23.34	54.00	30.66	H	-14.5
1331.500000	30.69	---	74.00	43.31	H	-14.5
3259.300000	---	31.50	54.00	22.50	V	-7.0
3259.300000	37.84	---	74.00	36.16	V	-7.0
5462.500000	---	36.23	54.00	17.77	H	0.7
5462.500000	44.53	---	74.00	29.47	H	0.7
10010.000000	---	43.59	54.00	10.41	H	7.8
10010.000000	50.61	---	74.00	23.39	H	7.8
13676.900000	---	44.76	54.00	9.24	H	10.8
13676.900000	53.18	---	74.00	20.82	V	10.8
17542.700000	---	46.19	54.00	7.81	V	13.4
17542.700000	56.25	---	74.00	17.75	V	13.4



**High Channel: 2480 MHz**

**Common Information**

Project No.: RKSA240319002  
 Test Mode: BLE 1M  
 Standard: FCC Part 15.247 & FCC Part 15.205 & Part 15.209  
 Test Engineer: Peter Wang

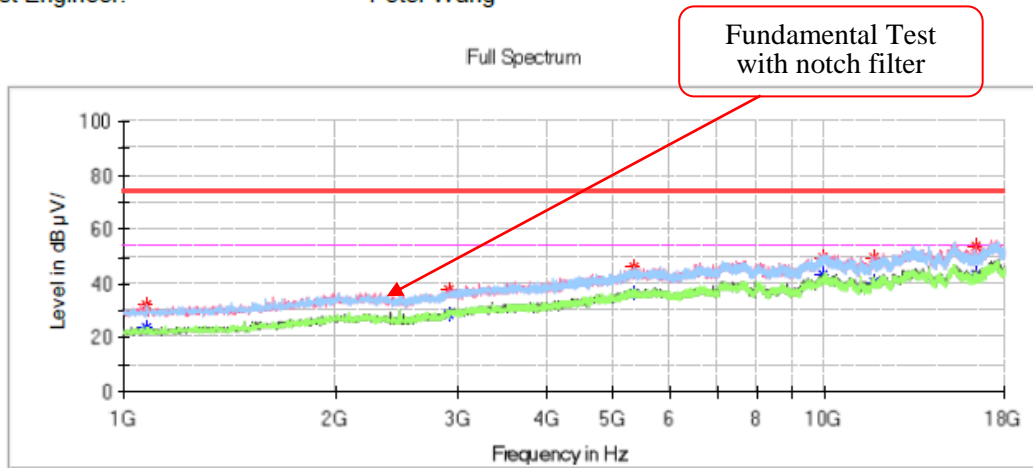

**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1079.900000	---	23.46	54.00	30.54	H	-15.3
1079.900000	32.23	---	74.00	41.77	H	-15.3
2898.900000	---	28.71	54.00	25.29	V	-8.4
2898.900000	37.69	---	74.00	36.31	V	-8.4
5343.500000	---	36.68	54.00	17.32	H	0.2
5343.500000	46.44	---	74.00	27.56	H	0.2
9901.200000	---	43.70	54.00	10.30	V	7.5
9901.200000	49.66	---	74.00	24.34	V	7.5
11708.300000	---	40.50	54.00	13.50	V	7.1
11708.300000	49.76	---	74.00	24.24	V	7.1
16369.700000	---	43.35	54.00	10.65	V	9.9
16369.700000	53.72	---	74.00	20.28	V	9.9


**Band Edge:**

**Left Side**

**Common Information**

Project No.: RKSA240319002  
 Test Mode: BLE 1M  
 Standard: FCC Part 15.247 & FCC Part 15.205 & Part 15.209  
 Test Engineer: Peter Wang

Full Spectrum

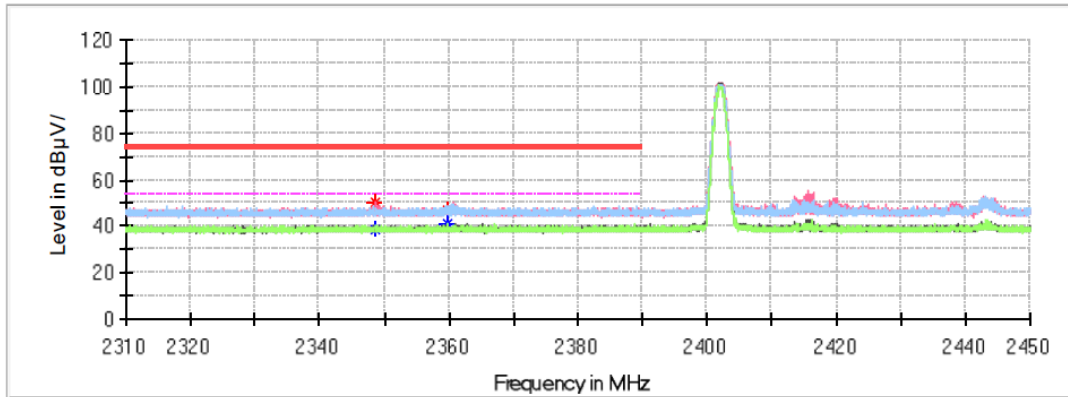

**Critical\_Freqs**


Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2348.682000	50.40	---	74.00	23.60	V	0.0
2348.682000	---	38.69	54.00	15.31	V	0.0
2359.784000	46.98	---	74.00	27.02	H	0.0
2359.784000	---	41.40	54.00	12.60	H	0.0

**Right Side**

**Common Information**

Project No.: RKSA240319002  
 Test Mode: BLE 1M  
 Standard: FCC Part 15.247 & FCC Part 15.205 & Part 15.209  
 Test Engineer: Peter Wang

Full Spectrum

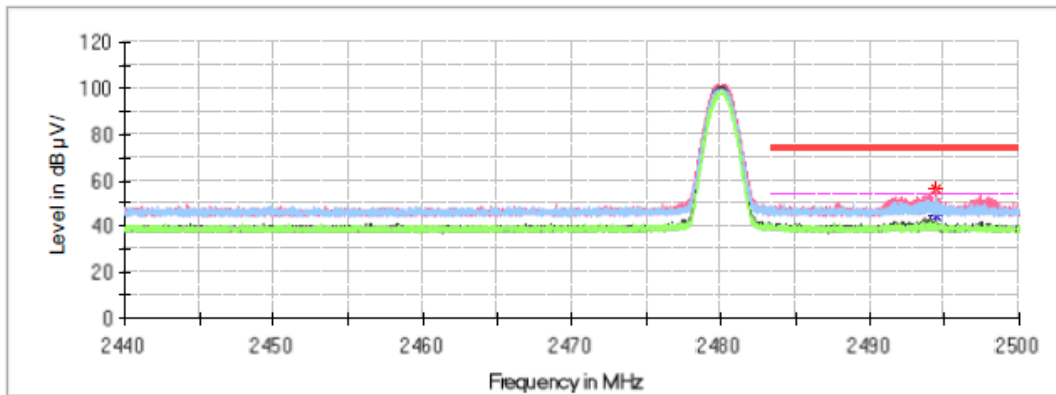


**Critical Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2494.462000	---	44.30	54.00	9.70	V	0.2
2494.462000	55.86	---	74.00	18.14	V	0.2


18 GHz - 25 GHz (low channel was worst):

Horizontal

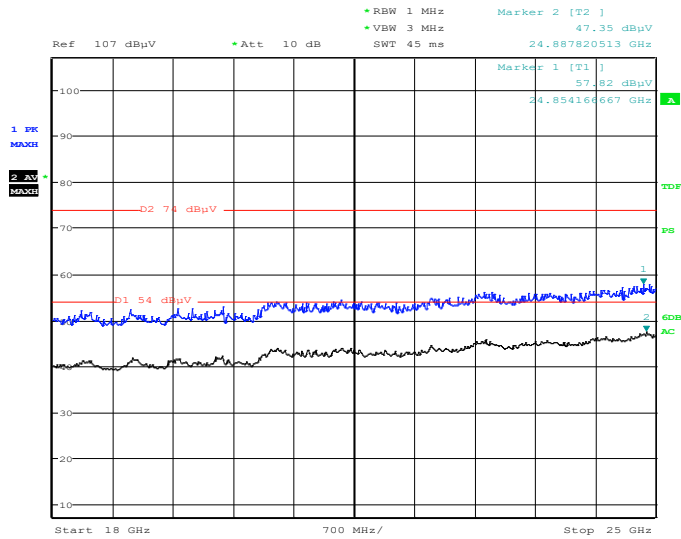

Project No.: RKSA240319002      Tester: Peter Wang  
Date: 20.APR.2024 18:55:54

Vertical

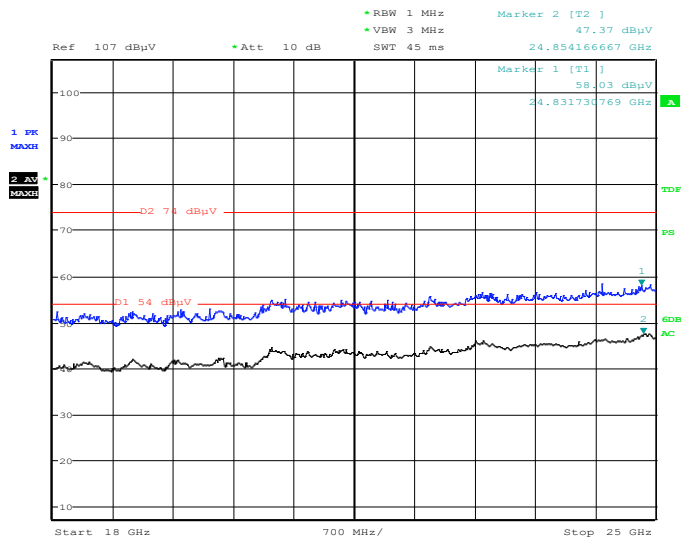


Project No.: RKSA240319002      Tester: Peter Wang  
Date: 20.APR.2024 19:22:11

Note: The test distance is 3m. The limit is 74dBμV/m(Peak) and 54dBμV/m(Average).

**6 dB EMISSION BANDWIDTH**


Mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
BLE (1Mbps)	Low	2402	0.732	≥0.5
	Middle	2440	0.740	≥0.5
	High	2480	0.744	≥0.5

**Low Channel**

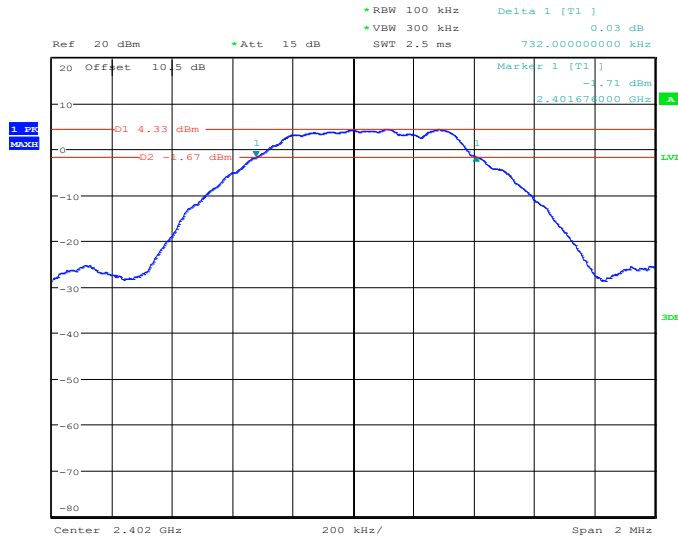


ProjectNo.:RKSA240319002 Tester:Hardy Huang  
 Date: 19.MAR.2024 20:25:58

### Middle Channel

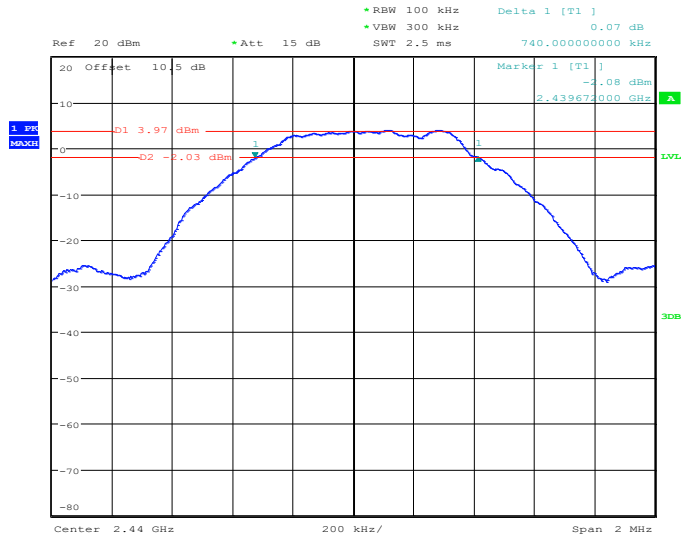

ProjectNo.:RKSA240319002    Tester:Hardy Huang  
Date: 19.MAR.2024    20:31:41

### High Channel

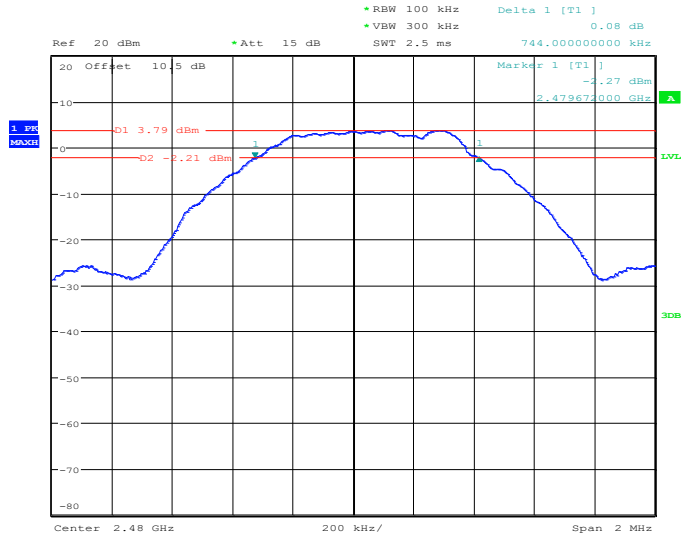

ProjectNo.:RKSA240319002    Tester:Hardy Huang  
Date: 19.MAR.2024    20:37:40


### MAXIMUM CONDUCTED OUTPUT POWER

**Test Result:** Compliant.

*EUT operation mode: Transmitting*


Mode	Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
BLE (1Mbps)	Low	2402	6.17	30	Pass
	Middle	2440	5.82	30	Pass
	High	2480	5.69	30	Pass

#### Low Channel

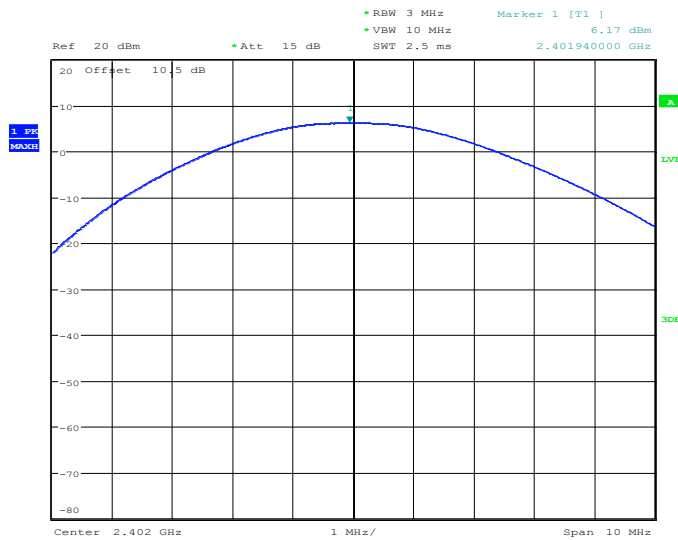


ProjectNo.:RKSA240319002    Tester:Hardy Huang  
 Date: 19.MAR.2024    20:26:20

### Middle Channel

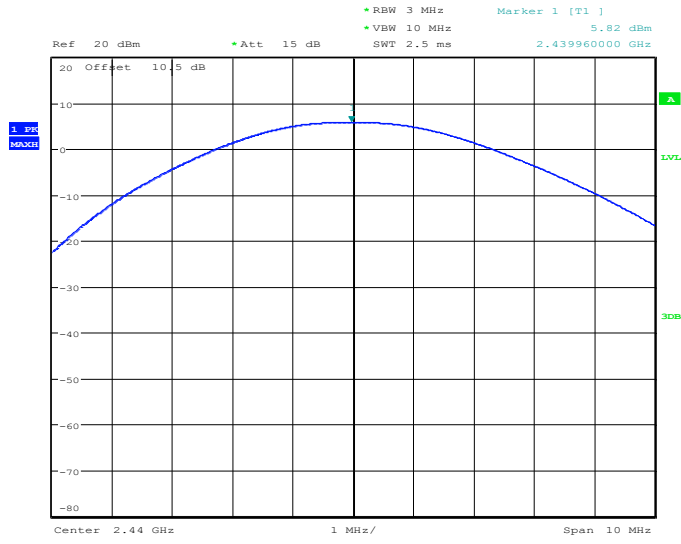

ProjectNo.:RKSA240319002 Tester:Hardy Huang  
Date: 19.MAR.2024 20:32:02

### High Channel

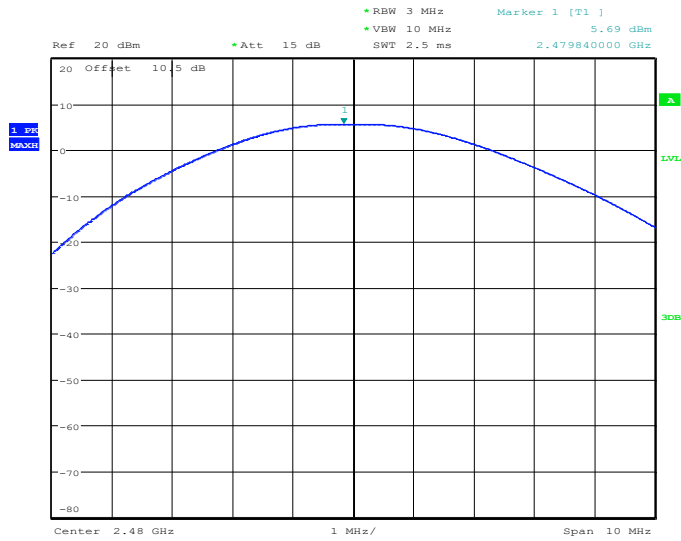

ProjectNo.:RKSA240319002 Tester:Hardy Huang  
Date: 19.MAR.2024 20:38:01




**BAND EDGE**

**Test Result:** Compliant.

*EUT operation mode: Transmitting*


Mode	Channel	Frequency (MHz)	Result (dBc)	Limit (dBc)
BLE (1Mbps)	Low	2402	57.91	20
	High	2480	58.04	

**Left Side**

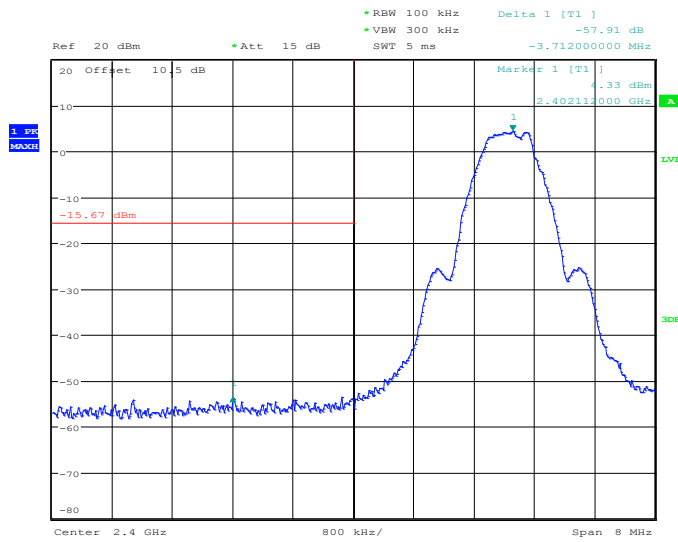

ProjectNo.:RKSA240319002 Tester:Hardy Huang  
 Date: 19.MAR.2024 20:27:05

### Right Side

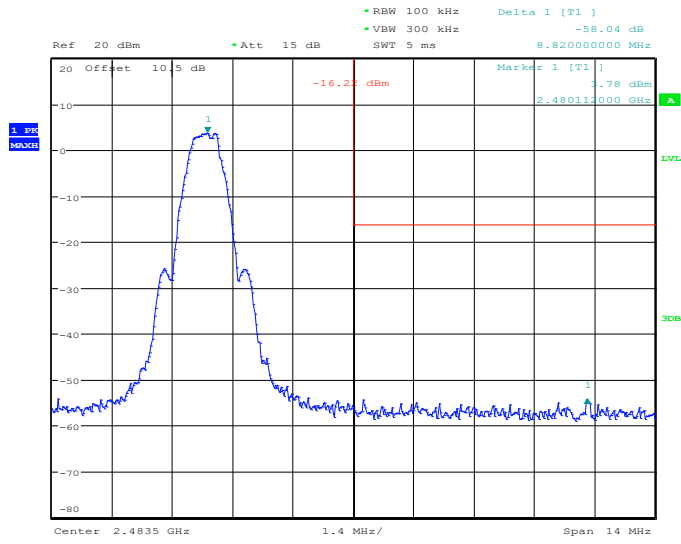


ProjectNo.:RKSA240319002 Tester:Hardy Huang  
Date: 19.MAR.2024 20:38:45

**POWER SPECTRAL DENSITY****Test Result:** Compliant.*EUT operation mode: Transmitting*


Mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
<b>BLE (1Mbps)</b>	Low	2402	-10.74	≤8
	Middle	2440	-11.08	≤8
	High	2480	-11.29	≤8

### Low Channel

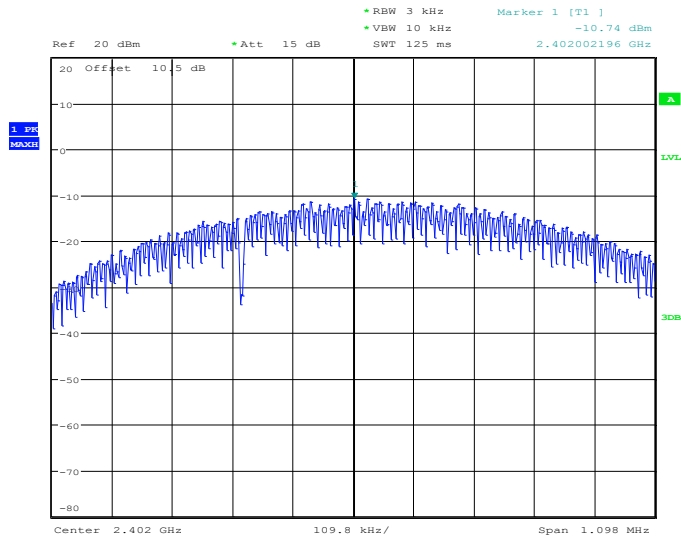


ProjectNo.:RKSA240319002 Tester:Hardy Huang  
Date: 19.MAR.2024 20:26:28

### Middle Channel

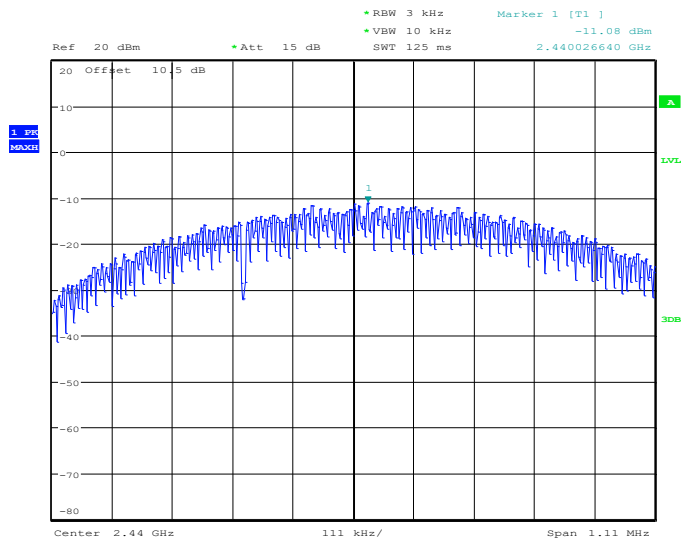

ProjectNo.:RKSA240319002 Tester:Hardy Huang  
Date: 19.MAR.2024 20:32:10

### High Channel

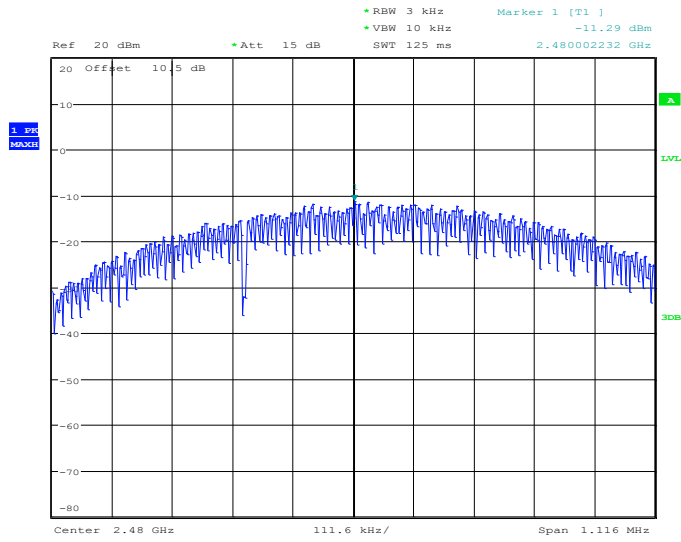

ProjectNo.:RKSA240319002    Tester:Hardy Huang  
Date: 19.MAR.2024    20:38:09

### **Declarations**

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor  $k=2$  with the 95.45% confidence interval.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***